BhR2_bmr6717
Largest-cluster review

Primary analysis: 11,000 models. Cluster 1 contributes 9,856 models to the second pass.

Fresh automatic result: 4 child clusters. Exploratory review covers every K from 2 to 20.

The complete supplied constructs and the frozen primary residue/pair mask define the child analysis.


Fresh PCA, UMAP and t-SNE use only the selected parent-cluster models. Primary labels remain unchanged.

One fixed pool of up to 100 structures supplies all candidate ensemble-TM comparisons.

Within/between TM, cluster population and structural views support per-target review. Final K remains unselected.


Two-level analysis. Child labels identify subsets of primary Cluster 1. The candidate cuts remain exploratory and await per-target review.


BhR2_bmr6717 · Within/between ensemble similarity

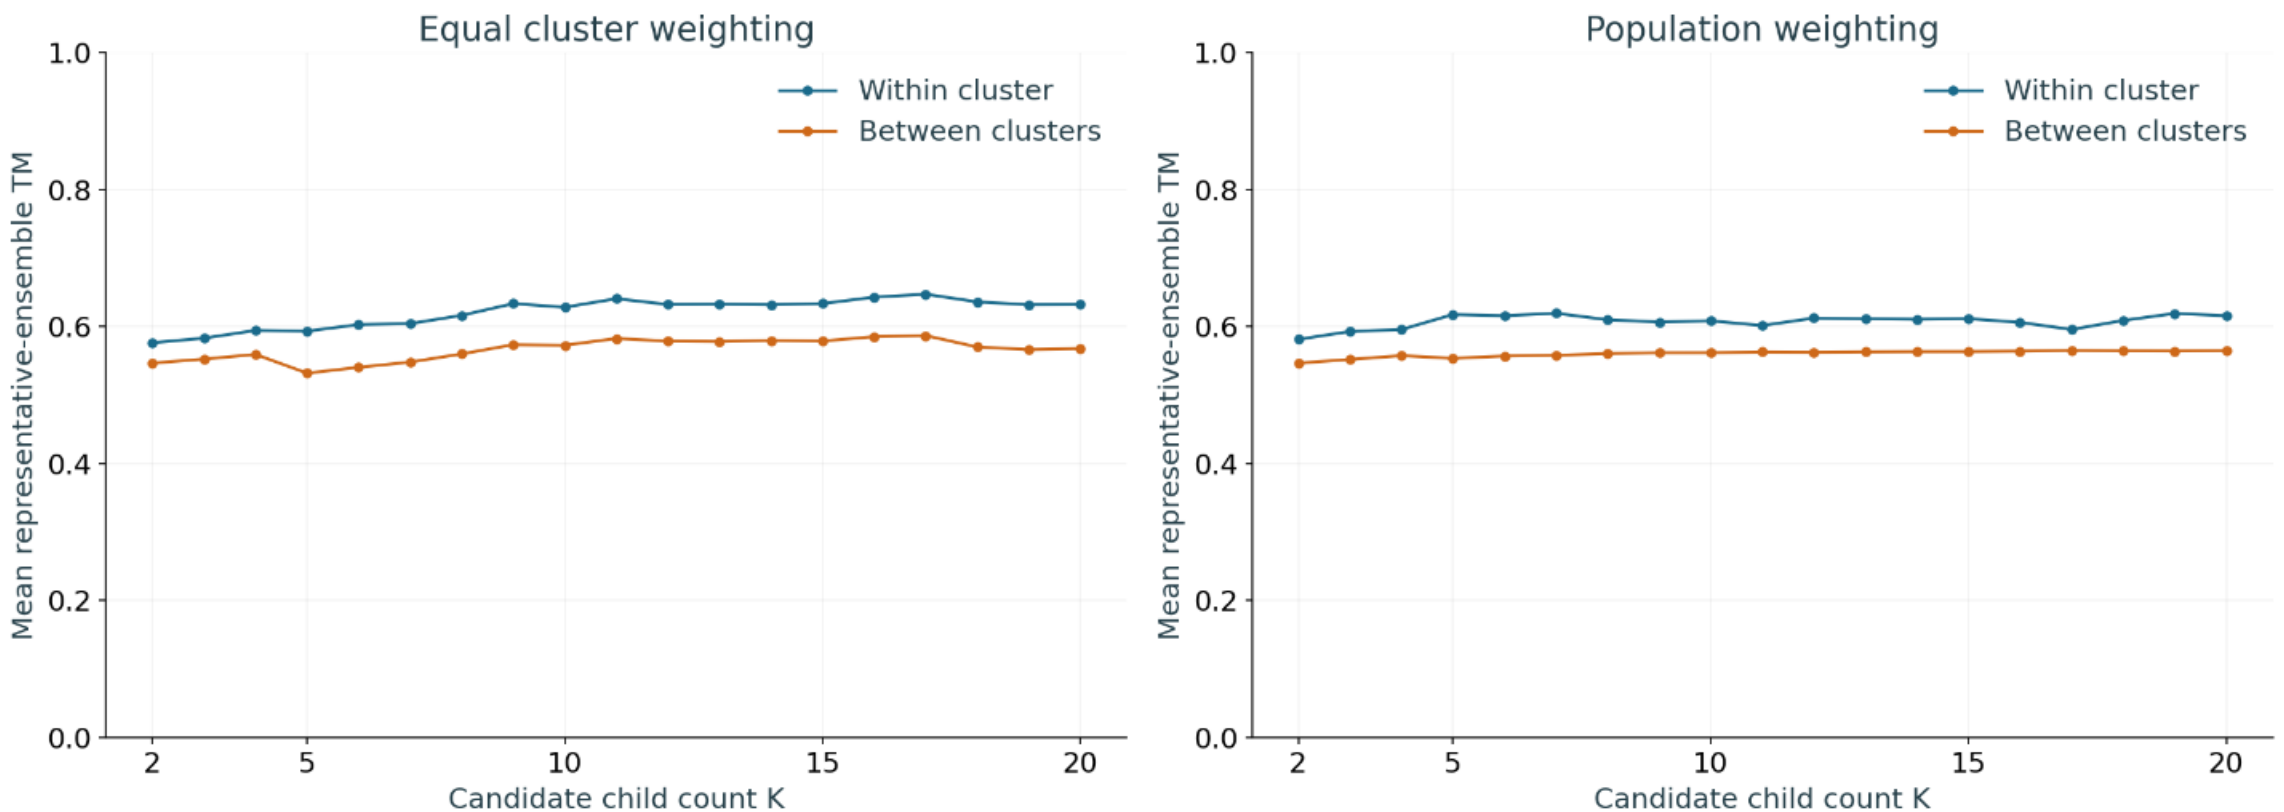

All K values reuse the same fixed representative pool and TM matrix. Population weights reflect finest-group sizes. These are representative estimates, not all-model TM distributions.

BhR2_bmr6717 · Count tradeoffs

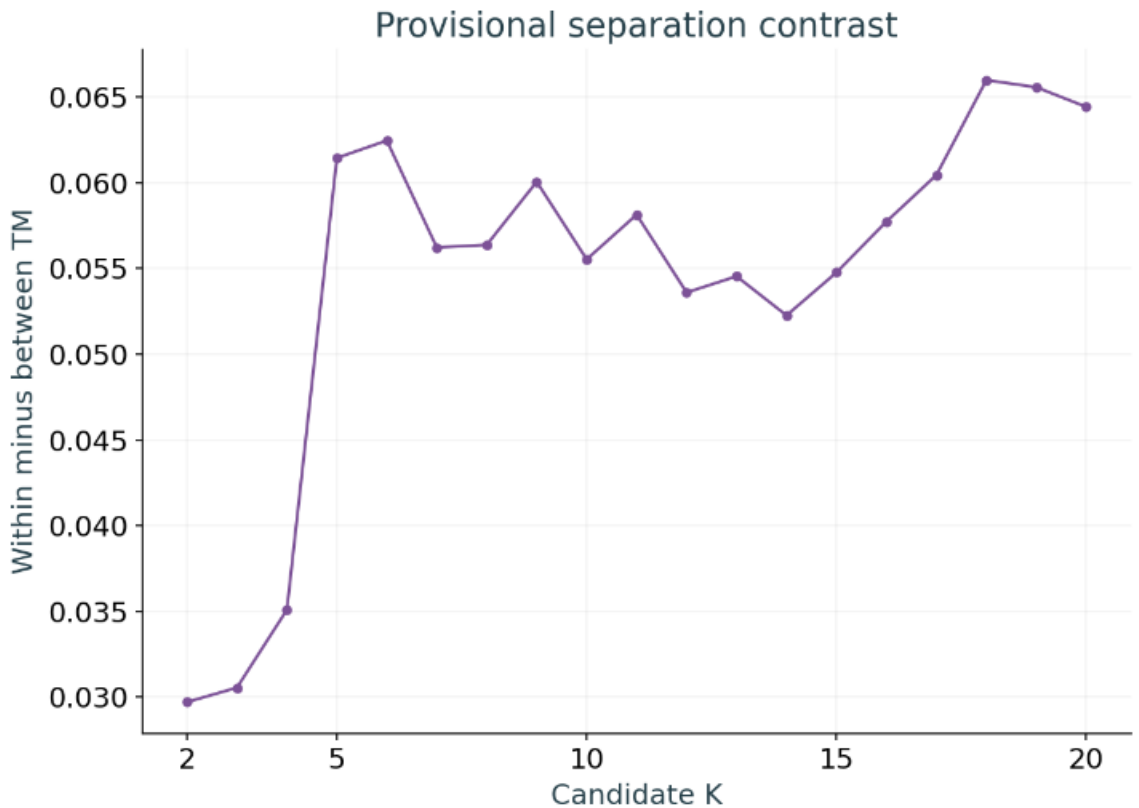

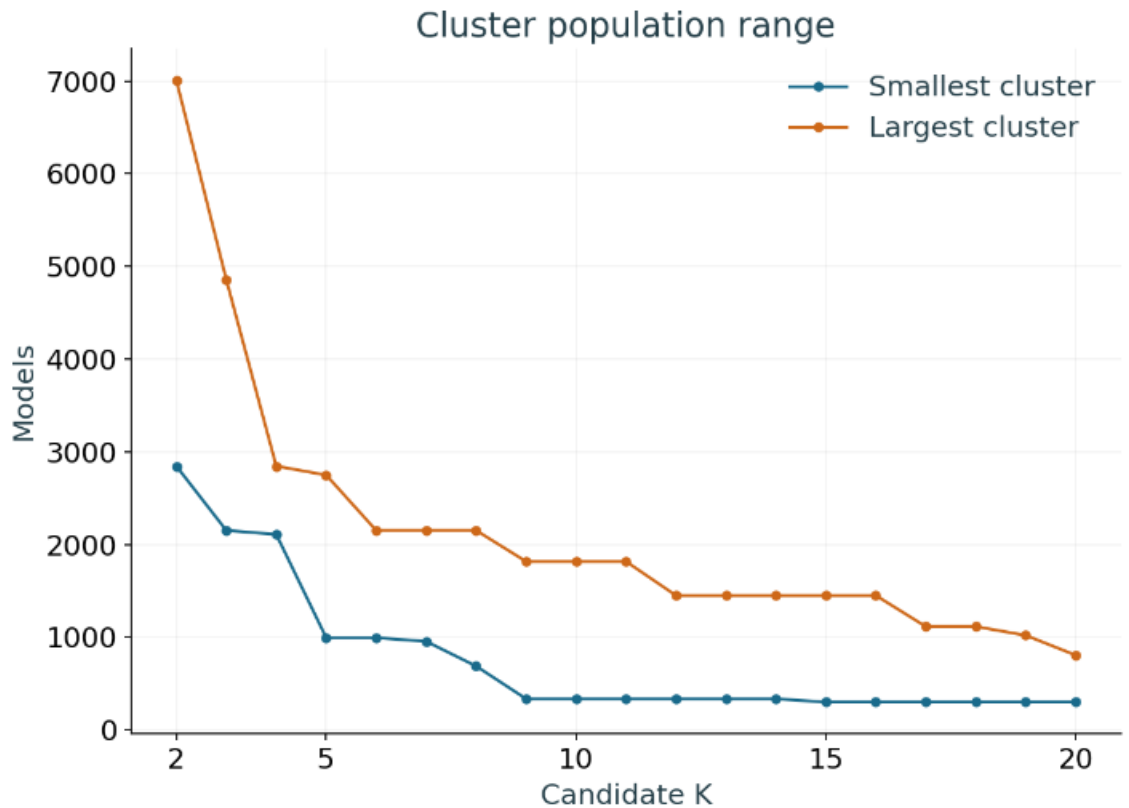


Contrast provides a provisional ranking. Increasing K can overpartition the ensemble, so this score does not determine an ideal state count. Review small groups and their structures.


BhR2_bmr6717 · Every candidate count

K	Within TM	Between TM	Contrast	Min n	Max n	Singletons
2	0.577	0.547	0.030	2,846	7,010	0
3	0.583	0.553	0.031	2,152	4,858	0
4	0.595	0.559	0.035	2,109	2,846	0
5	0.594	0.532	0.061	994	2,749	0
6	0.603	0.541	0.062	994	2,152	0
7	0.604	0.548	0.056	955	2,152	0
8	0.617	0.560	0.056	688	2,152	0
9	0.634	0.574	0.060	335	1,817	0
10	0.628	0.573	0.056	335	1,817	0
11	0.641	0.583	0.058	335	1,817	0
12	0.632	0.579	0.054	335	1,450	0
13	0.633	0.578	0.055	335	1,450	0
14	0.632	0.580	0.052	335	1,450	0
15	0.634	0.579	0.055	300	1,450	0
16	0.643	0.585	0.058	300	1,450	0
17	0.647	0.587	0.060	300	1,115	0
18	0.636	0.570	0.066	300	1,115	0
19	0.632	0.567	0.066	300	1,020	0
20	0.632	0.568	0.064	300	806	0


Equal-cluster TM estimates exclude self pairs. Unavailable within-cluster values occur when representative support is insufficient. The full CSV preserves every value and population count.

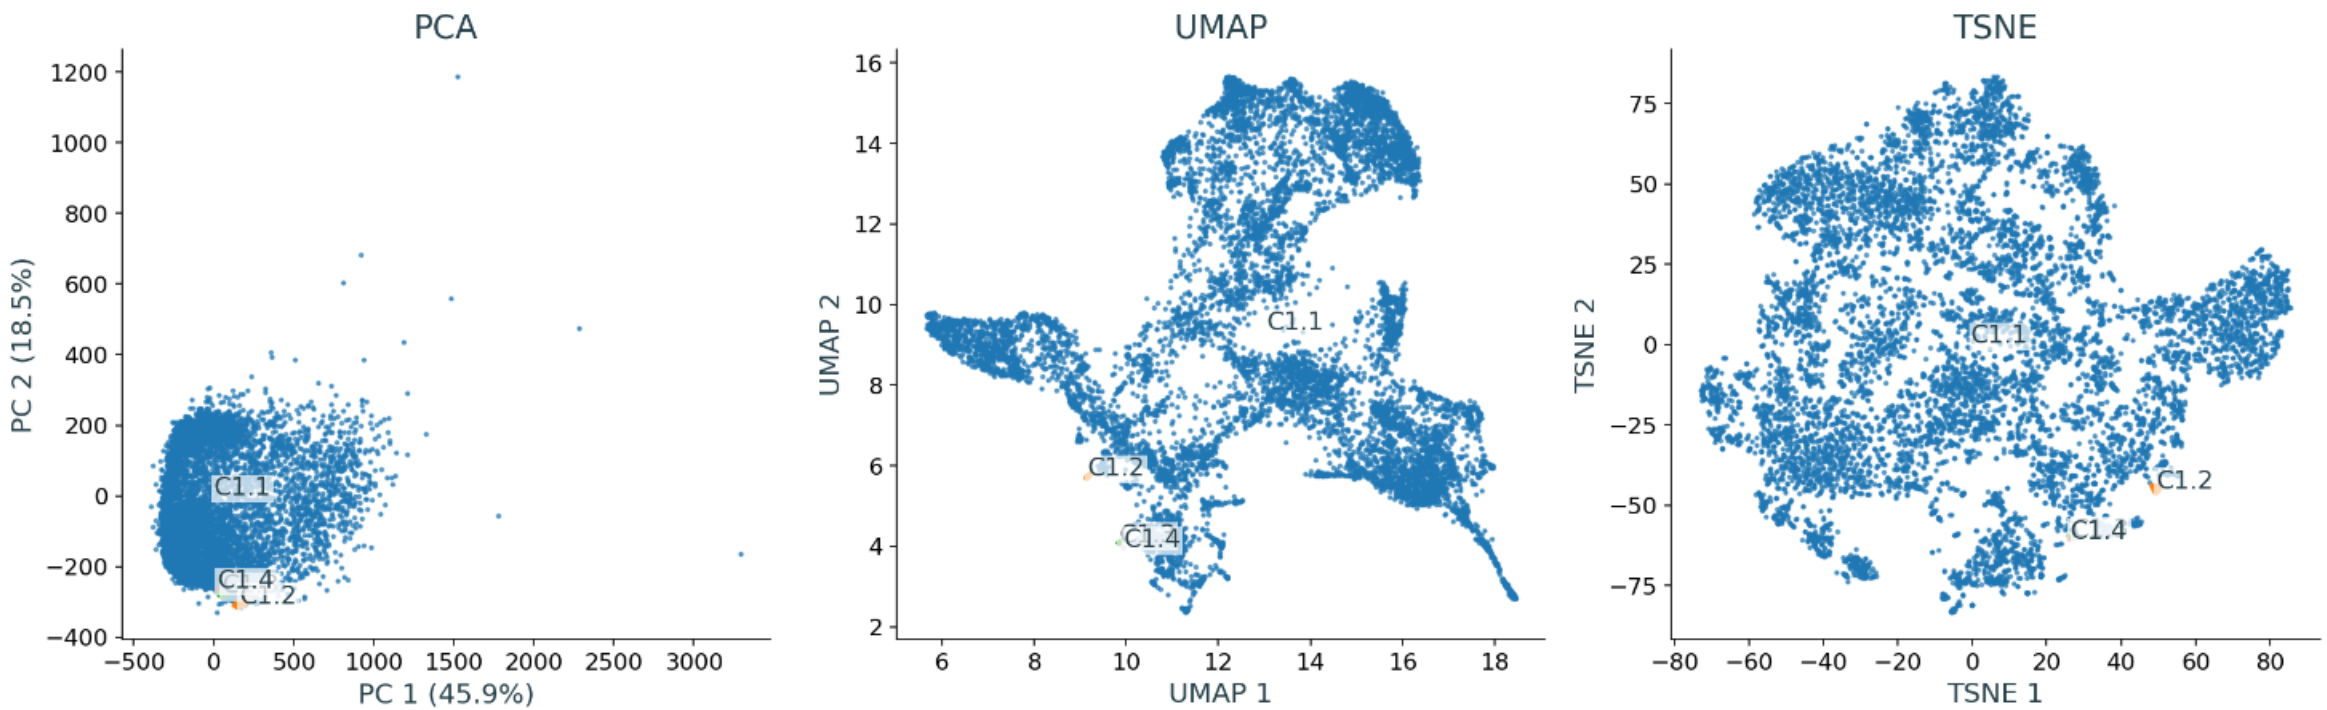


Automatic child baseline: 4 child clusters among 9,856 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

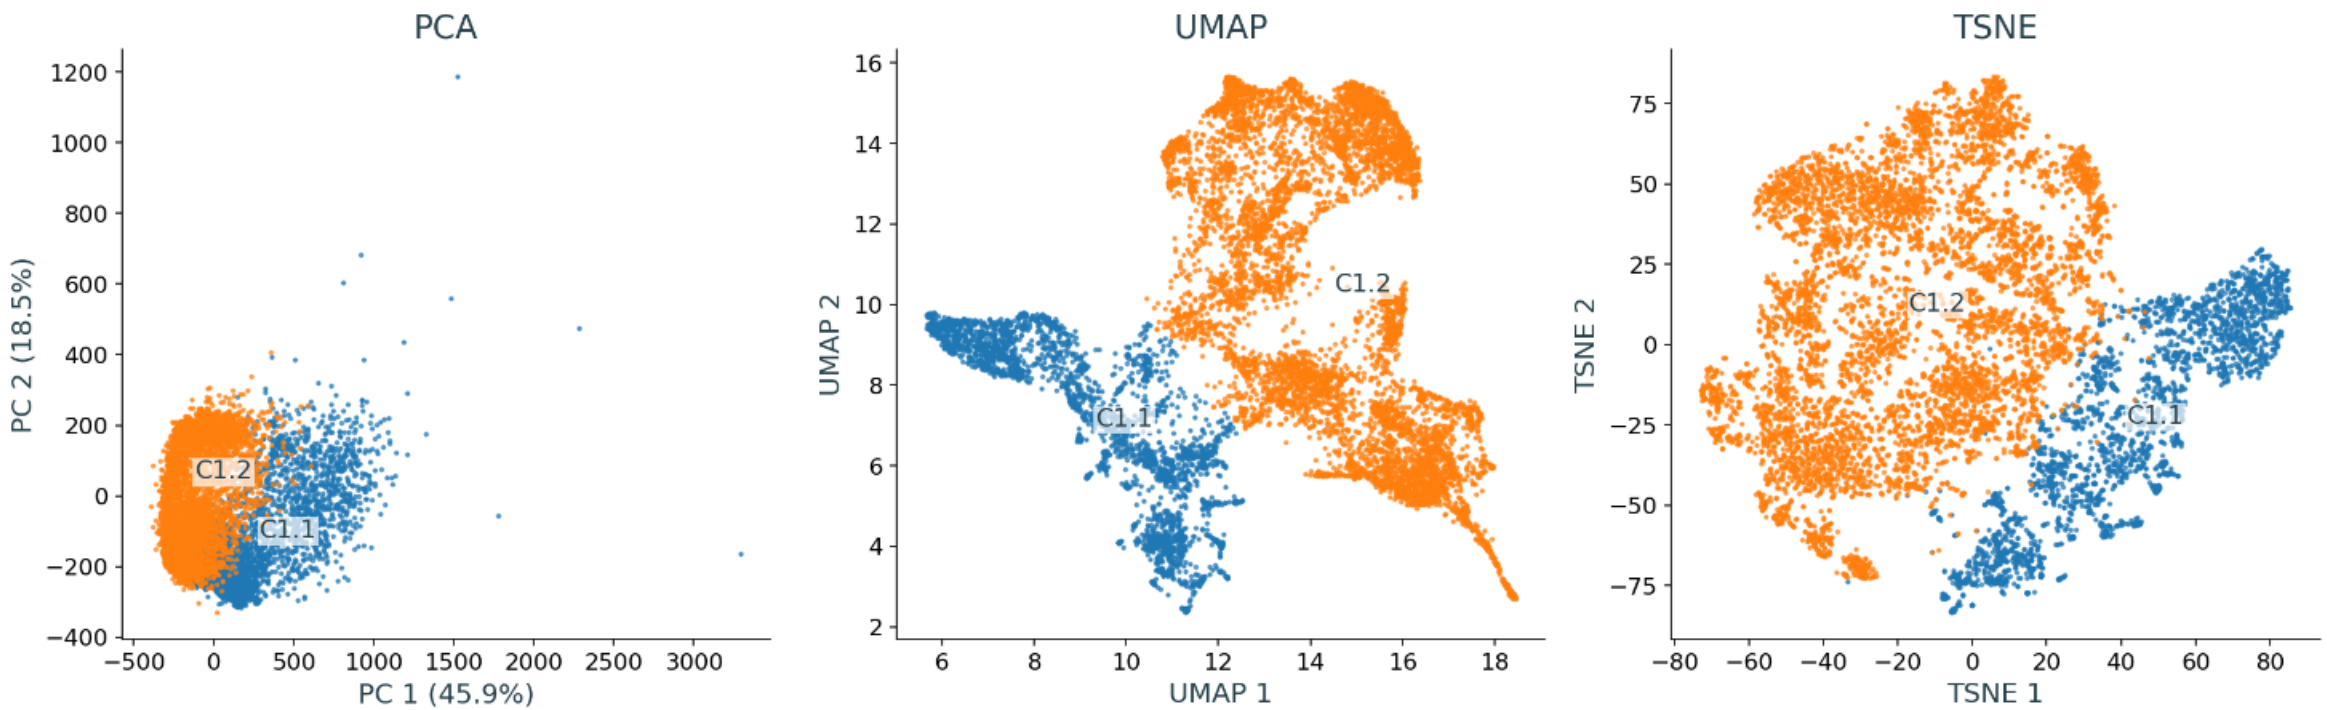


Exploratory K=2: 2 child clusters among 9,856 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

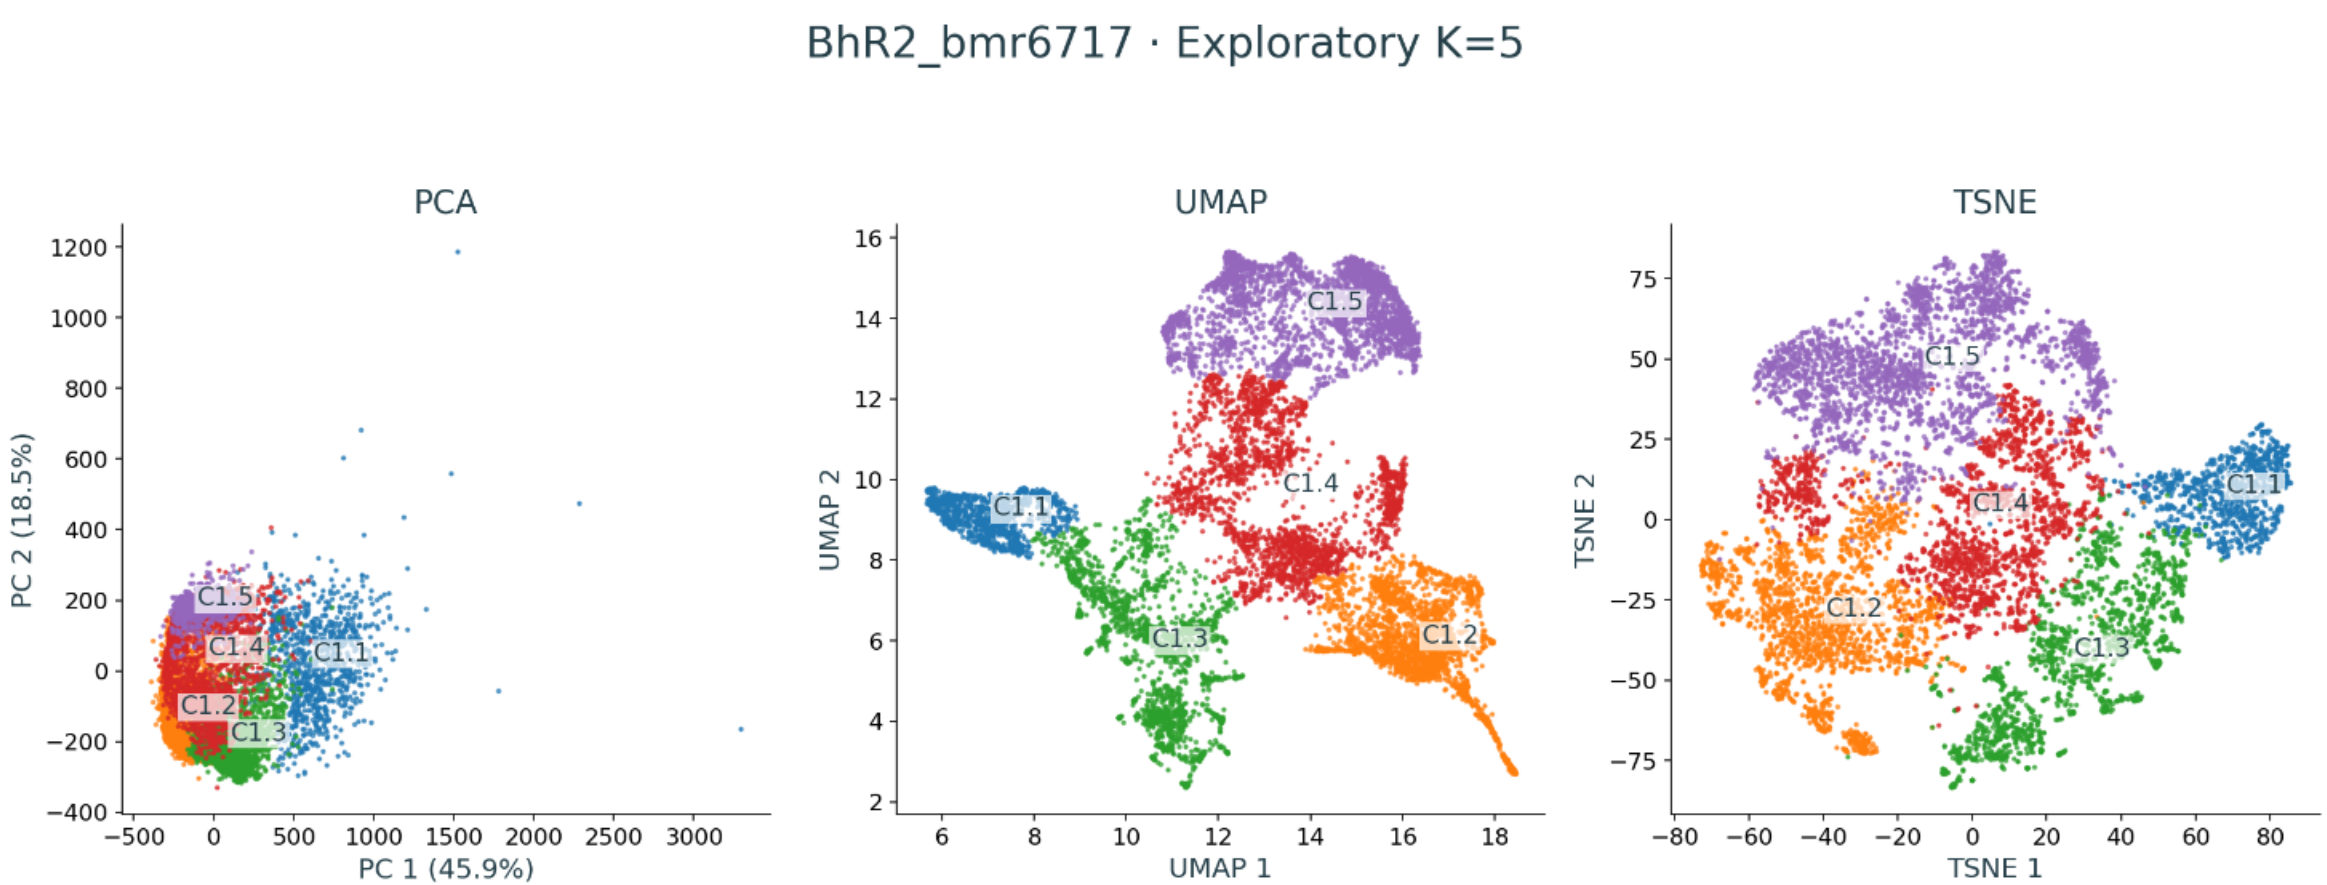


Exploratory K=5: 5 child clusters among 9,856 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

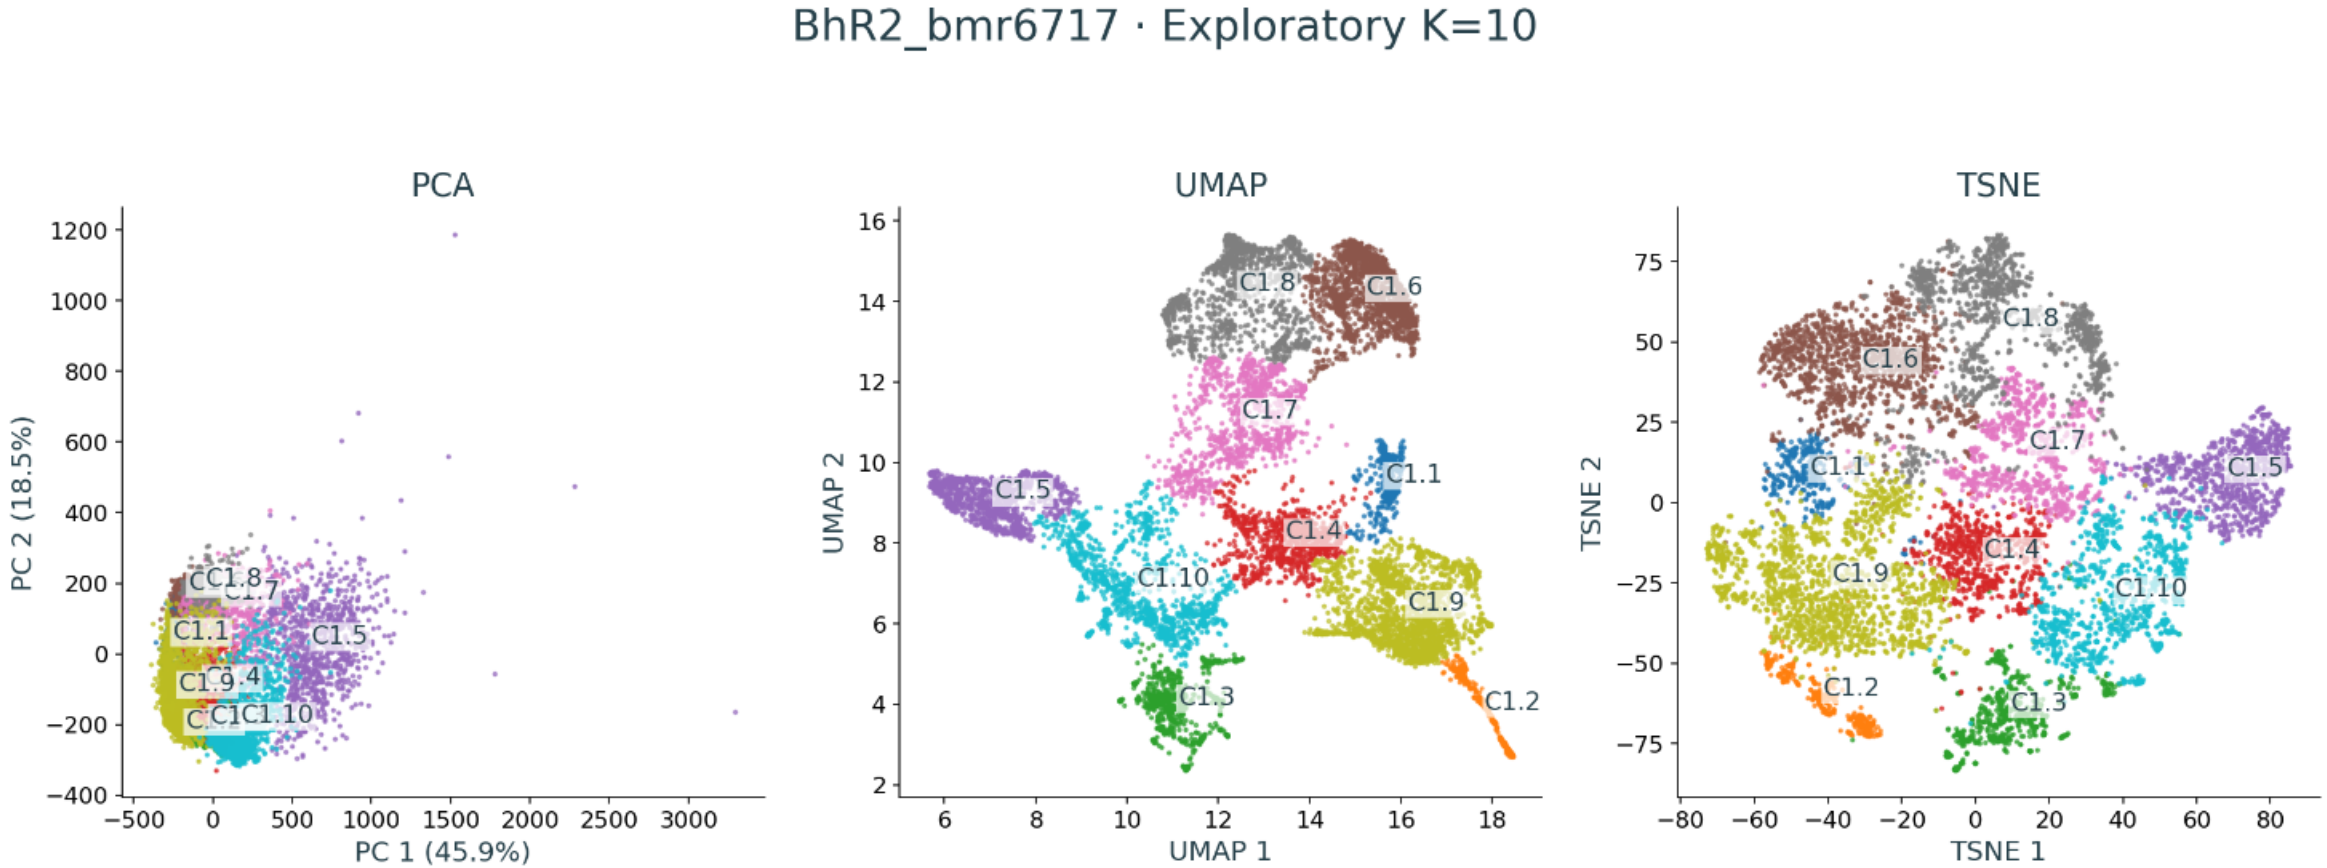


Exploratory K=10: 10 child clusters among 9,856 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

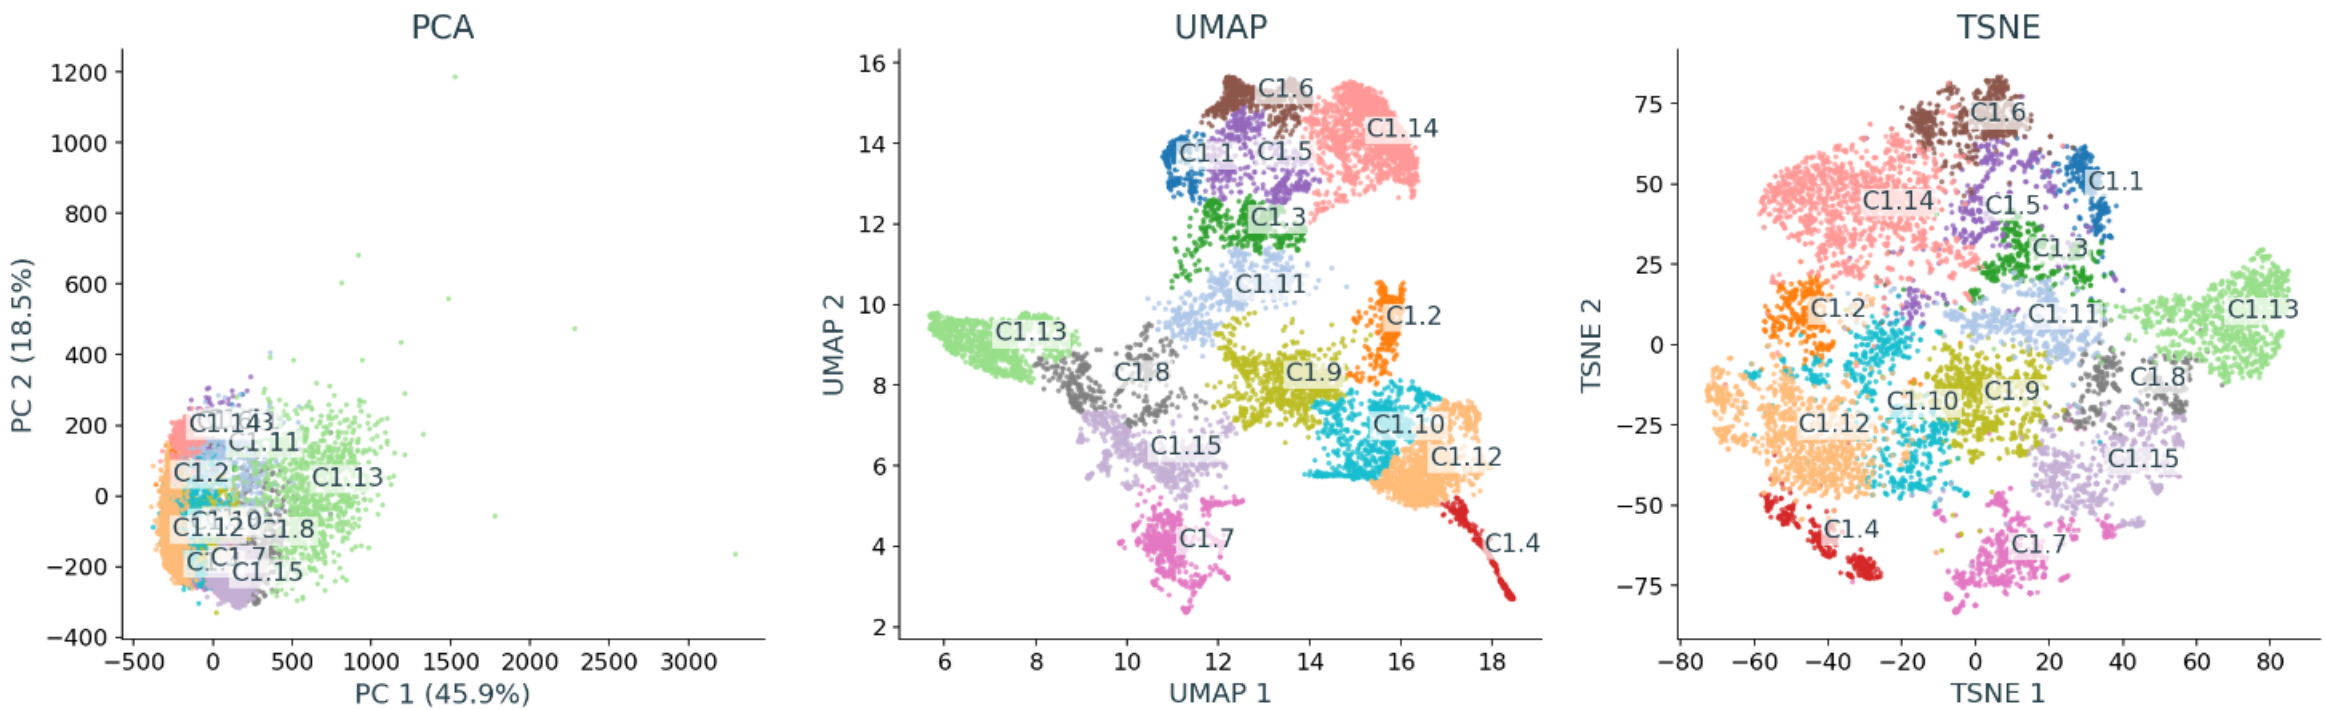


Exploratory K=15: 15 child clusters among 9,856 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

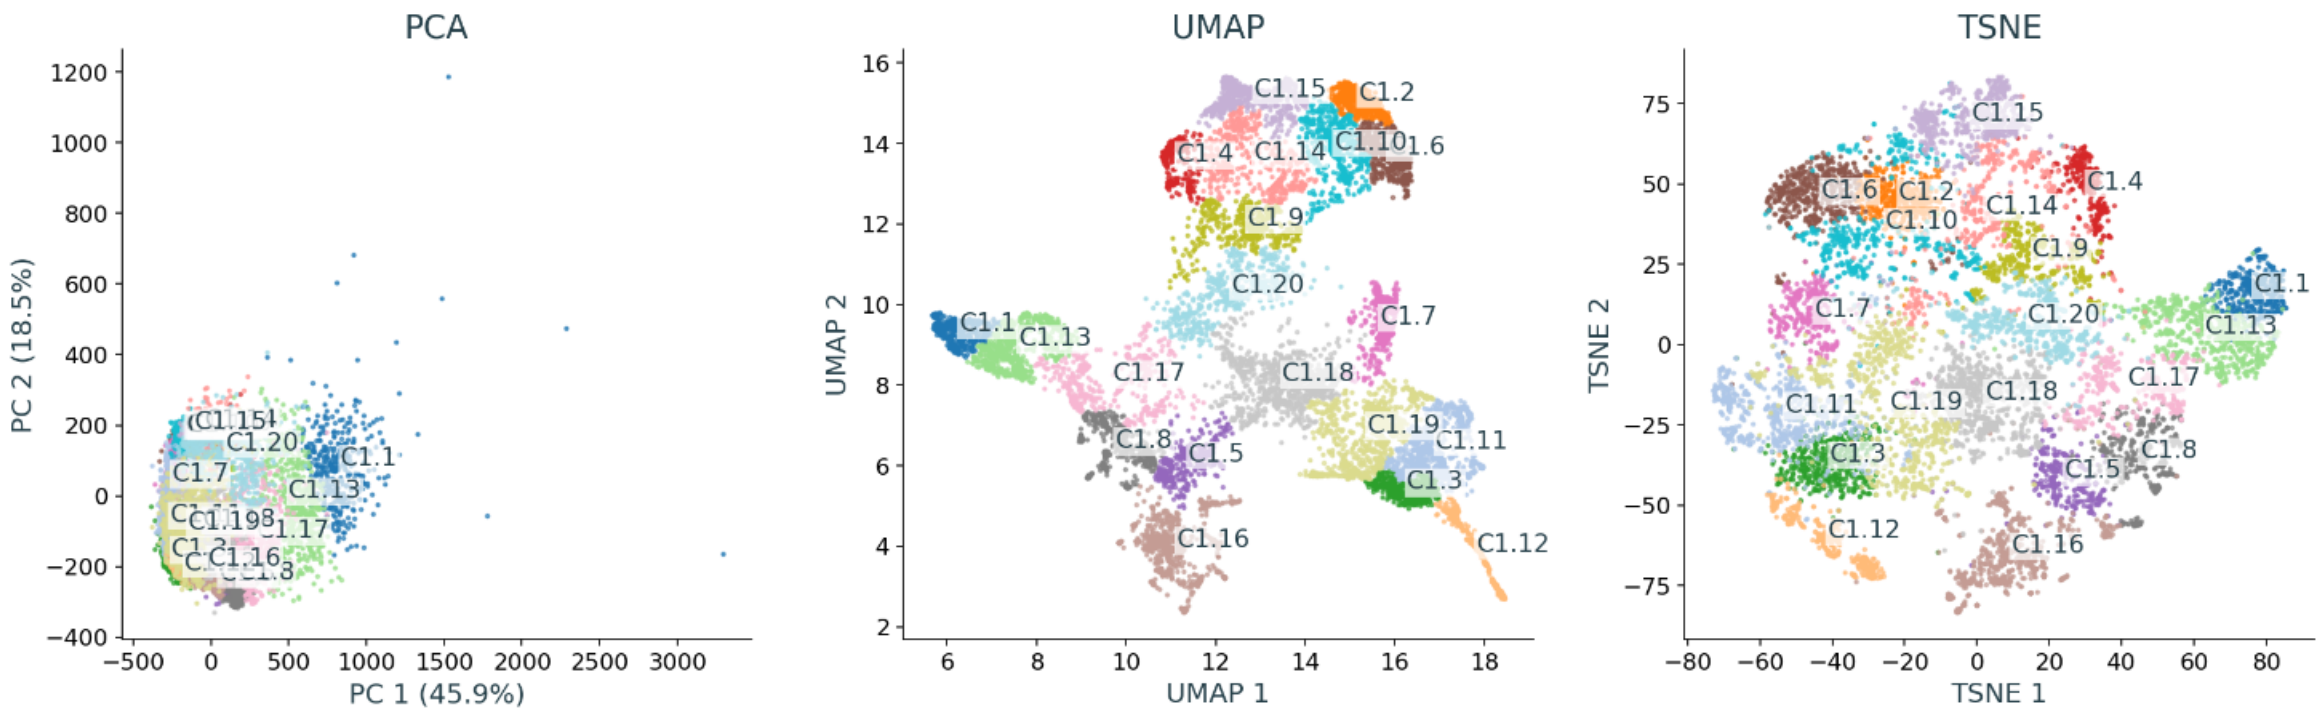


Exploratory K=20: 20 child clusters among 9,856 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

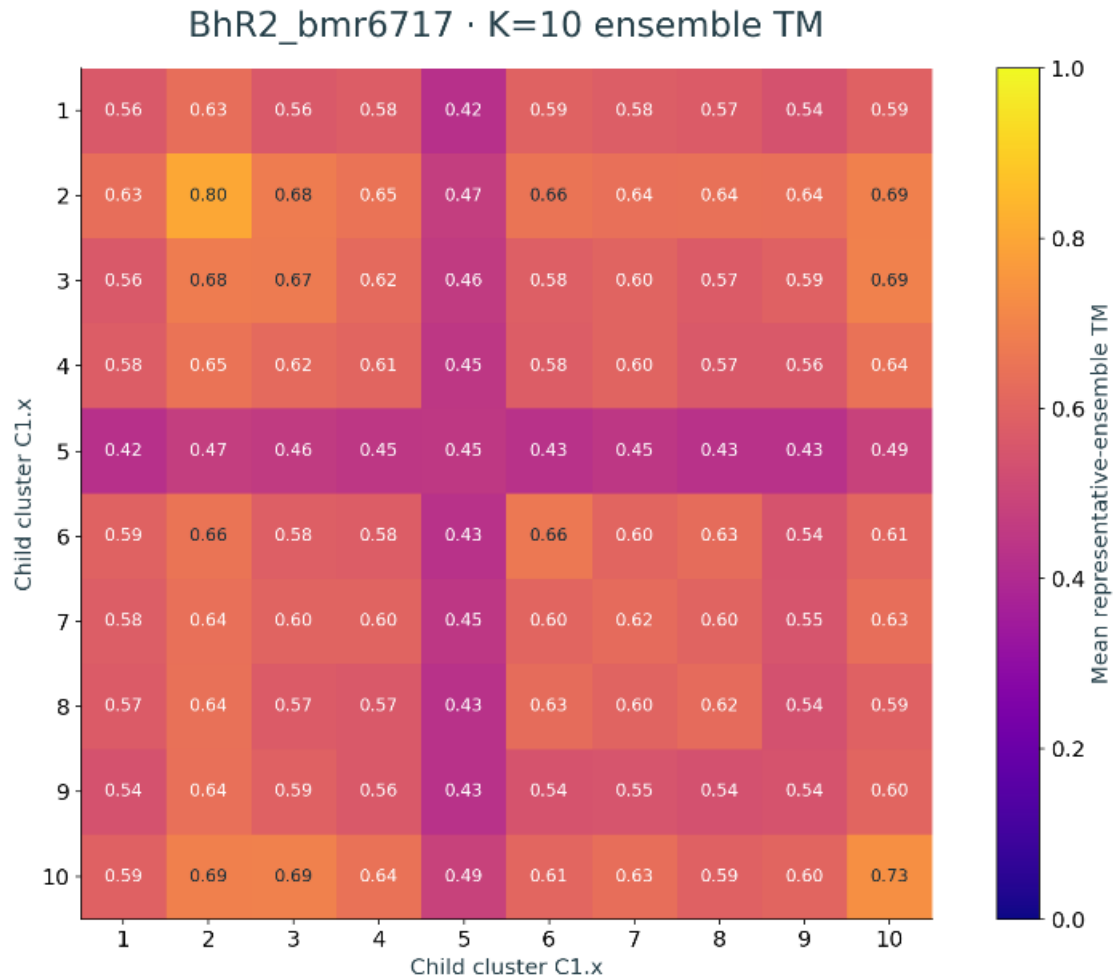

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

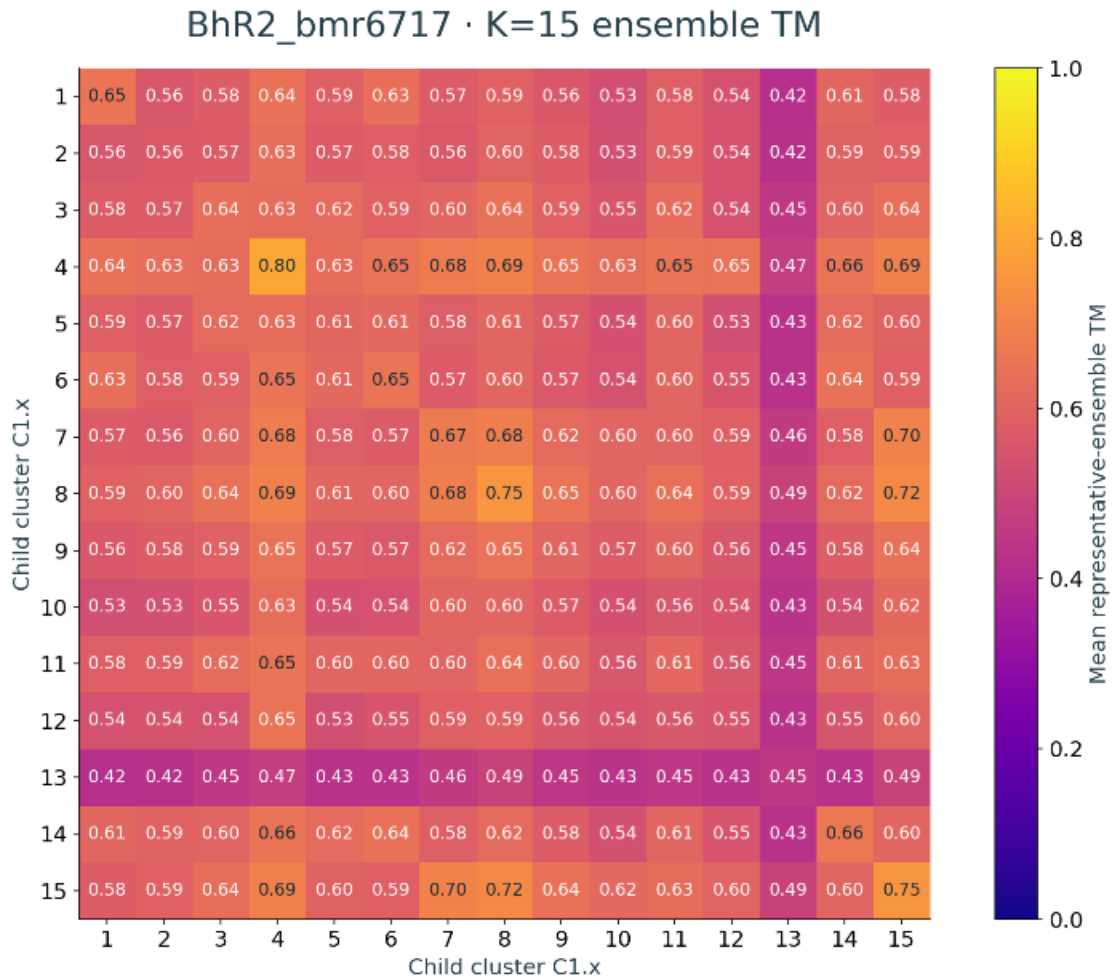

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

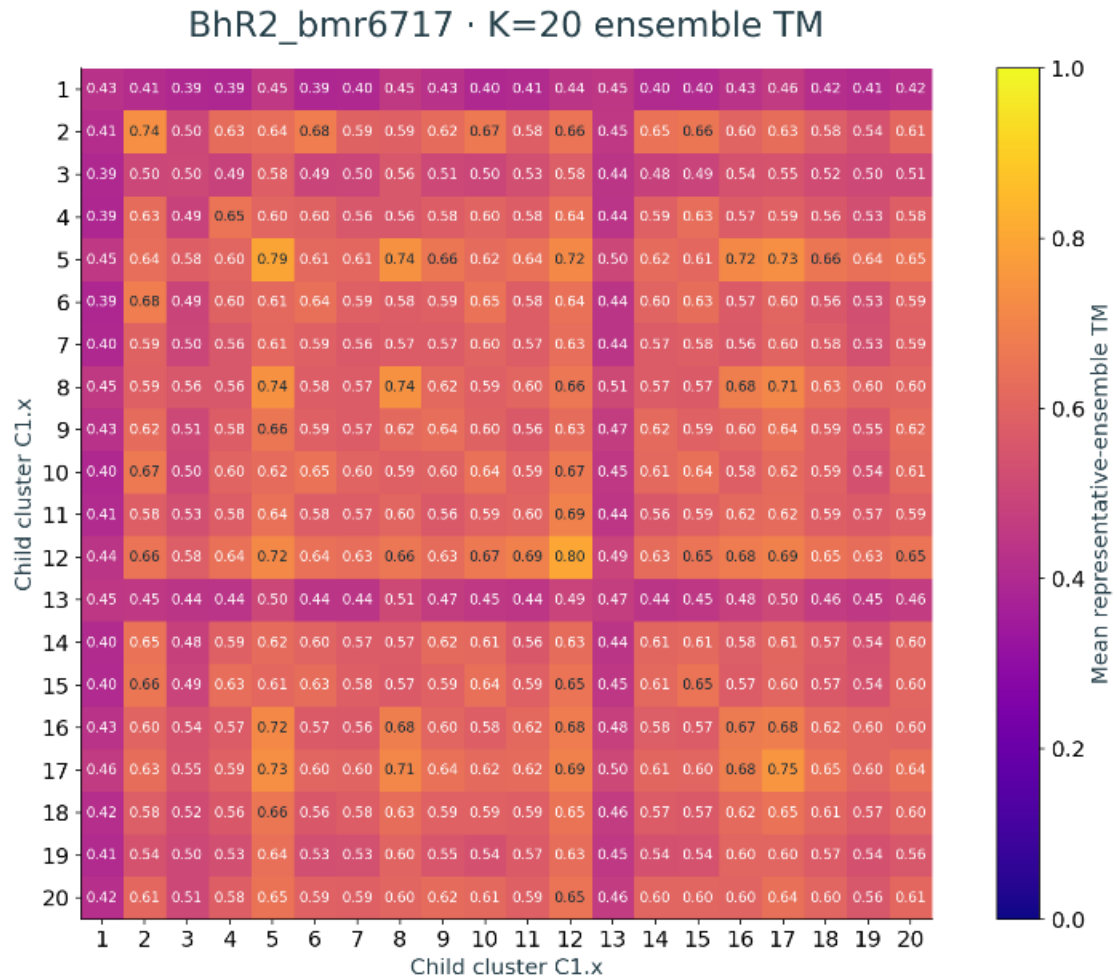

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.