PaT90_bmr7191
Largest-cluster review

Primary analysis: 11,000 models. Cluster 1 contributes 10,028 models to the second pass.

Fresh automatic result: 9 child clusters. Exploratory review covers every K from 2 to 20.

The complete supplied constructs and the frozen primary residue/pair mask define the child analysis.


Fresh PCA, UMAP and t-SNE use only the selected parent-cluster models. Primary labels remain unchanged.

One fixed pool of up to 100 structures supplies all candidate ensemble-TM comparisons.

Within/between TM, cluster population and structural views support per-target review. Final K remains unselected.


Two-level analysis. Child labels identify subsets of primary Cluster 1. The candidate cuts remain exploratory and await per-target review.


PaT90_bmr7191 · Within/between ensemble similarity

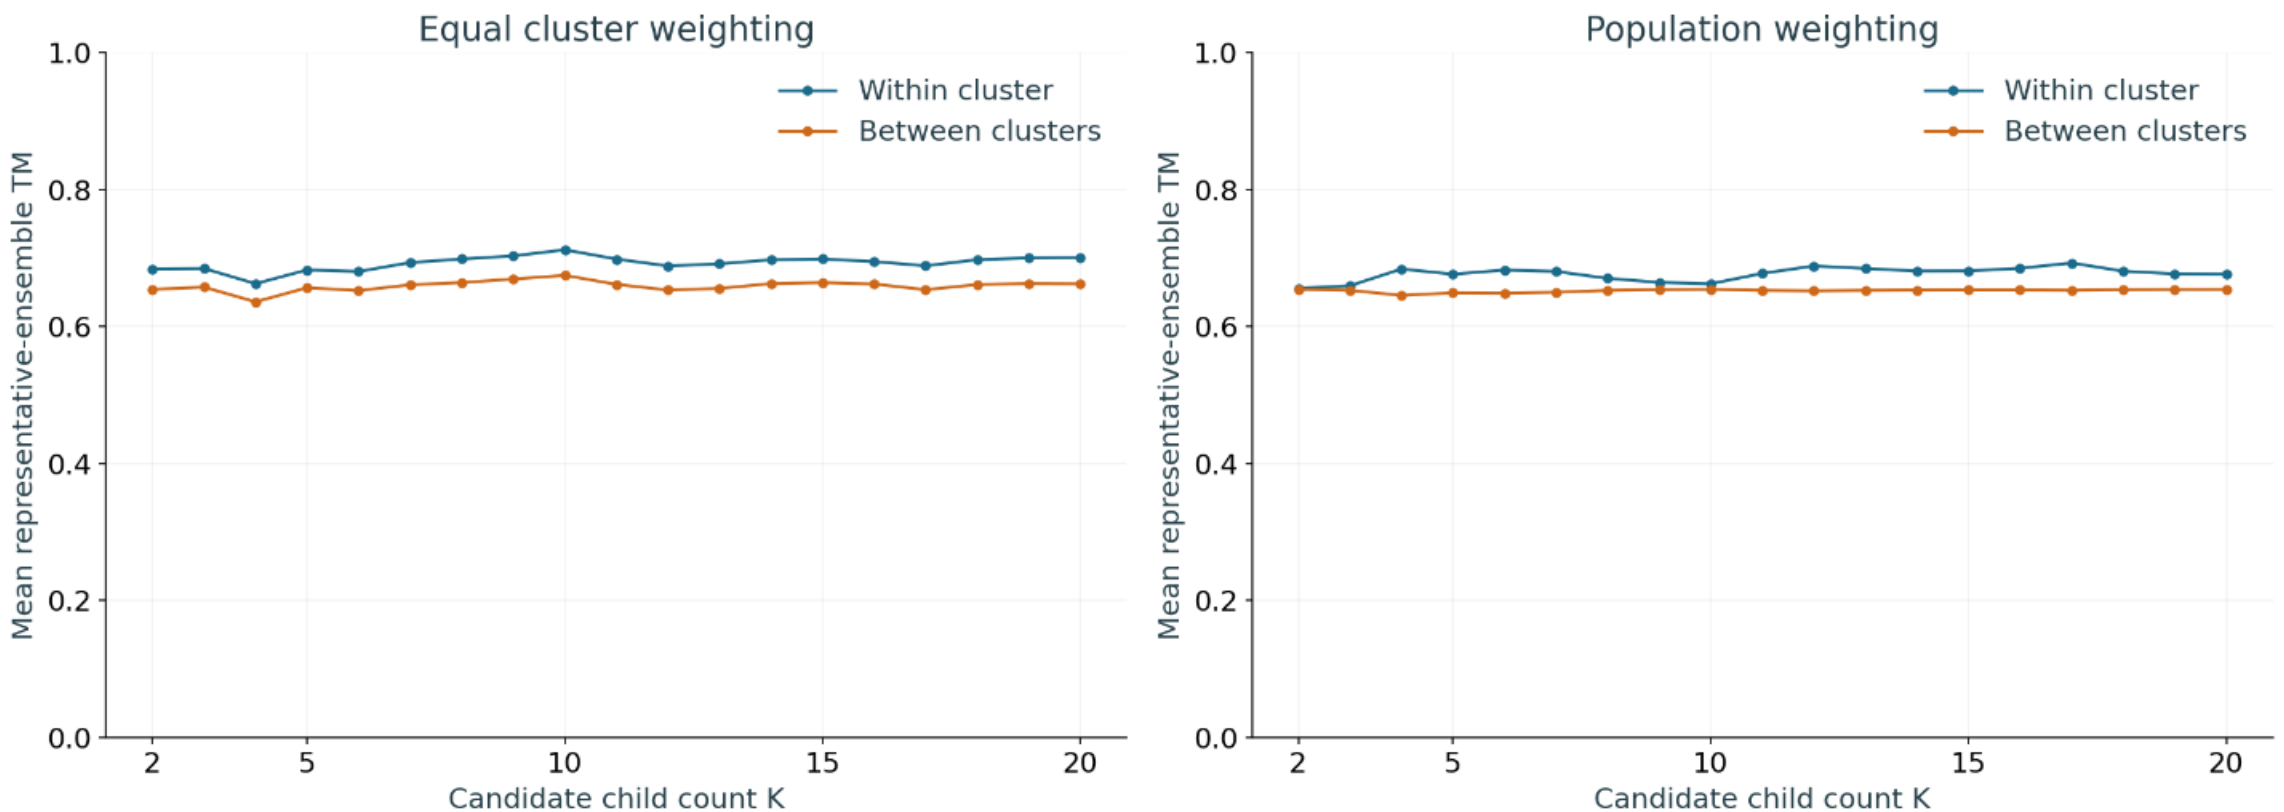

All K values reuse the same fixed representative pool and TM matrix. Population weights reflect finest-group sizes. These are representative estimates, not all-model TM distributions.

PaT90_bmr7191 · Count tradeoffs

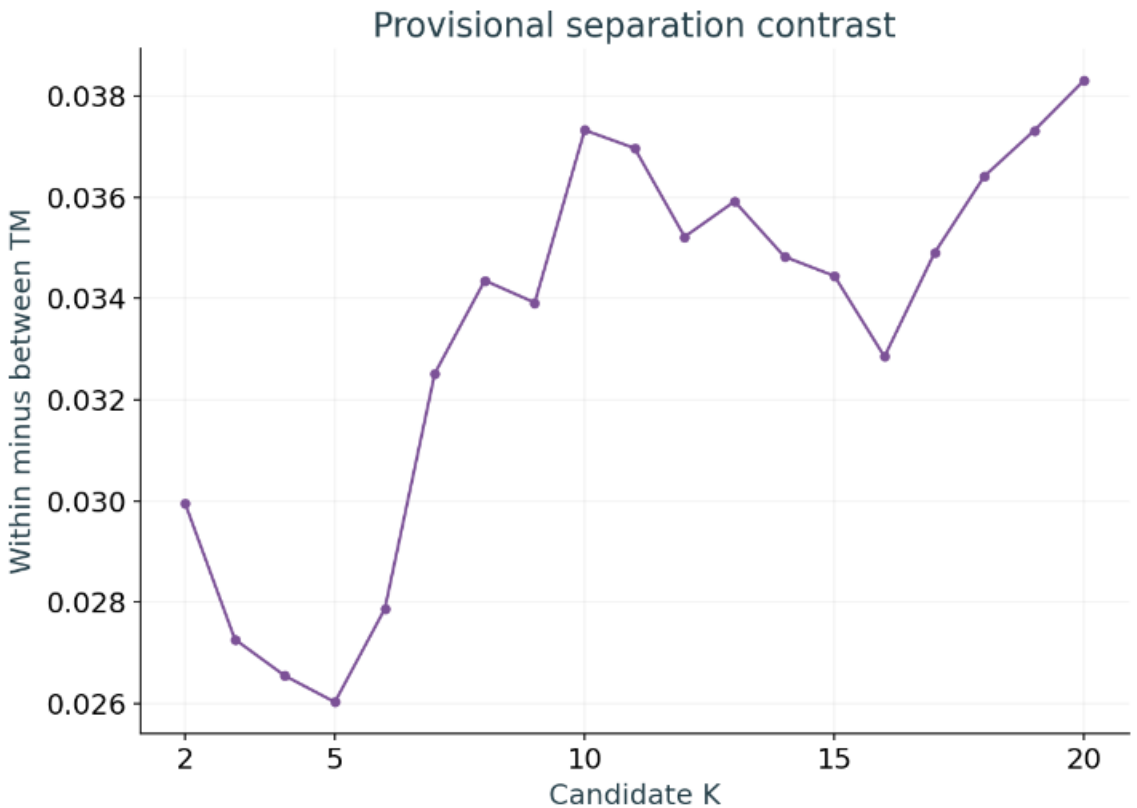

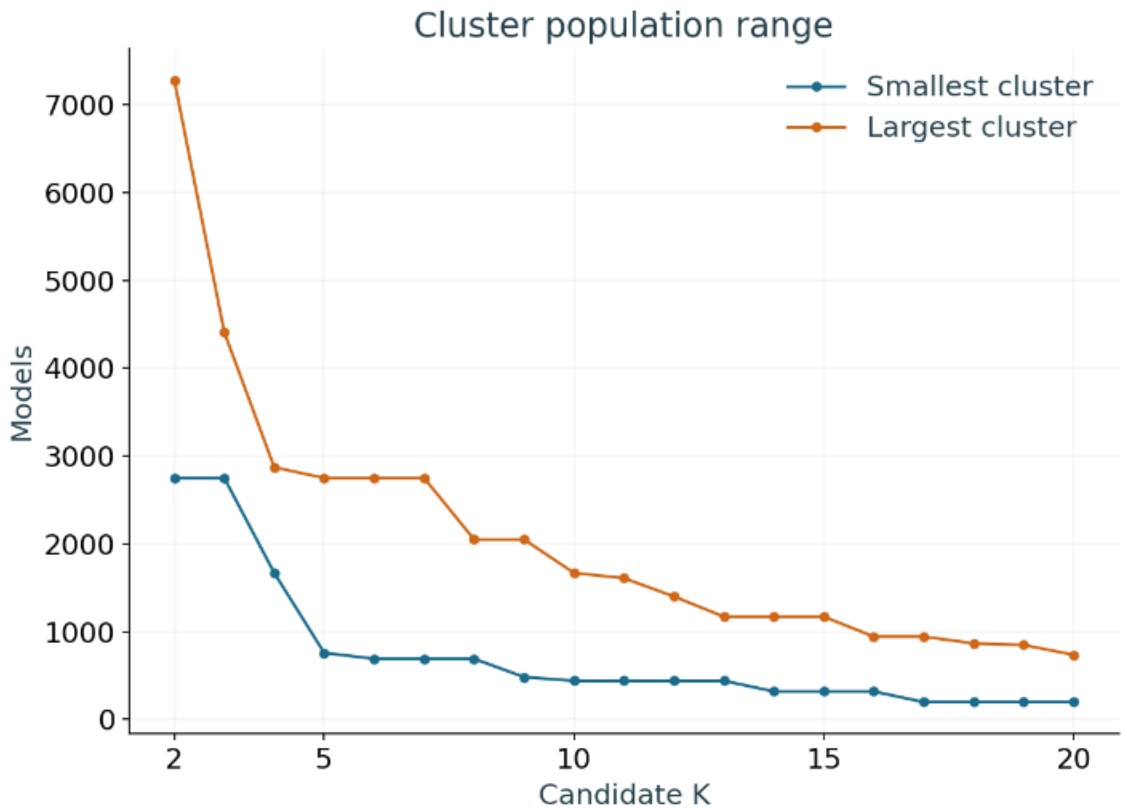


Contrast provides a provisional ranking. Increasing K can overpartition the ensemble, so this score does not determine an ideal state count. Review small groups and their structures.


PaT90_bmr7191 · Every candidate count

K	Within TM	Between TM	Contrast	Min n	Max n	Singletons
2	0.685	0.655	0.030	2,749	7,279	0
3	0.685	0.658	0.027	2,749	4,408	0
4	0.663	0.636	0.027	1,668	2,871	0
5	0.683	0.657	0.026	758	2,749	0
6	0.681	0.653	0.028	691	2,749	0
7	0.694	0.661	0.033	691	2,749	0
8	0.699	0.664	0.034	691	2,049	0
9	0.703	0.670	0.034	483	2,049	0
10	0.712	0.675	0.037	440	1,668	0
11	0.699	0.662	0.037	440	1,609	0
12	0.689	0.654	0.035	440	1,400	0
13	0.692	0.656	0.036	440	1,170	0
14	0.698	0.663	0.035	319	1,170	0
15	0.699	0.664	0.034	319	1,170	0
16	0.695	0.662	0.033	319	943	0
17	0.689	0.654	0.035	198	943	0
18	0.698	0.662	0.036	198	866	0
19	0.700	0.663	0.037	198	848	0
20	0.701	0.663	0.038	198	736	0


Equal-cluster TM estimates exclude self pairs. Unavailable within-cluster values occur when representative support is insufficient. The full CSV preserves every value and population count.

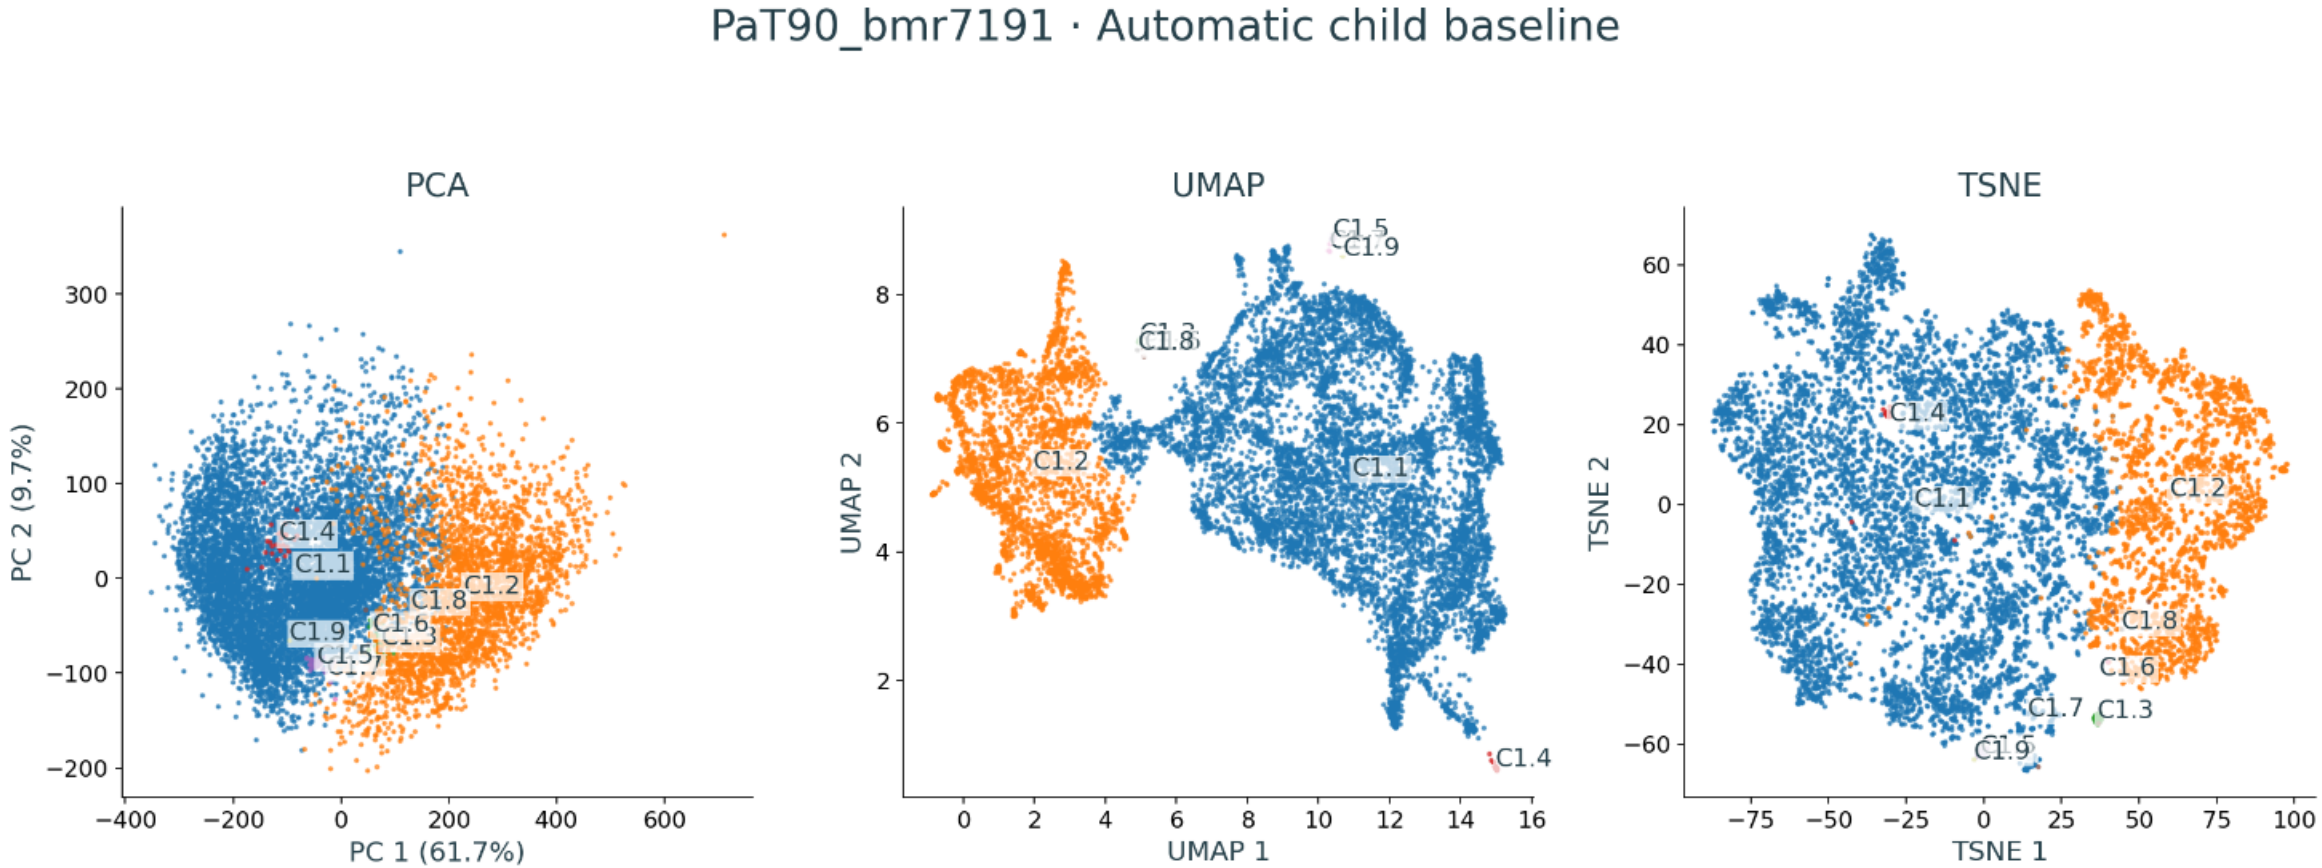


Automatic child baseline: 9 child clusters among 10,028 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

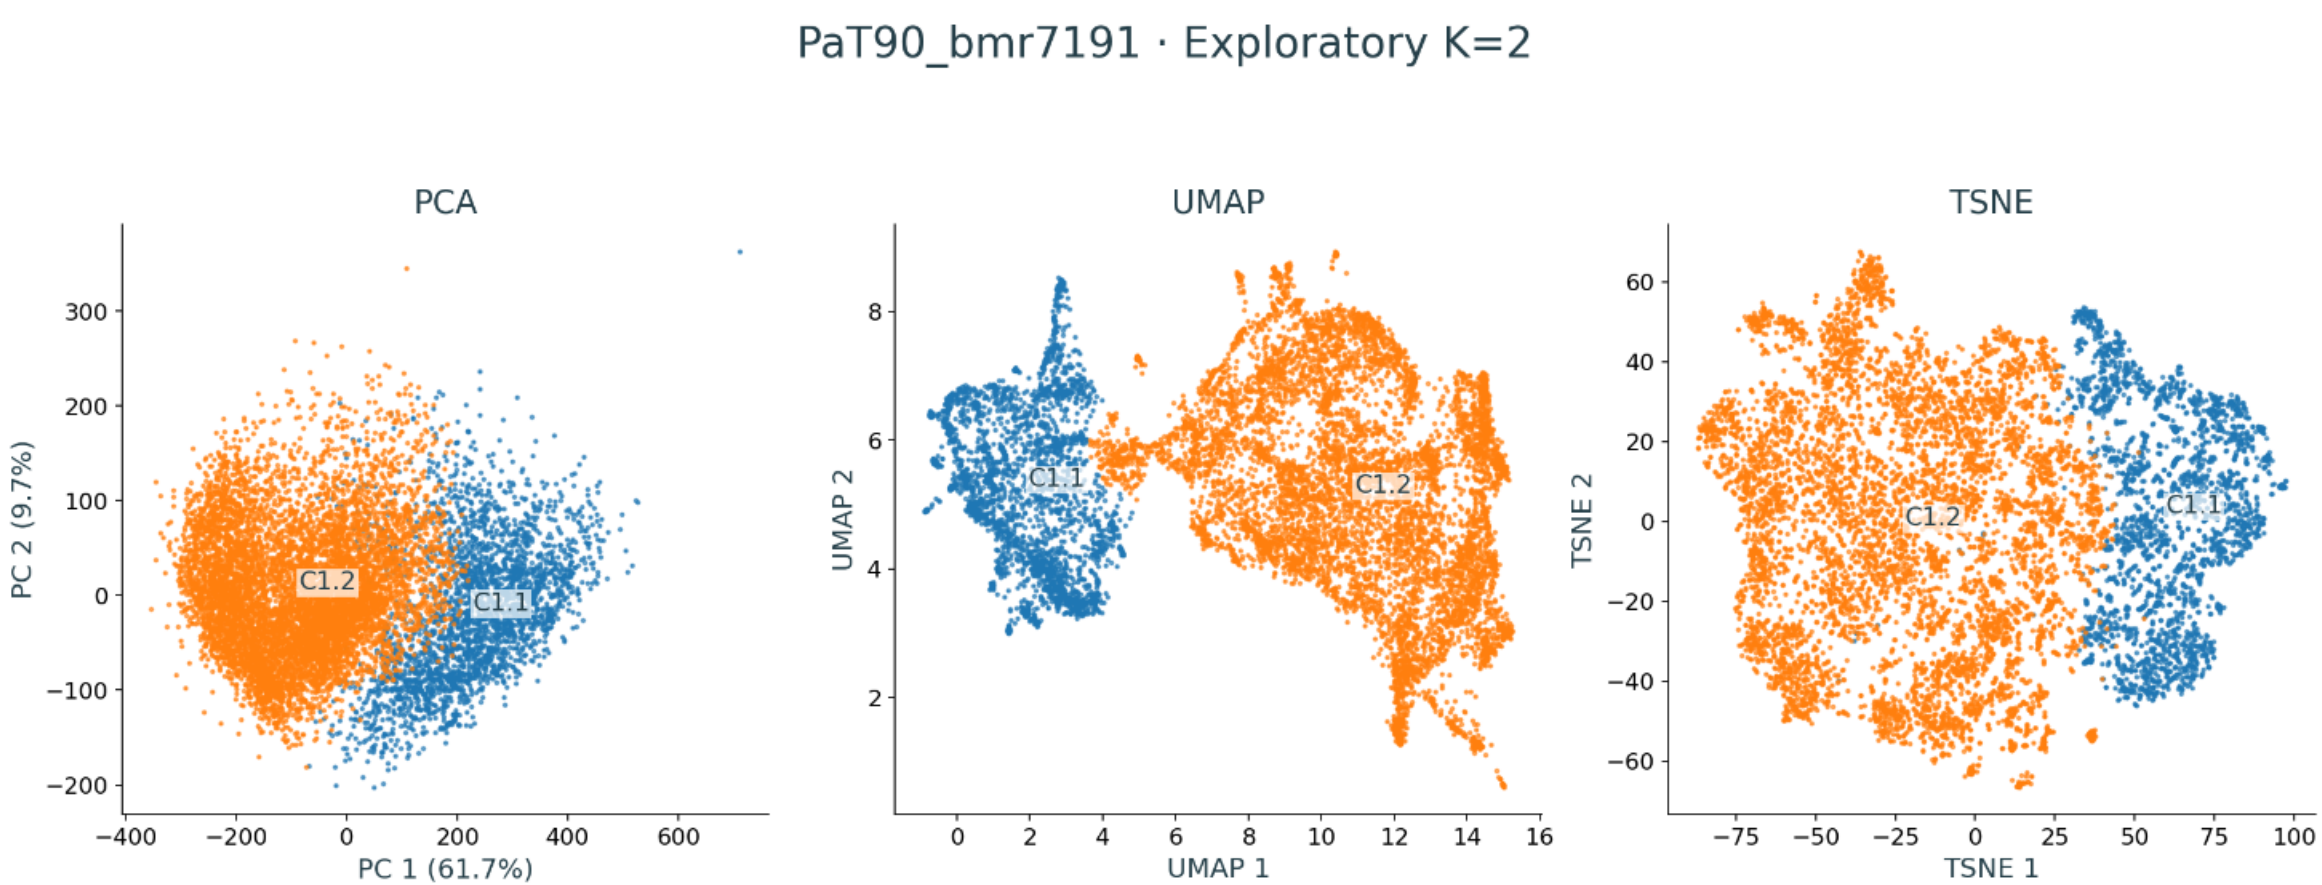


Exploratory K=2: 2 child clusters among 10,028 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

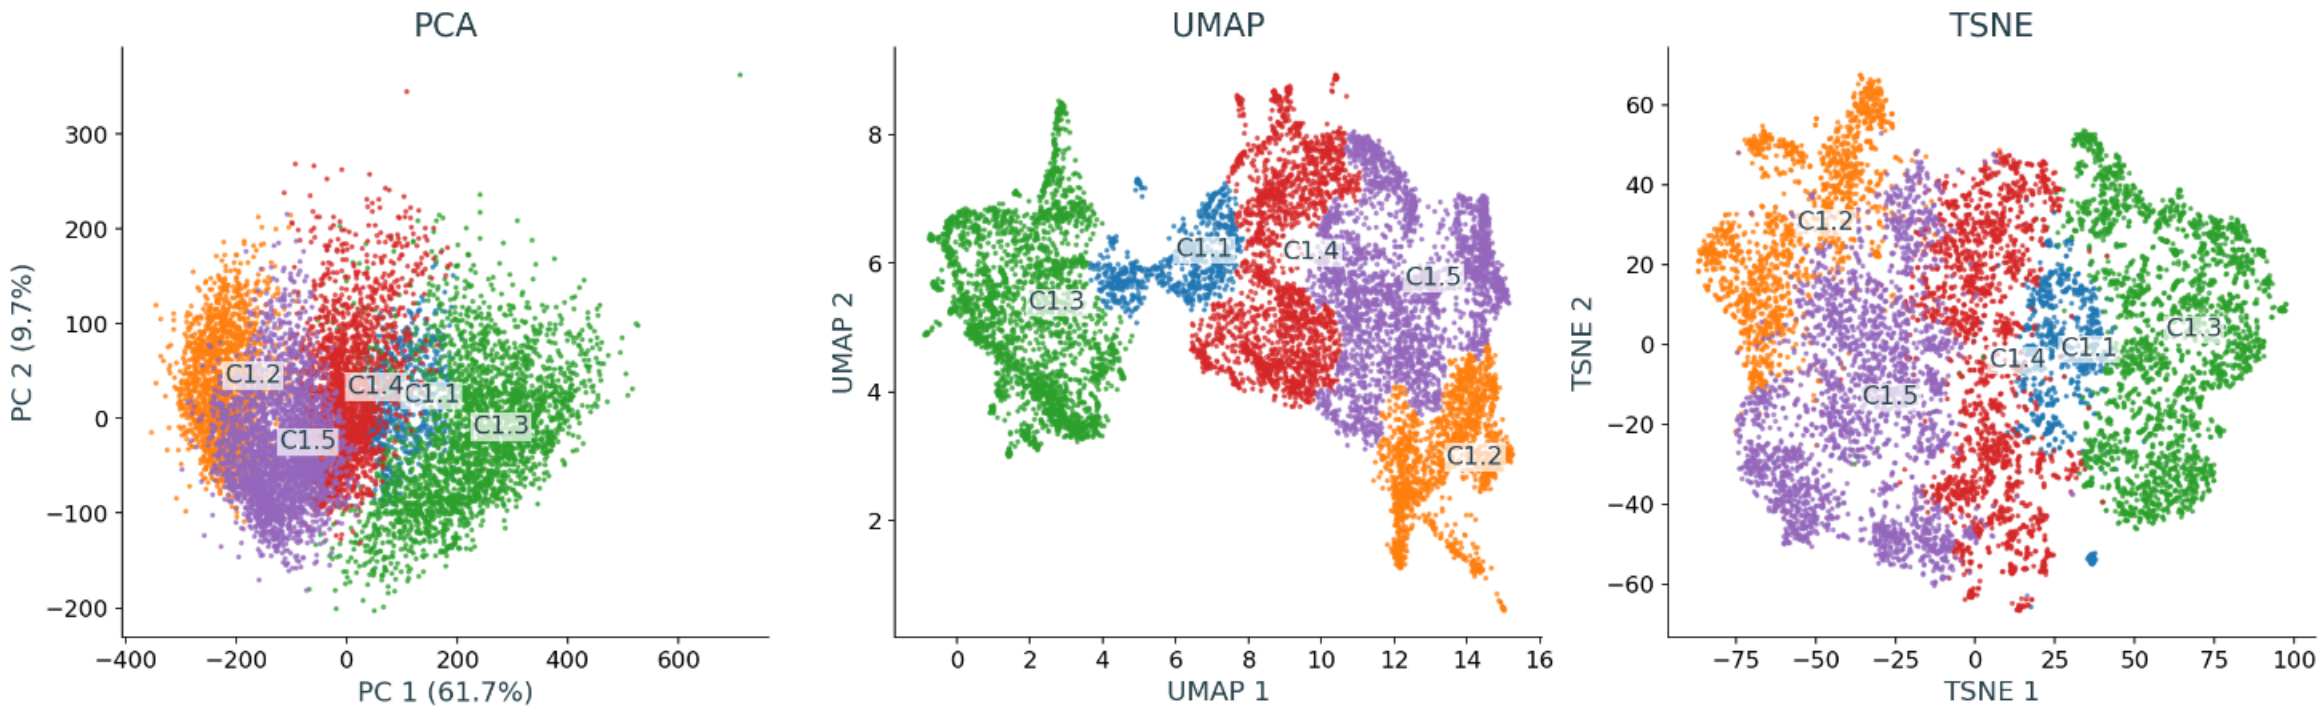


Exploratory K=5: 5 child clusters among 10,028 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

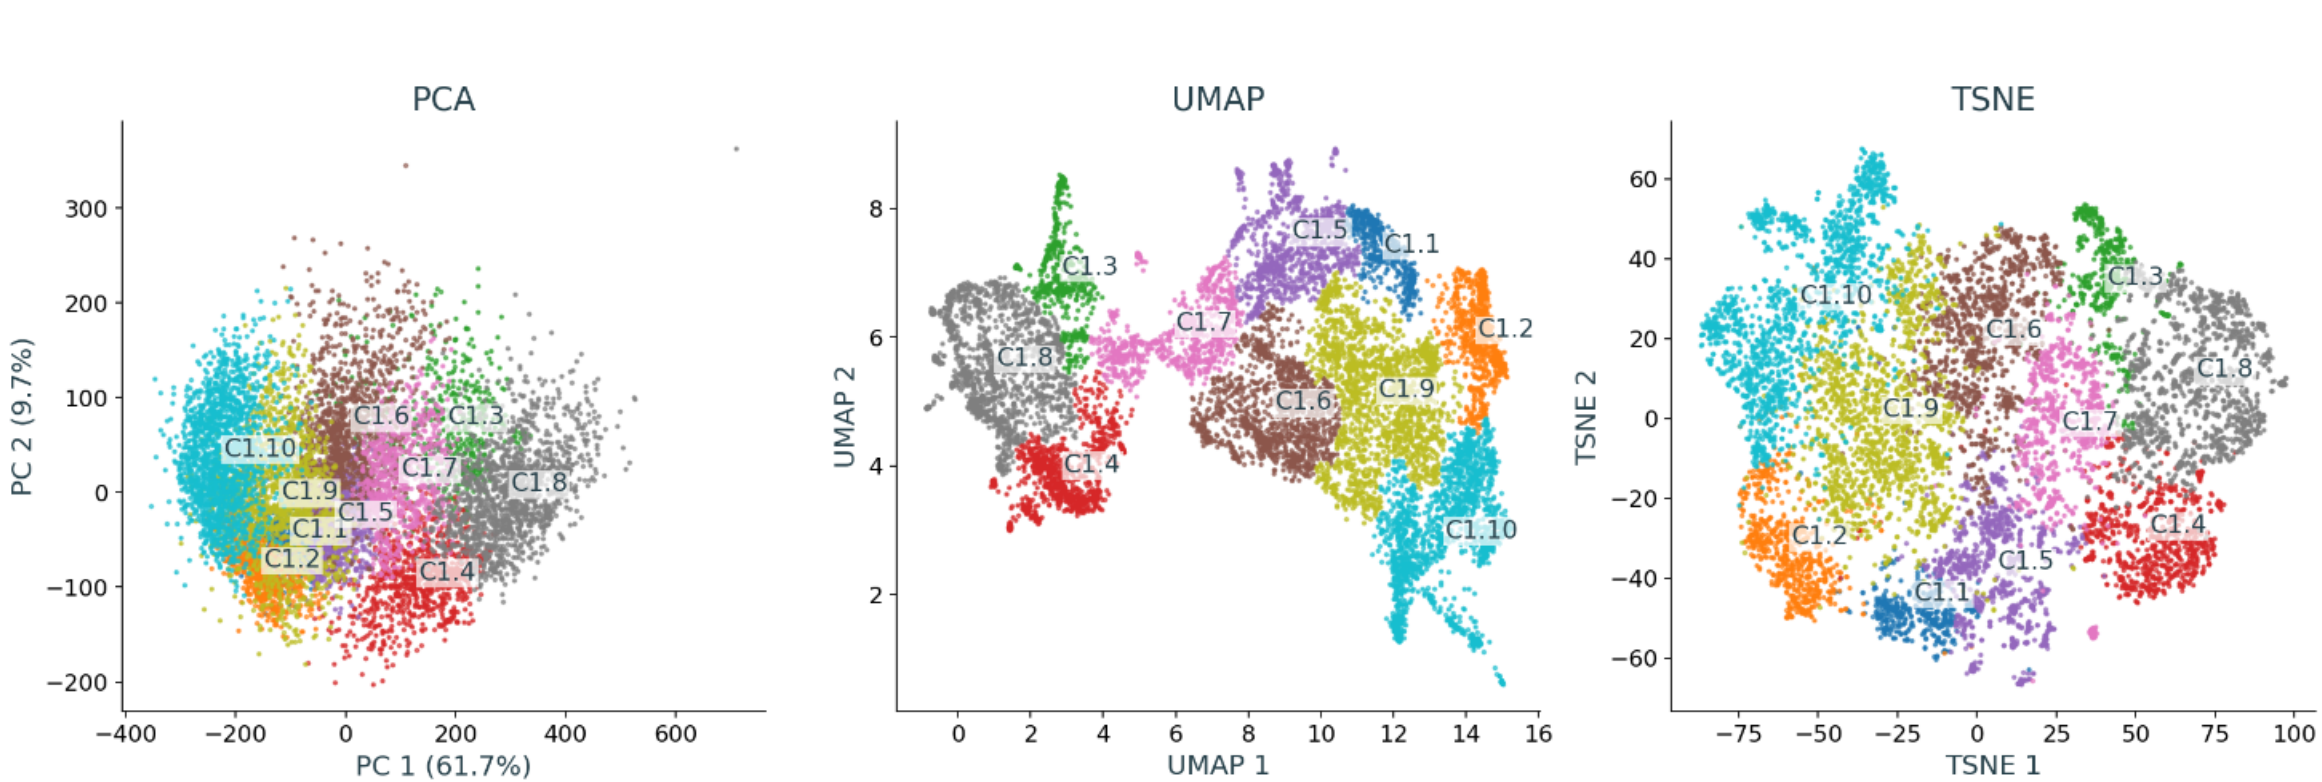


Exploratory K=10: 10 child clusters among 10,028 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

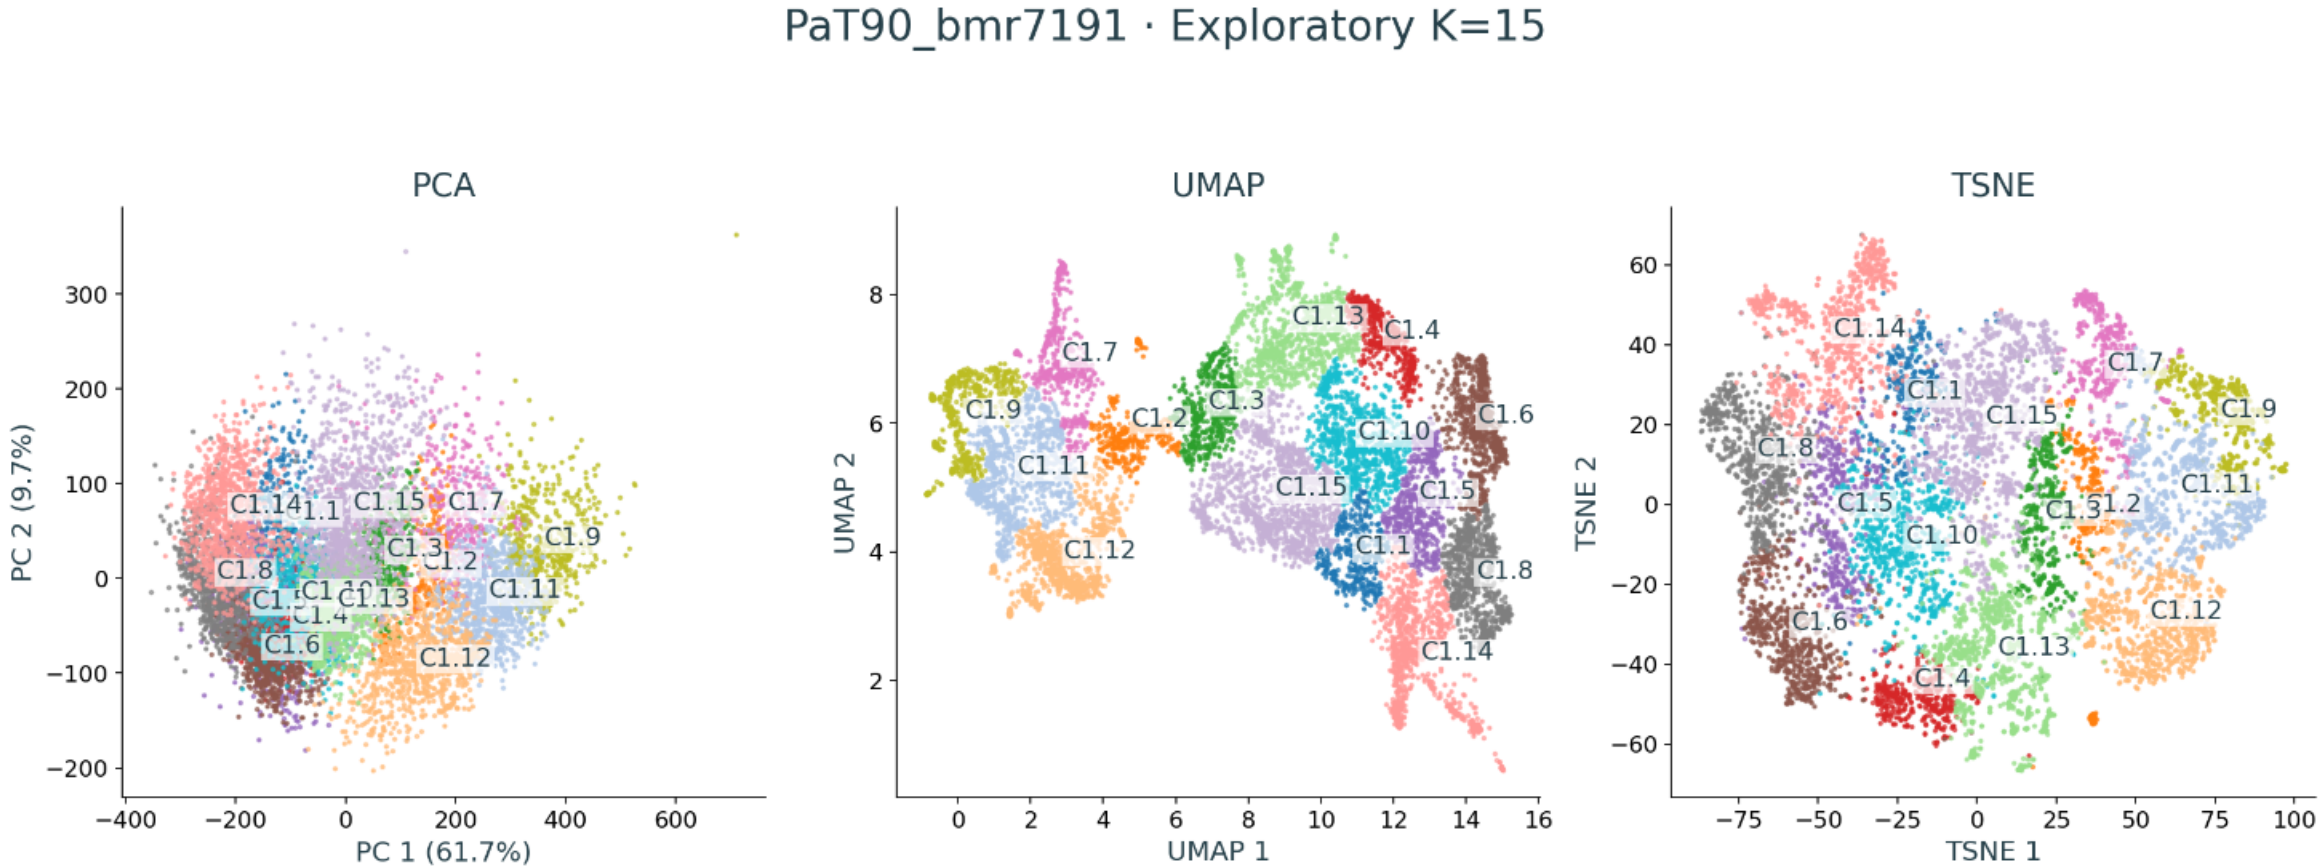


Exploratory K=15: 15 child clusters among 10,028 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

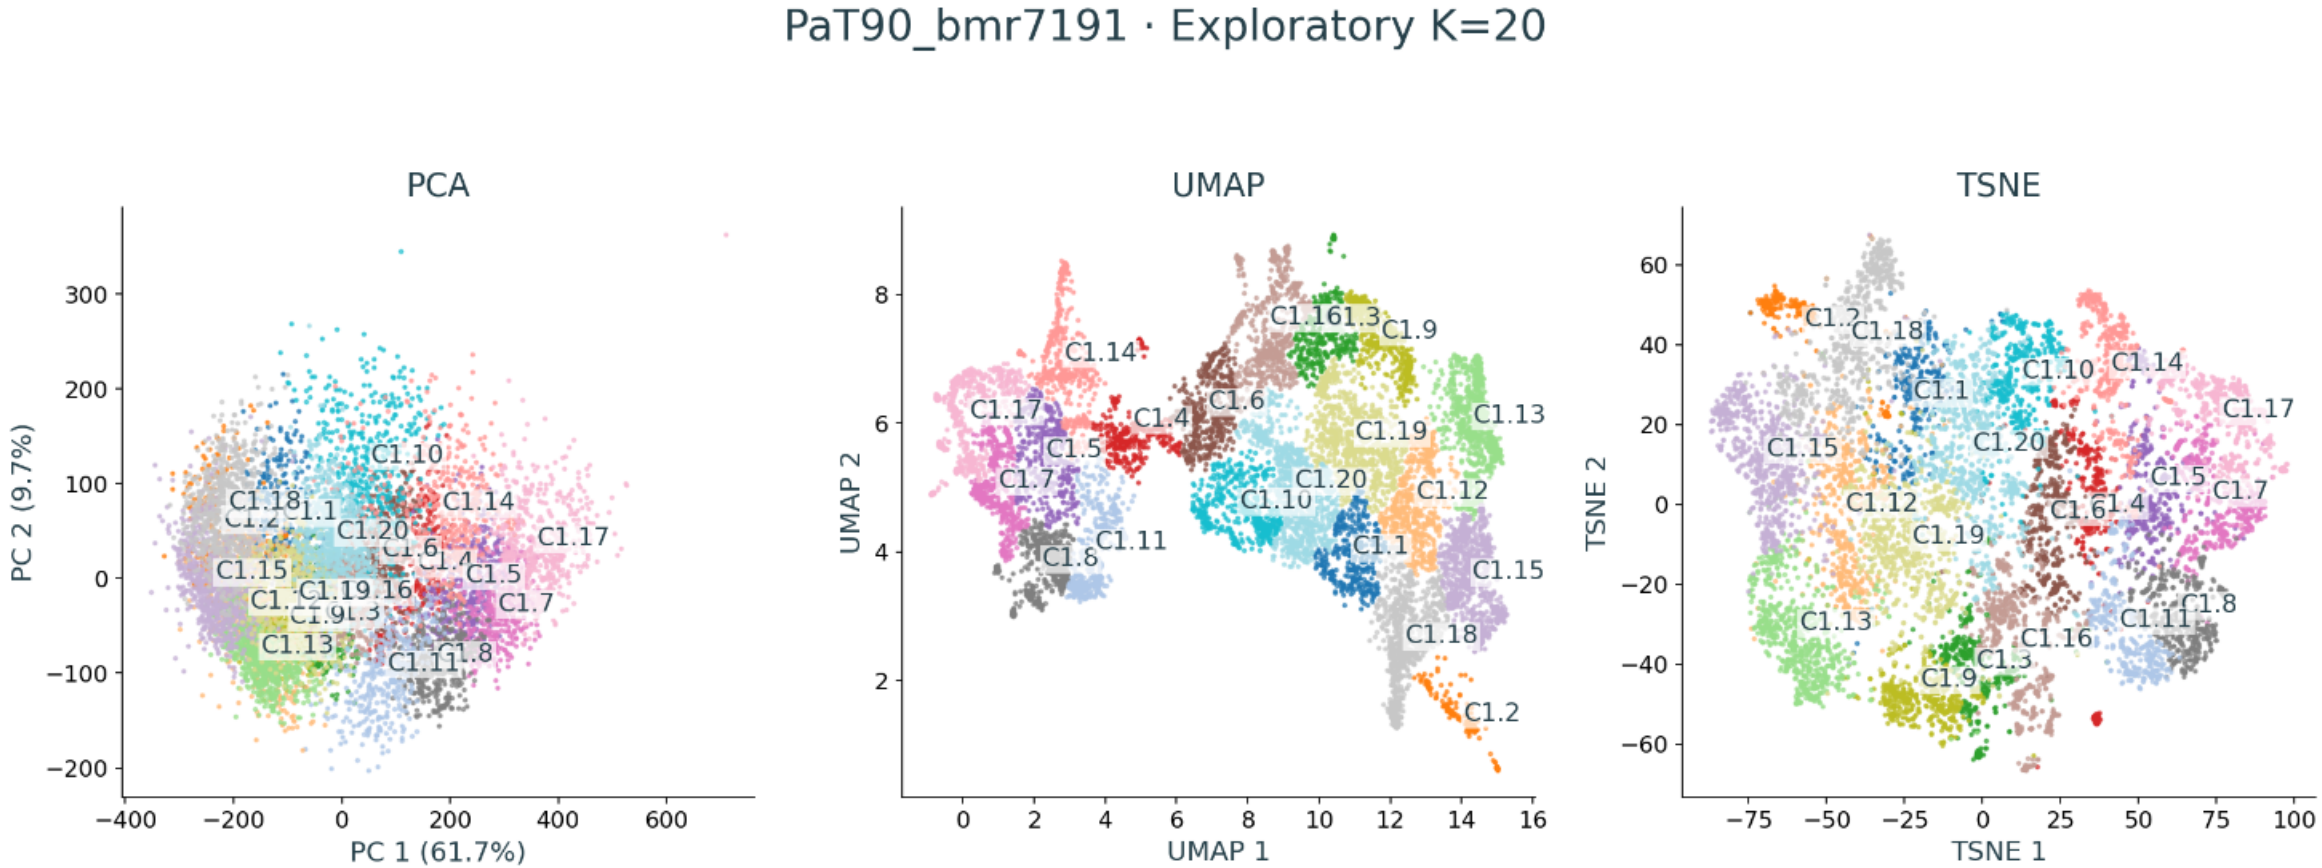


Exploratory K=20: 20 child clusters among 10,028 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

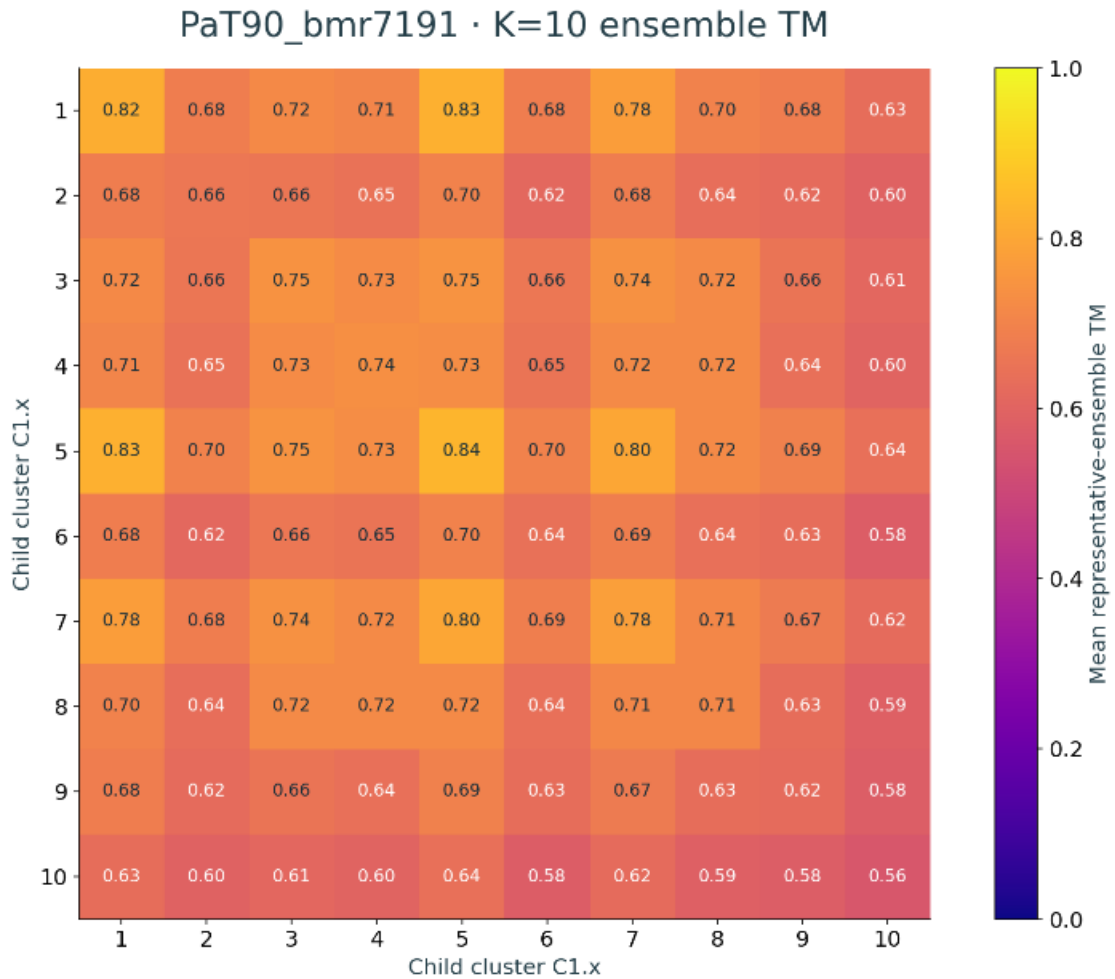

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

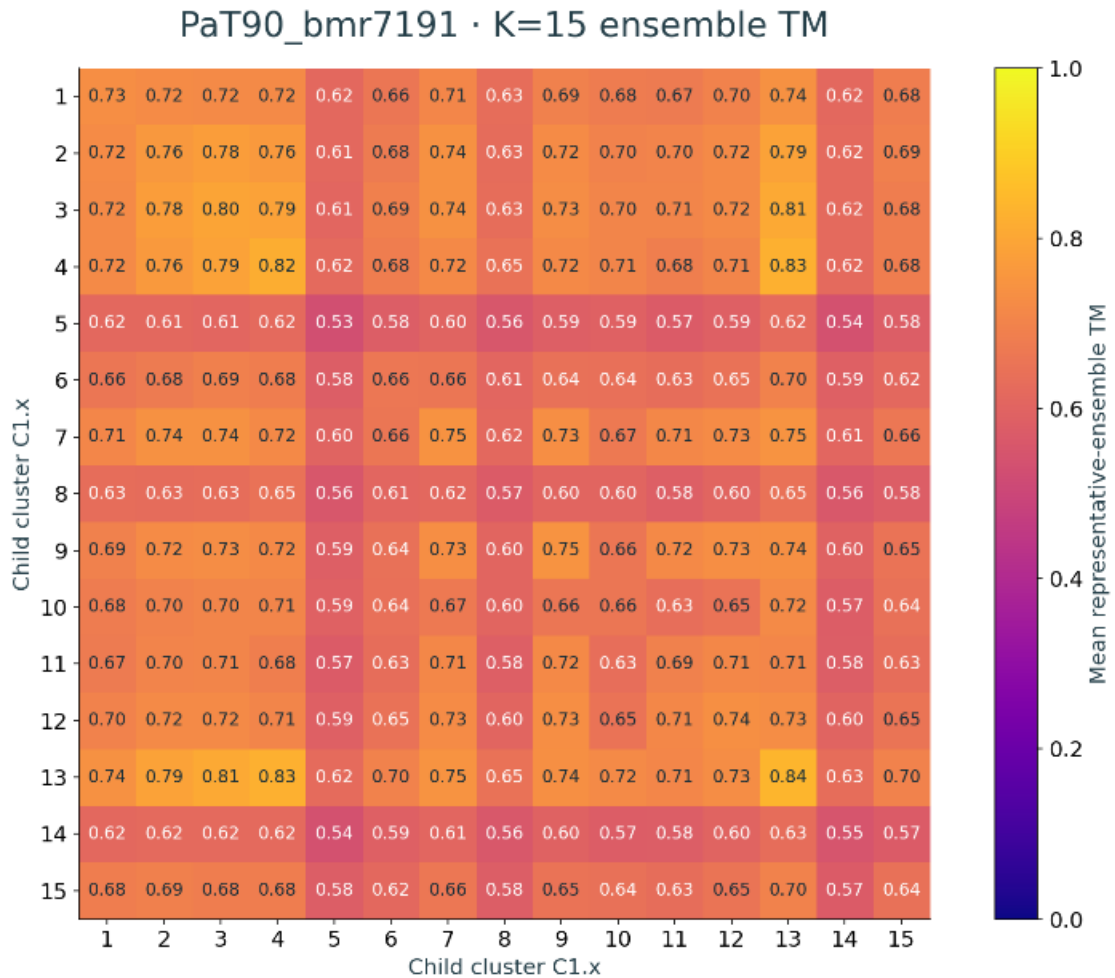

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

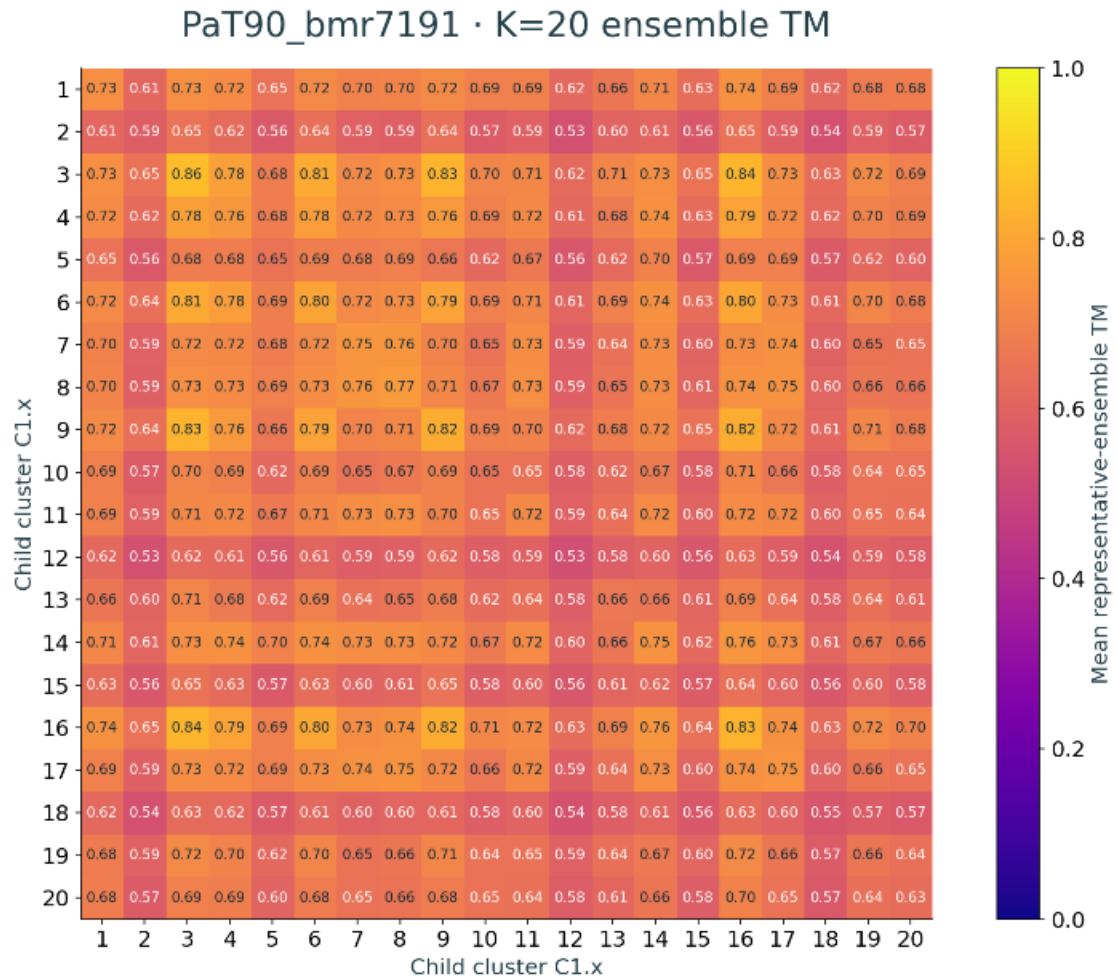

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.