SR215_bmr6366
Largest-cluster review

Primary analysis: 11,000 models. Cluster 1 contributes 10,120 models to the second pass.

Fresh automatic result: 3 child clusters. Exploratory review covers every K from 2 to 20.

The complete supplied constructs and the frozen primary residue/pair mask define the child analysis.


Fresh PCA, UMAP and t-SNE use only the selected parent-cluster models. Primary labels remain unchanged.

One fixed pool of up to 100 structures supplies all candidate ensemble-TM comparisons.

Within/between TM, cluster population and structural views support per-target review. Final K remains unselected.


Two-level analysis. Child labels identify subsets of primary Cluster 1. The candidate cuts remain exploratory and await per-target review.


SR215_bmr6366 · Within/between ensemble similarity

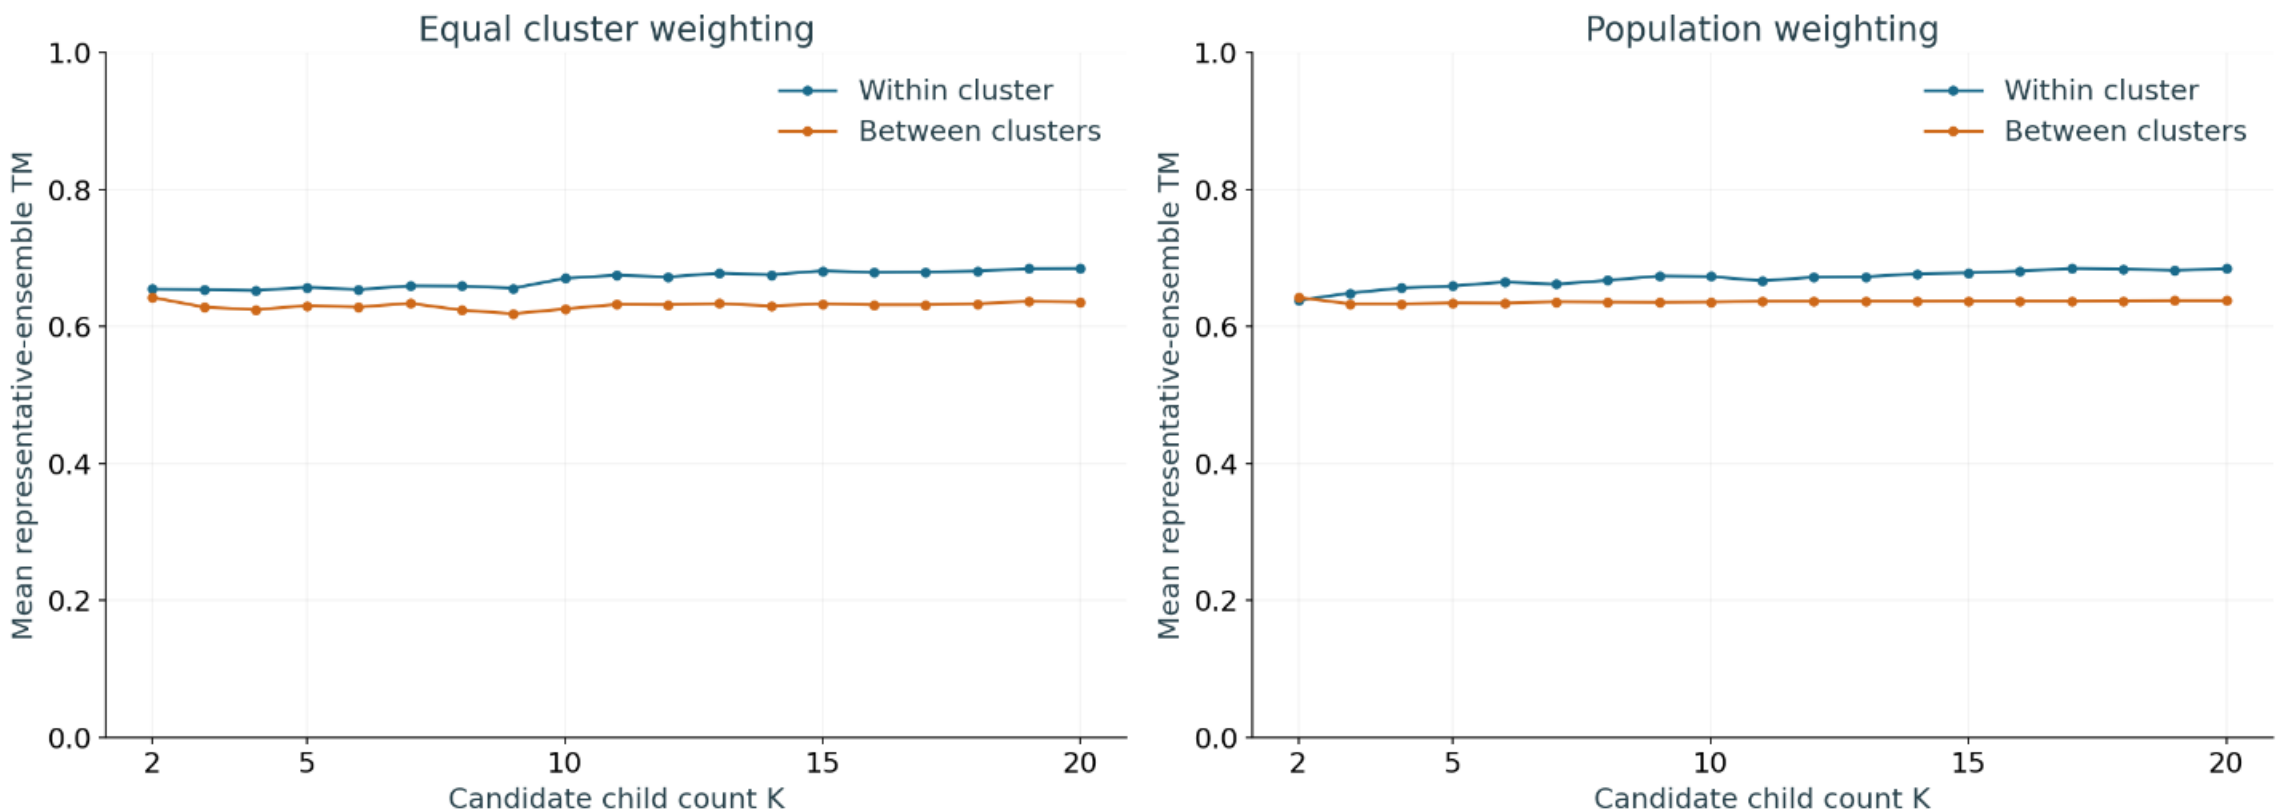

All K values reuse the same fixed representative pool and TM matrix. Population weights reflect finest-group sizes. These are representative estimates, not all-model TM distributions.

SR215_bmr6366 · Count tradeoffs

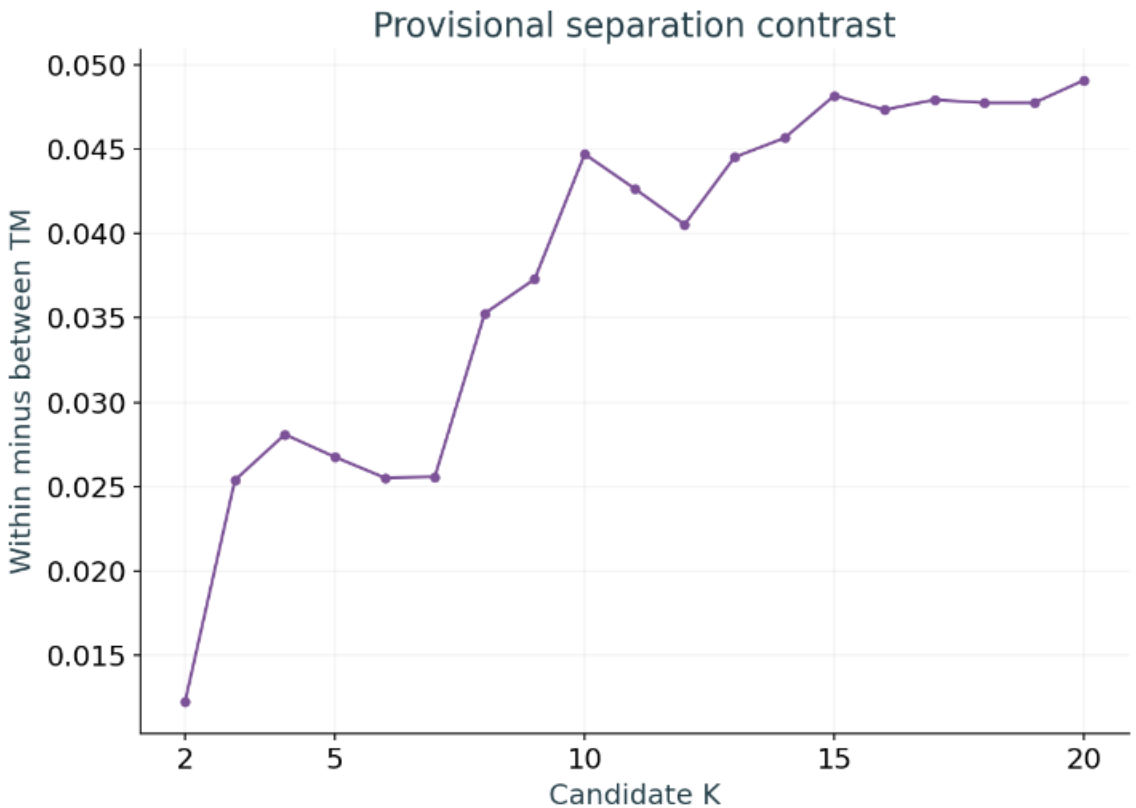

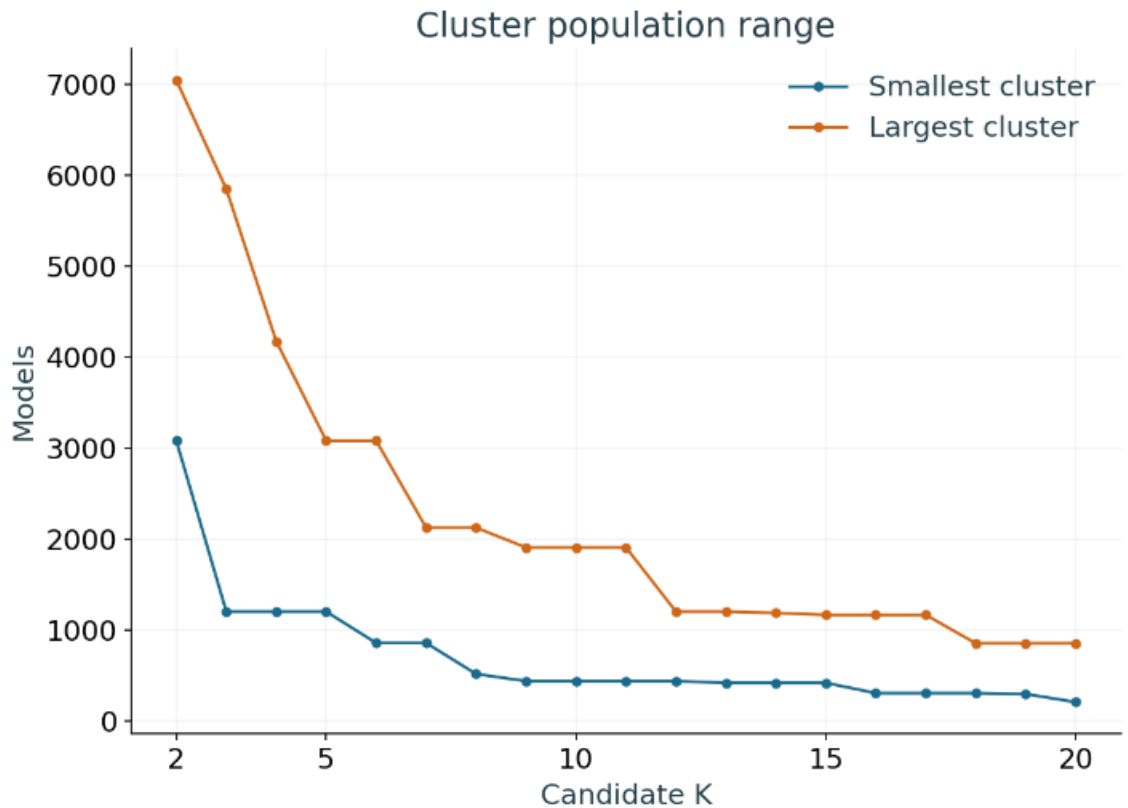


Contrast provides a provisional ranking. Increasing K can overpartition the ensemble, so this score does not determine an ideal state count. Review small groups and their structures.


SR215_bmr6366 · Every candidate count

K	Within TM	Between TM	Contrast	Min n	Max n	Singletons
2	0.655	0.643	0.012	3,077	7,043	0
3	0.654	0.629	0.025	1,198	5,845	0
4	0.653	0.625	0.028	1,198	4,171	0
5	0.658	0.631	0.027	1,198	3,077	0
6	0.654	0.629	0.026	853	3,077	0
7	0.660	0.634	0.026	853	2,121	0
8	0.659	0.624	0.035	512	2,121	0
9	0.656	0.619	0.037	434	1,903	0
10	0.671	0.626	0.045	434	1,903	0
11	0.675	0.633	0.043	434	1,903	0
12	0.673	0.632	0.041	434	1,198	0
13	0.678	0.634	0.045	414	1,198	0
14	0.676	0.630	0.046	414	1,183	0
15	0.682	0.634	0.048	414	1,162	0
16	0.679	0.632	0.047	302	1,162	0
17	0.680	0.632	0.048	302	1,162	0
18	0.681	0.634	0.048	302	849	0
19	0.685	0.637	0.048	292	849	0
20	0.685	0.636	0.049	203	849	0


Equal-cluster TM estimates exclude self pairs. Unavailable within-cluster values occur when representative support is insufficient. The full CSV preserves every value and population count.

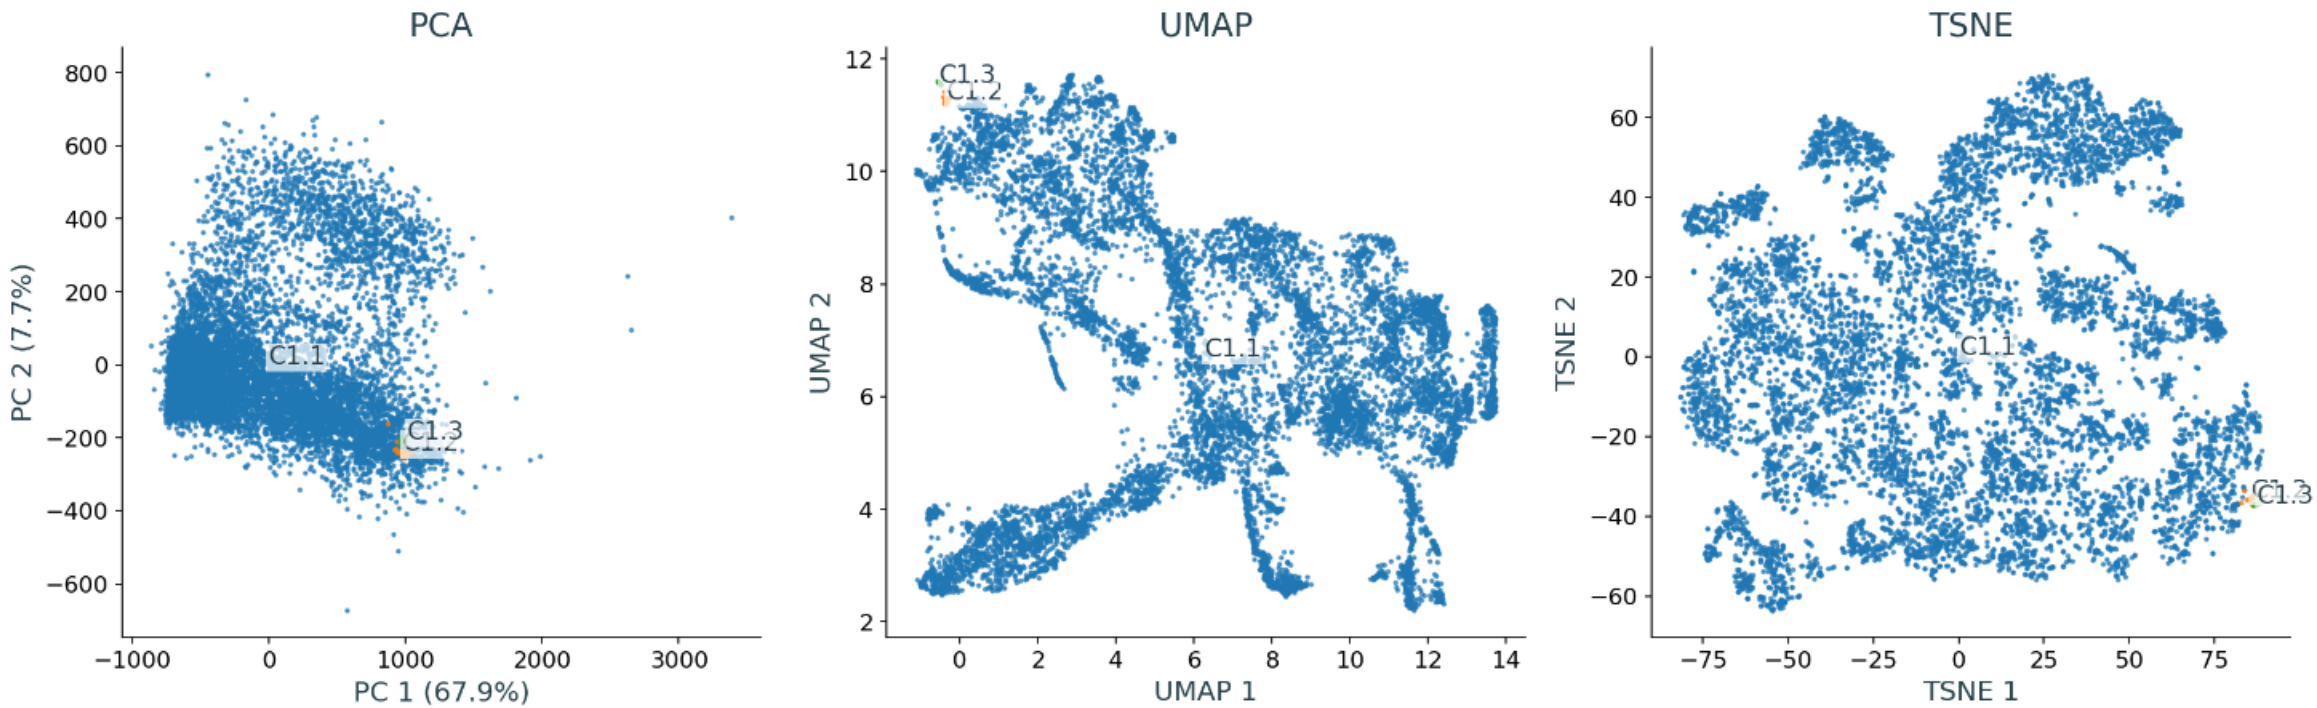


Automatic child baseline: 3 child clusters among 10,120 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

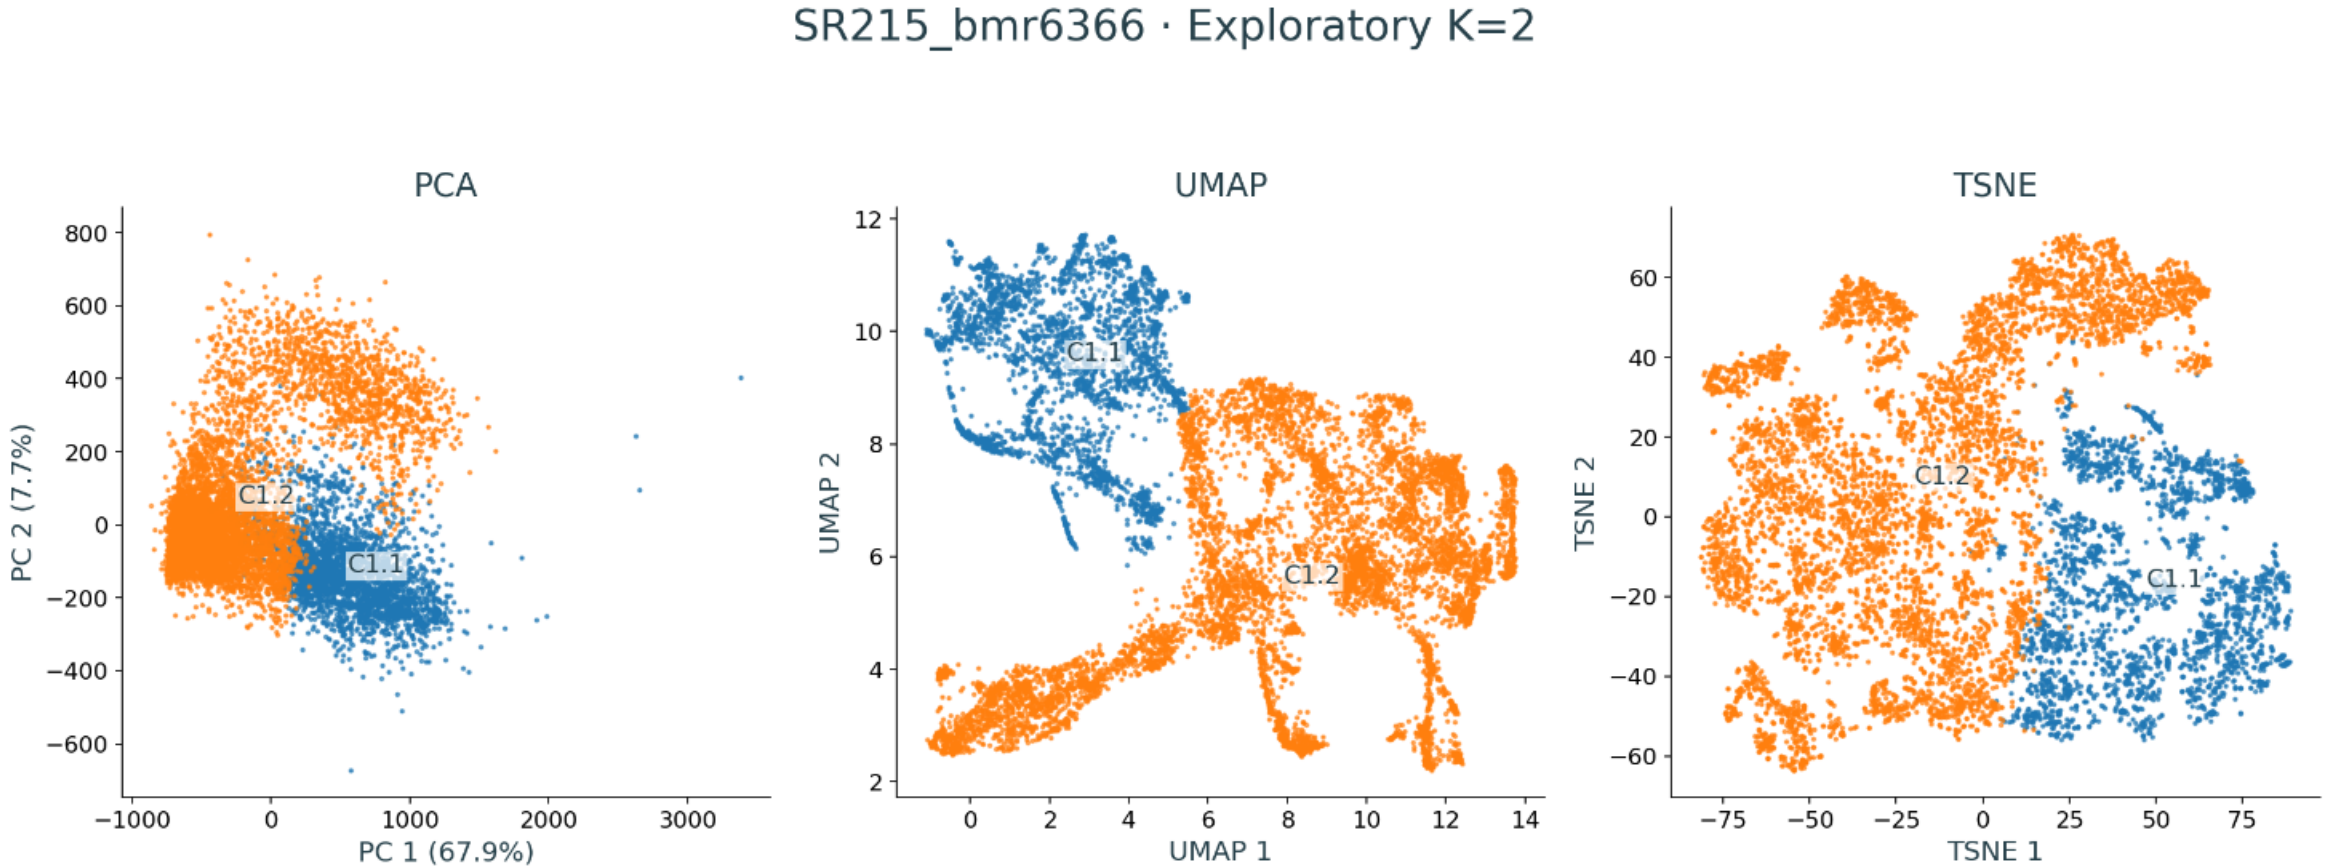


Exploratory K=2: 2 child clusters among 10,120 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

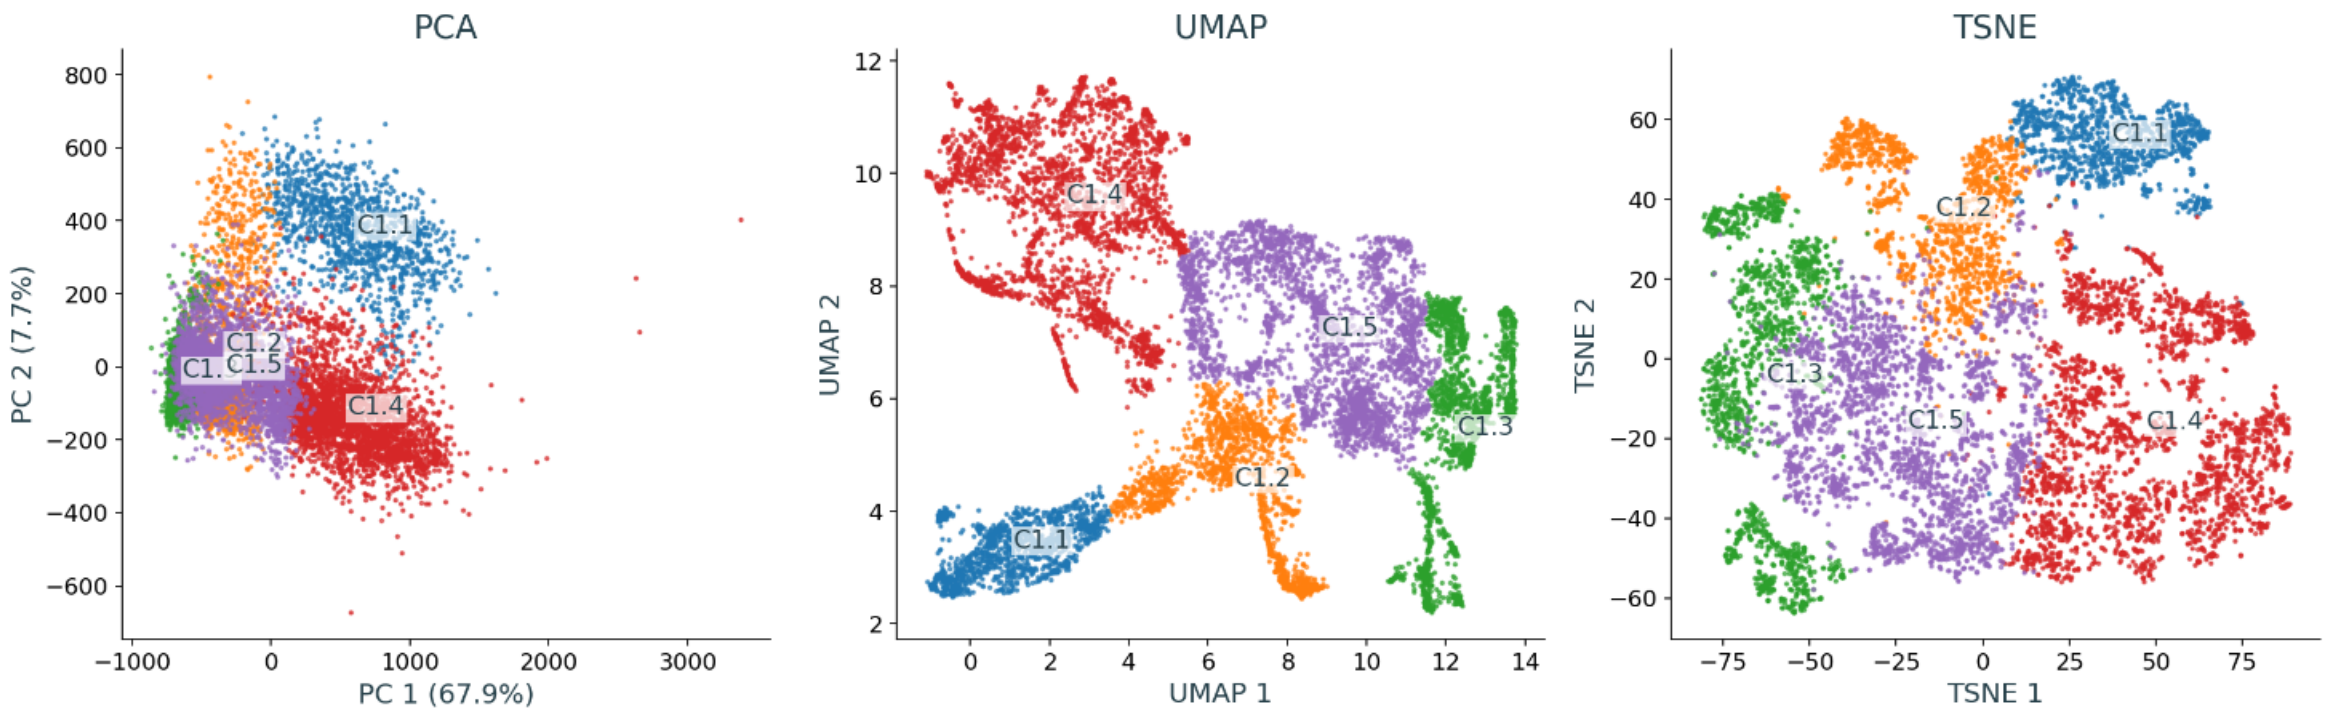


Exploratory K=5: 5 child clusters among 10,120 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

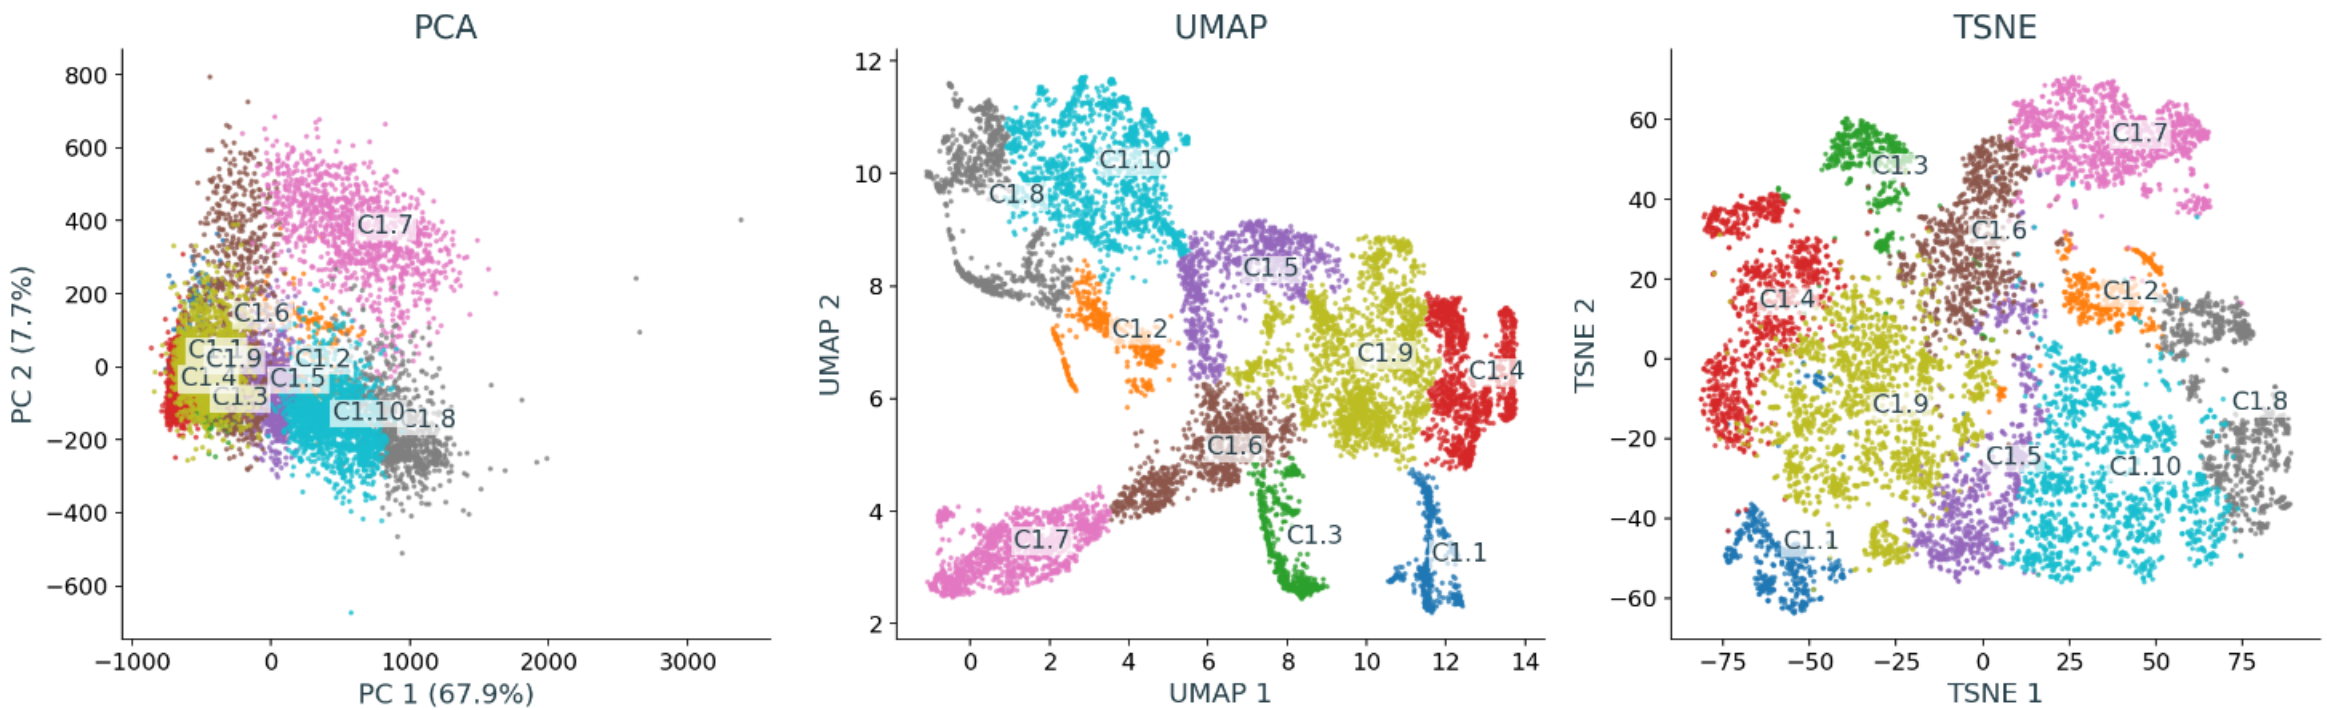


Exploratory K=10: 10 child clusters among 10,120 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

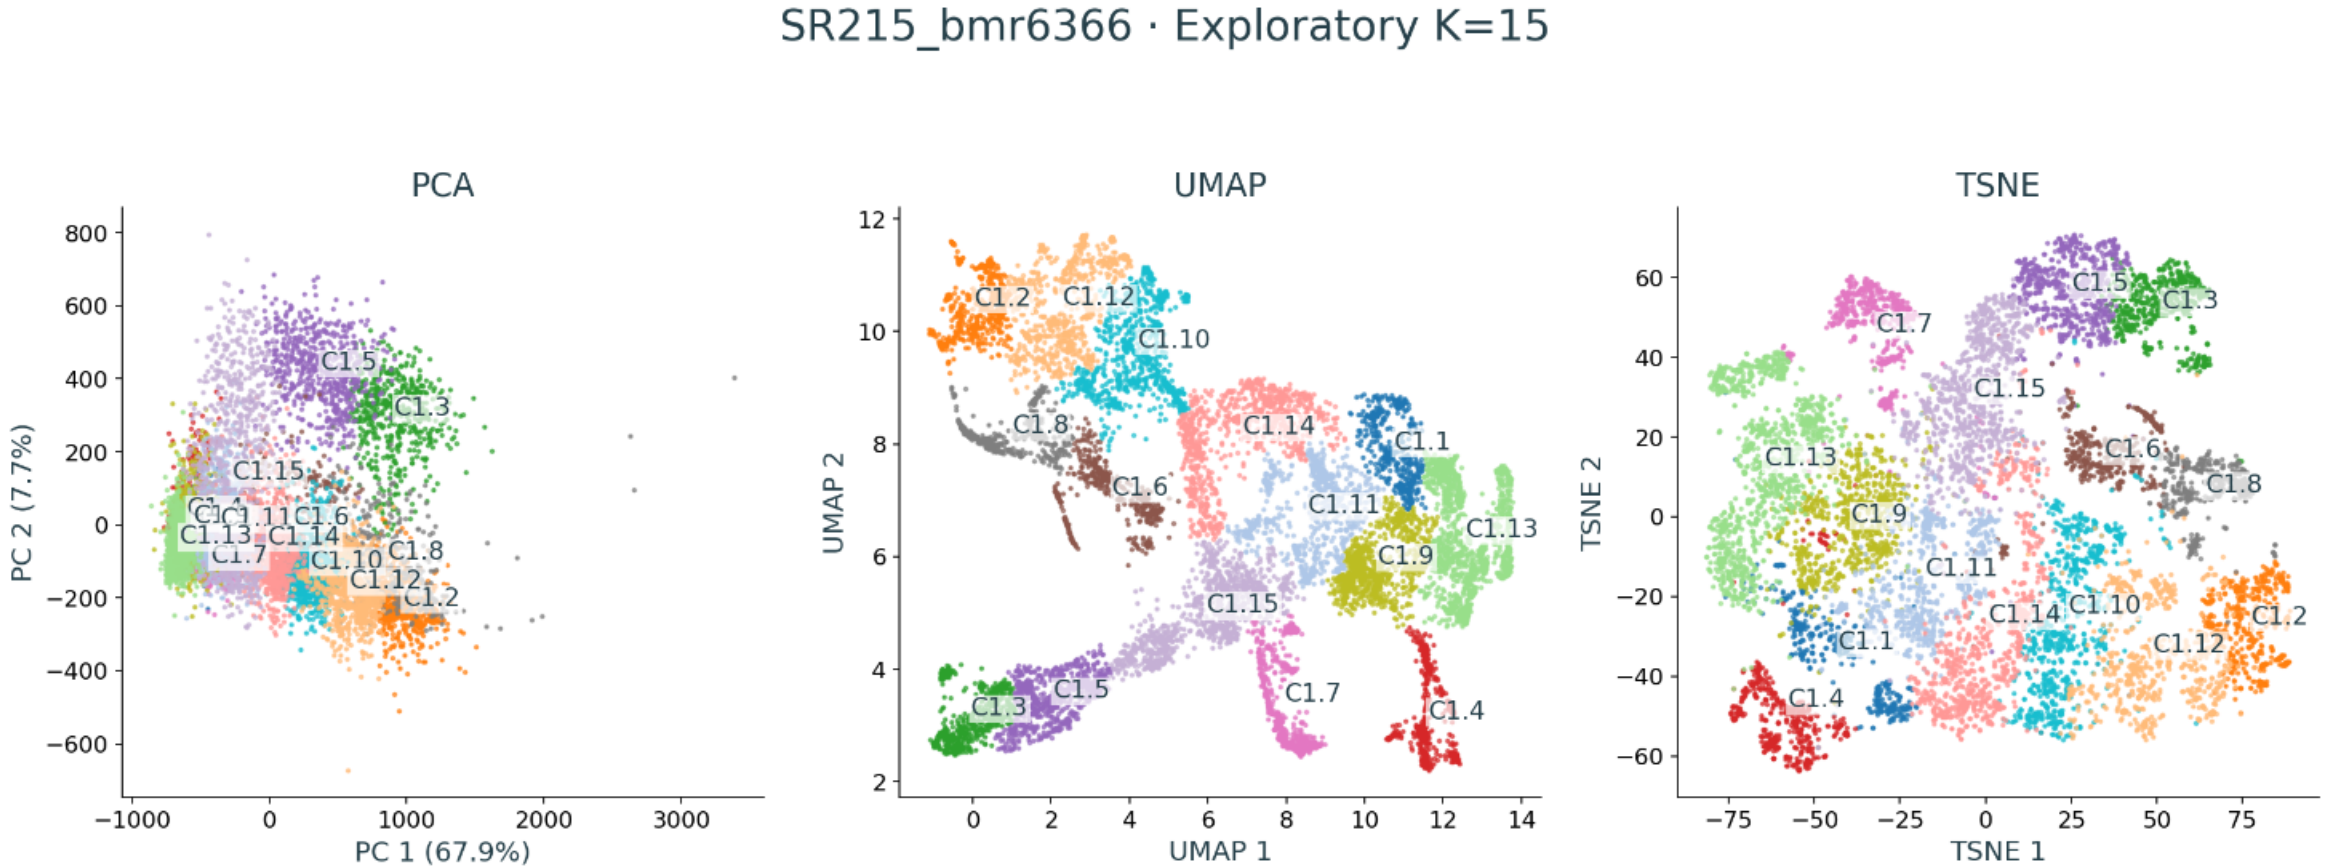


Exploratory K=15: 15 child clusters among 10,120 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

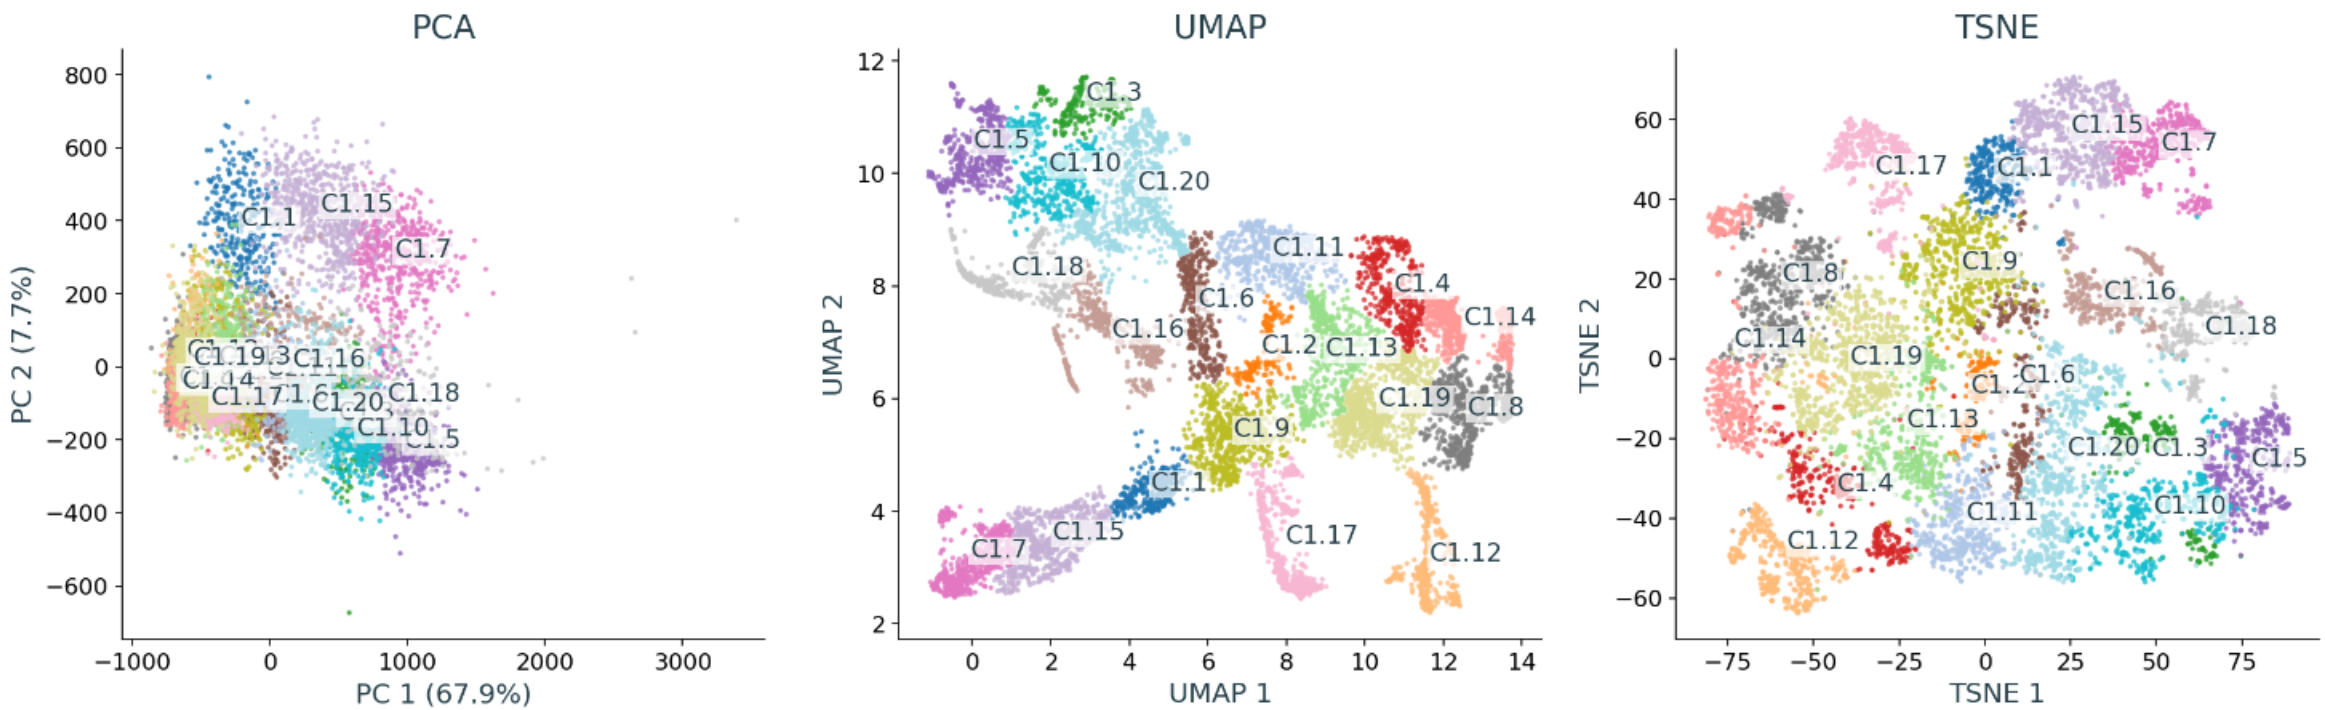


Exploratory K=20: 20 child clusters among 10,120 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

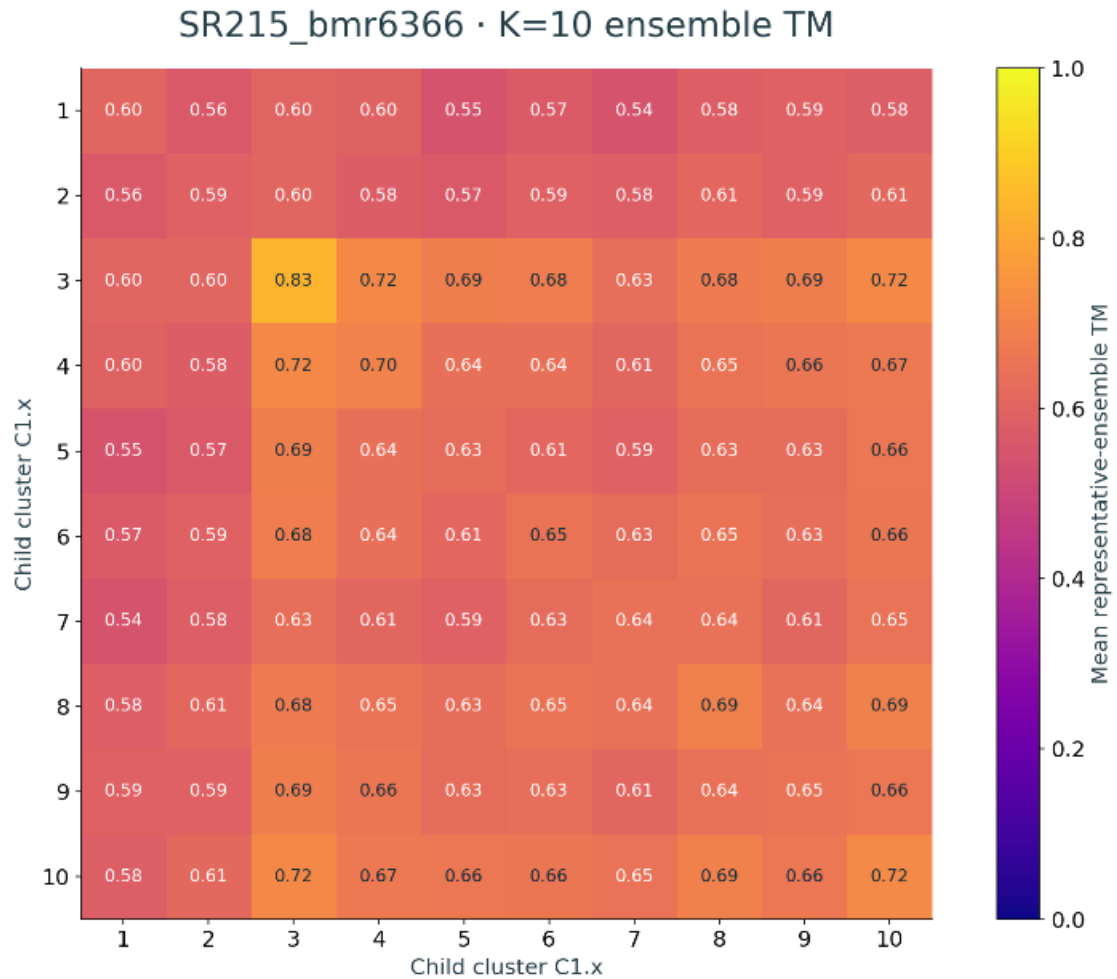

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

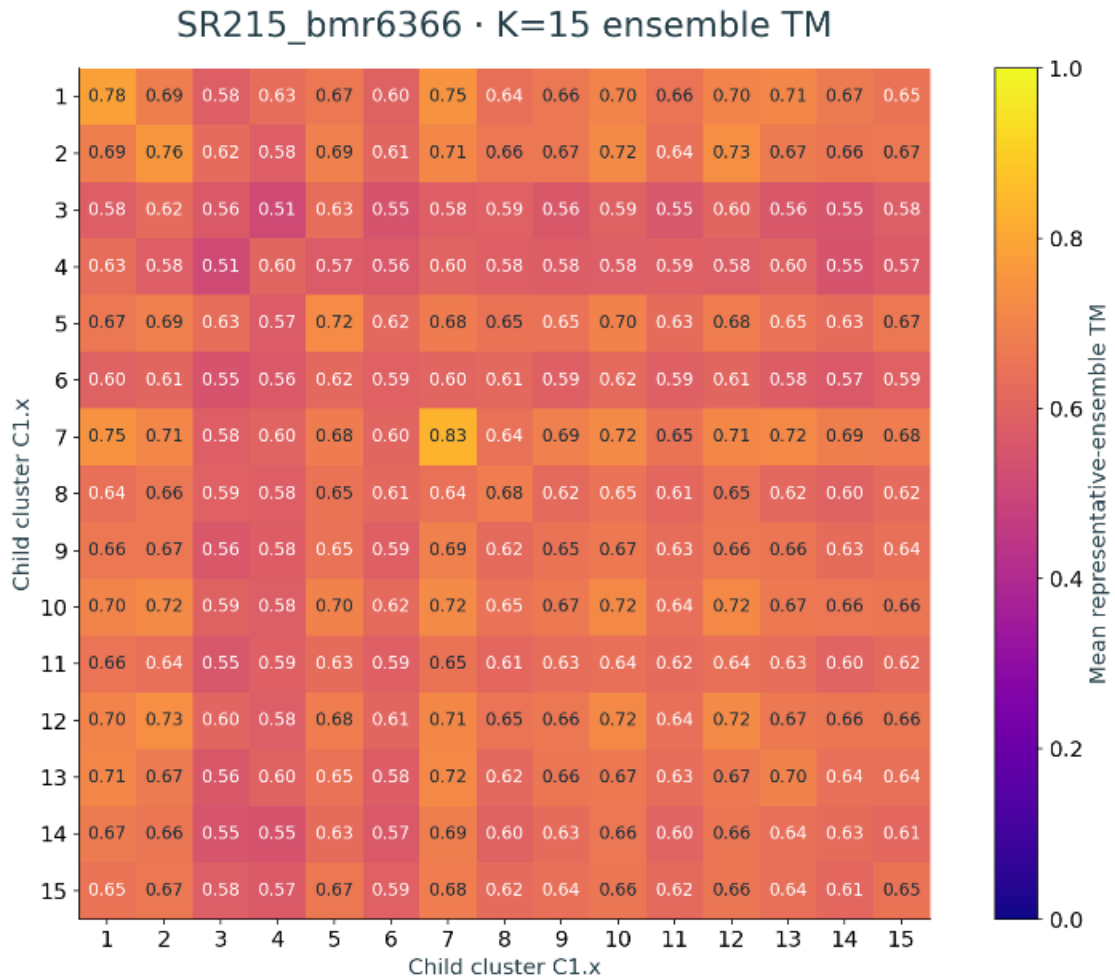

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

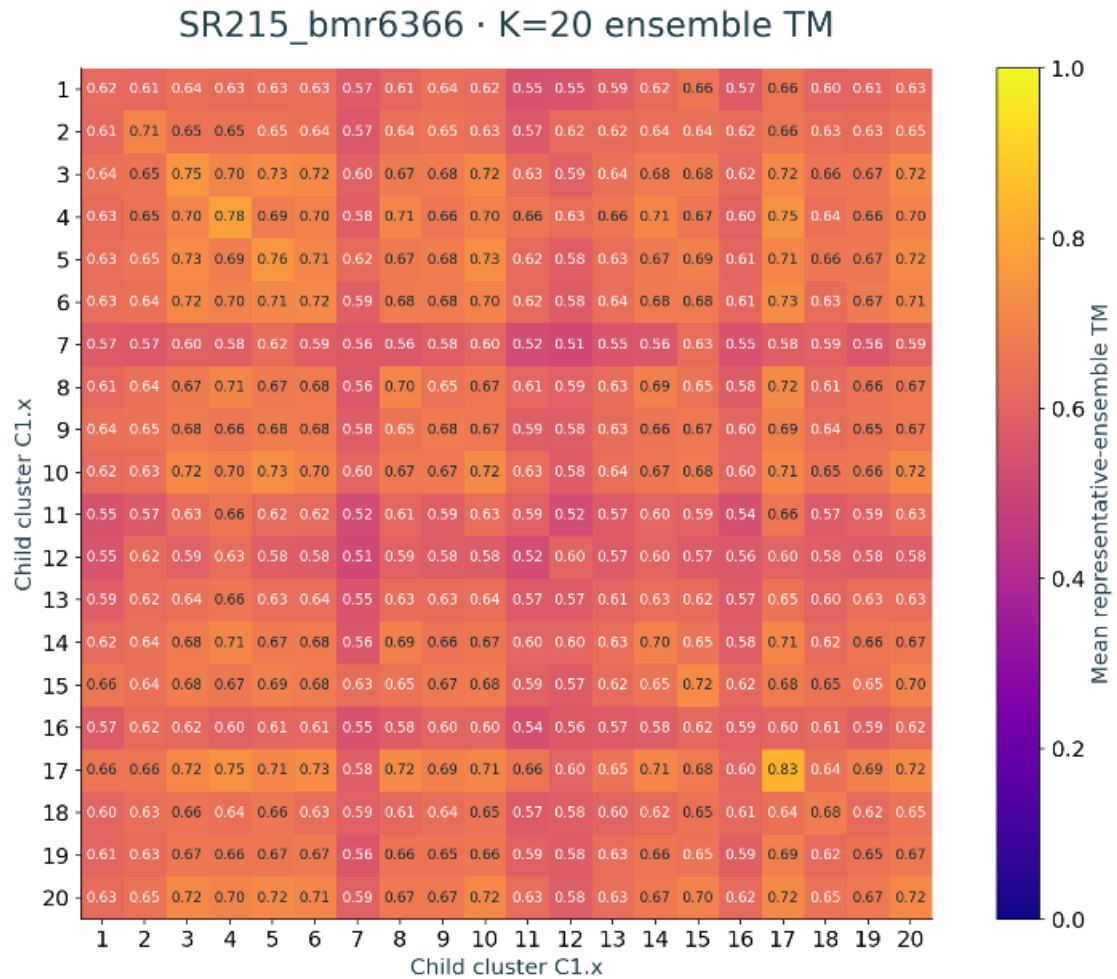

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.