StR82_bmr15386
Largest-cluster review

Primary analysis: 11,000 models. Cluster 1 contributes 10,376 models to the second pass.

Fresh automatic result: 4 child clusters. Exploratory review covers every K from 2 to 20.

The complete supplied constructs and the frozen primary residue/pair mask define the child analysis.


Fresh PCA, UMAP and t-SNE use only the selected parent-cluster models. Primary labels remain unchanged.

One fixed pool of up to 100 structures supplies all candidate ensemble-TM comparisons.

Within/between TM, cluster population and structural views support per-target review. Final K remains unselected.


Two-level analysis. Child labels identify subsets of primary Cluster 1. The candidate cuts remain exploratory and await per-target review.


StR82_bmr15386 · Within/between ensemble similarity

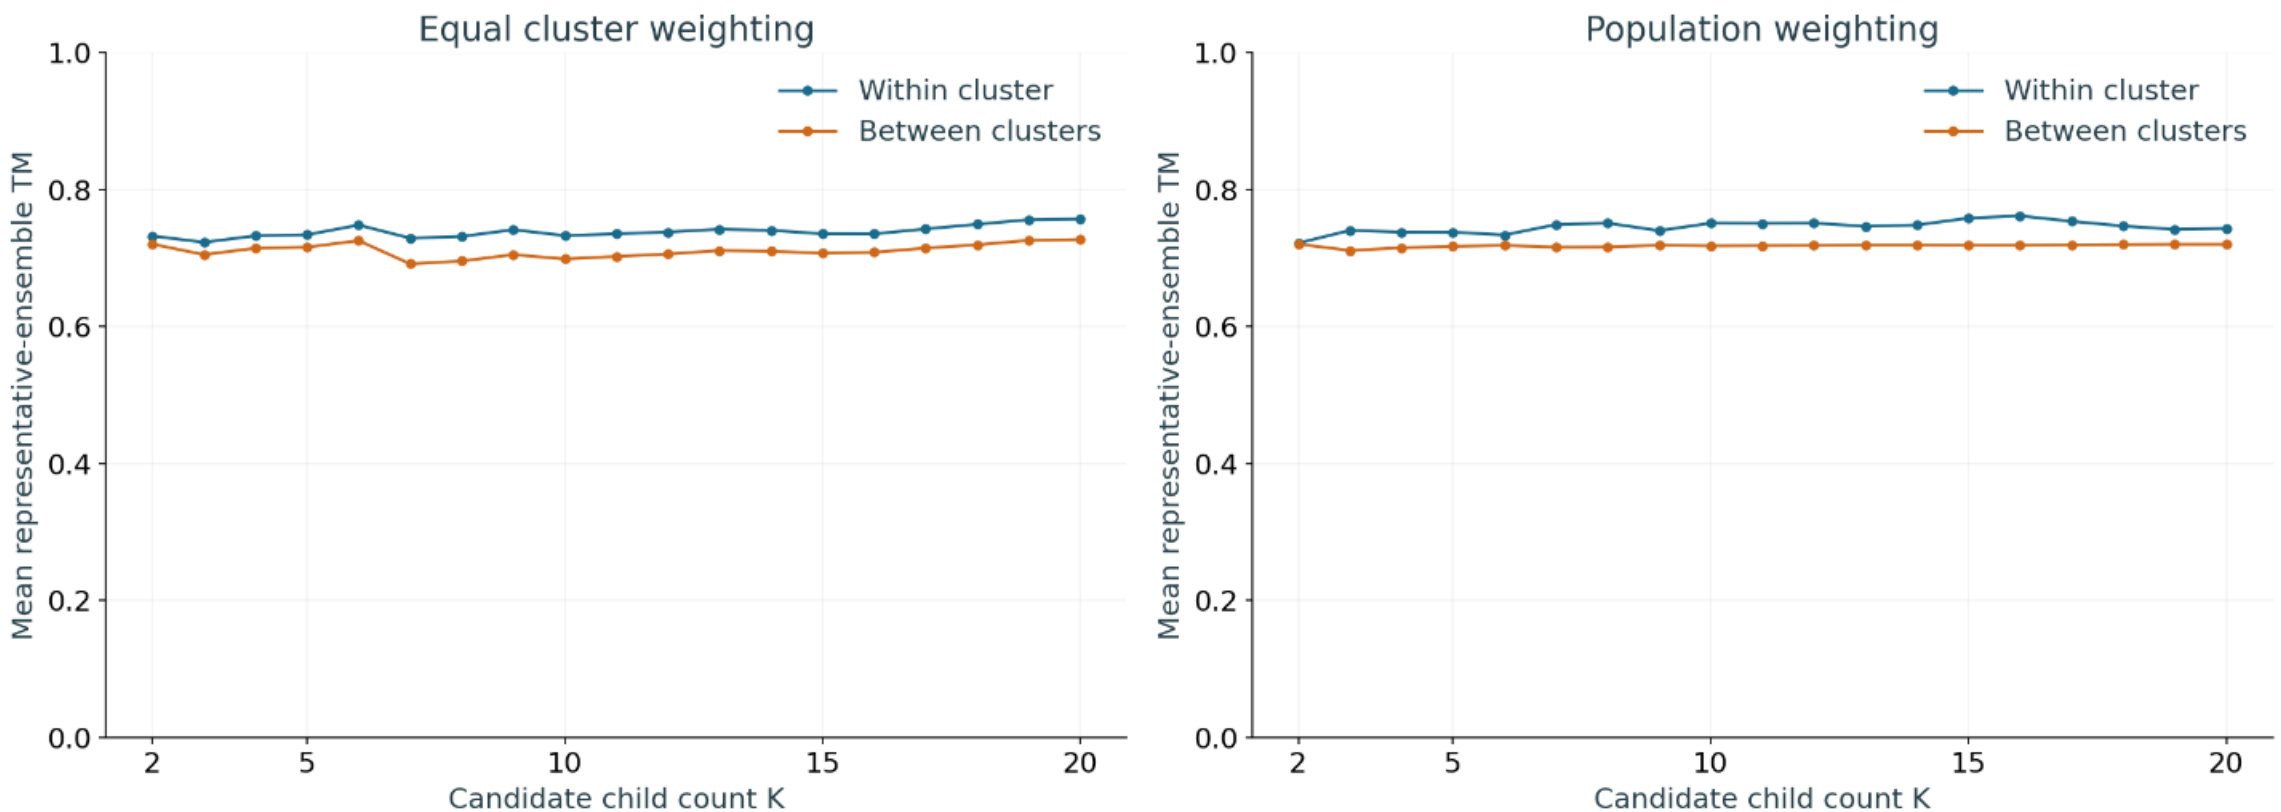

All K values reuse the same fixed representative pool and TM matrix. Population weights reflect finest-group sizes. These are representative estimates, not all-model TM distributions.

StR82_bmr15386 · Count tradeoffs

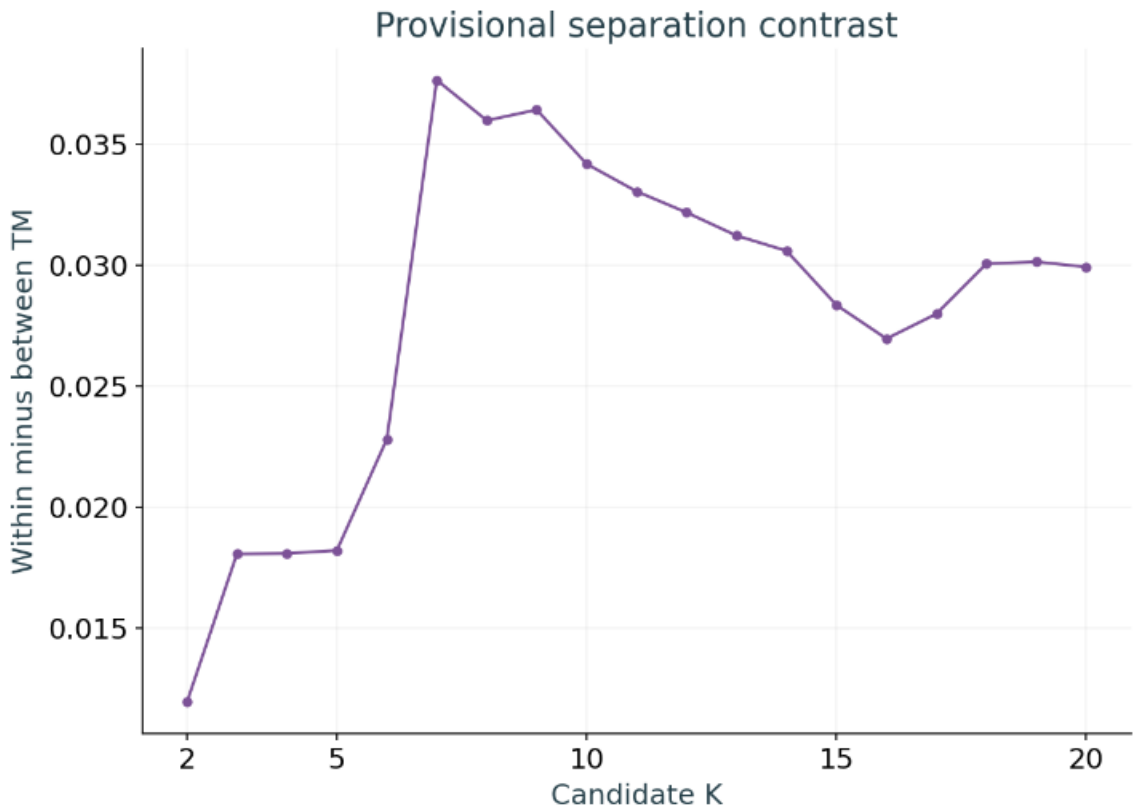

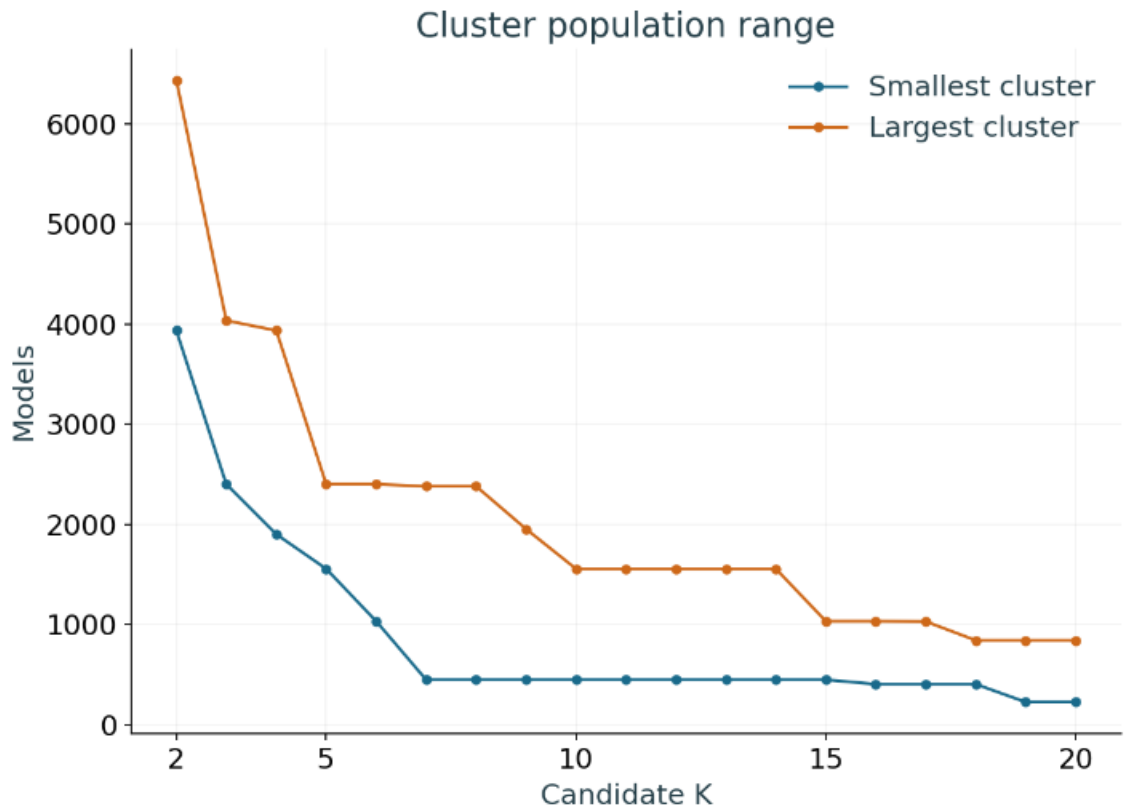


Contrast provides a provisional ranking. Increasing K can overpartition the ensemble, so this score does not determine an ideal state count. Review small groups and their structures.


StR82_bmr15386 · Every candidate count

K	Within TM	Between TM	Contrast	Min n	Max n	Singletons
2	0.733	0.721	0.012	3,937	6,439	0
3	0.723	0.705	0.018	2,402	4,037	0
4	0.733	0.715	0.018	1,902	3,937	0
5	0.734	0.716	0.018	1,556	2,402	0
6	0.749	0.726	0.023	1,033	2,402	0
7	0.729	0.692	0.038	448	2,381	0
8	0.732	0.696	0.036	448	2,381	0
9	0.742	0.705	0.036	448	1,954	0
10	0.733	0.699	0.034	448	1,556	0
11	0.736	0.703	0.033	448	1,556	0
12	0.738	0.706	0.032	448	1,556	0
13	0.742	0.711	0.031	448	1,556	0
14	0.741	0.710	0.031	448	1,556	0
15	0.736	0.707	0.028	448	1,033	0
16	0.736	0.709	0.027	404	1,033	0
17	0.743	0.715	0.028	404	1,030	0
18	0.750	0.720	0.030	404	842	0
19	0.756	0.726	0.030	225	842	0
20	0.757	0.727	0.030	225	842	0


Equal-cluster TM estimates exclude self pairs. Unavailable within-cluster values occur when representative support is insufficient. The full CSV preserves every value and population count.

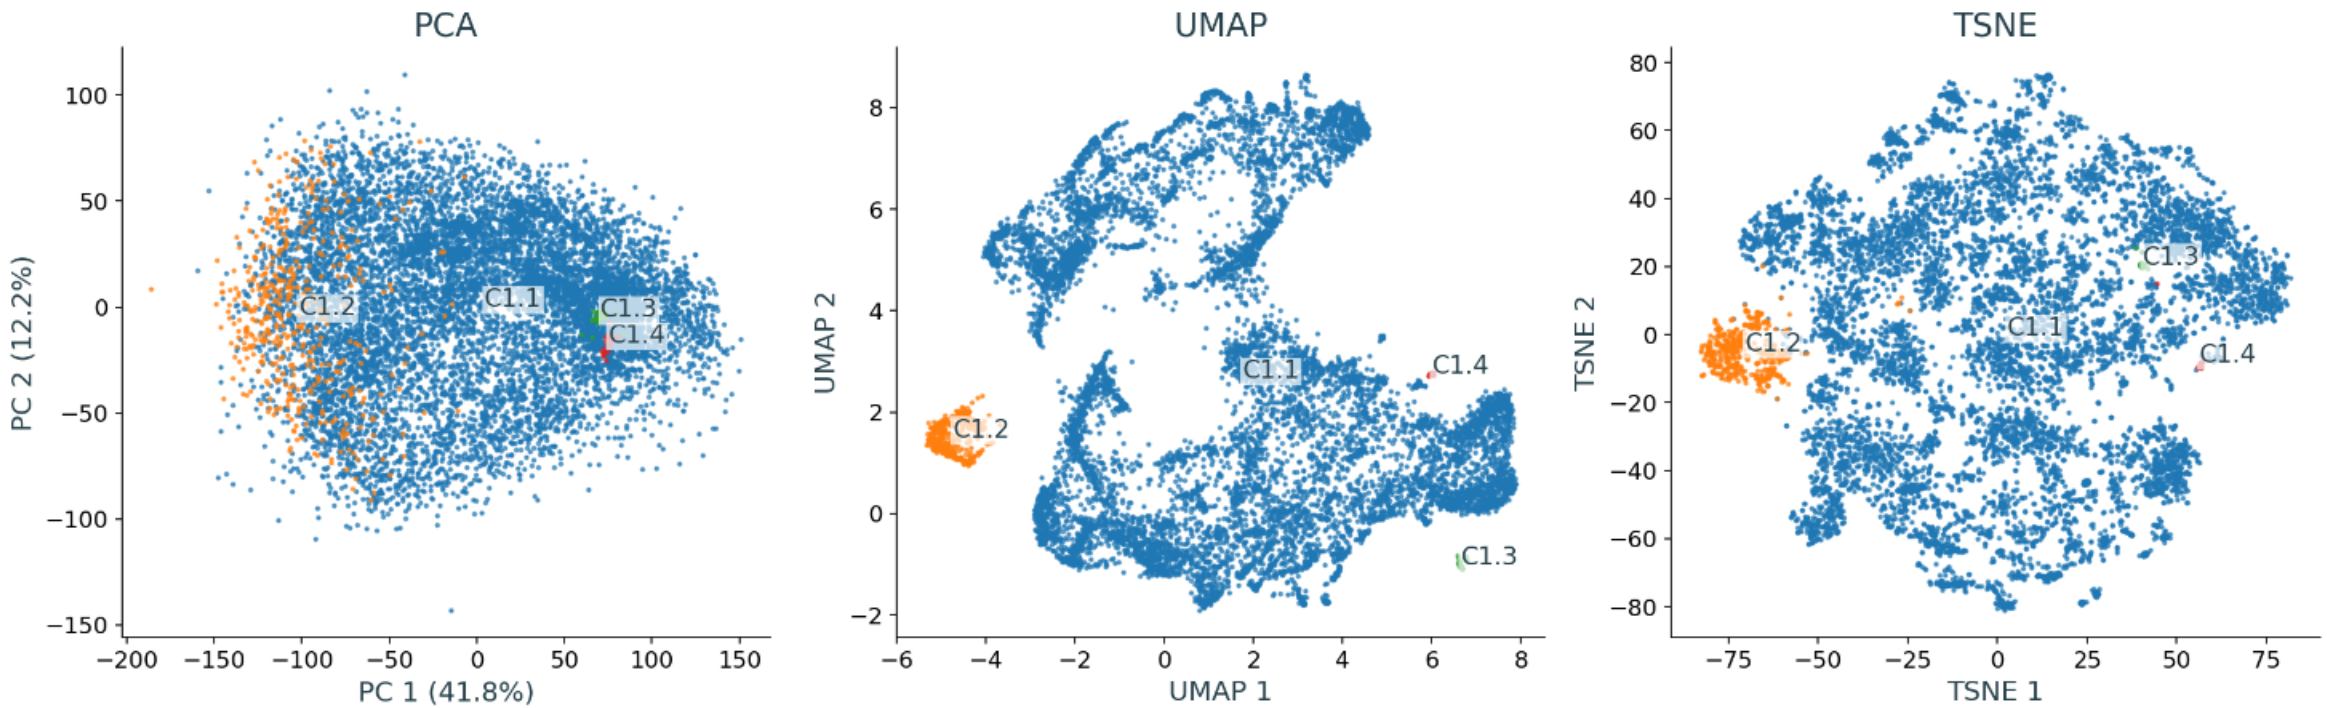


Automatic child baseline: 4 child clusters among 10,376 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

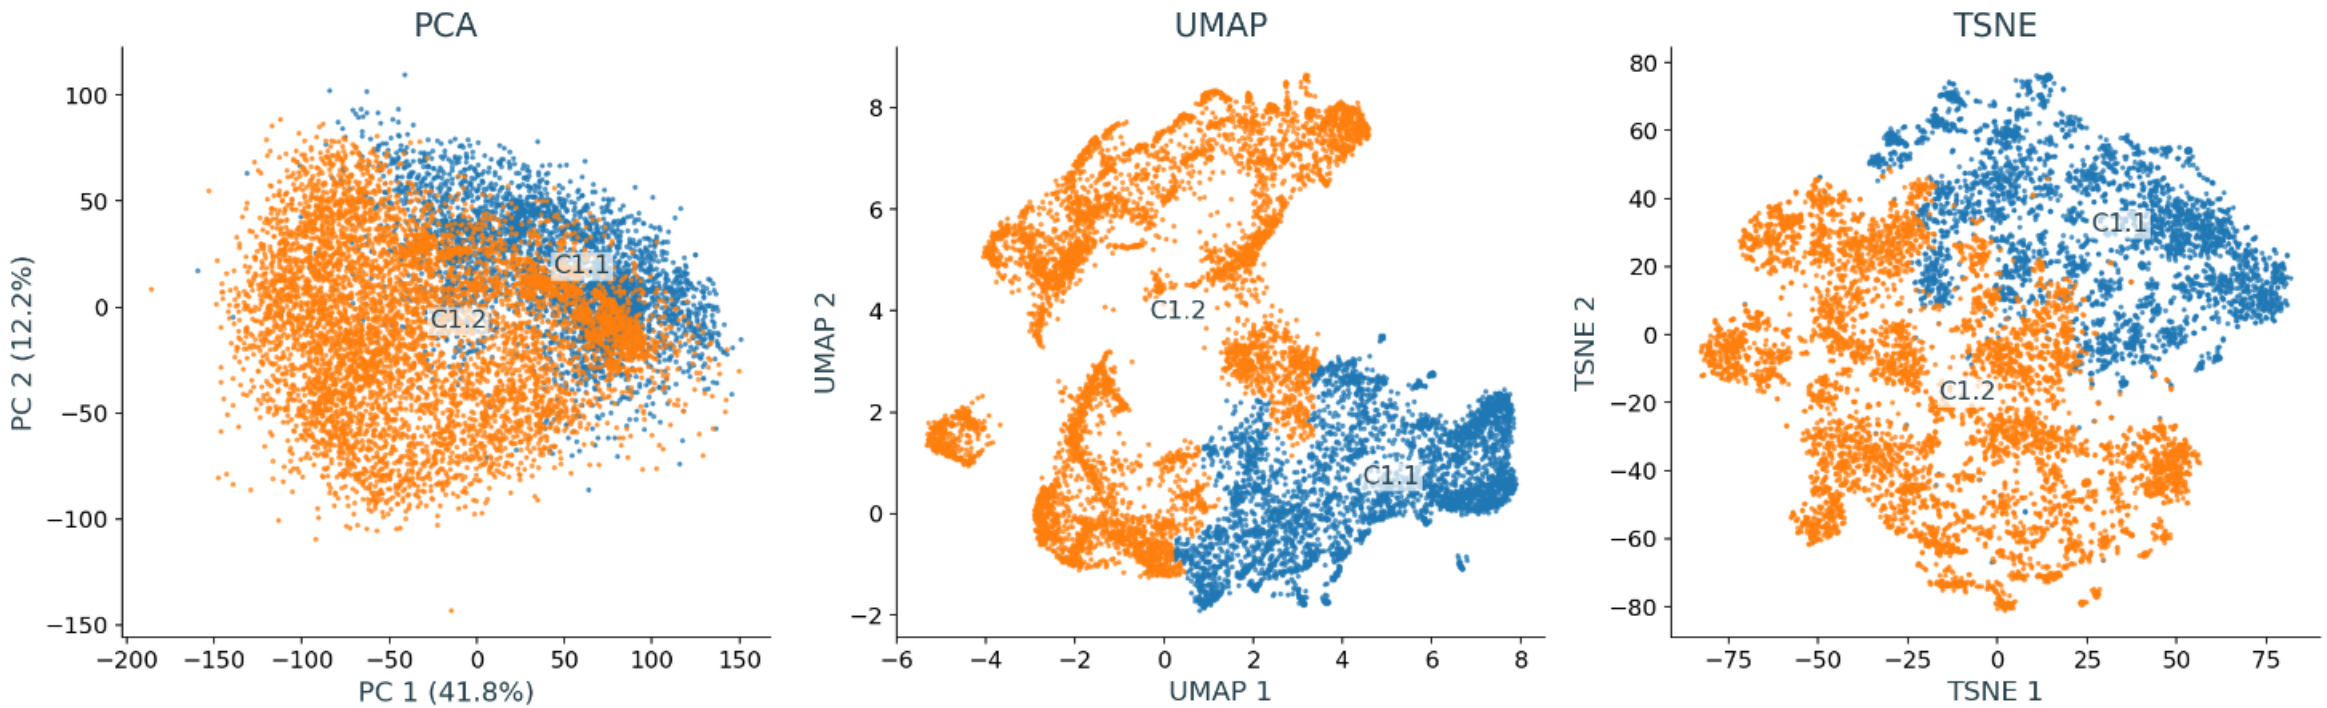


Exploratory K=2: 2 child clusters among 10,376 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

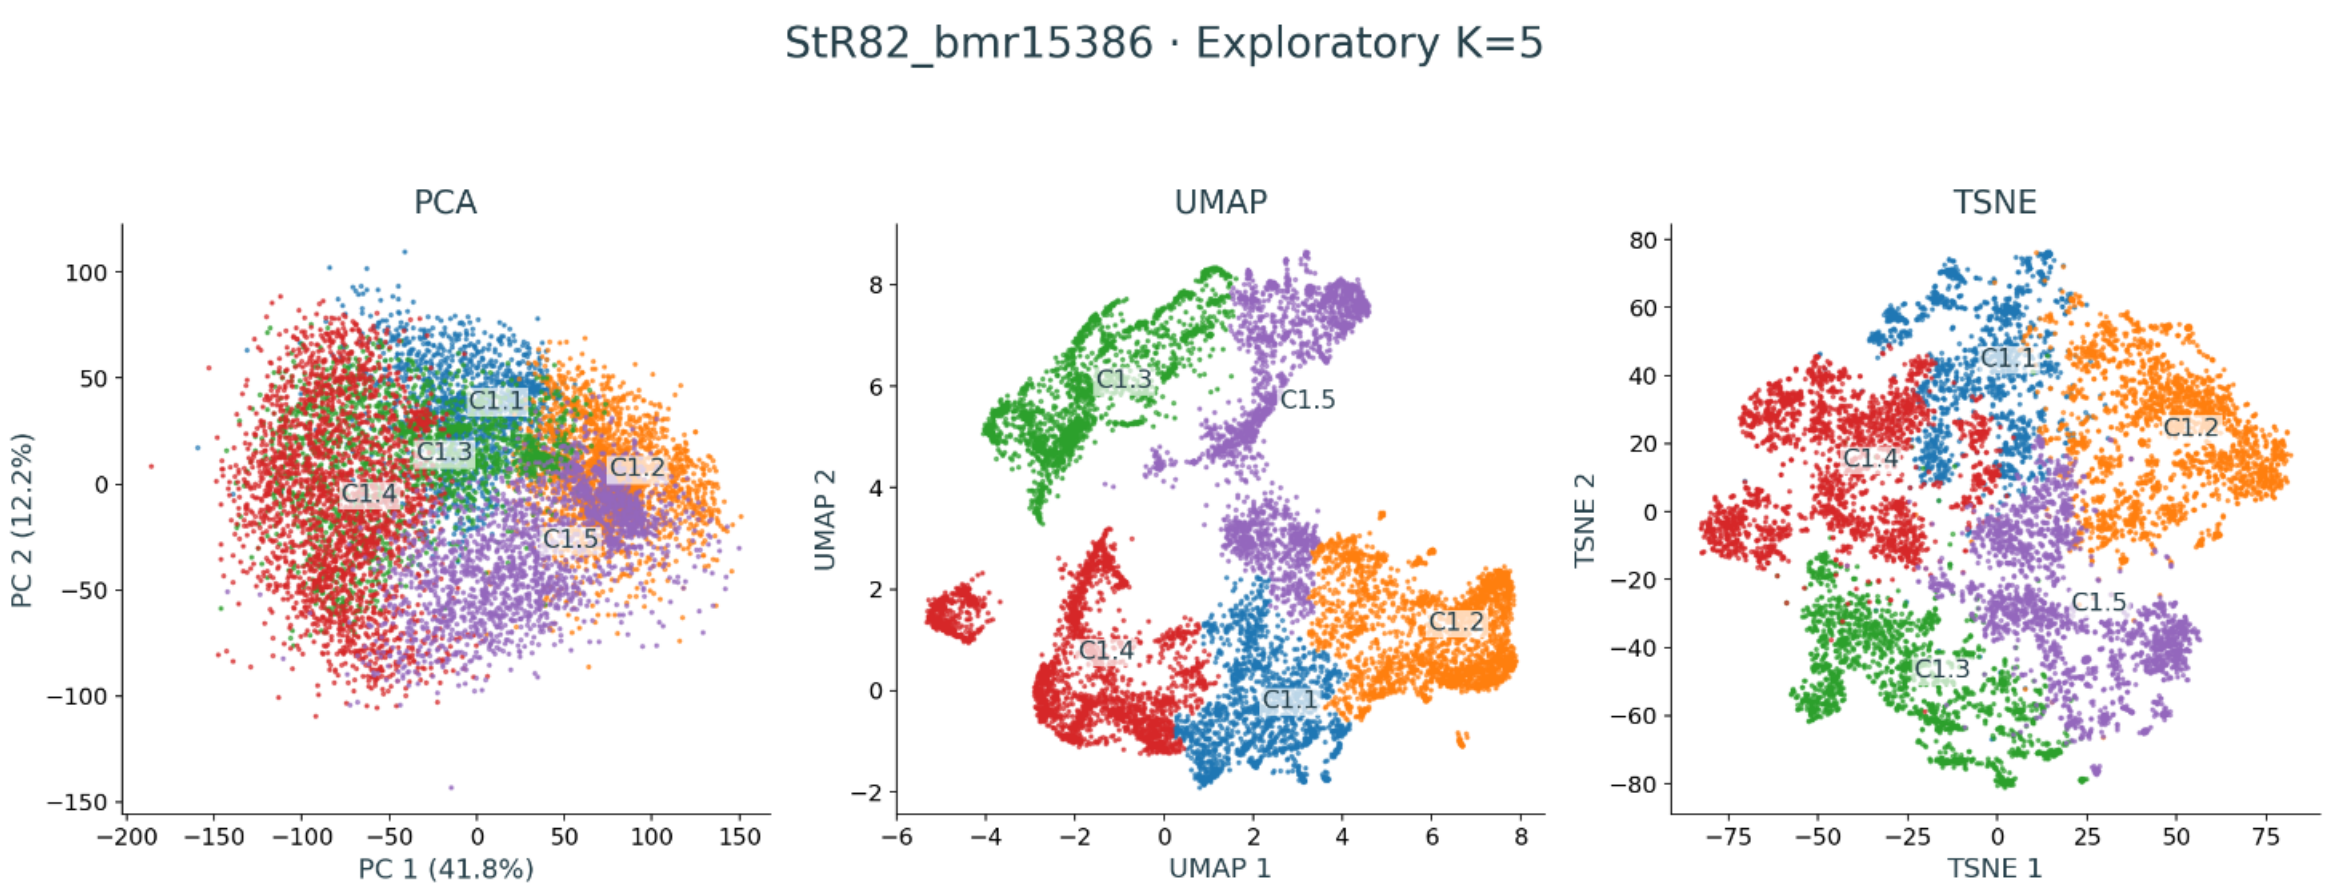


Exploratory K=5: 5 child clusters among 10,376 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

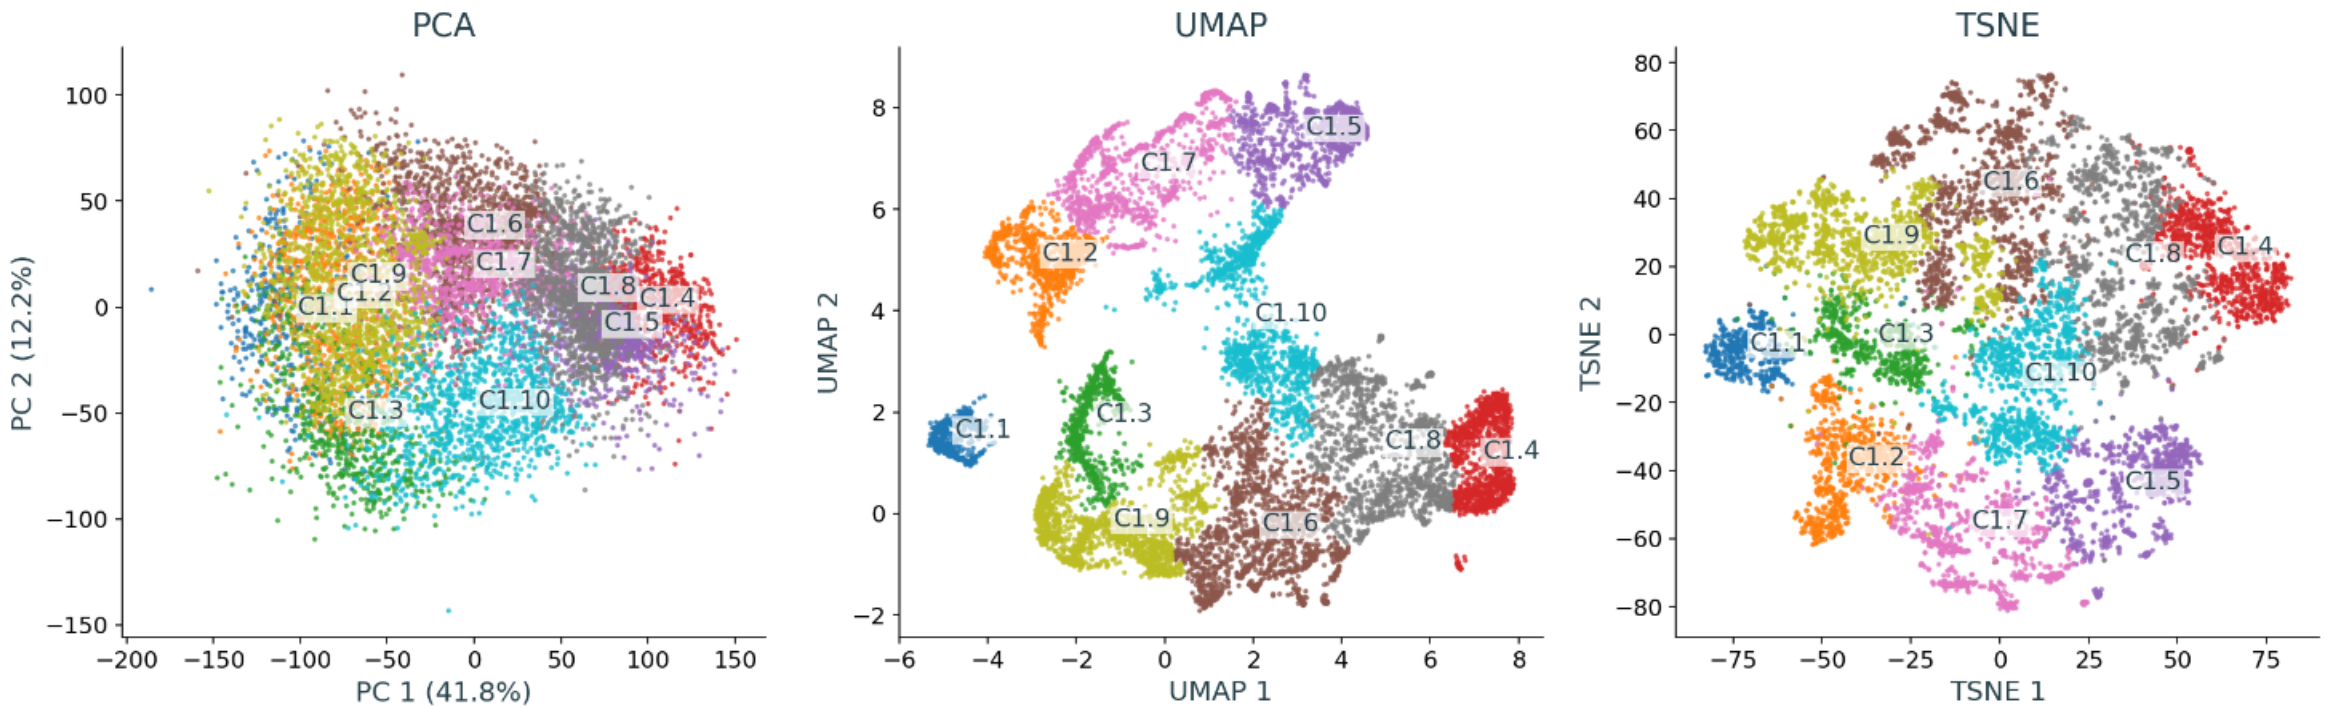


Exploratory K=10: 10 child clusters among 10,376 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

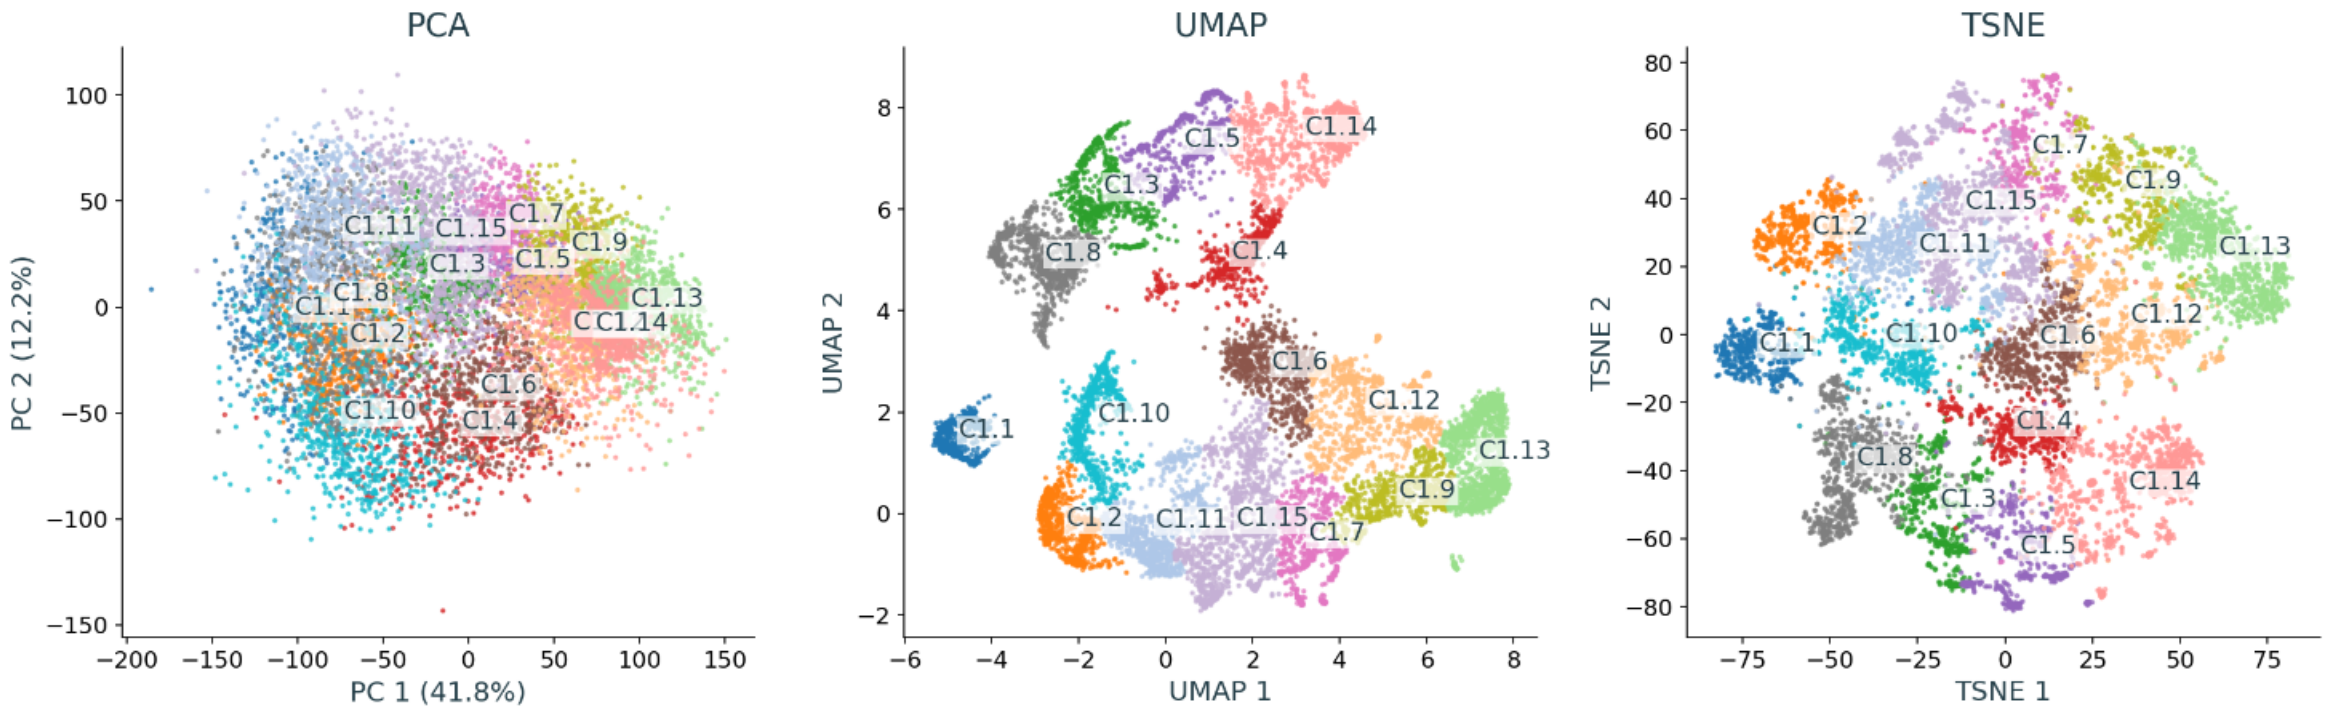


Exploratory K=15: 15 child clusters among 10,376 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

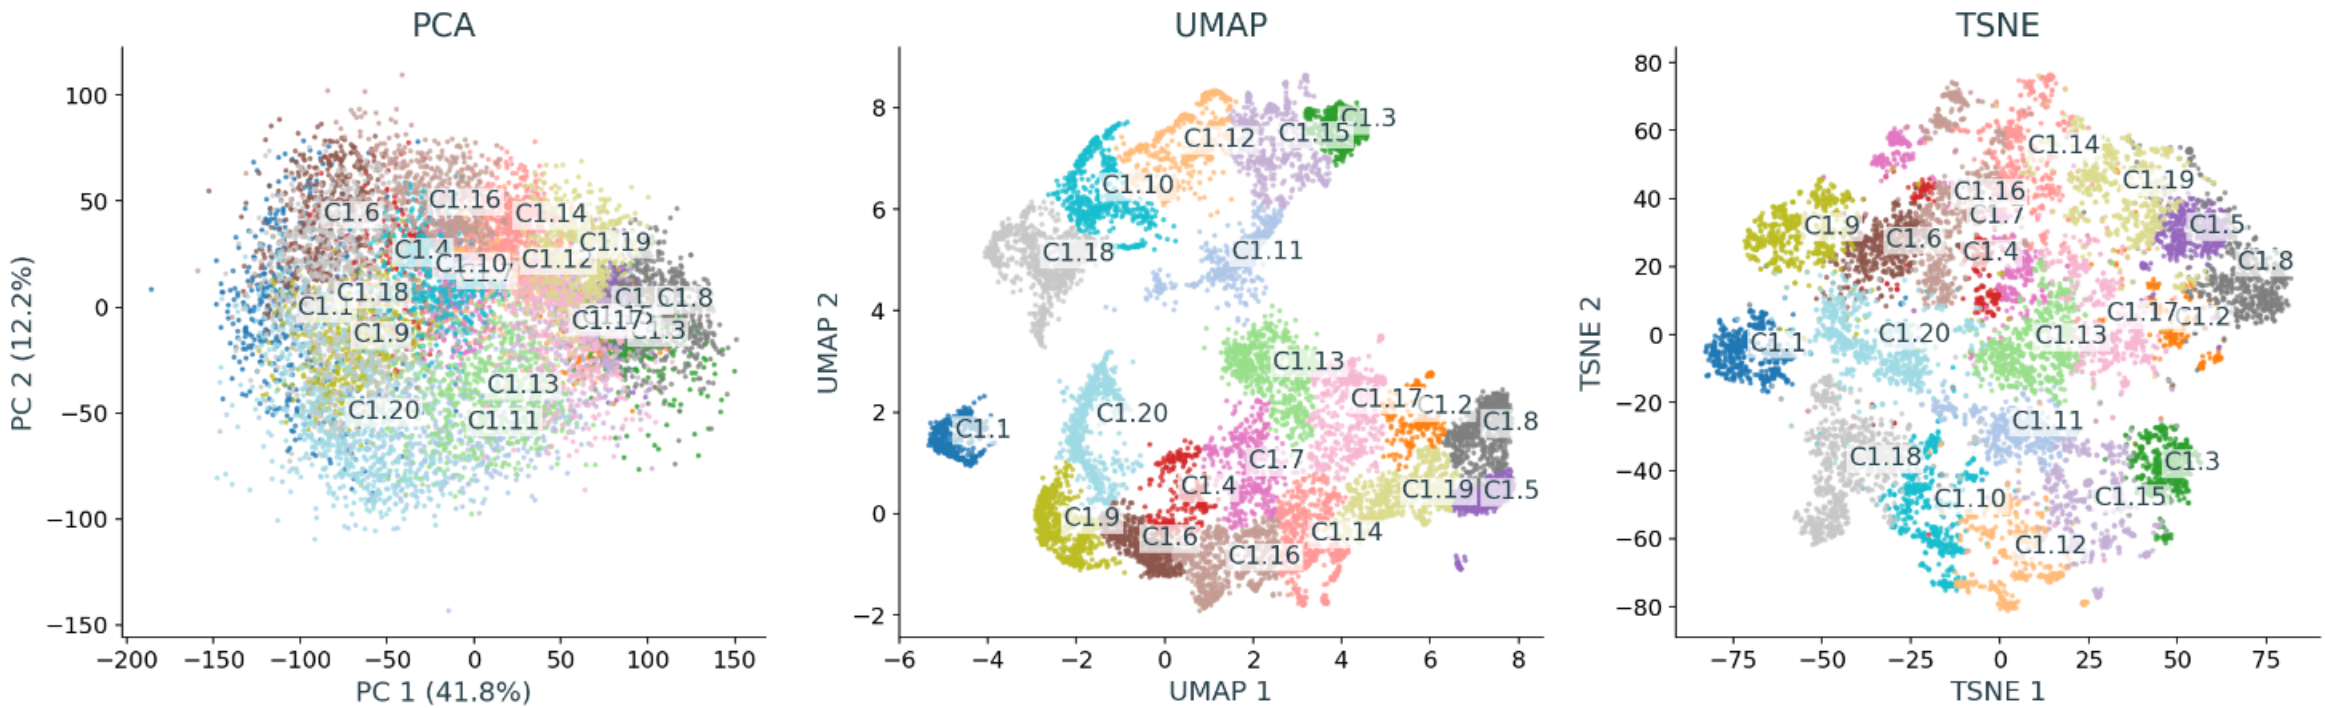


Exploratory K=20: 20 child clusters among 10,376 selected models. The three projections share these labels. All K=2–20 views are available in the interactive atlas.

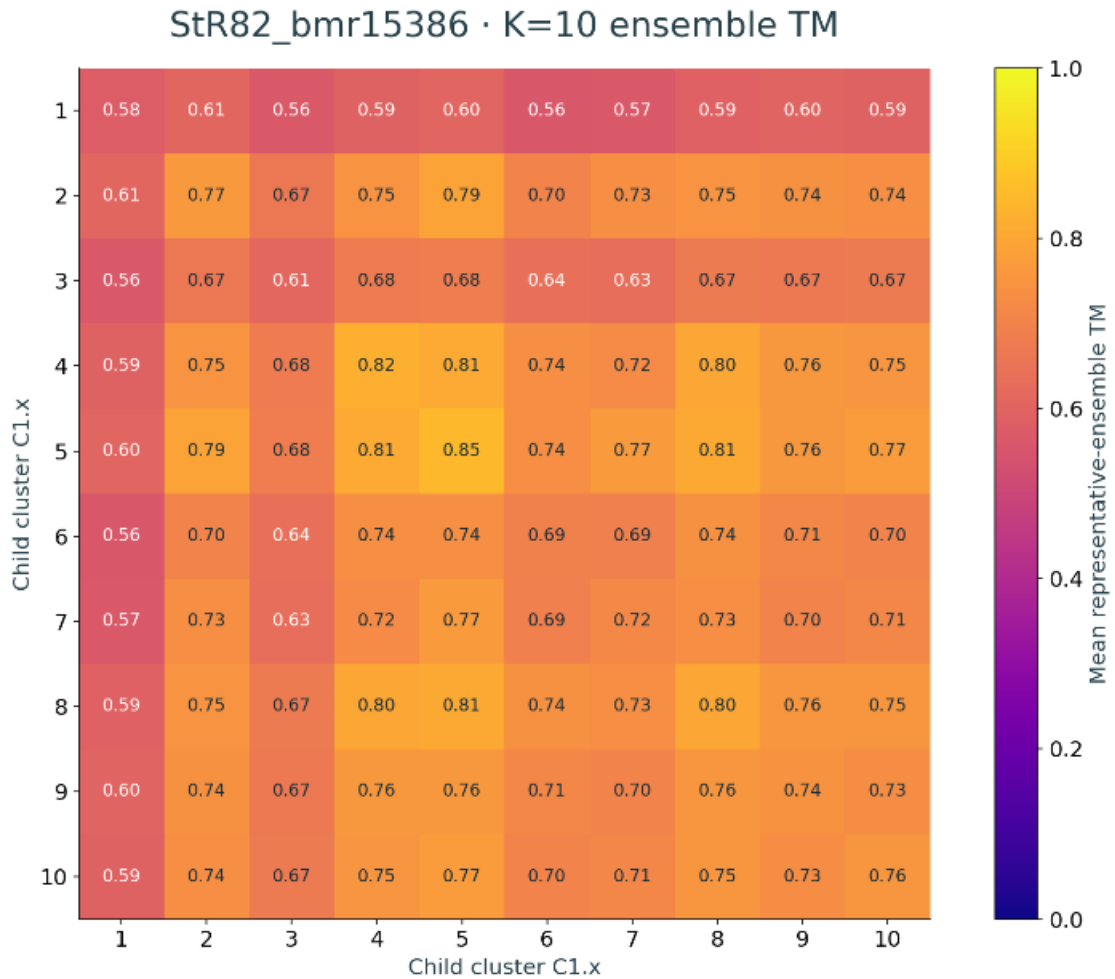

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

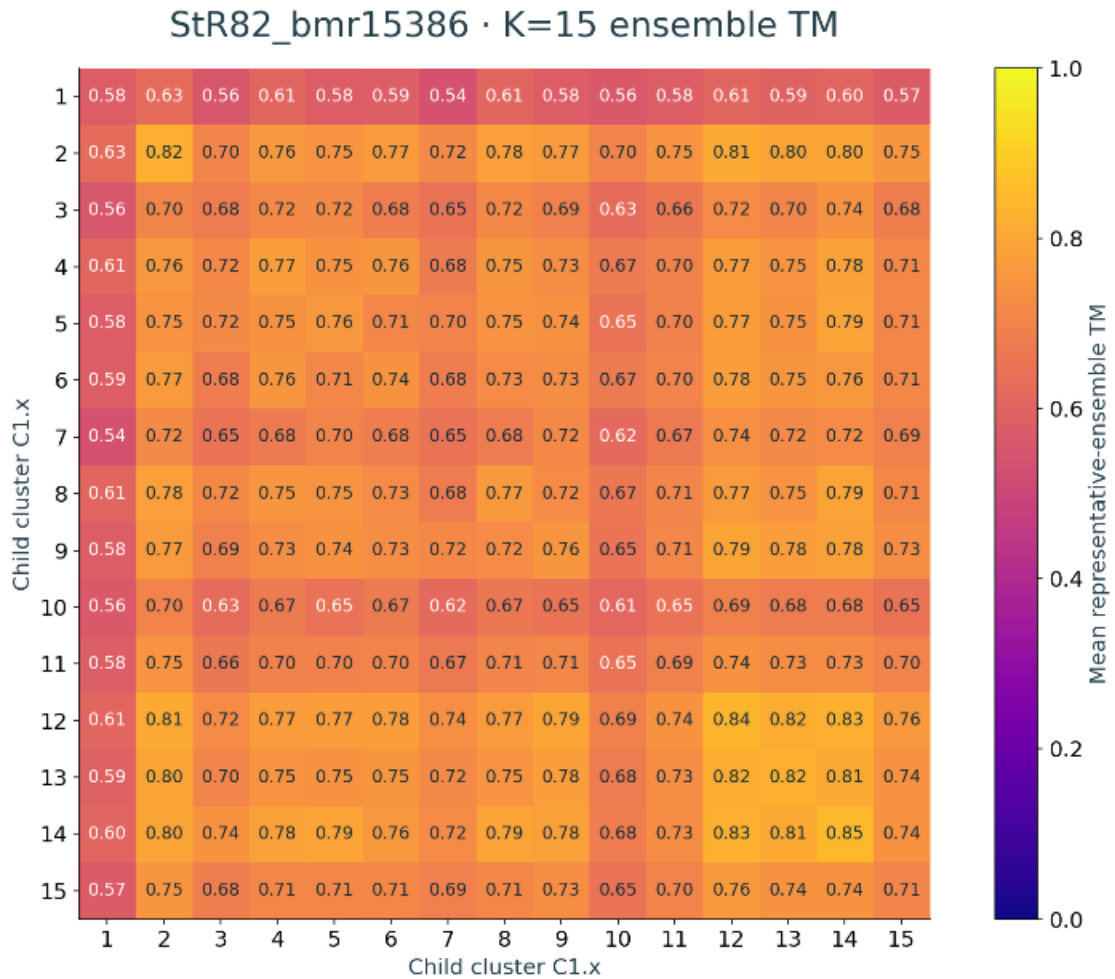

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.

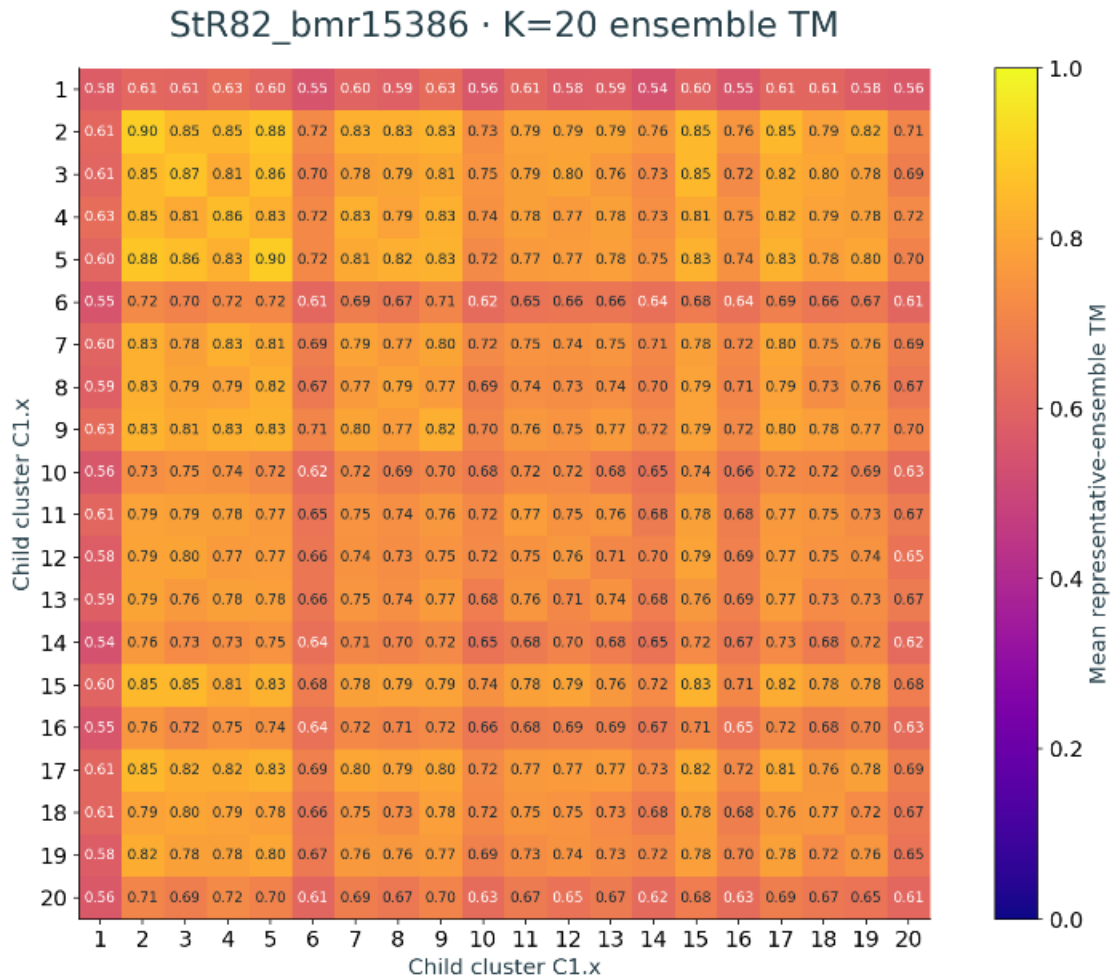

Off-diagonal cells show weighted mean TM between representative ensembles. Diagonal cells show within-ensemble TM excluding self pairs. Blank estimates have insufficient representative support. The model pool is identical across K.