1、建立数据库

不会的话学习一下数据库应用

Mysql视频教程请点击此处

2、修改 settings.py 数据库连接

```
#settings.py文件中
  DATABASES = {
        'default': {
            'ENGINE': 'django.db.backends.mysql',
4
            'NAME': 'tiantian',
5
           'PORT': '3306',
6
7
           'HOST': 'localhost',
           'USER': 'tiantian',
8
           'PASSWORD': 'tiantian',
9
       }
10
11 }
```

3、安装项目所用包

先安装 MySQL-python 包

```
(ttsx) [root@Ops_salt dailyfresh-master]# pip install MySQL_python-1.2.5-
cp27-none-win_amd64.whl

Processing d:\mysql_python-1.2.5-cp27-none-win_amd64.whl

Installing collected packages: MySQL-python

Successfully installed MySQL-python-1.2.5

(ttsx) [root@Ops_salt dailyfresh-master]# ls
(ttsx) [root@Ops_salt dailyfresh-master]# pip install -r freeze.txt
```

4、安装 whoosh_cn_backend, ChineseAnalyzer

在项目目录下有一个 whoosh_cn_backend.py 和 ChineseAnalyzer.py 文件 把项目目录下的 whoosh_cn_backend.py 和 ChineseAnalyzer.py 文件文件拷贝 到 site-packages/haystack/backends 文件夹下

5、初始化数据库信息

```
(ttsx) [root@Ops_salt dailyfresh-master]# python manage.py makemigrations
1
2
   No changes detected
3
4
   (ttsx) [root@Ops_salt dailyfresh-master]# python manage.py migrate
   Operations to perform:
5
6
     Apply all migrations: admin, auth, contenttypes, df_cart, df_goods,
   df_order, df_user, sessions
7
   Running migrations:
     Applying contenttypes.0001_initial... OK
8
9
     Applying auth.0001_initial... OK
     Applying admin.0001_initial... OK
10
11
     Applying admin.0002_logentry_remove_auto_add... OK
     Applying contenttypes.0002_remove_content_type_name... OK
12
13
     Applying auth.0002_alter_permission_name_max_length... OK
     Applying auth.0003_alter_user_email_max_length... OK
14
15
     Applying auth.0004_alter_user_username_opts... OK
     Applying auth.0005_alter_user_last_login_null... OK
16
17
     Applying auth.0006_require_contenttypes_0002... OK
     Applying auth.0007_alter_validators_add_error_messages... OK
18
19
     Applying auth.0008_alter_user_username_max_length... OK
     Applying df_user.0001_initial... OK
20
21
     Applying df_goods.0001_initial... OK
22
     Applying df_cart.0001_initial... OK
23
     Applying df_cart.0002_auto_20170731_1252... OK
     Applying df_order.0001_initial... OK
24
25
     Applying sessions.0001_initial... OK
```

6、建立索引

```
1 (ttsx) [root@7zOps_salt dailyfresh-master]# python manage.py
    rebuild_index
2 WARNING: This will irreparably remove EVERYTHING from your search index
    in connection 'default'.
3 Your choices after this are to restore from backups or rebuild via the
    `rebuild_index` command.
4 Are you sure you wish to continue? [y/N] y
5 Removing all documents from your index because you said so.
6 All documents removed.
```


Indexing 0 goods infos

7、创建管理员权限

```
1 (ttsx) [root@Ops_salt dailyfresh-master]# python manage.py
    createsuperuser
2 Username (leave blank to use 'root'): myadmin
3 Email address: myadmin@qq.com
4 Password:
5 Password (again):
6 Superuser created successfully.
```

8、启动项目

```
1 (ttsx) [root@Ops_salt dailyfresh-master]# python manage.py runserver
0.0.0.0:9002
2 Performing system checks...
3
4 System check identified no issues (0 silenced).
5 October 27, 2017 - 14:38:18
6 Django version 1.11.6, using settings 'dailyfresh.settings'
7 Starting development server at http://0.0.0.0:9002/
8 Quit the server with CONTROL-C.
```

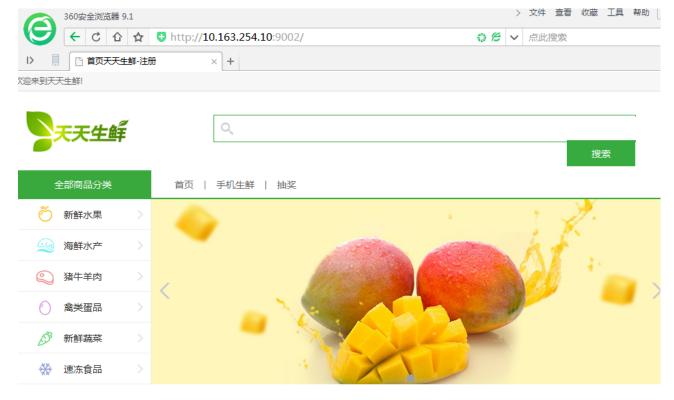


9、登入后台添加商品信息





10、查看结果

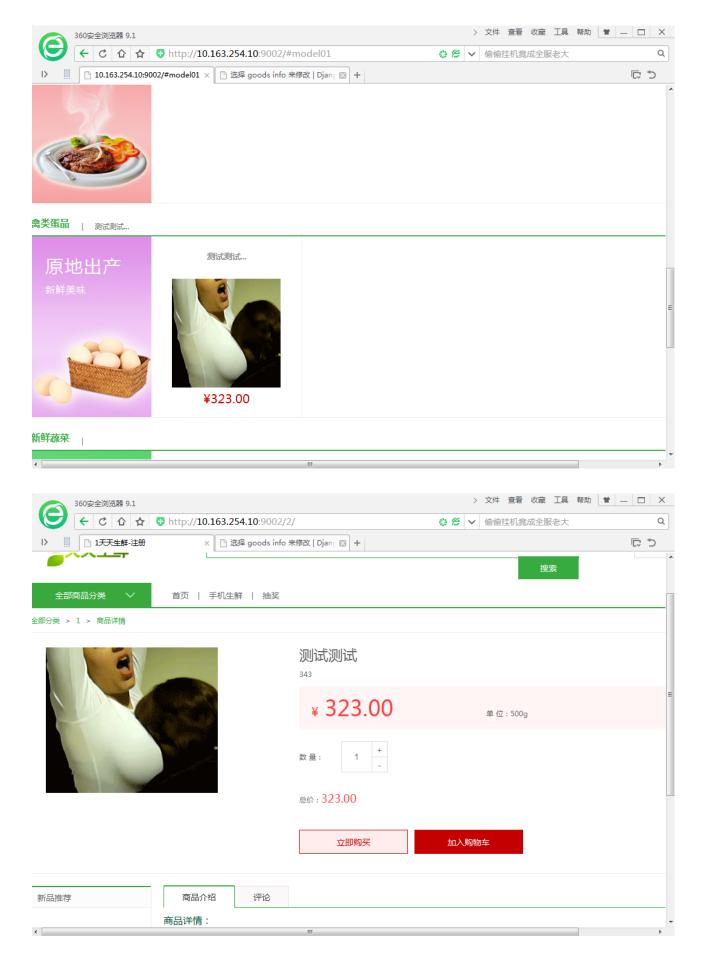

若以上这些搭建内容看的有点迷茫,需要学习一些基础课程。

django基础视频教程

磨刀不误砍柴工,要打好基础,欲速则不达哈。