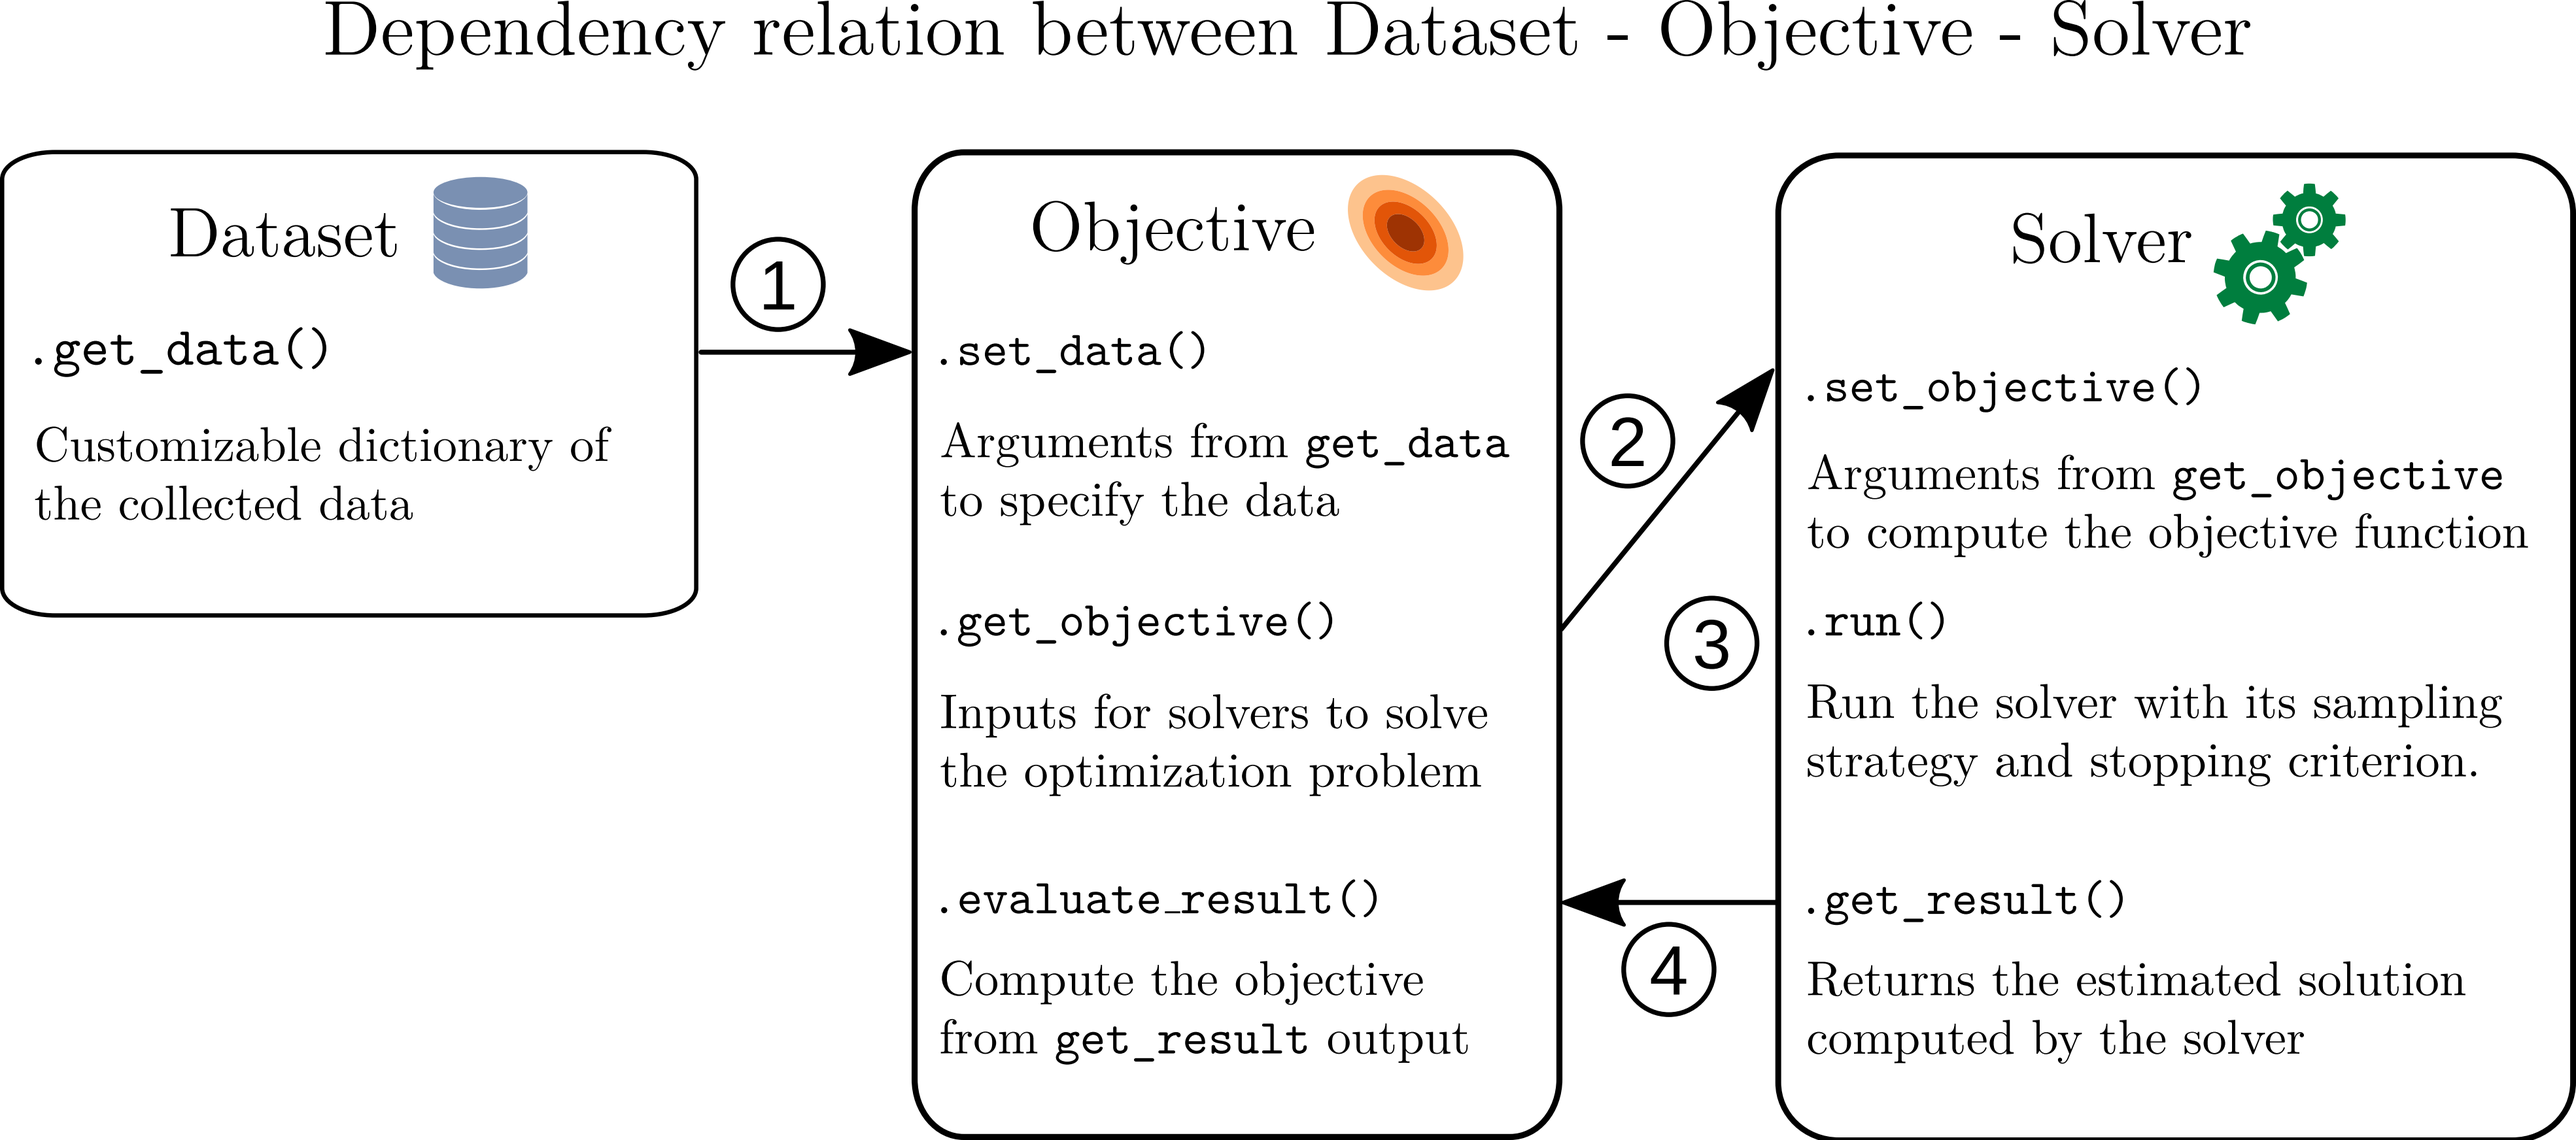

Dependency relation between Dataset - Objective - Solver
Dataset
.get_data()
Customizable dictionary of the collected data
1
Objective
.set_data()
Arguments from get_data to specify the data
.get_objective()
Inputs for solvers to solve the optimization problem
.evaluate_result()
Compute the objective from get_result output
2
3
4
Solver
.set_objective()
Arguments from get_objective to compute the objective function
.run()
Run the solver with its sampling strategy and stopping criterion.
.get_result()
Returns the estimated solution computed by the solver