


MICROSOFT AZURE


Copy Data Operation

Step 1: Creating a Resource Group

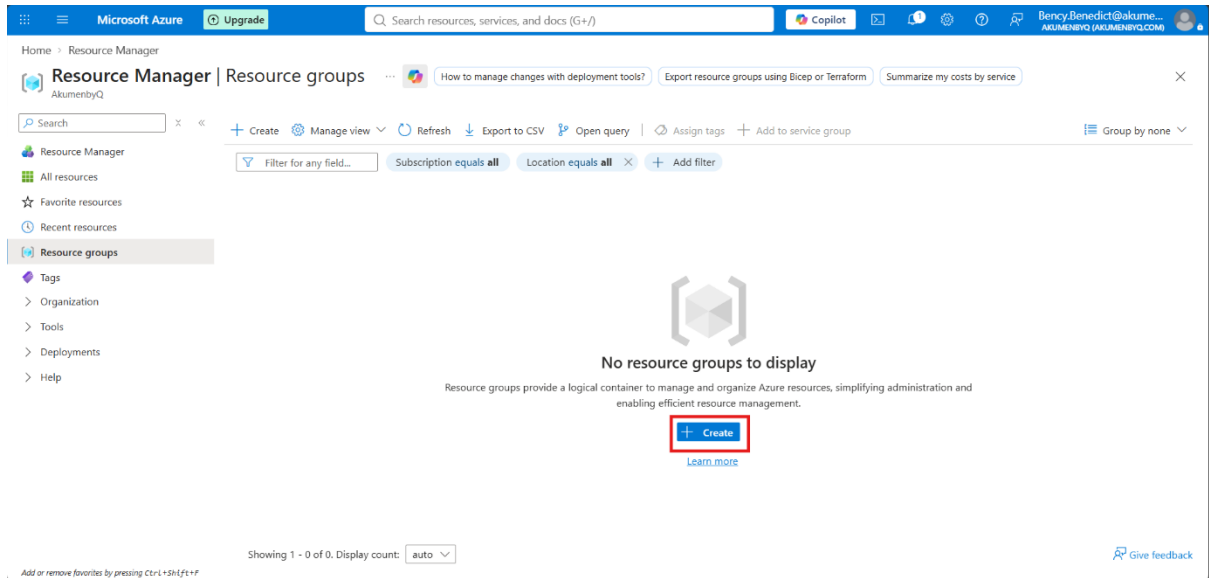


Step 2:

- Entered the resource group name
- Selected the appropriate Azure Subscription
- Chose the Region
- Click Review + Create

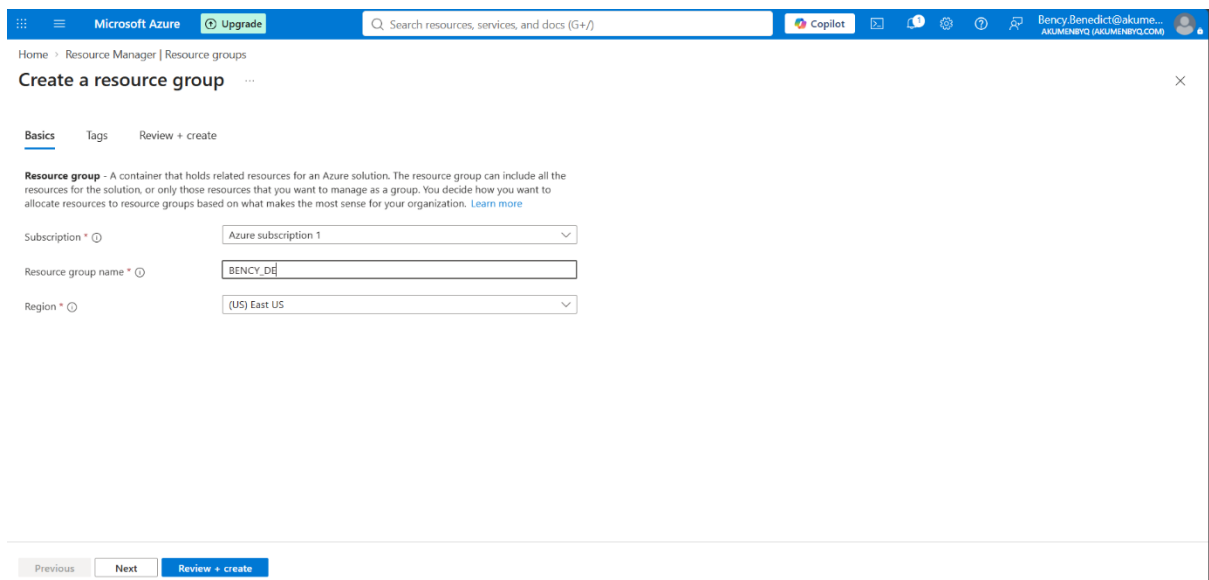

Step 3: Create Storage Account


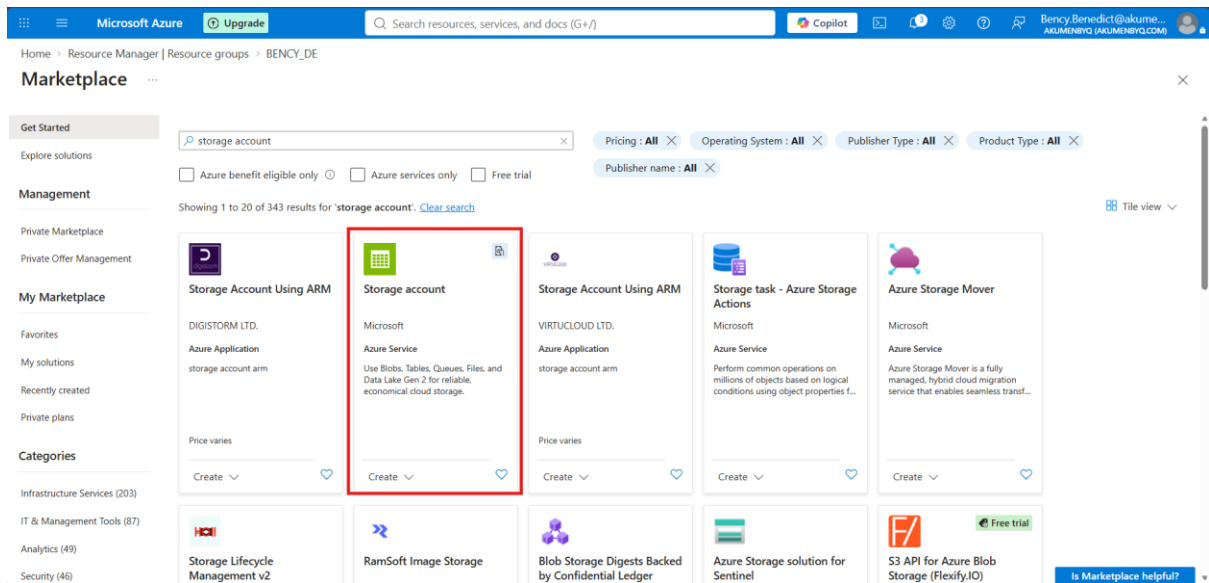


Configure the storage settings

- Select the subscription.
- Select the previously created Resource Group.
- Enter a unique Storage Account name.
- Select the appropriate region/performance settings.
- Click Review + Create

The screenshot shows the 'Create a storage account' form in the Microsoft Azure portal. The form is divided into two main sections: 'Project details' and 'Instance details'. In the 'Project details' section, the 'Subscription' is set to 'Azure subscription 1' and the 'Resource group' is set to 'BENCY_DE'. In the 'Instance details' section, the 'Storage account name' is 'bencyst790', the 'Region' is '(US) East US', and the 'Primary service' is 'Azure Blob Storage or Azure Data Lake Storage'. The 'Performance' section has two options: 'Standard' (selected) and 'Premium'. The 'Redundancy' section is set to 'Locally redundant storage (LRS)'. At the bottom of the form, there are three buttons: 'Previous', 'Next', and 'Review + create'. The 'Review + create' button is highlighted with a red box.

Step 4: Create Azure Data Factory

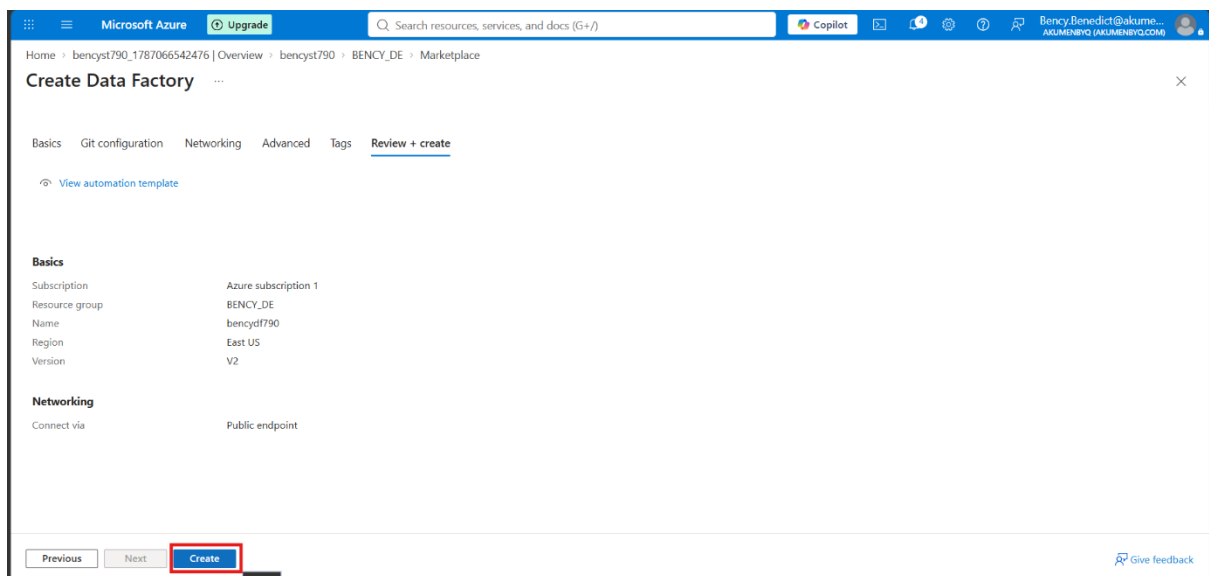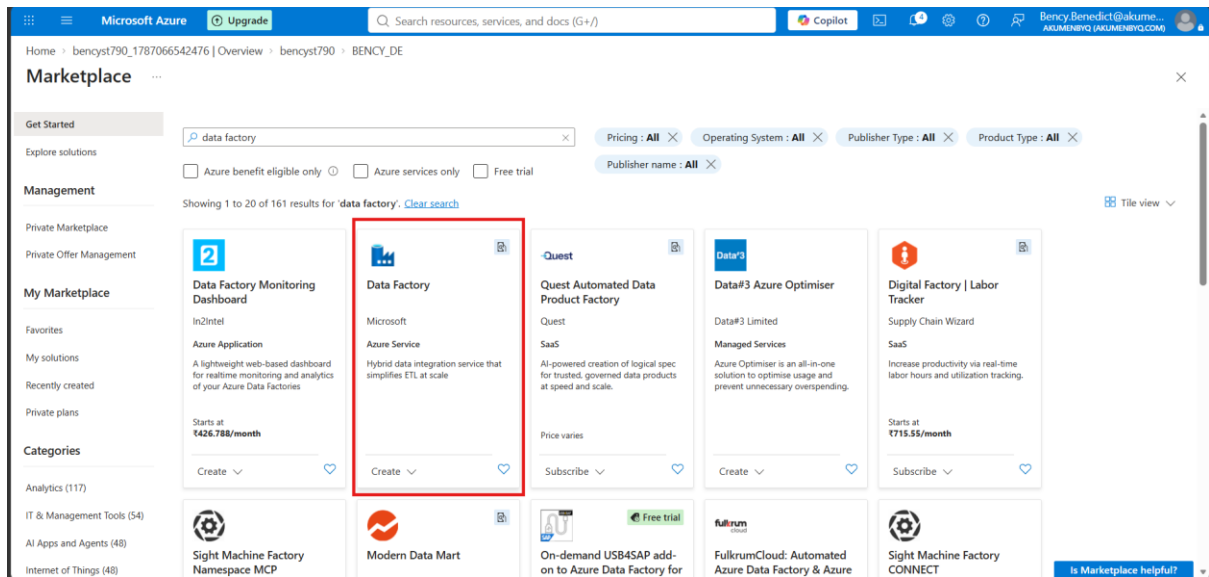

Step 5: From Data Storage

- Open Containers

The screenshot shows the Microsoft Azure portal interface for the 'bencyst790' storage account. The left-hand navigation pane is visible, with 'Containers' highlighted under the 'Data storage' section. The main content area displays the 'Essentials' tab, showing account details such as Resource group (BENCY_DE), Location (eastus), Subscription (Azure subscription 1), and Subscription ID (bdb9d3db-c3e8-4c8a-96c3-27db6b002aaf). The 'Properties' tab is also visible, showing settings for Blob service, Security, and Networking.

The screenshot shows the Microsoft Azure portal interface for the 'bencyst790' storage account, specifically the 'Containers' page. The '+ Add container' button is highlighted with a red rectangle. The page displays a table of containers, with one container named '\$logs' listed. The table columns are Name, Last modified, Anonymous access level, Lease state, and Storage connector.

Name	Last modified	Anonymous access level	Lease state	Storage connector
\$logs	18/8/2026, 8:53:15 pm	Private	Available	-

- Create the Source Container

The screenshot shows the Microsoft Azure portal interface for the 'bencyst790' storage account. The 'Containers' section is selected in the left sidebar. The 'New container' dialog box is open on the right. The 'Name' field is set to 'source' and the 'Anonymous access level' is set to 'Private (no anonymous access)'. The 'Create' button is highlighted with a red box.


Name	Last modified	Anonymous access level
\$logs	18/8/2026, 8:53:15 pm	Private

- Create the Destination Container Same as Source Container


The screenshot shows the Microsoft Azure portal interface for the 'bencyst790' storage account. The 'Containers' section is selected in the left sidebar. The 'Containers' list is displayed, showing three containers: '\$logs', 'destination', and 'source'. The 'destination' and 'source' containers are highlighted with a red box.

Name	Last modified	Anonymous access level	Lease state	Storage connector
\$logs	18/8/2026, 8:53:15 pm	Private	Available	-
destination	18/8/2026, 9:00:59 pm	Private	Available	-
source	18/8/2026, 9:00:43 pm	Private	Available	-


Step 6: Upload files to source container

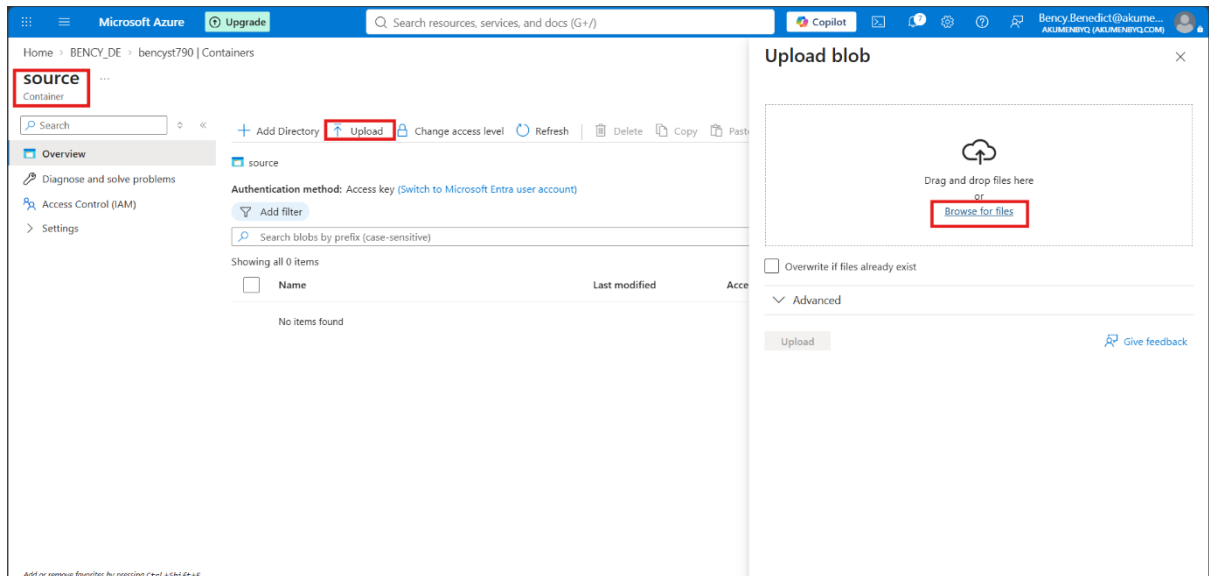

select files from device

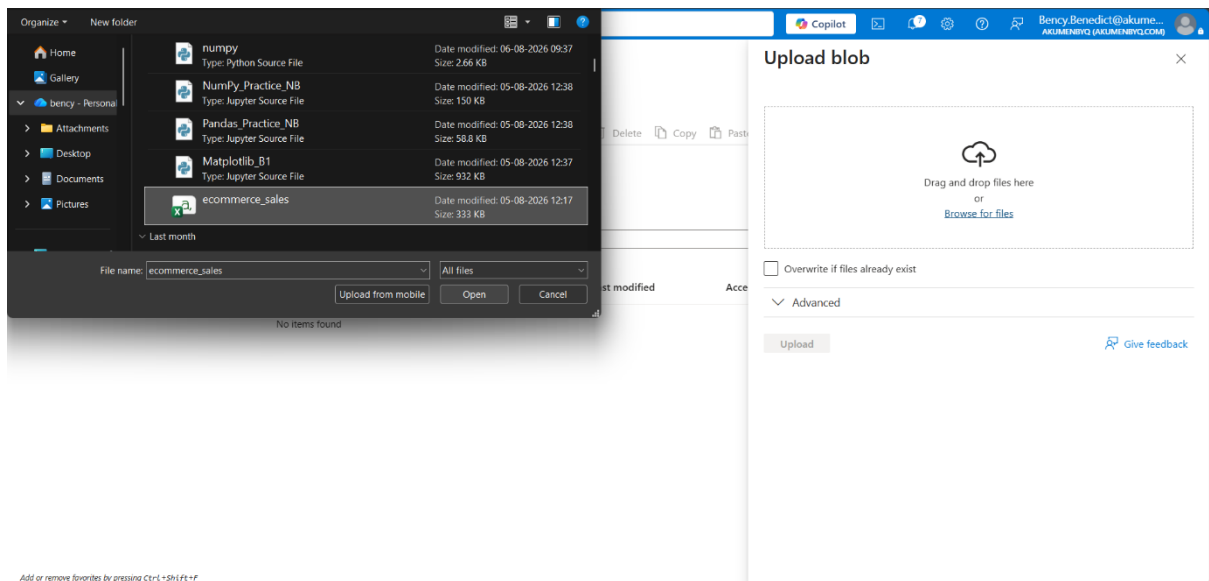


File Uploaded to Source Container

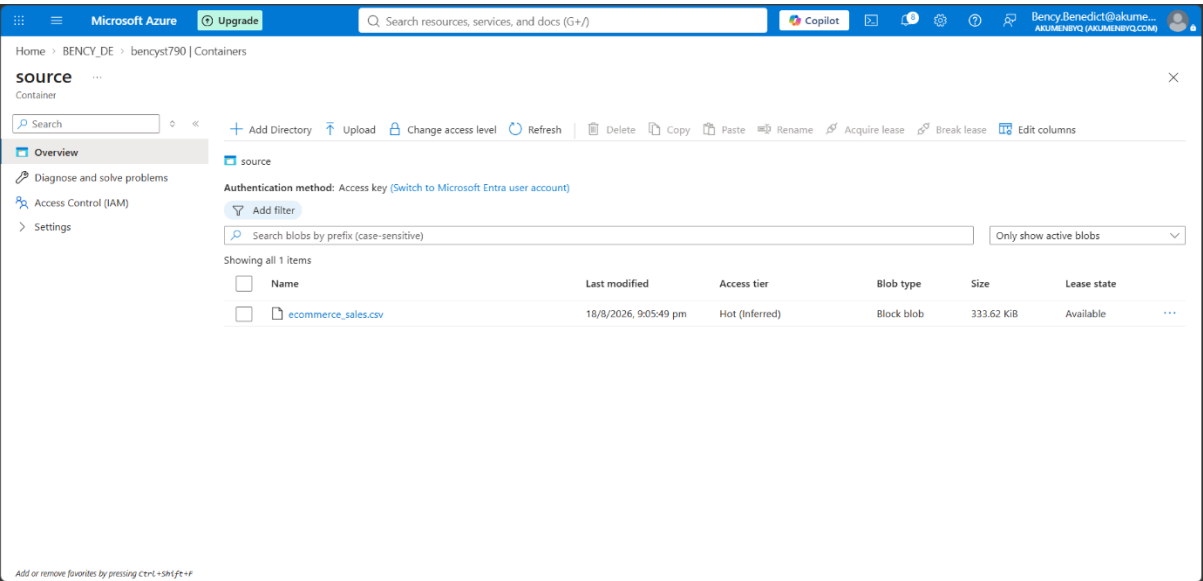


Step 7: Open Azure Data Factory Studio


- Studio Launch

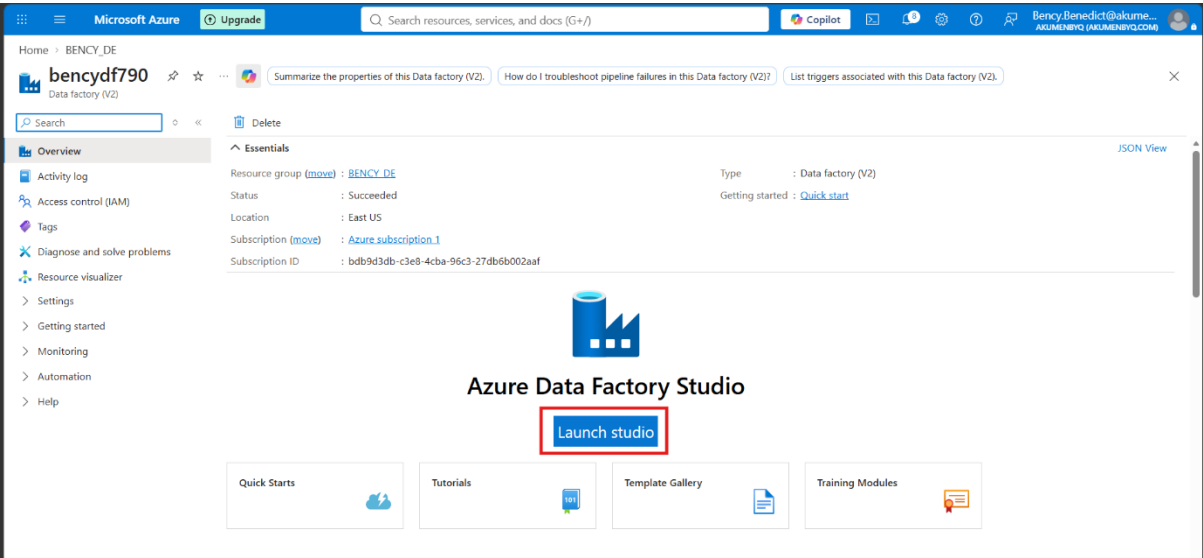


- Choose Author
- Select New Pipeline

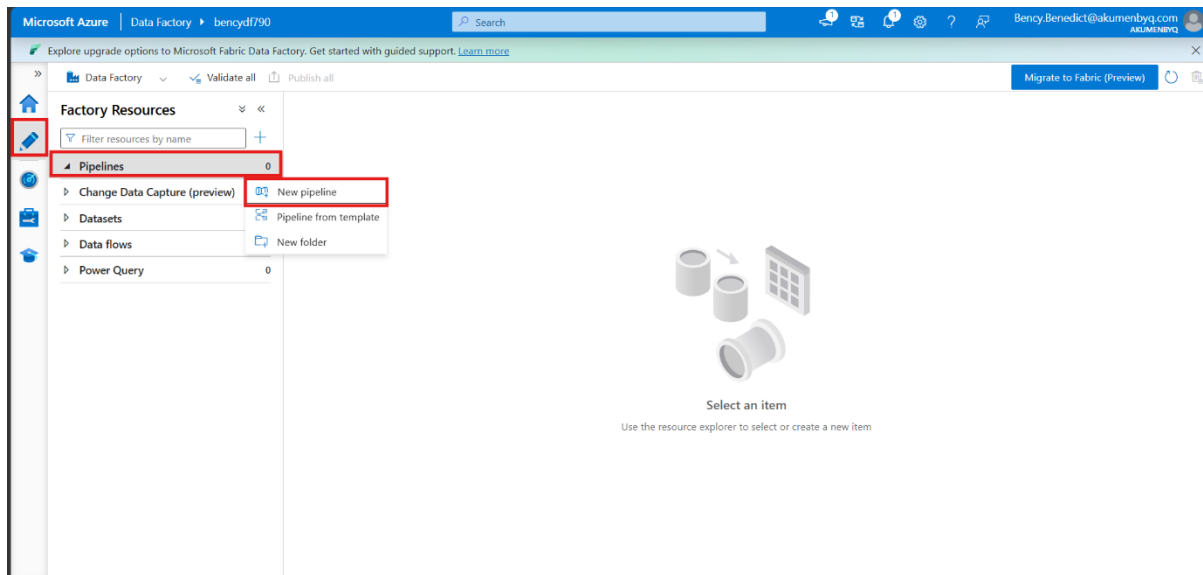


From the Activities , Drag and Drop Copy Data (From Move And Transform)

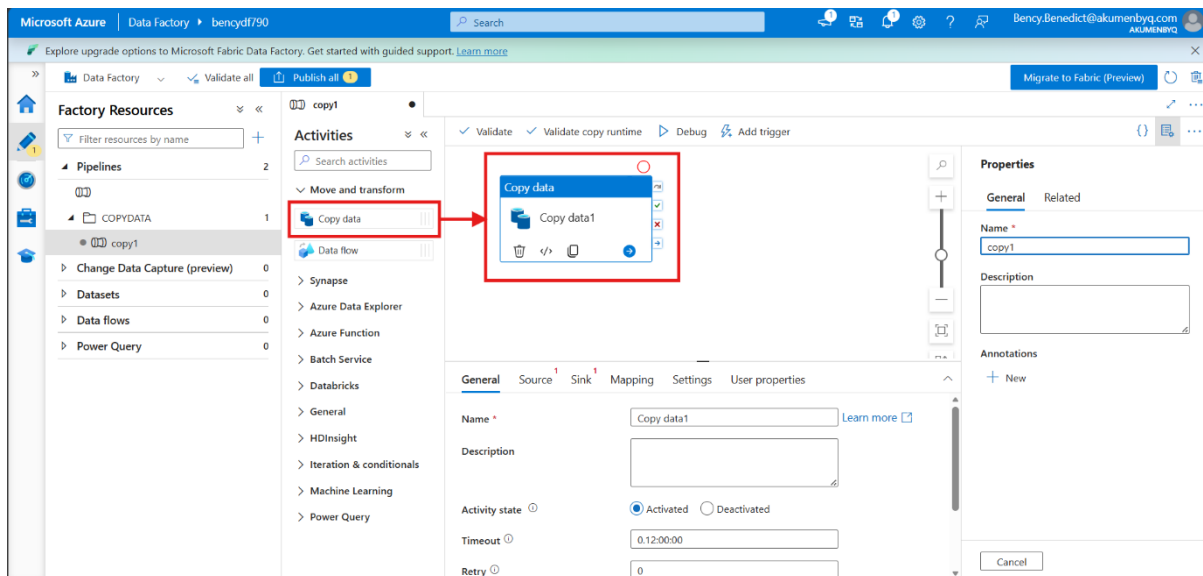



Create the Source Dataset

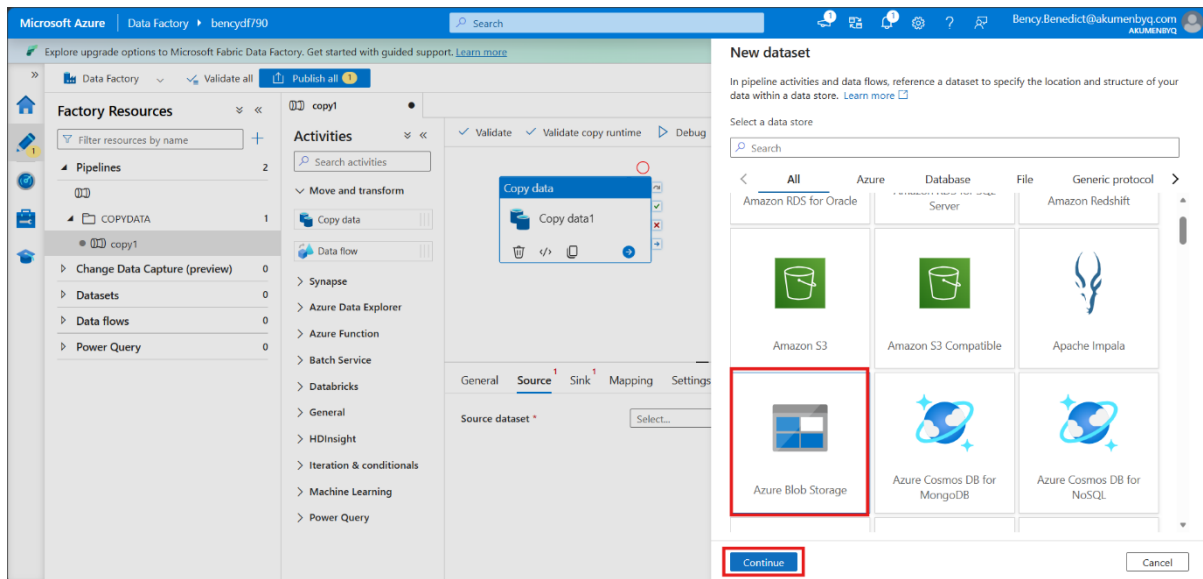

Choose Appropriate File Format

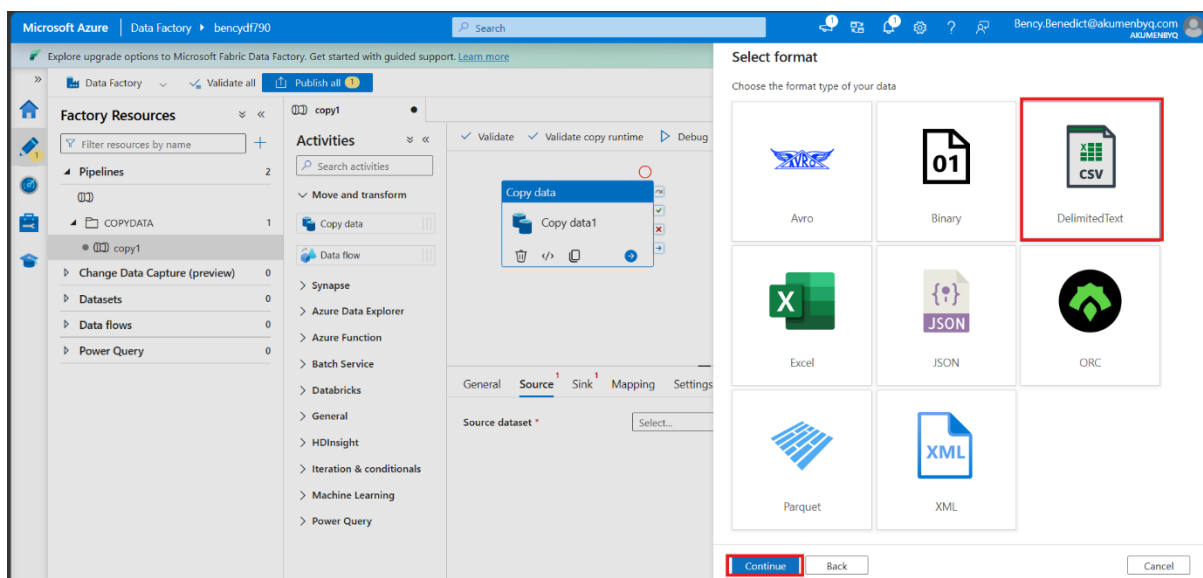

Set New Link Service

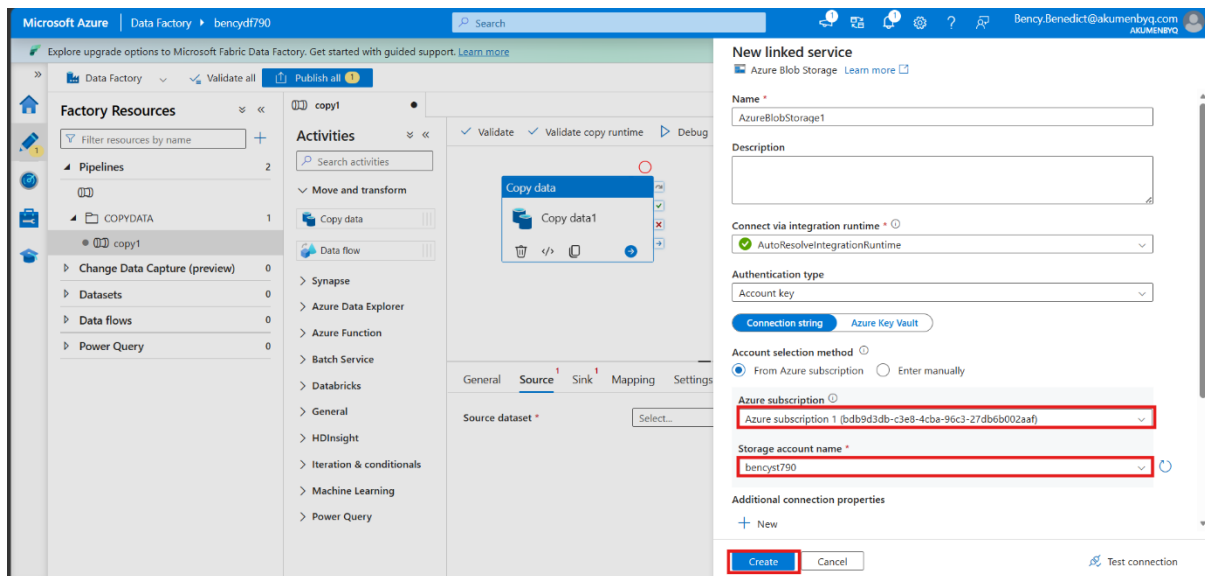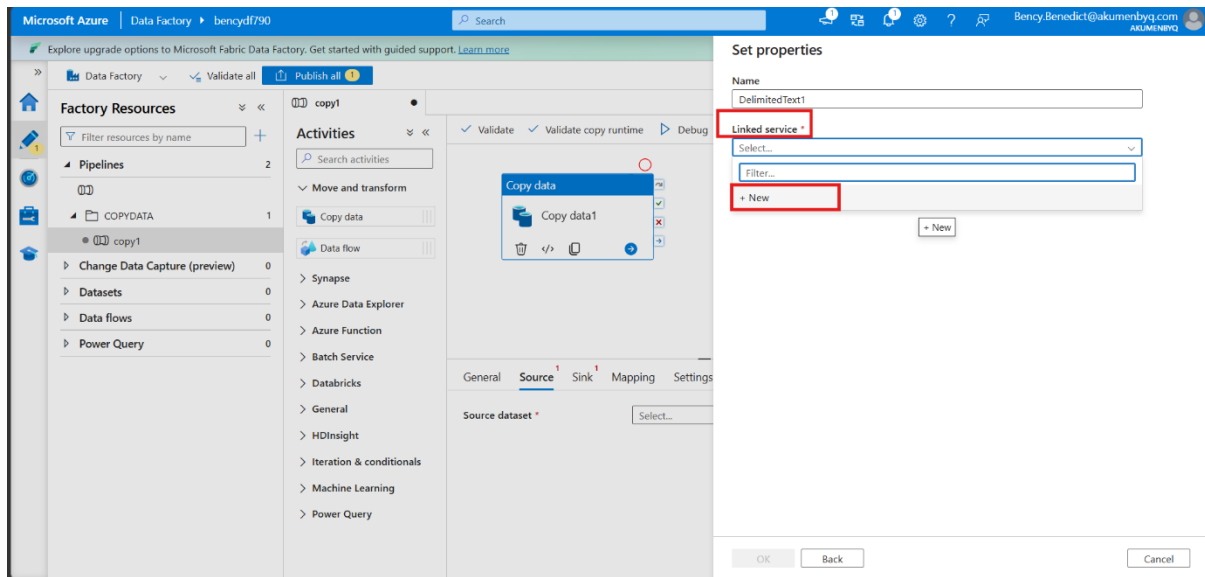

Browse and Select the Source File and Add the File Path in Source


The image displays three sequential screenshots of the Microsoft Azure Data Factory interface, illustrating the process of selecting a source file for a dataset.

Top Screenshot: The 'DelimitedText1' dataset is selected in the 'Factory Resources' pane. The 'Connection' tab is active, showing the 'Container' and 'Directory' fields. The 'File name' field is highlighted with a red box, and a 'Browse' button is visible next to it.


Middle Screenshot: The 'Browse' dialog box is open, showing the 'Root folder' as 'destination'. The 'source' folder is selected and highlighted with a red box.

Bottom Screenshot: The 'Browse' dialog box is open, showing the 'Root folder' as 'source'. The file 'ecommerce_sales.csv' is selected and highlighted with a red box.


Browse the Destination Folder in Sink

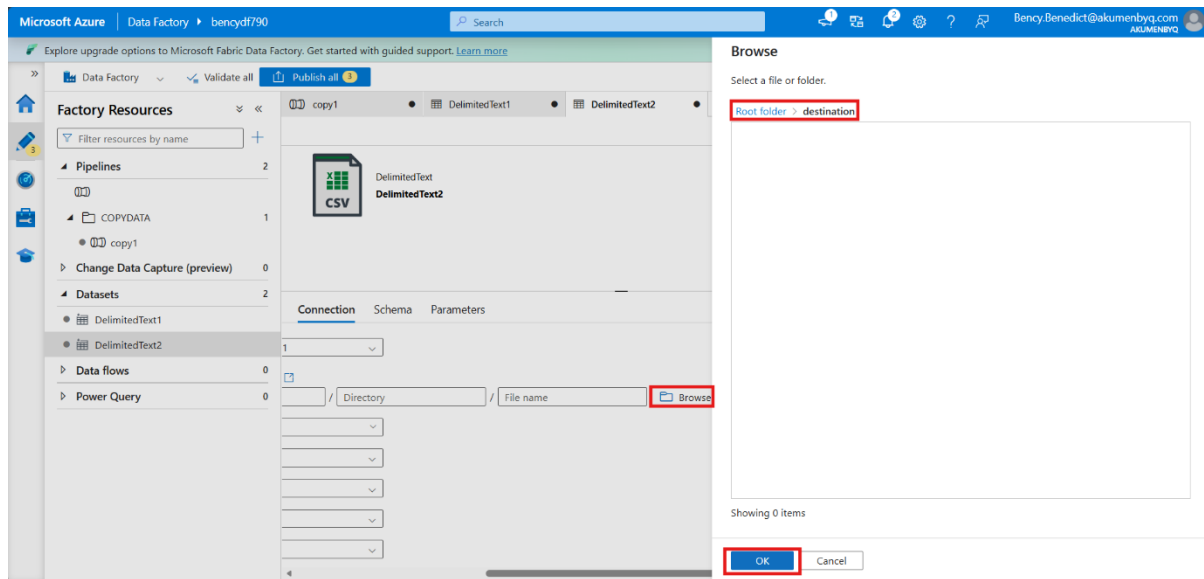


Validate the Pipeline and Debug it

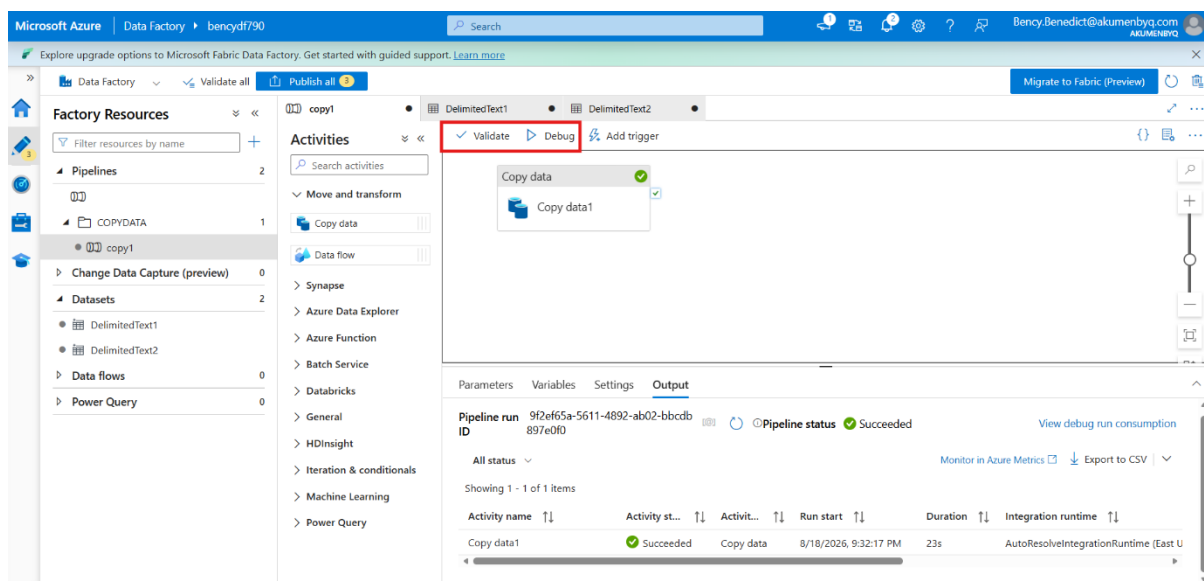

After Run the Pipeline, the File which was inside the Source folder is Copied to the Destination Container

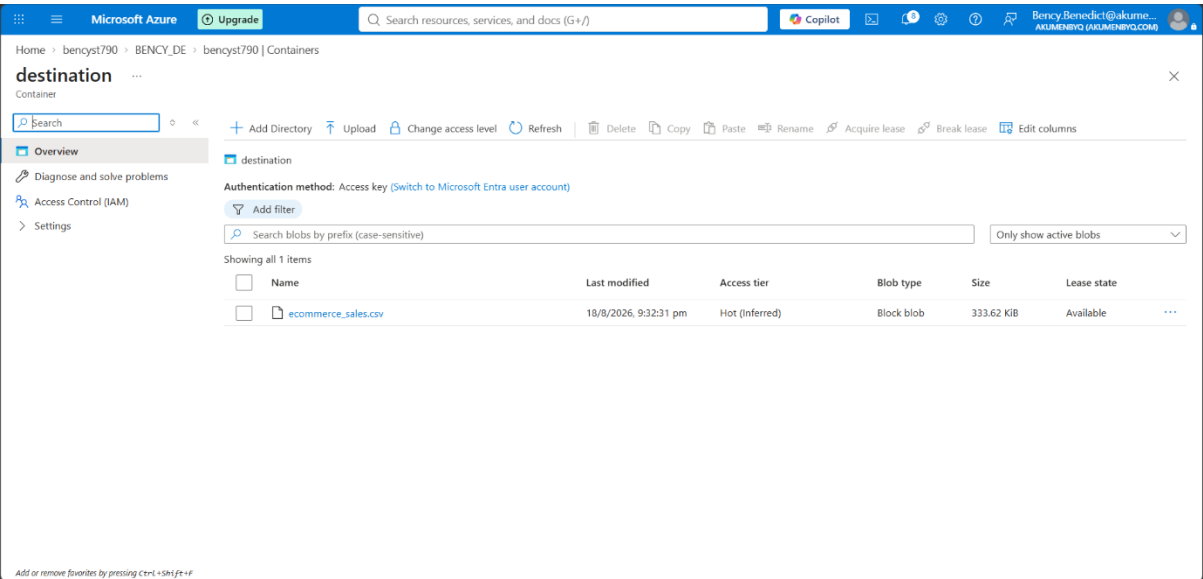


Upload more files to perform more copy data operations

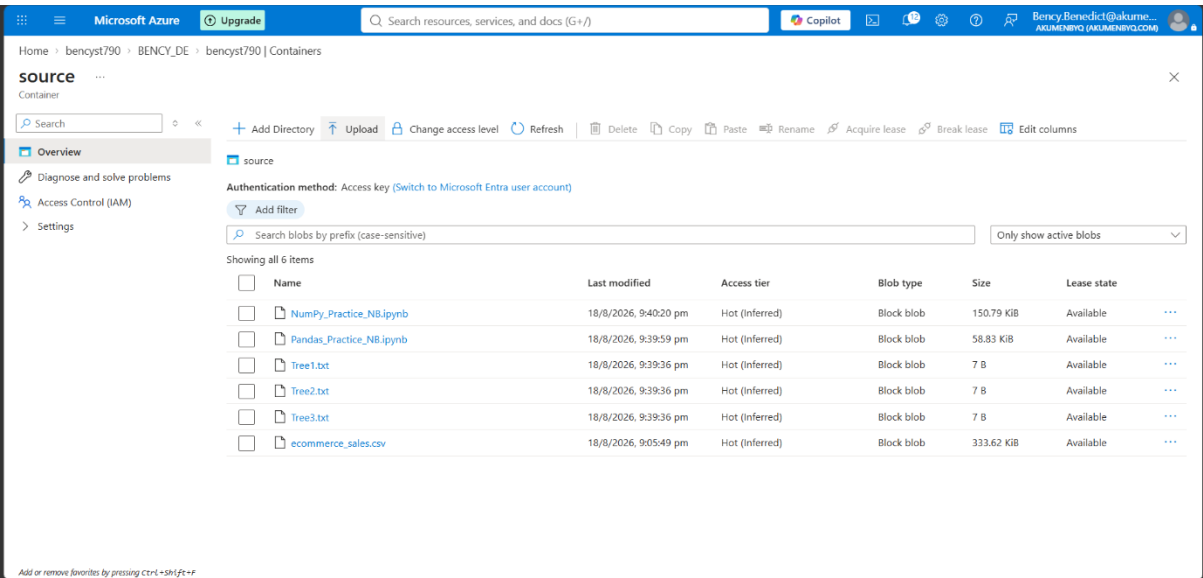


Step 8: Next Copying Data using Prefix


(we gave the prefix as “Tre” to get the files starting with Tre)

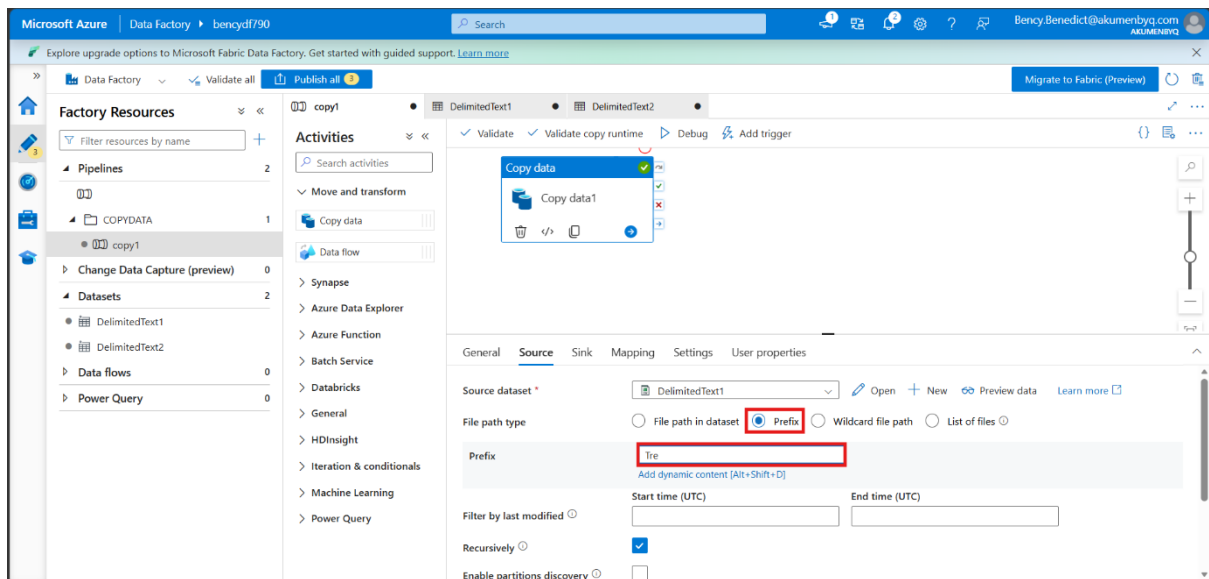

- Follow the previous steps selecting the source and destination path
- Validate and Debug

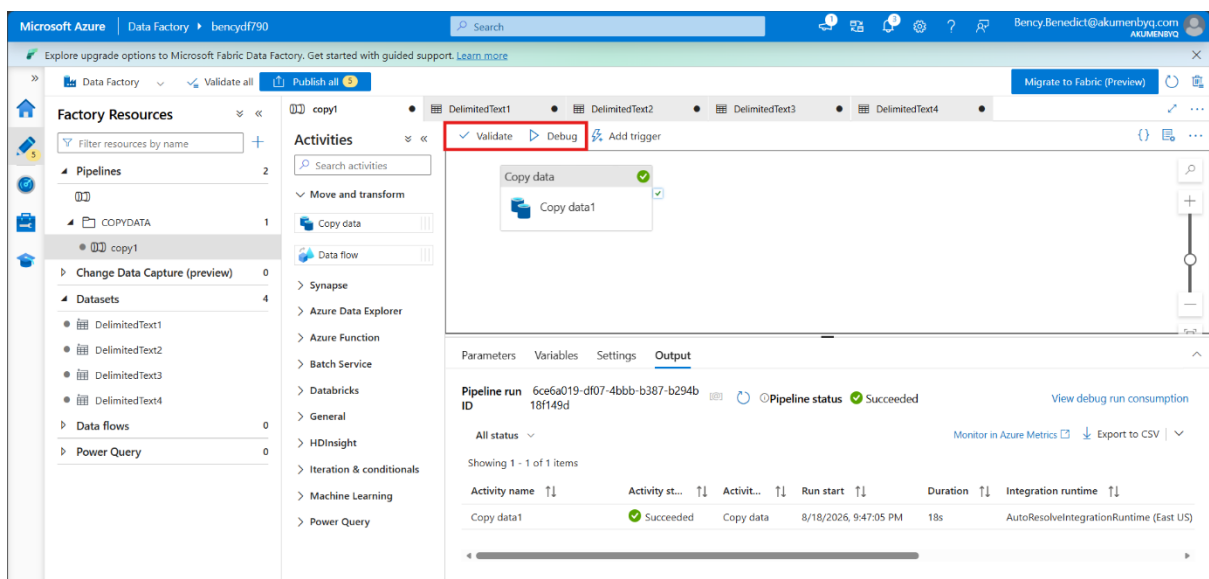


- All the file name which start with Tre are copied to destination

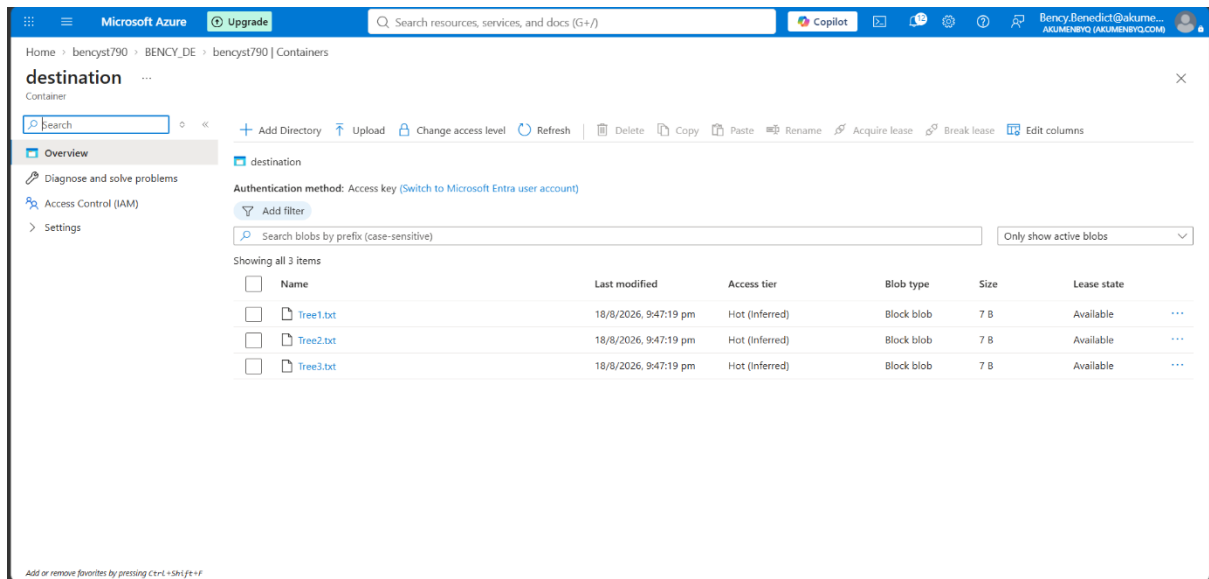

Step 9: Wildcard file path

- Copy the data by giving the file type (Eg. .pdf,.txt,.csv etc)
- Here we're going to fetch a .txt files

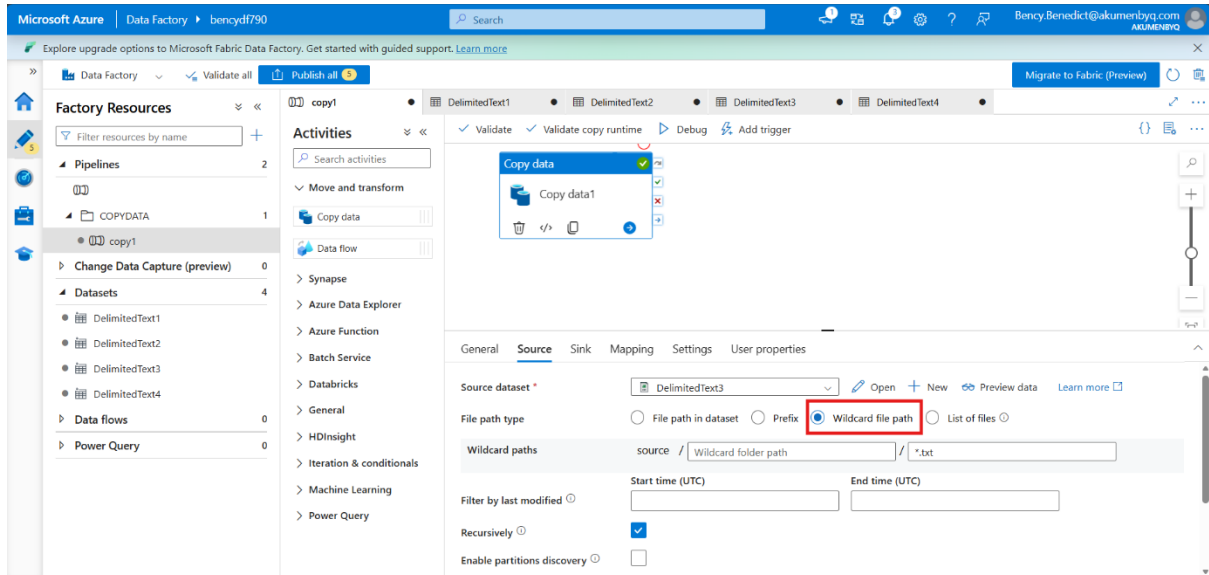

Validate and Debug the Pipeline

The screenshot shows the Microsoft Azure Data Factory interface. On the left, the 'Factory Resources' pane lists various resources including Pipelines, Datasets, and Data flows. The 'Activities' pane on the right shows a list of activities, with 'Copy data' selected. The 'Copy data' activity is highlighted, and the 'Validate' and 'Debug' buttons are visible. The 'Output' tab at the bottom shows the pipeline run details, including the Pipeline ID, Pipeline status (Succeeded), and a table of activity results.

Activity name	Activity st...	Activit...	Run start	Duration	Integration runtime
Copy data1	Succeeded	Copy data	8/18/2026, 9:53:57 PM	17s	AutoResolveIntegrationRuntime (East US)


The file with the extension .txt has been copied to the destination

The screenshot shows the Microsoft Azure Storage Explorer interface. The 'destination' container is selected, and the 'Overview' tab is active. The 'Authentication method' is set to 'Access key'. The 'Search blobs by prefix (case-sensitive)' field is empty. The table below shows the contents of the container.

Name	Last modified	Access tier	Blob type	Size	Lease state
Tree1.txt	18/8/2026, 9:54:09 pm	Hot (inferred)	Block blob	7 B	Available
Tree2.txt	18/8/2026, 9:54:09 pm	Hot (inferred)	Block blob	7 B	Available
Tree3.txt	18/8/2026, 9:54:09 pm	Hot (inferred)	Block blob	7 B	Available

Step 10: List of Files

- Browse and Select the List of Files Documents (notepad.csv)
- Give the File Paths

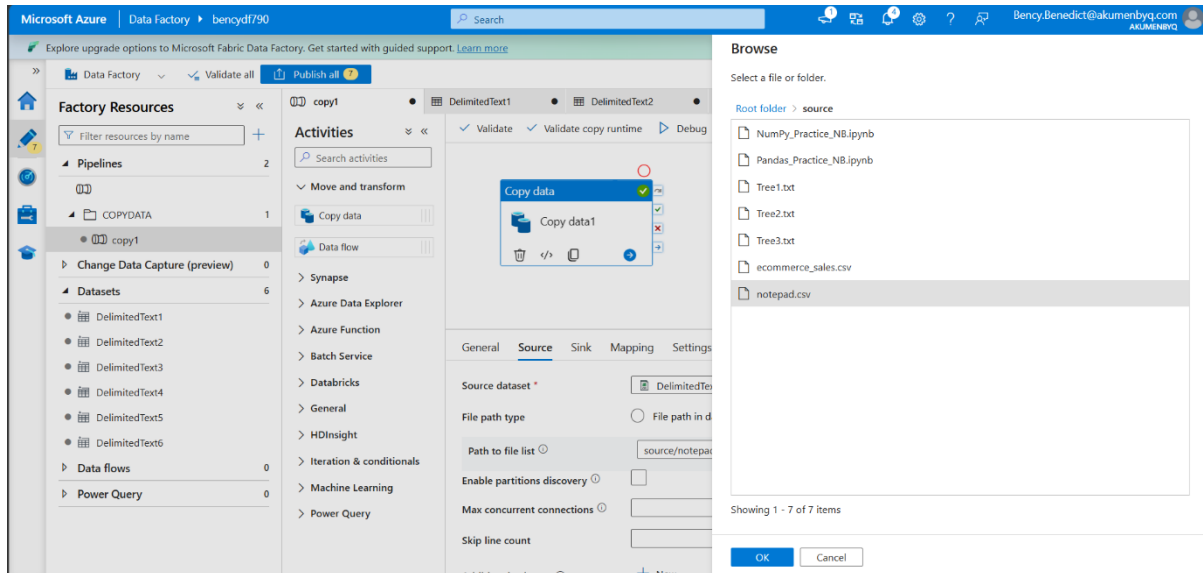

All the files inside the notepad.csv are copied to destination

