


五、微调数据构造

参考:

<https://github.com/ConardLi/easy-dataset>

<https://github.com/ConardLi/easy-dataset/blob/main/README.zh-CN.md>

<https://docs.easy-dataset.com/>

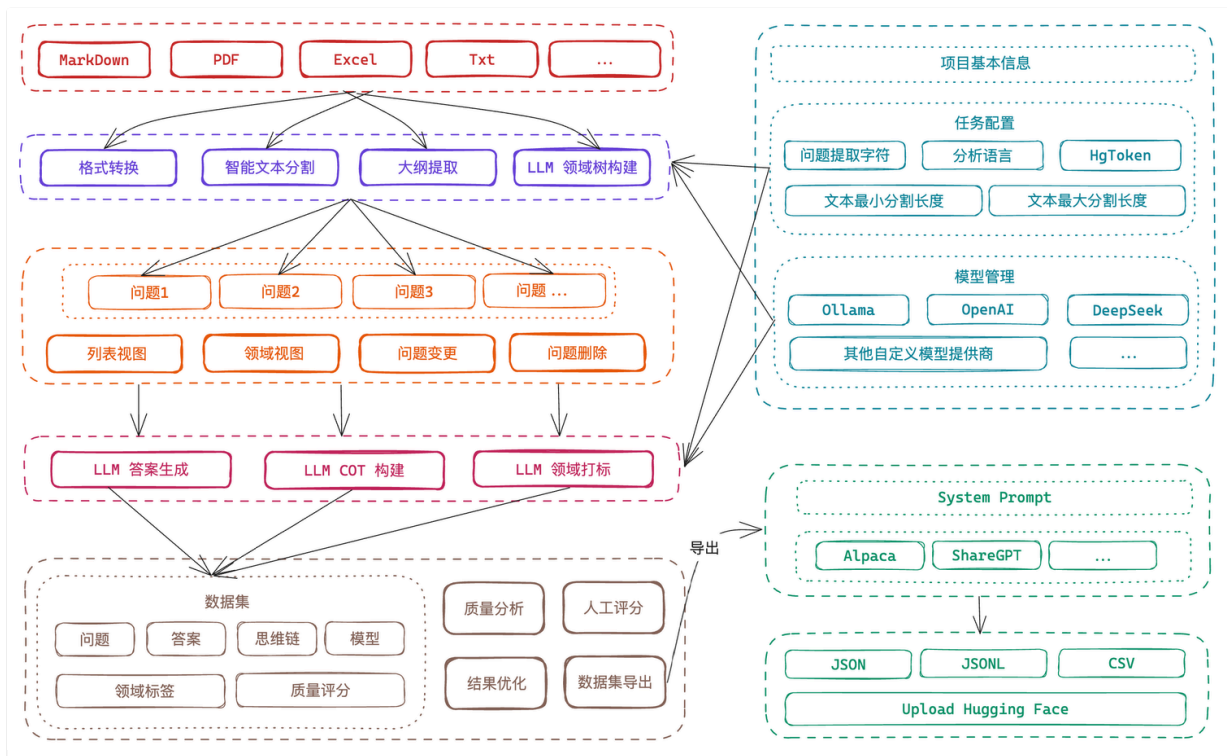

操作步骤:

```
# 参考:
https://docs.easy-dataset.com/

# 下载代码
git clone https://github.com/ConardLi/easy-dataset.git
cd easy-dataset

# 构建镜像
## 镜像构建的时候, 需要先添加国内docker镜像仓库源, 方便下载依赖仓库
## 如果出现npm源访问不了的情况, 可以考虑修改npm源为国内源 或者 重试
## PS: 建议先不要修改, 哪怕出现TimeOut之类的异常, 建议重试最好。
vim .npmrc
##### 使用国内淘宝源
# 国内用户可使用淘宝源加速 (Chinese users can use Taobao registry for faster downloads)
registry=https://registry.npmirror.com
```

Bash

```

#registry=https://registry.npmjs.org
#####

docker build -t easy-dataset .
=====

(base) root@iZbp15dscmm321tx32xls0Z:~/easy-dataset# docker build -t easy-dataset .
[+] Building 507.1s (21/21) FINISHED
=> [internal] load build definition from Dockerfile
=> => transferring dockerfile: 2.02kB
=> [internal] load metadata for docker.io/library/node:20-alpine
0.1s => [internal] load .dockerignore
0.0s
=> [internal] load .dockerignore
=> => transferring context: 205B
=> [pnpm-base 1/2] FROM docker.io/library/node:20-alpine@sha256:eabac870db94f7342d6c33560d6613f188bbcf4bbe1f4eb47d5e2a08e1a37722
=> [internal] load build context
=> => transferring context: 24.93kB
=> CACHED [pnpm-base 2/2] RUN npm install -g pnpm@9
=> CACHED [builder 1/7] WORKDIR /app
=> CACHED [builder 2/7] RUN apk add --no-cache --virtual .build-deps python3
make g++ cairo-dev pango-dev jpeg-dev giflib-dev libsvg-dev
build-base pixman-dev pkgconfig 0.0s
=> CACHED [builder 3/7] COPY package.json pnpm-lock.yaml .npmrc ./
0.0s
=> CACHED [runner 2/8] RUN apk add --no-cache cairo pango jpeg gifli
b libsvg pixman
0.0s
=> CACHED [runner 3/8] COPY package.json .env ./
0.0s
=> [builder 4/7] RUN pnpm install
172.9s
=> [builder 5/7] COPY . .
0.2s
=> [builder 6/7] RUN if [ "linux/amd64" = "linux/arm64" ]; then echo "Config
uring for ARM64 platform"; sed -i 's/binaryTargets = \[.*\]/binaryTargets =
\[ "linux-musl-arm64-openssl-3.0.x" \]/' prisma/sche 247.0s
=> [builder 7/7] RUN pnpm prune --prod
7.3s
=> [runner 4/8] COPY --from=builder /app/node_modules ./node_modules
23.4s
=> [runner 5/8] COPY --from=builder /app/.next ./next
12.2s
=> [runner 6/8] COPY --from=builder /app/public ./public
0.2s
=> [runner 7/8] COPY --from=builder /app/electron ./electron
0.1s
=> [runner 8/8] COPY --from=builder /app/prisma ./prisma
0.1s
=> exporting to image
25.4s

```

```
=> => exporting layers
25.3s
=> => writing image sha256:ab604606abb3d3f864acdbe6191123071a5d977eedb5ebdc17190e564
0b49815
0.0s
=> => naming to docker.io/library/easy-dataset
0.0s
```

=====

```
# 运行镜像 --> 将 {YOUR_LOCAL_DB_PATH} 替换成宿主存储数据的文件夹路径
```

```
docker run \
  -d \
  -p 1717:1717 \
  -v {YOUR_LOCAL_DB_PATH}:/app/local-db \
  --name easy-dataset \
  easy-dataset
```

```
docker run \
  -d \
  -p 1717:1717 \
  -v /root/easy-dataset/running:/app/local-db \
  --name easy-dataset \
  easy-dataset
```

```
# 访问
```

```
http://xxx:1717
```