

[Tables](#)
[Relationships](#)
[Constraints](#)
[Anomalies](#)
[Columns](#)
[Donate](#)

## Table walkerb5.Courses

☐ Related columns
 ☐ Constraints
 ☐ Comments
 ☒ Legend

Column	Type	Size	Nulls	Auto	Default	Children	Parents
courseCode	varchar	6				<a href="#">Registration</a>	
courseName	varchar	70					
level	char	2	√		null		
credits	float	12					

Table contained 8 rows at Thu Oct 29 18:00 PDT 2015

**Indexes:**

Column(s)	Type	Sort
courseCode	Primary key	Asc

**Close relationships** within ☒ one ☐ two degrees of separation:

Courses		
courseCode	varchar[6]	
courseName	varchar[70]	
level	char[2]	
credits	float[12]	
< 0	8 rows	1 >

Registration		
studentID		
courseCode		
grade		
< 2	15 rows	

Generated by SchemaSpy

[Tables](#)[Relationships](#)[Constraints](#)[Anomalies](#)[Columns](#)[Donate](#)

## Table walkerb5.Registration

☐ Related columns ☐ Constraints ☐ Comments ☒ Legend


Column	Type	Size	Nulls	Auto	Default	Children	Parents
studentID	char	11					<a href="#">Students</a>
courseCode	varchar	6					<a href="#">Courses</a>
grade	decimal	2,1					

Table contained 15 rows at Thu Oct 29 18:00 PDT 2015

### Indexes:

Column(s)	Type	Sort
studentID + courseCode	Primary key	Asc/Asc
courseCode	Performance	Asc
studentID + courseCode	Must be unique	Asc/Asc

### Close relationships:

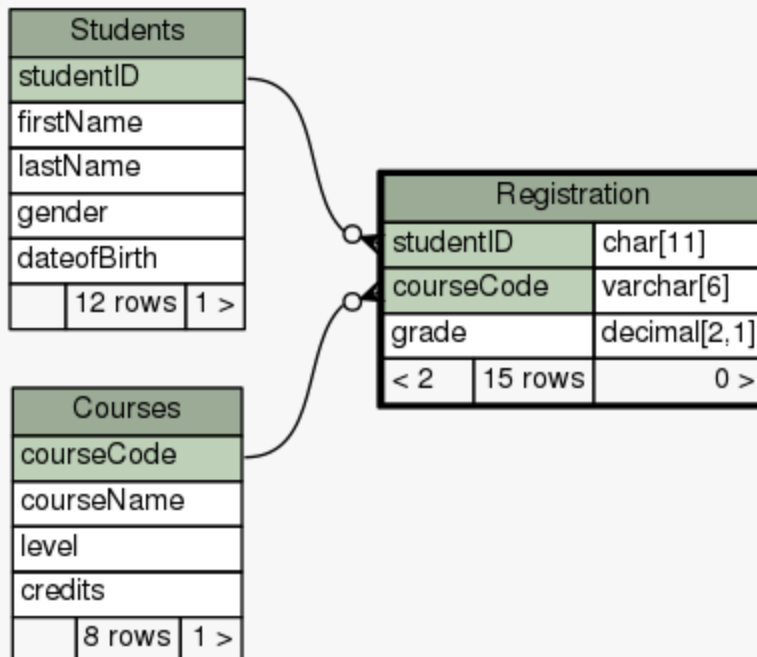

Generated by SchemaSpy

## Table walkerb5.Students

☐ Related columns
 ☐ Constraints
 ☐ Comments
 ☒ Legend


Column	Type	Size	Nulls	Auto	Default	Children	Parents
studentID	char	11				<a href="#">Registration</a>	
firstName	varchar	20					
lastName	varchar	20					
gender	char	1					
dateofBirth	date	10					

Table contained 12 rows at Thu Oct 29 18:00 PDT 2015

### Indexes:

Column(s)	Type	Sort
studentID	Primary key	Asc

**Close relationships** within ☒ one ☐ two degrees of separation:

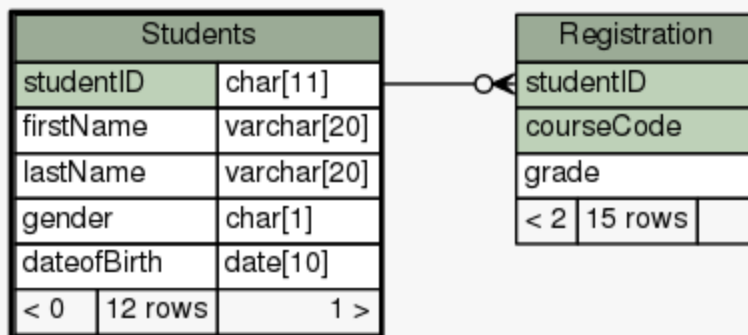

Generated by SchemaSpy

Tables

Relationships

Constraints

Anomalies

Columns

Donate

## SchemaSpy Analysis of walkerb5 - Constraints

### 2 Foreign Key Constraints:

Constraint Name	Child Column	Parent Column	Delete Rule
Registration_ibfk_1	Registration.studentID	Students.studentID	Restrict delete
Registration_ibfk_2	Registration.courseCode	Courses.courseCode	Restrict delete

### Check Constraints:

Table	Constraint Name	Constraint
None detected		

Tables

Relationships

Constraints

Anomalies


Columns

Donate

## SchemaSpy Analysis of walkerb5 - All Relationships

Generated by [SchemaSpy](#) on Thu Oct 29 18:00 PDT 2015

☐ All columns

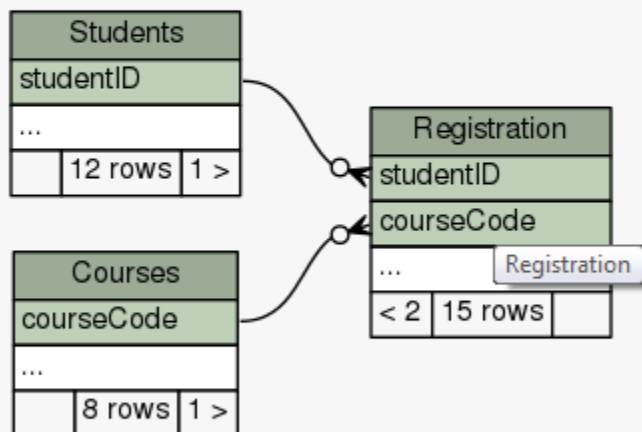

Generated by SchemaSpy

## SchemaSpy Analysis of walkerb5 - Columns

Generated by [SchemaSpy](#) on Thu Oct 29 18:00 PDT 2015

☐ Comments ☒ Legend

**walkerb5 contains 12 columns** - click on heading to sort:

Table	Column	Type	Size	Nulls	Auto	Default
<a href="#">Courses</a>	courseCode	varchar	6			
<a href="#">Courses</a>	courseName	varchar	70			
<a href="#">Courses</a>	credits	float	12			
<a href="#">Courses</a>	level	char	2	√		null
<a href="#">Registration</a>	courseCode	varchar	6			
<a href="#">Registration</a>	grade	decimal	2,1			
<a href="#">Registration</a>	studentID	char	11			
<a href="#">Students</a>	dateofBirth	date	10			
<a href="#">Students</a>	firstName	varchar	20			
<a href="#">Students</a>	gender	char	1			
<a href="#">Students</a>	lastName	varchar	20			
<a href="#">Students</a>	studentID	char	11			