



## MOED REFERENCE GUIDE

# Comprehensive User Manual

Plan engagements. Keep relationship history.  
Coordinate follow-up. Manage communication.  
Protect and recover shared records.

### ONE CONNECTED WORKFLOW

Inquiry > Engagement > Presentations

People > Chron and email > Follow-up

Financial closeout > Relationship history

Application version 2.4.18 | October 5, 2026

Comprehensive Guide for this application release

Reviewer, editor, and administrator reference

[Open contents >](#)

Clickable chapters, topic finder, bookmarks, and related-topic navigation

# Contents

Select a chapter or use the PDF bookmarks panel. Printed page numbers are the same as the page numbers in your PDF reader.

|    |                                       |    |    |                                   |     |
|----|---------------------------------------|----|----|-----------------------------------|-----|
| 01 | Getting Oriented                      | 4  | 08 | Chron and Email                   | 88  |
| 02 | Roles and Access                      | 11 | 09 | Map and Calendar                  | 95  |
| 03 | Daily Dashboard                       | 13 | 10 | Reimbursements                    | 104 |
| 04 | Inquiry and Booking Pipeline          | 16 | 11 | Profile and Security              | 123 |
| 05 | Engagements                           | 26 | 12 | Mattermost                        | 132 |
| 06 | Organizations, Contacts, and Speakers | 61 | 13 | Administration                    | 137 |
| 07 | Work Queue                            | 76 | 14 | Troubleshooting and Good Practice | 156 |

[Alphabetical topic finder - p. 160](#)

[Appendix A: complete current README.md - p. 162](#)

# How to use this manual

Start with your task, then use the illustrated walkthroughs

## Navigate in four ways

Use the clickable contents for chapters; use the bookmarks panel for sections and screenshots; follow Related chapters links for connected work; or use the alphabetical topic finder. Every page has Contents, Topic finder, Previous, Next, and Chapter start links.

## Choose your starting point

Start your day: Daily dashboard and Work queue. Plan an event: Booking pipeline, then Engagements. Send or file correspondence: Chron and email. Submit expenses: Reimbursements. Look up a person: People and organizations.

Read the short chapter guidance first, then follow the matching screenshot walkthrough. Administrator-only actions are labeled. The technical repository README is separated in Appendix A for operators.

## Scope and edition

This manual describes the MOED browser application at application version 2.4.18, updated on October 5, 2026. This edition refreshes the everyday workflows through version 2.4.18: task filtering and bulk updates, event planning and retained history, presentation Archive and Delete controls, scoped QR statistics resets, map filter changes, reimbursement selection, PDF/CSV packages and size review, email cards, draft recovery, and administrator unlock extensions. It retains ai coach conversations, interactive walkthroughs, answer feedback, administrator request review, and verified guidance improvements. It also documents chunked PowerPoint and PDF uploads, visible progress, retries, and the 500 MB PowerPoint limit and the exact entry points for event creation and presentation uploads. ai coach is available only when enabled for the installation. Existing account, deletion, and record-management guidance is retained. It covers reviewer, editor, and administrator workflows and the configured Mattermost integration. Deployment-specific settings may change names, reminder windows, available integrations, or branding.

The 14 chapters follow the sidebar User Manual. Each begins with the reference guidance and continues with illustrated

walkthroughs. Section and figure headings also appear as PDF bookmarks.

## Screenshots and example records

Screenshots use isolated local previews, with the changed workflows refreshed for this edition and earlier captures retained where their controls still apply. Cedar Grove Community, Jordan Parker, Alex Morgan, Example Conference, Avery Host, Casey Speaker, and their events and inquiries are fictional training examples. A few existing preview records and the preview account name may appear in directory or account views. No production messages were sent and no invitations were submitted.

The previews have no connected Mattermost service. Mail is disabled or uses a local development log; no email was queued during screenshot capture. Those capabilities are documented from the application guide and source; screenshots label the configuration limitation. Empty financial/statistics views represent a new training record, not a claim that the feature is unavailable.

Screenshots show selected viewports and form sections. Scroll in the application to continue longer forms. Zoom into the PDF for fine control labels. Most screenshots use the light theme; dark theme and mobile navigation are illustrated separately.

## Meaning of access labels

**Reviewer:** read records, export, inspect statistics, and manage the personal account.

**Editor:** additionally create, edit, archive/restore, manage work, and correspond.

**Administrator:** additionally govern users, audit, backups, and permanent deletion.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Daily dashboard \(p. 13\)](#) / [Profile and security \(p. 123\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 01

# Getting Oriented

MOED keeps event planning, people, communication history, and next actions connected instead of scattering them across separate systems.

Related chapters: [Roles and access](#) (p. 11) / [Daily dashboard](#) (p. 13) / [Profile and security](#) (p. 123) / [Reimbursements](#) (p. 104)

## The Record Model at a Glance

An Inquiry holds a possible booking while it is being qualified. Once booked, it creates an Engagement linked to an Organization and its Contacts. These records can carry Chron Log history and Follow-Up Work.

## Use the Sidebar

The logo stays at the top of the sidebar and your profile and sign-out controls stay at the bottom. Scroll the menu between them to reach every destination. Under Work, open **Email Templates**; under Schedule, open **Calendar**. Administrators also have **Network** under Administration.

On a narrow screen, use the menu button in the top bar. The drawer keeps its logo, close button, and account controls visible while the menu scrolls. Select **Close navigation**, tap outside the panel, or press [Esc](#) to close it.

## Switch the Theme

Select **Dark Theme** or **Light Theme** near the bottom of the sidebar. MOED remembers the choice in this browser.

## Open Your Account

Select your fixed name and picture block to edit your profile, or its adjacent sign-out icon to log out. **Account Security**, **User Manual**, Mattermost, and the theme switch are in the lower part of the scrollable menu.

## A Practical First Session

- 01 Complete your profile.** Review your name, phone, picture, and verified recovery email in [My Profile](#).
- 02 Protect the account.** Enroll an authenticator and store the one-time recovery codes from [Account Security](#).

- 03 Check the daily view.** Use the [Dashboard](#) to scan upcoming engagements, assigned work, and missing details.
- 04 Find the relationship.** Open the organization and relevant contacts before an event to review relationship details, financial history, Chron, and open work.
- 05 Leave a clear next action.** When a conversation creates a commitment, record the communication in Chron and create an owned, dated task.

## Learn with AI Coach

When enabled for your installation, **ai coach** helps you understand MOED and learn how to use its controls. Select the **ai coach** button on a signed-in application page, or **Learn with ai coach** at the top of this manual. On a wide screen the panel sits beside the page in the right margin; on a narrower screen it opens over the page. Use the minus button to minimize it and the ai coach button to reopen it.

- 01 Ask about your goal.** Type in **How do I...?**, then press [Enter](#) or select **Ask**. For example, ask "What does MOED do?" or "How do I add speaker notes to this presentation?" Use [Shift+Enter](#) for a new line.
- 02 Follow the explanation or guided step.** The coach uses your current page, role, and basic interface state to guide you. It can explain a feature conversationally, give numbered instructions, or offer a supported interactive walkthrough. A follow-up question can refer to the preceding conversation.
- 03 Check the source and make the change yourself.** Manual source buttons open the relevant page of the Comprehensive User Guide PDF. The coach draws on this guide and verified application procedures. It does not enter field values, upload a file, save a form, send a message, or grant additional permissions.

The conversation and walkthrough cards appear in chronological order. Sending a question brings the latest question and answer into view. You can navigate to another MOED page in the same browser tab while an answer is being prepared; the panel resumes the conversation there.

## Follow an Interactive Walkthrough

The opening panel offers eight walkthroughs: **add a new event**, **add speaker notes pdf**, **add a powerpoint**, **understand waiting tasks**, **add a task**, **assign a task**, **change event dates**, and **subscribe to your calendar**. Ask in your own words or select an option. Questions about why a feature works receive explanations; an unclear task may need one clarifying question before steps are offered.

For event tasks, select the event's **Tasks** tab before **Add Task**. In a task form, use **Change record** and **Find a related record** to choose a different linked record. Assignment uses **Assigned to**; the check-mark completes a task. Calendar subscriptions are personal and available to reviewers too. The copy step appears only after the private link has been created; keep that link out of coach questions.

**01 Choose the task.** The card starts from your current page. If the task needs another page, use its navigation link. For a new event, go to **Engagements**, select **+ New Engagement**, and choose the organization inside the form.

**02 Locate the next control.** Select the card's **show** button to highlight the named control. You still select it yourself. For presentation files, first select the event's **Presentations** tab, then **Edit Presentations**; the editing button is not visible on the Activity tab.

**03 Complete the step on the page.** The coach follows supported page and form changes and updates its next instruction. If the card asks you to review details, check them before selecting **i have reviewed the details**. Choose and save files using the application controls, then check its success message.

**04 Ask for help or change direction.** Select **i can't see that control** if the suggested control is missing. Select **read in comprehensive manual** for the full procedure. **end walkthrough** stops the active guide. Asking another question also ends it and answers your new question.

## Manage the Coach Conversation

**Stop answer** cancels an answer that is still being prepared. **New conversation** starts a fresh conversation and ends the active walkthrough. Minimizing the panel only hides it; it does not cancel the answer. Conversation continuity is for the current signed-in browser tab, not a shared chat history across devices.

New conversation does not delete the administrator's request log. Questions, responses, the requesting user, and basic page context are recorded for review. The coach does not collect the contents of page fields; information you type into the question is included. Do not put passwords or other secrets in a question.

## Rate an Answer and Report a Missing Control

Use **helpful** when an answer helps you complete or understand the task, or **needs work** when it is incorrect, confusing, or irrelevant. You can change your rating; the latest selection is saved. During a walkthrough, **i can't see that control** records the missing-control problem with the current page and guided step.

Feedback enters an administrator review queue together with failed or slow answers. It helps identify missing manual instructions, incorrect workflow steps, and service problems. A rating does not immediately rewrite the manual or train the model. Improvements are checked against the application and tested before reuse; you do not need to write a replacement answer yourself.

## Find a Topic in This Manual

Use **Search the manual** at the top of this page, or press **/** to move to it. Results list specific topics with a short excerpt. Select a result, or press **Enter** for the first match, to jump to the highlighted text. Matching troubleshooting entries open automatically. Use **Clear**, or press **Esc** in the search field, to restore the full manual.

The fixed bar at the bottom of the window has **Top** and **Bottom** links to jump to either end of the page. In the Comprehensive User Guide PDF, use your reader's Find command, bookmarks, and the guide's page navigation.

## Browse Longer Lists

Use **Records per page**, where available, to choose 20, 50, or 100 records. Each list remembers your preferred size in this browser. Use the page numbers, **Previous**, or **Next** to move through results. Search and sorting apply to the full result list, so you do not need to search each page separately.

## Read Lists and Tables

Table headings stay together where space permits, while long owner names can wrap within their column. On narrow screens, scroll wide tables horizontally or use the page's card layout to read the full record.

When a row or card has a linked record name, you can select the surrounding row or card to open that record. Checkboxes, action buttons, and other links still perform their own actions. Keyboard users can tab to the record link and press **Enter**.

## Read the Page Footer

The copyright line identifies the application version and, when available, its build date and source revision. Use that information when reporting a problem.

## Common Action Icons

**View** - Open details

**Edit** - Change a record

**Start** - Begin a task

**Complete** - Confirm and finish a task

**Archive** - Hide reversibly

**Restore** - Return to active

**Delete** - Remove permanently

**Archive first.** Archiving is reversible and keeps history. Permanent deletion is limited to administrators, requires freshly confirmed administrator access, and cannot be undone.

In a task's related-record search or the Inbox engagement search, **Enter** runs the search without saving the task or filing the message. Choose the intended result, then use the explicit Save action. Enter on a focused button activates that button.

## Collapse Sidebar Sections

Select a sidebar section heading to collapse or expand its links. The app remembers your choice. Expand Work to reach Reimbursements; administrators find Reimbursement Setup under Administration. If a link seems missing, check the collapsed headings and scroll the menu. The account controls remain at the bottom.

## Save and Return with Confidence

Some forms keep a draft in this browser as you type. If you return before saving, use **Restore Draft** to bring it back or **Discard Draft** to start fresh. A browser draft is not a saved record, and selected files must be chosen again. On shared computers, discard drafts you no longer need.

If someone changed the record while your form was open, compare a fresh view before saving again. Follow the message on screen; do not repeatedly submit an old form. Use the page's Back or Cancel link to return to the list or record you came from.

## Save, cancel, and recover a draft

Required fields are marked in the forms. Correct the listed errors and save again if validation fails. Cancel returns without saving the current form.

When you create a related organization or contact from an inquiry/contact form, MOED carries the draft back to the original form. Confirm the selected relationship after returning.

If another person changes a record while you are editing, MOED may report a conflict. Preserve your unsaved text, reload the latest record, and reapply only the changes that still belong. A reload is also the first step after an expired request.

Keyboard users can use the Skip to main content link, Tab/Shift+Tab, and the visible focus indication. Reduce-motion preferences suppress attention animations while retaining due-state color cues.

## Use Enter without losing your place

In the related-record search on a task or the engagement search in the Inbox, Enter runs the search. It does not save the task or file the message. Review the results, choose the intended destination, then use the explicit Save action.

Inquiry organization/contact searches and the engagement contact picker also use Enter to search. Use Tab to move between controls; Enter on a focused button activates that button.

In the bulk-user deletion review, type DELETE USERS and press Enter or select Permanently delete. The Are you sure? dialog still requires confirmation. Cancel closes the dialog without deleting; Cancel on the review page abandons the selection.

Financial Closeout offers Save draft before Finalize. Enter in an amount field saves a draft; use the explicit finalization control after reviewing the required completion conditions.

## Sidebar and Validation Updates

Sidebar section headings expand/collapse and remember the user choice. Scroll the central menu independently of the logo/account area. On narrow screens, close the navigation drawer before continuing the form. AI Coach highlights and walkthrough spacing help locate controls; the coach still cannot click, save, or send on your behalf.

Relationship selectors return bounded results. Refine the search if a desired organization/contact is not listed; selected existing values remain available. Validation summaries link directly to invalid fields. Correct required fields and save; do not discard the entire form solely because a result is outside the initial search page.

CHAPTER 01 / ILLUSTRATED WALKTHROUGH

Find help by task

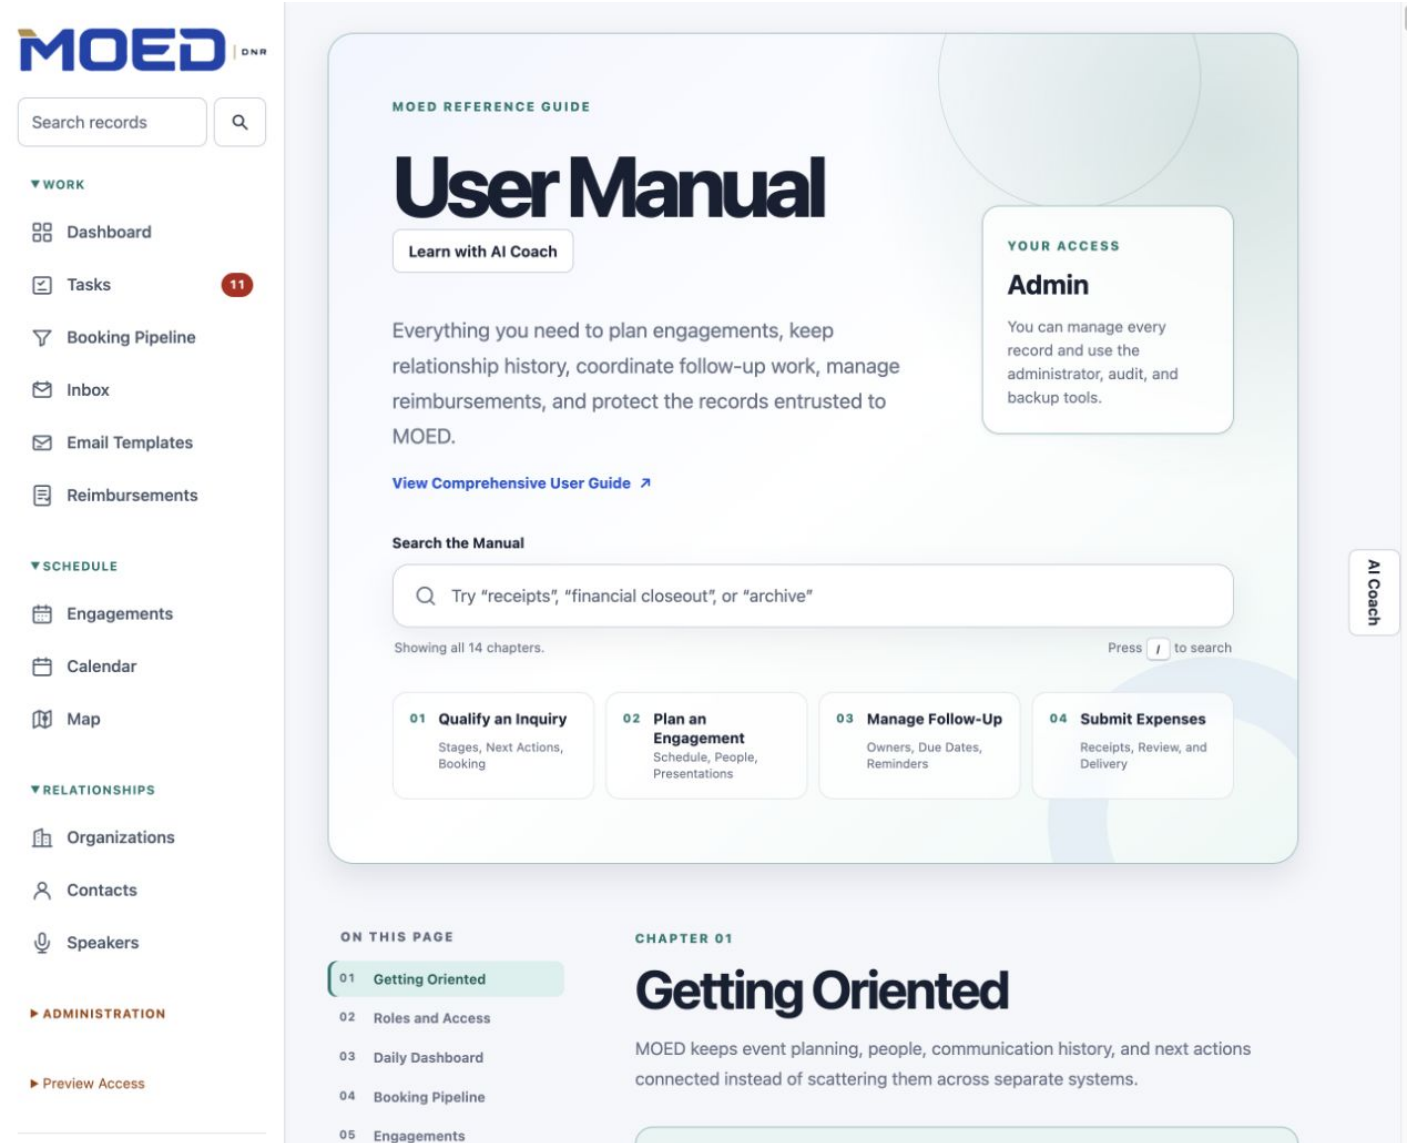


Figure 01. Find help by task. Actual preview screen; fictional records.

**01** Open User Manual from the sidebar. Browse the 14 chapters or choose a popular help topic.

**02** Open View Comprehensive User Guide for the illustrated PDF.

Related chapters: [Roles and access \(p. 11\)](#) / [Daily dashboard \(p. 13\)](#) / [Profile and security \(p. 123\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 01 / ILLUSTRATED WALKTHROUGH

Dark theme

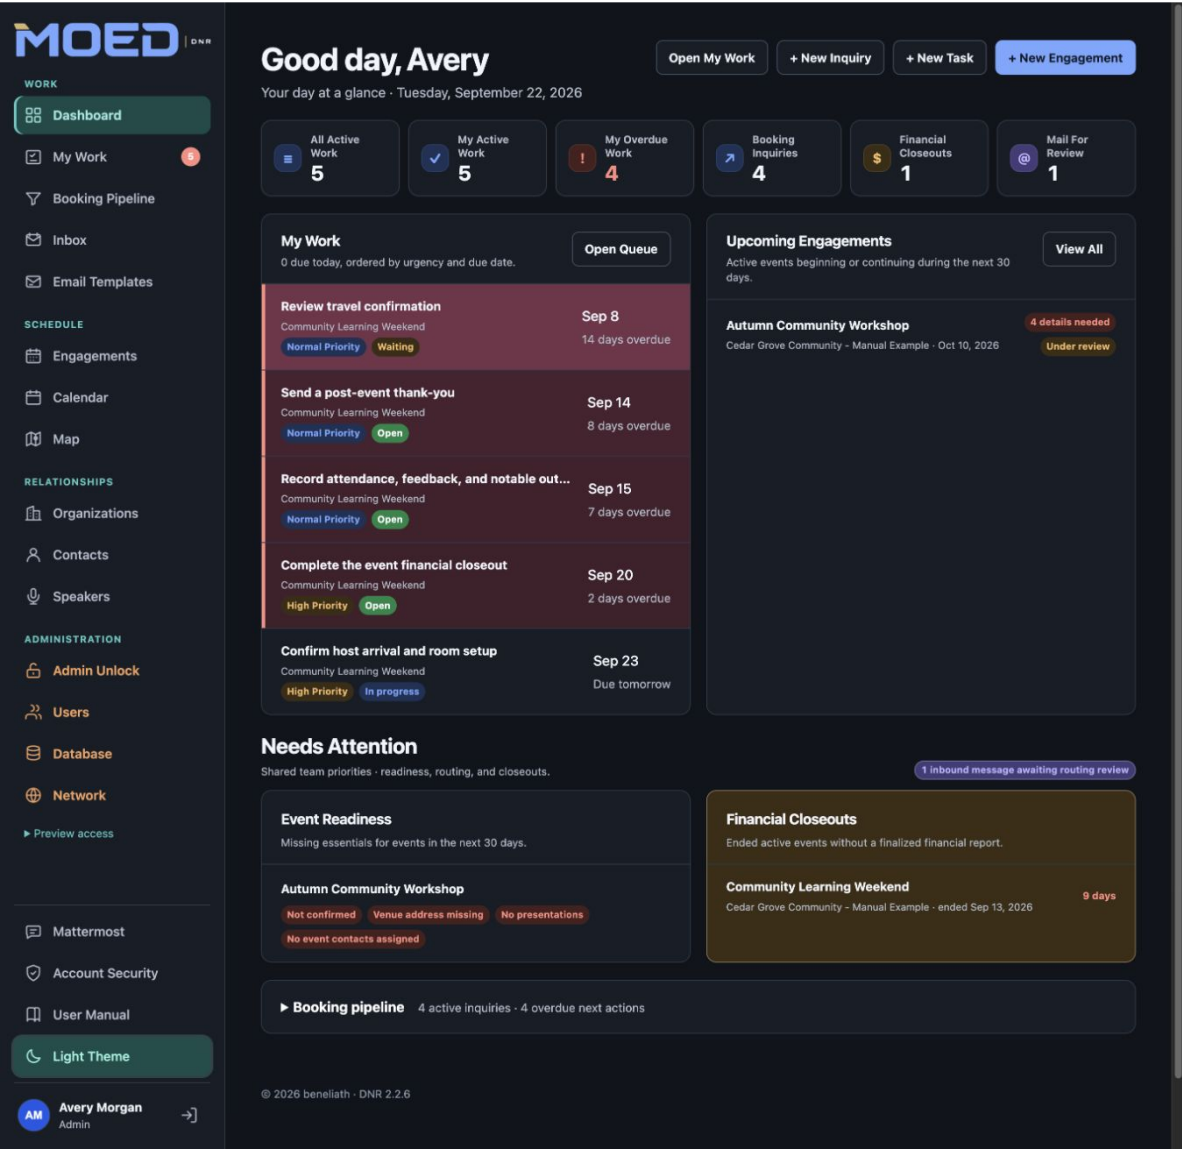


Figure 02. Dark theme. Actual preview screen; fictional records.

01 Select Dark Theme in the sidebar to use the dark palette.

02 Select Light Theme to return. The preference is remembered by this browser.

Related chapters: Roles and access (p. 11) / Daily dashboard (p. 13) / Profile and security (p. 123) / Reimbursements (p. 104)

## CHAPTER 01 / ILLUSTRATED WALKTHROUGH

## Navigation on a phone

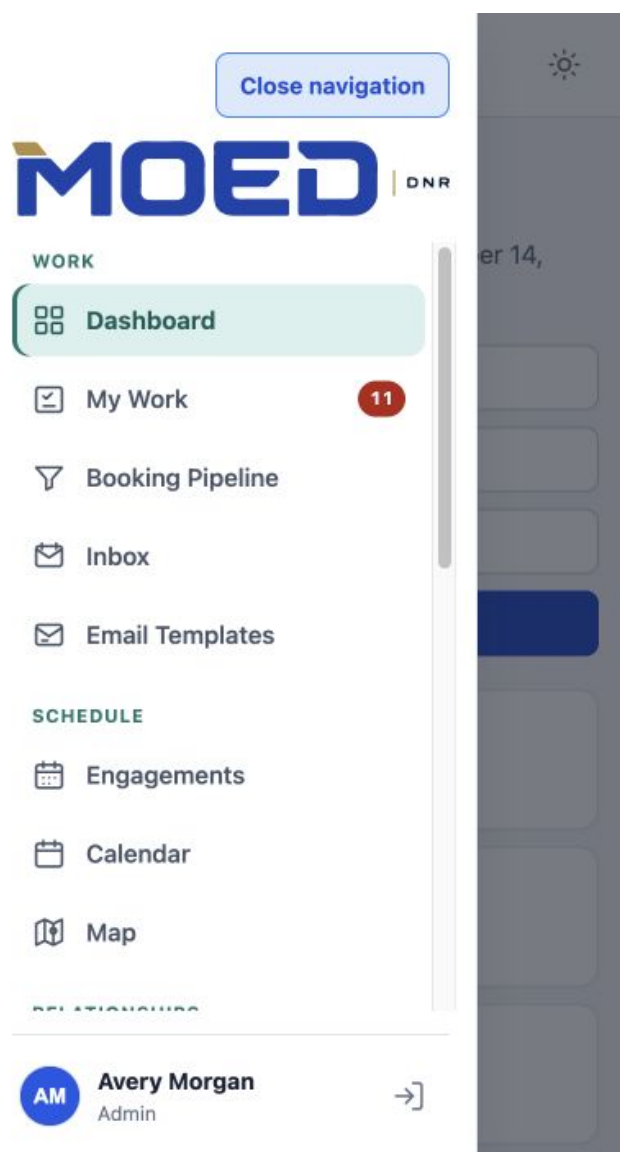


Figure 03. Navigation on a phone. Actual preview screen; fictional records.

**01** Tap the menu button to open navigation. The close button, logo, and profile/sign-out block stay in place.

**02** Scroll the menu between the fixed controls to reach other areas, including User Manual.

**03** Choose an area, use Close navigation, tap outside the panel, or press Esc.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Daily dashboard \(p. 13\)](#) / [Profile and security \(p. 123\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 01 / ILLUSTRATED WALKTHROUGH

Recover a local browser draft

Primary HostOn-Site ContactTo

SpeakerTo

Send yourself a copy

avery@example.org

1 recipient selected.

Your Copy:

No Copy

04 Write the Message

The engagement routing marker is required and will be appended automatically if removed.

Subject \*

Confirmation: Community Learning Weekend [MOED#1.dfoH9uu-AzsrhCKqDS69zA]

Plain-Text Message \*

Hello Jordan, please confirm the arrival details for our planning visit. Fictional documentation draft.

☐ Append the Share-Safe Event Brief

Includes schedule, venue, description, and presentations. It excludes Chron, internal notes, compensation, and financial information

Preview Event Brief

AI Coach

Figure 04. Recover a local browser draft. Actual preview screen; fictional records.

- 01 Use Save Draft to keep supported form text in this browser.
- 02 On return, choose Restore Draft to bring it back, or Discard Draft to clear it.

- 03 Review restored text against the current record; files and changes on another browser are not restored.
- Related chapters: [Roles and access \(p. 11\)](#) / [Daily dashboard \(p. 13\)](#) / [Profile and security \(p. 123\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 02

# Roles and Access

Everyone can read the shared operational picture. Editing and destructive actions are deliberately narrower.

Related chapters: [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

| Capability                                                                        | Reviewer | Editor | Administrator |
|-----------------------------------------------------------------------------------|----------|--------|---------------|
| View records, Chron, work, map, and exports                                       | Yes      | Yes    | Yes           |
| Manage own profile, calendar links, and security                                  | Yes      | Yes    | Yes           |
| Create and edit inquiries, engagements, organizations, contacts, and speakers     | No       | Yes    | Yes           |
| Manage tasks, Chron entries, closeouts, and engagement email                      | No       | Yes    | Yes           |
| Add, edit, archive, and restore email templates                                   | No       | Yes    | Yes           |
| Archive and restore shared records                                                | No       | Yes    | Yes           |
| Manage users, network diagnostics, audit history, backups, and permanent deletion | No       | No     | Yes           |

## Read and Export

Reviewers can inspect shared records, follow links between them, use search and filters, copy presentation briefs, view presentation and QR-code PDFs, review link statistics, and subscribe to the calendar.

## Coordinate and Maintain

Editors add reviewer capabilities plus record creation, editing, archive/restore, task management, Chron maintenance, financial closeout, engagement email, and inbound email review.

## Govern and Recover

Administrators add user profile and lifecycle controls, remote network diagnostics, audit inspection, encrypted backups, permanent deletion, and access to deployment signals. Sensitive actions require fresh password and 2FA confirmation.

CHAPTER 02 / ILLUSTRATED WALKTHROUGH

Preview role permissions

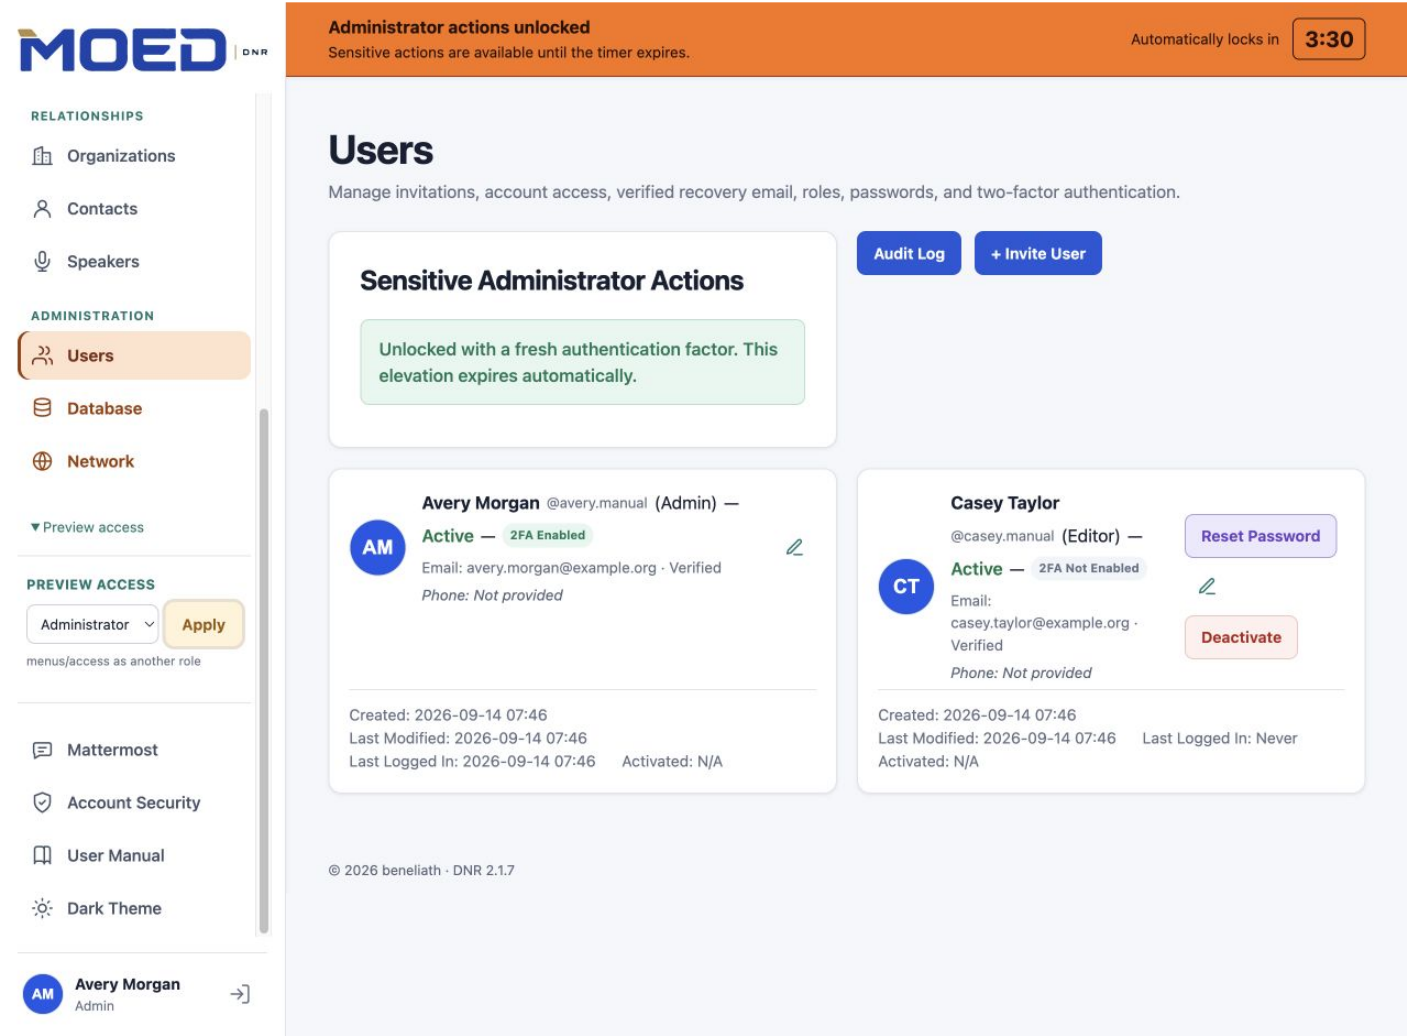


Figure 05. Preview role permissions. Actual preview screen; fictional records.

- 01** Administrators can expand Preview access in the sidebar and select Editor or Reviewer.

**02** Apply changes the menus and effective permissions. Return to Administrator ends the preview.
- 03** Preview actions affect application data. Use a separate sample environment when practicing.

**Related chapters:** [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 03

# Daily Dashboard

The Dashboard answers three questions: what is coming, what is yours, and what is incomplete.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Reimbursements \(p. 104\)](#)

## Daily Summary

The compact top cards distinguish all active work from your own active and overdue work. The Dashboard loads its workload and readiness summaries efficiently as records grow. Shared counts link to the booking pipeline, financial closeouts, and - when available to your role - inbound mail awaiting review.

Purple marks **Mail For Review** and the mail-review alert. The **Financial Closeouts** panel uses gold to distinguish unfinished financial reports.

## Primary Panels

**My Work** leads with assigned tasks by urgency and due date, alongside **Upcoming Engagements**. Open the **Booking pipeline** disclosure below Needs Attention for inquiry next actions and pipeline health.

My Work and Inquiry Next Actions show a short due date with a second line such as **1 day overdue**, **Due today**, **Due tomorrow**, or **Upcoming** for later dates. Items more than 3 days overdue pulse red in a repeating cascade to draw your attention. For inquiries, this is based on the next-action due date.

## Event Readiness

Readiness flags an unconfirmed event, missing venue address, missing presentation, or missing event contact assignment. Open the event to complete the missing details.

## Financial Closeouts

Ended events remain here until actual giving, lodging, travel, and book-table receipts are finalized. The age indicator shows how many days the report has been waiting.

## Follow Dashboard Date Windows

Dashboard links to inquiries and upcoming engagements carry the relevant view or date window into the destination list. Review the destination filters before interpreting its counts. On Engagements, change the start/end date filters or clear them to see a broader period.

## Read Task Timing and Financial Follow-Up

In **My Tasks**, use the due date and urgency label to decide what needs attention first. The timing bar gives context for the deadline; open the task for the full details. In **Financial Closeouts**, **since event** tells you how long ago the event ended. It is different from a task's due date. Open the event's closeout to review what remains.

CHAPTER 03 / ILLUSTRATED WALKTHROUGH

Dashboard work and task timing

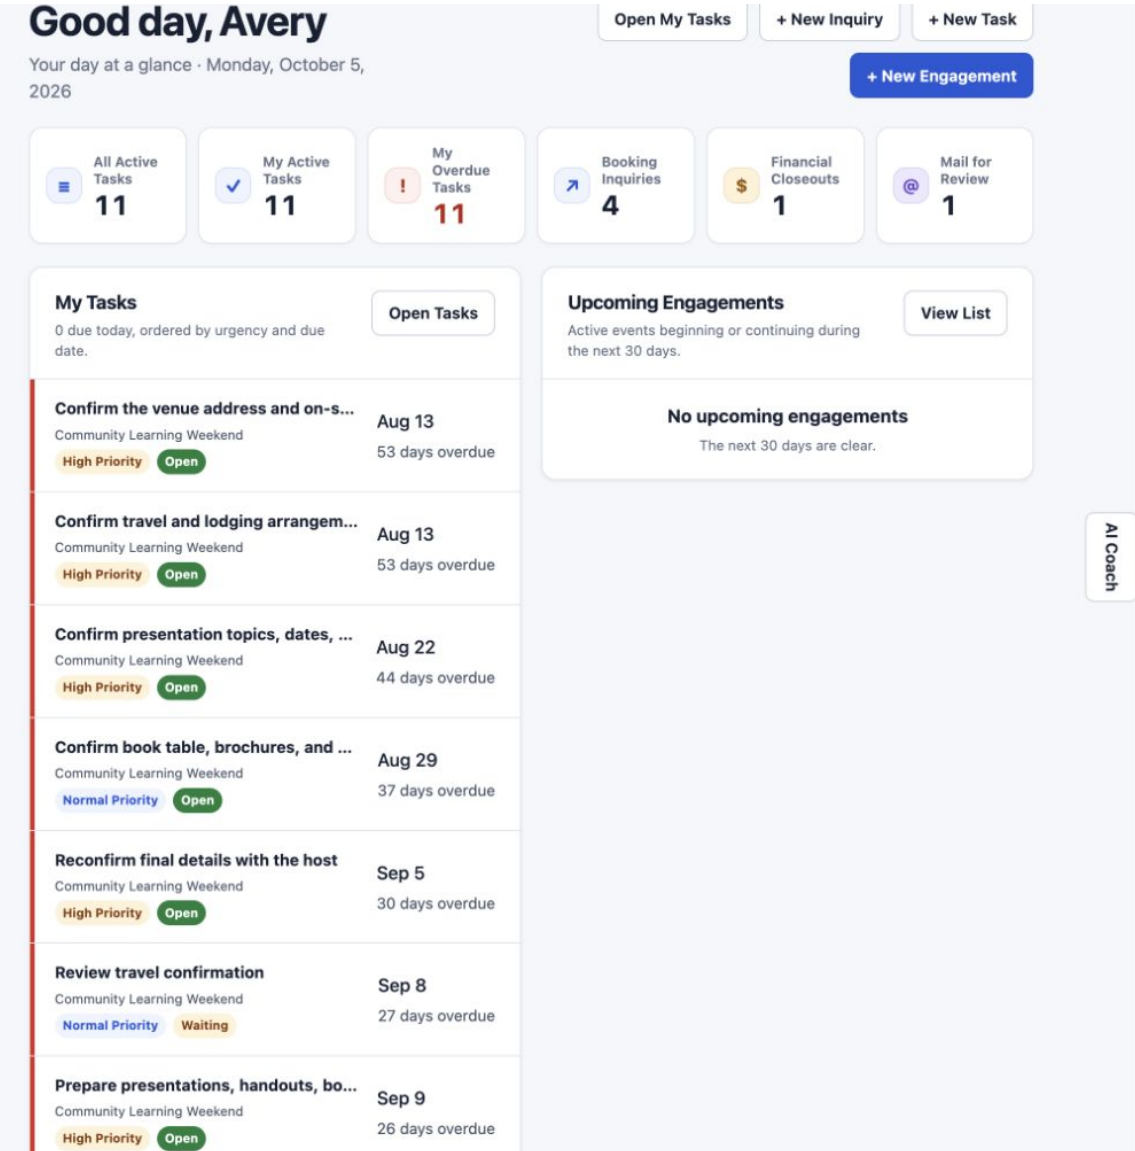


Figure 06. Dashboard work and task timing. Actual preview screen; fictional records.

- 01 Use the task counts and My Tasks rows to choose work.
- 02 Deadline bars show timing and urgency alongside the written due date; open a task for its details.
- Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 03 / ILLUSTRATED WALKTHROUGH

Financial follow-up since the event

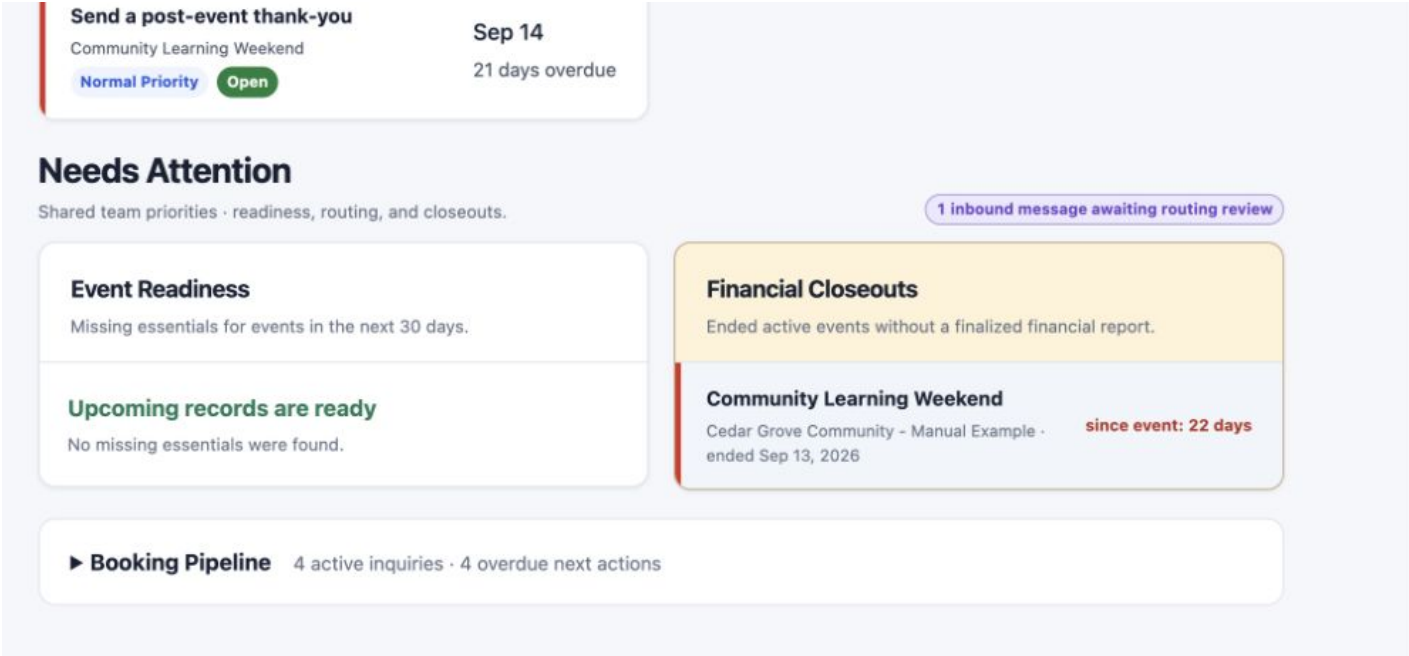


Figure 07. Financial follow-up since the event. Actual preview screen; fictional records.

- 01 Review Needs Attention and Financial Closeouts.
- 02 Read the elapsed time since the event alongside its dates, then open the event to finish its report.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 04

# Inquiry and Booking Pipeline

Use an Inquiry for a possible event that is not booked yet. It keeps early communication and follow-up visible without creating a partly known Engagement.

**Related chapters:** [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

## Inquiry First, Engagement After Booking

The Inquiry is the source record for qualification. Converting it creates the Engagement once an organization, title, and preferred date range are known. The original Inquiry then becomes read-only and remains linked for reference.

## Work the Pipeline

- 01 Capture the request.** Select **New Inquiry** in the Booking Pipeline. Add the organization and contact when known; they can remain blank during early triage.
- 02 Assign the next action.** Choose an owner and priority, then state the concrete next step and its due date. The pipeline cards and Dashboard emphasize this action.
- 03 Move the stage.** Use **New > Contacted > Qualified > Awaiting Details > Proposal Sent** as the normal path. Move backward when the facts warrant it. Declining requires a reason and can be reopened later.
- 04 Keep the history together.** Open the Inquiry and use the **Activity**, **Correspondence**, and **Tasks** tabs to keep decisions, email, and follow-up work together. Open a message from Correspondence to review delivery or retry a failed delivery while the Inquiry is active.
- 05 Review the booking.** Select **Convert to Engagement** when the request is ready. Check the imported engagement details, availability warnings, and which open tasks should move. Clearing every task checkbox moves none. If a next action remains, explicitly carry it forward as a task or resolve it with a reason; the original action and your decision remain in history. Warnings require acknowledgement but remain a deliberate, auditable decision.

**06 Continue in the Engagement.** Conversion creates the Engagement, assigns the Inquiry's primary contact as Primary Host when available, moves selected work, and adds the standard event checklist. Replies to earlier Inquiry correspondence continue into the converted Engagement.

## Filter the Board

Search request text, organizations, contacts, and locations. Use the owner and next-action filters to find your inquiries, unassigned work, overdue actions, or requests that still need a next step.

## Use the Starting Templates

Initial response, request details, date options, and proposal follow-up templates are editable before sending. Sent messages appear in Correspondence and Chron with delivery status.

## Keep the Source Record

Do not copy pre-booking Chron Log Entries by hand. The booked Inquiry retains its source email, stage history, Chron, correspondence, and any work not moved to the Engagement. Resolve or reassign active Inquiries before archiving their Contact or Organization.

The default board shows active inquiries and those booked this month. Use the **Stage** filter for **Booked**, **Declined**, or **All Stages**. In All Stages, Declined starts on a separate row. The stages wrap to fit your screen; scroll down to see the remaining rows.

## Archive Finished Inquiries

After declining an Inquiry or converting a booked Inquiry to an Engagement, administrators and editors can select **Archive Inquiry** on its card or detail page. It leaves the Booking Pipeline and its Dashboard count while all details, history, correspondence, tasks, and the Engagement link remain available.

Open **Archived Inquiries** from the Booking Pipeline to search, filter, export, or review retained records. Select **Restore Inquiry** to return one to its previous outcome. Restore a declined Inquiry before editing or reopening it. Its Engagement and follow-up tasks keep their existing state.

### Archive a finished inquiry

Open a declined inquiry or an inquiry that was booked and converted to an engagement. Select Archive Inquiry in the Archive This Inquiry panel or on its pipeline card.

Archiving retains the stage, request details, activity, correspondence, tasks, and any surviving engagement link. It removes the inquiry from ordinary pipeline views, counts, and exports, and hides its tasks from active work until restored. It does not archive or change the engagement.

Choose Archived Inquiries to search retained records or export that view. Open an archived inquiry to read its information, or select Restore Inquiry to return it to its original Booked or Declined stage.

Restore a declined inquiry before reopening it to Qualified. A booked inquiry remains a read-only source record after restoration. A recorded conversion still permits archiving when its engagement was later deleted; an inquiry merely labeled Booked without a recorded conversion is not eligible.

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Read and filter the booking board

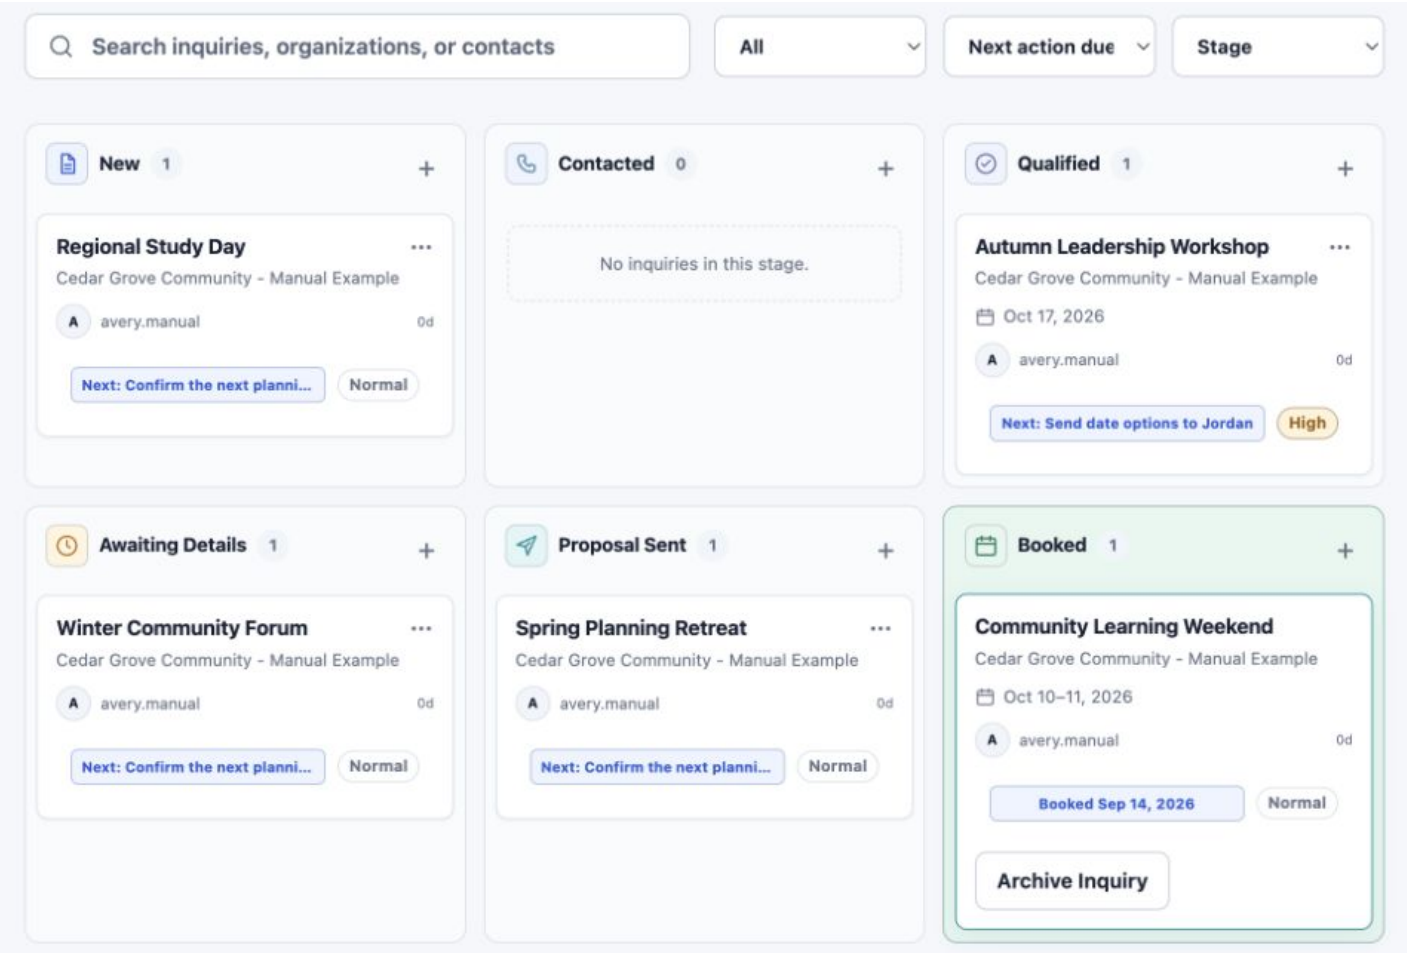


Figure 08. Read and filter the booking board. Actual preview screen; fictional records.


- 01** Search requests and narrow by owner, stage, or next action.

**02** Open a card to review the request and its next step. The default view includes active inquiries and bookings from this month.
- 03** Archive Inquiry is available for declined requests and recorded bookings. Archived Inquiries opens retained records outside the current pipeline.

**Related chapters:** [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Review an inquiry

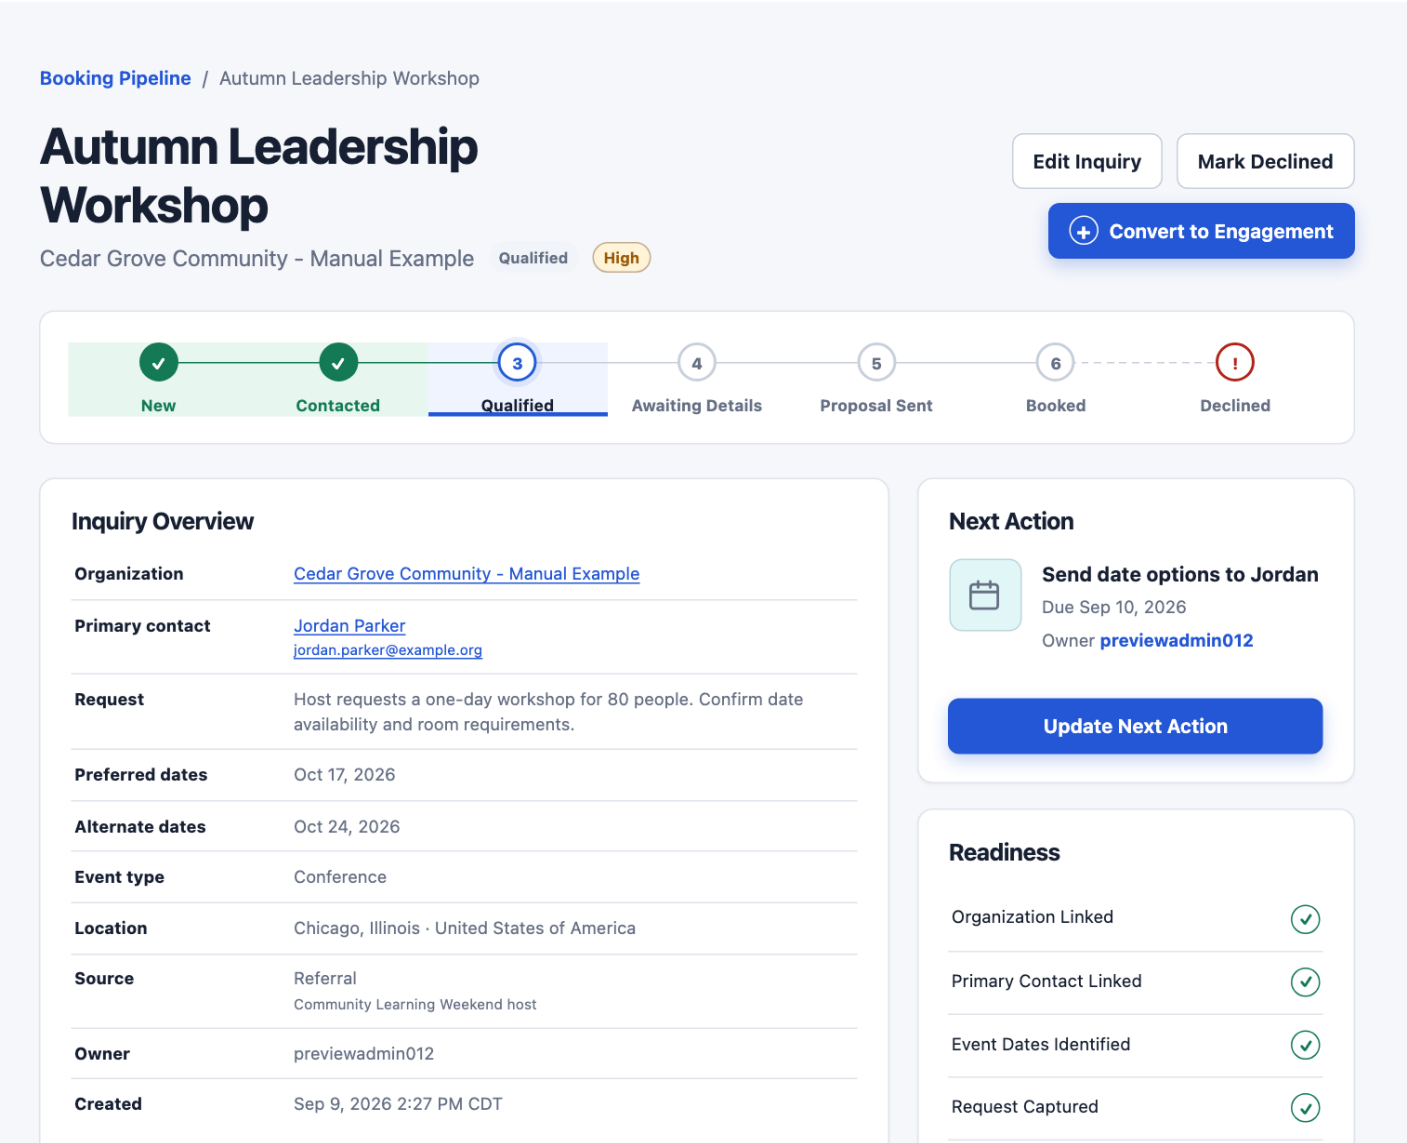

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Capture the request and date options

[Booking Pipeline](#) / [Inquiry](#) / [Edit](#)

INQUIRY #1

# Edit Inquiry

Keep the request and its next action current.

\* Required fields

01

## Request

Capture enough context to qualify the opportunity without inventing event details.

Inquiry Title

Autumn Leadership Workshop

Organization

Search organizations

Cedar Grove Community - Manual Example

Create organization

Primary Contact

Search compatible contacts

Parker, Jordan · Cedar Grove Community - Manual Example

Create contact

Choose an organization to narrow contacts. Standalone contacts can be selected when no organization is chosen. Creating a related record keeps this inquiry draft.

Figure 10. Capture the request and date options. Actual preview screen; fictional records.

- 01

Enter the request title and summary. Choose the organization and primary contact when known.
- 02

Record preferred dates, alternate dates, event type, and location.
- 03

Choose an owner, priority, source, next action, and due date, then save.
- Related chapters:

[Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Give the inquiry a next action

03

**Ownership & Next Action**  
Every active inquiry should make its next move visible.

Owner

previewadmin012 · Admin

▼

Priority

High

▼

Source

Referral

▼

Source Detail

Community Learning Weekend host

Next Action

Send date options to Jordan

Due

09/10/2026

📅

Cancel

Save Changes

© 2026 beneliath · DNR 1.11.11 · 2026-09-05 14:19:58 CDT (ec7dc08)


Figure 11. Give the inquiry a next action. Actual preview screen; fictional records.

- 01 Keep the next action concrete, such as sending date options or requesting room details.
- 02 Set a due date so the pipeline and Dashboard can highlight it.

- 03 Use Source Detail for a referral, mailbox, form, or campaign reference.
- Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Convert a qualified inquiry

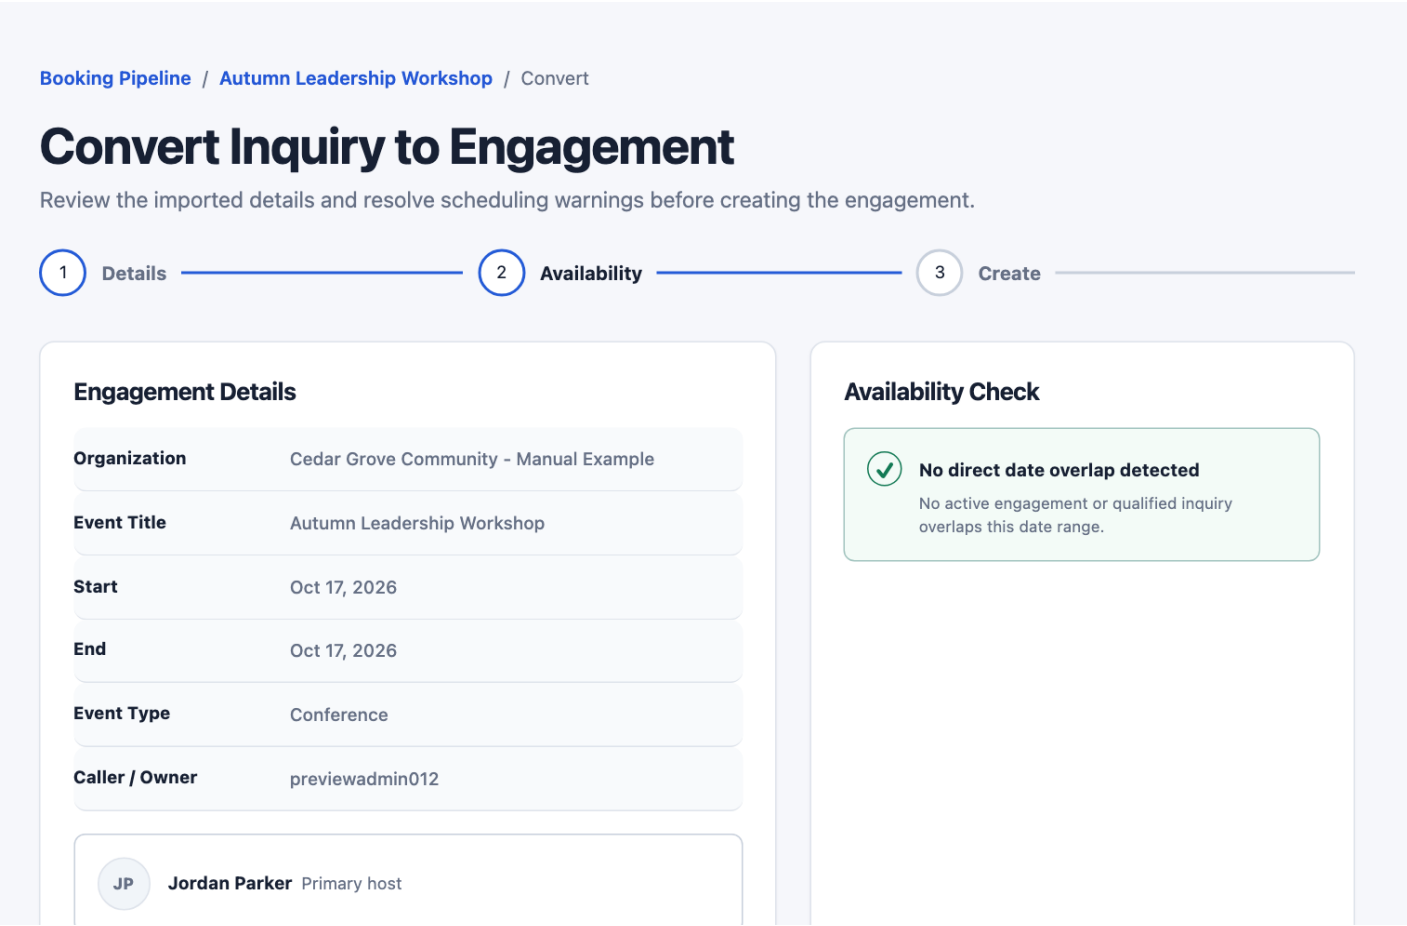

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Write inquiry correspondence

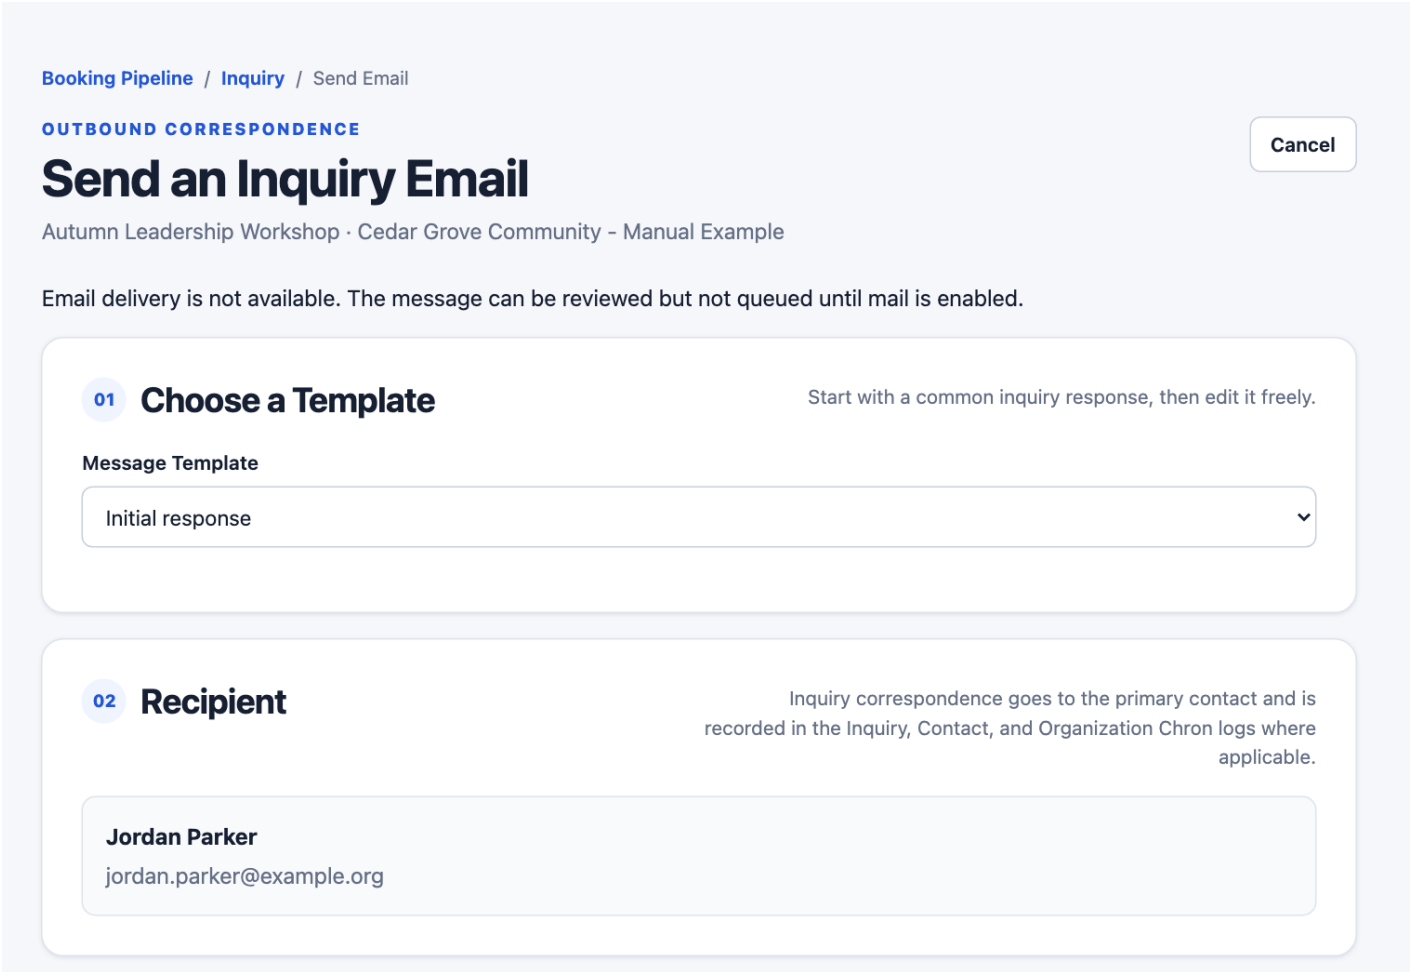


Figure 13. Write inquiry correspondence. Actual preview screen; fictional records.

- 01** Choose Initial response, Request details, Date options, or Proposal follow-up.

**02** Verify the primary contact, then edit the subject and plain-text message.
- 03** Queue the message when ready; its signed inquiry marker keeps replies connected.

**Screenshot context:** The screenshot preview has mail delivery disabled. The form is shown without sending a message.

**Related chapters:** [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Archive a booked or declined inquiry

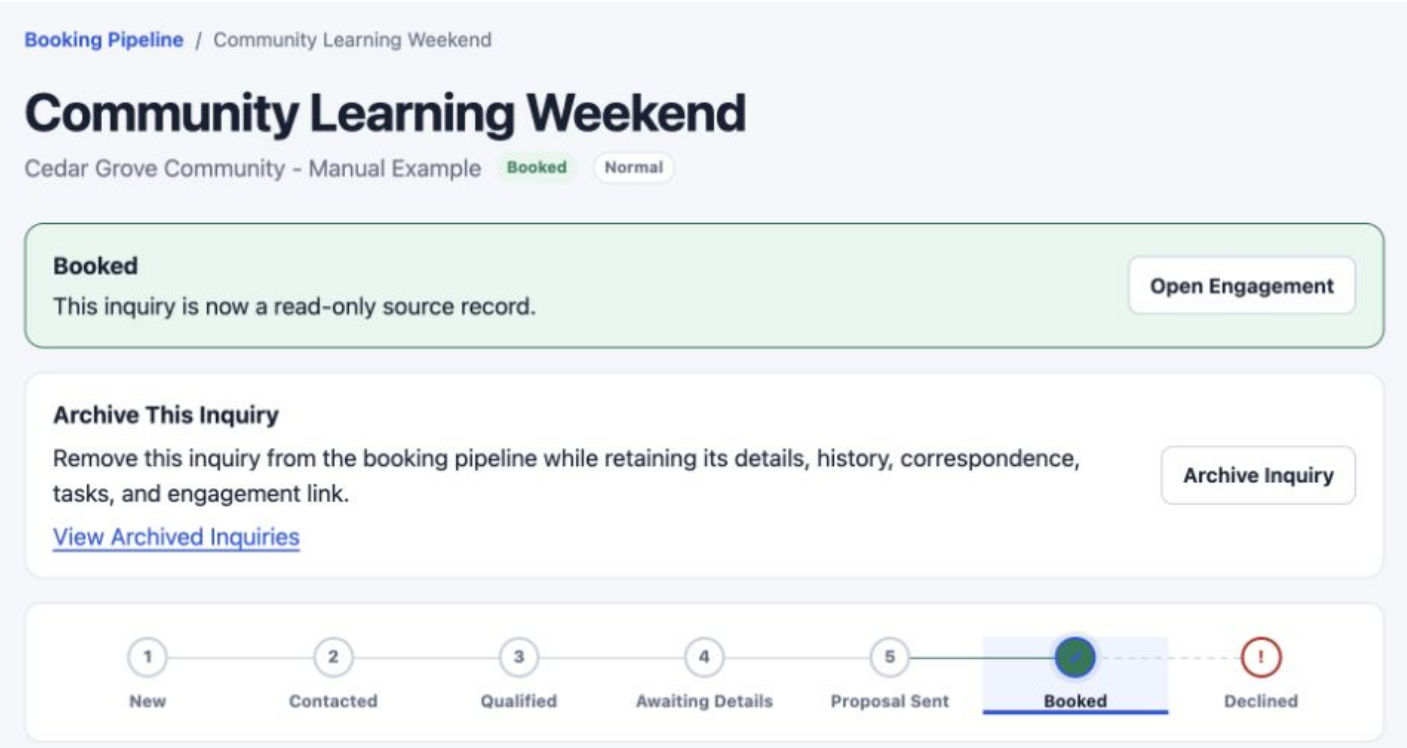


Figure 14. Archive a booked or declined inquiry. Actual preview screen; fictional records.

- 01 Finish declining the request or booking and converting it to an engagement. Open the inquiry.
- 02 Select Archive Inquiry. Its details, history, correspondence, tasks, and engagement link are retained.

- 03 The inquiry leaves ordinary pipeline views. Archiving this source inquiry does not archive its engagement.

Related chapters: Engagements (p. 26) / Work queue (p. 76) / Chron and email (p. 88)

CHAPTER 04 / ILLUSTRATED WALKTHROUGH

Find and restore archived inquiries

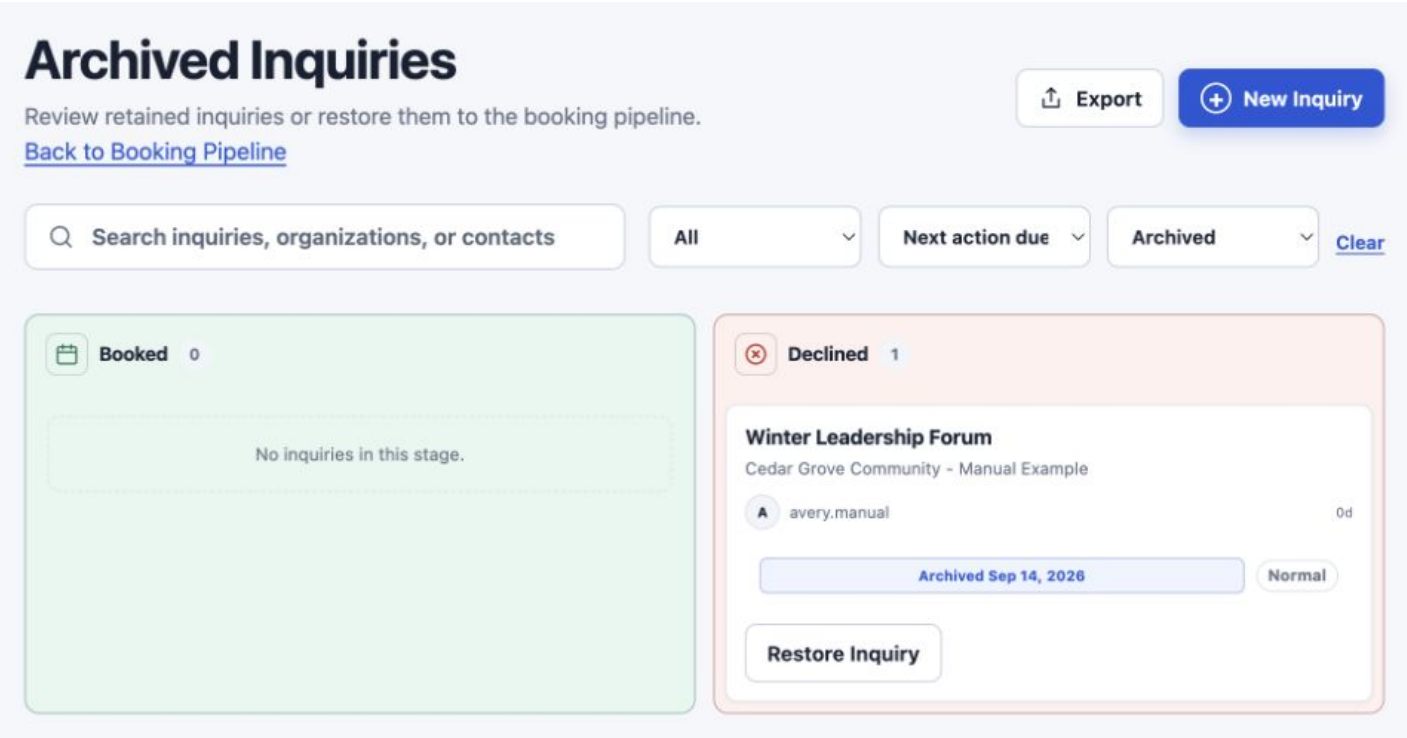


Figure 15. Find and restore archived inquiries. Actual preview screen; fictional records.

- 01** Choose Archived Inquiries from the pipeline or the archive panel on an inquiry.

**02** Search retained Booked and Declined records. Export downloads the filtered archived view.
- 03** Open a title to read its retained information. Restore Inquiry returns it to its original stage; restore a declined inquiry before reopening it.

Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 05

# Engagements

An engagement is the operational record for one event: the schedule, assigned people, presentations, logistics, planning state, communication history, work, and final receipts.

Related chapters: [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

## Find and Read an Engagement

### Search Broadly

The Engagements search checks event titles and descriptions, organizations, contacts, caller names, active Chron text, and Chron authors. Unquoted words are alternatives; words inside one quoted group must all match. Terms shorter than three characters are ignored.

Example: conference "travel confirmed"

### Filter Precisely

Switch between current and archived records, filter by lifecycle, then sort by organization, date, confirmation, or lifecycle. The summary cards show current lifecycle totals.

The table shows event dates, lifecycle, confirmation, and whether financial closeout is open, closed, or not applicable. Select the title or View icon for the full record.

## Create or Edit an Engagement

**01 Open the form, then choose Organization.** Editors and administrators: open Engagements and select + New Engagement. Choose the active Organization inside the New Engagement form; Organization Details does not provide a new-event action. If needed, create the organization first, then return to this form. To change an existing event, open its details and select Edit Engagement instead.

**02 Name and schedule the event.** Enter a required event title, an optional description, a valid start and end date, and an event type. Use Other when the preset types do not fit.

**03 Assign event contacts.** Select multiple existing contacts and give each any applicable event roles: Primary host, On-site contact, Billing, Travel, or Materials. Search the directory to add another person, or use Add new contact

repeatedly. New contacts and organization affiliations are saved with the event.

**04 Add presentations.** Choose a saved speaker from the dropdown; add missing speakers in [Relationships > Speakers](#). Presentation details can be filled in later. Dates must fall within the event range, and duration is entered in minutes. Record actual attendance afterward, including zero when applicable. At least one complete presentation is required before the engagement can be Confirmed.

**05 Capture logistics.** Record book-table and brochure permissions, travel coverage, planned compensation, travel/lodging estimates, lodging type, and the physical event location.

**06 Set planning states and ownership.** Choose lifecycle and confirmation, then select the Caller when that person should own the initial standard checklist. If no Caller is selected, the checklist belongs to the user creating the engagement. Add an initial Chron entry when there is context worth preserving.

On **Edit Engagement**, **Save Changes** and **Cancel** stay visible in the bar at the bottom of the window as you scroll. Save Changes saves the entire engagement form, including presentation details and pending file changes.

## Lifecycle

|           |                                                                               |
|-----------|-------------------------------------------------------------------------------|
| Active    | The event is moving forward.                                                  |
| Postponed | The original is paused and may link to its replacement.                       |
| Canceled  | A reason is required; open event tasks are canceled automatically.            |
| Completed | The event has finished. Finalizing its financial report also sets this state. |

## Confirmation

|                  |                                                                         |
|------------------|-------------------------------------------------------------------------|
| Work in Progress | Details are still being assembled.                                      |
| Under Review     | The plan is ready for checking or decision.                             |
| Confirmed        | The commitment is agreed and at least one complete presentation exists. |

**Lifecycle and confirmation are independent.** A postponed event can retain its former confirmation state, while a

completed event may reflect the confirmation state it reached during planning.

The Engagements list starts with **All** lifecycle states. Your selection is remembered for your account in this browser. Use **Lifecycle** to narrow the list to Active, Postponed, Canceled, or Completed; the separate **Current/Archived** view controls whether archived records appear.

## Presentation Files, QR Codes, and History

Files belong to an individual presentation. From an event's detail page, select the **Presentations** tab, then **Edit Presentations**. Find the intended presentation and its speaker before choosing a file. A PowerPoint is not attached directly to an organization or to the engagement as a whole.

### PDF Speaker Notes

Attach one PDF up to 100 MB to each presentation with **Choose PDF**, or drag one file onto **Drop PDF here**. Select **Save Changes** to upload it. Select **View PDF Speaker Notes** on the event detail page to open it in a new tab. Use **Replace PDF** or **Remove current PDF** on the edit page and save to update it.

Use this file for notes you intend to share: anyone with its QR code can open the PDF without signing in.

### PPT Slidedeck

Attach one PowerPoint .ppt or .pptx file up to 500 MB with **Choose PPT**, or drag one file onto **Drop PowerPoint here**. Select **Save Changes** to upload it. Use **Replace PPT** or **Remove current PPT** and save to update it. **Download PPT Slidedeck**, next to the notes button, downloads the file to open in PowerPoint.

When editing an engagement, Save Changes uploads PowerPoint and PDF files in small pieces, with a progress indicator. Keep the page open until saving finishes. Interrupted transfers retry automatically; if an error remains, select Save Changes to retry. PowerPoint files may be up to 500 MB; PDFs may be up to 100 MB.

Anyone with the PPT Slidedeck QR link can download the file without signing in. Replacing it keeps the same QR code and statistics. Removing it hides the code and stops downloads; uploading again restores the same link.

## Speaker QR Codes

Saving creates separate codes for each presentation's available speaker resources: website, bio, donations, connection, blog, books, custom links, notes, and PPT Slidedeck. Select a displayed code to copy its image. Select the **Copy Link** icon beneath a code's image to copy its web address for an email, message, or document. These controls appear when viewing or editing a presentation. Download PNG or SVG images when you prefer to save a file for your slides or handouts.

File codes appear after you upload and save the corresponding PDF or PowerPoint. Replacing a file keeps its existing QR code and link, so shared slides and handouts continue to work. Removing a file hides its code; uploading it again reuses the link and its statistics.

Select **View QR Codes PDF**, choose the codes to include, then select **Prepare PDF** to view, save, or print a single landscape sheet with those labeled codes, schedule, and venue. Use **Select all** to include every available code. Drag any code by its handle to reorder the list, whether checked or unchecked. Only checked codes appear in the PDF, in that order from left to right and then top to bottom. Keyboard users can focus a handle and press the Up or Down arrow key. Missing schedule details show **To be confirmed**. Disabled codes are labeled; file codes without an uploaded PDF or PowerPoint and previous speakers' codes are left out. Viewing the sheet does not add visits.

Use **Edit Presentations** on the event's Presentations tab to open the presentation section of Edit Engagement. Numbered headings such as **Presentation 1** and **Presentation 2** separate the entries; check the topic and speaker before changing a file. File replacement and removal remain pending until you select **Save Changes** in the persistent bottom bar; the notice beside the PDF or PPT identifies the pending change. Choose replacement or removal, not both, then save and check the updated file details. Presentations can be archived and restored separately from the event. When restoring, update any date that falls outside the event's current date range. Administrators can permanently delete presentations after confirming their access; their scoped statistics reset actions appear with the saved presentation's management controls.

When postponing or canceling an event, link it to a replacement from the same organization. MOED displays both "rescheduled as" and "rescheduled from" references and prevents circular links.

## Manage Email Templates

Open [Email Templates](#) under **Work** in the sidebar, or select **Manage Email Templates** in the engagement email composer. This library supplies engagement email in the browser and Mattermost. Inquiry emails use their own starting templates.

**01 Add or edit a template.** Select **+ New Email Template**, or open an active template by its name or Edit action. Enter the template name, subject, and plain-text message. The original Booking confirmation, Travel and lodging request, Final-detail reconfirmation, Presentation schedule, and Post-event thank-you templates can all be edited.

**02 Personalize the starting text.** Expand **Personalize with event fields**. Click where the field belongs in the subject or message, then choose a field button. Event name, organization, dates, location, and speaker names are available; Presentation schedule belongs in the message only. For example, [Welcome to {{event\\_name}}](#) uses that engagement's event name when composing. The routing marker is added automatically.

**03 Choose suggestions and order.** Select the event contact roles to suggest when this template is chosen. Leave them clear to choose contacts when composing. Lower **Display order** numbers appear first. Speakers are always a separate sender choice; inserting Speaker names into the message does not add recipients.

**04 Save and review.** Select **Create Template** or **Save Changes**. Choose the saved template in an engagement email to review the filled subject, message, and recipients before queuing. When you entered the library from an engagement, **Return to Email** takes you back to its composer.

### Archive and Restore

Search the library by name or subject. **Archive** removes a template from new emails in both composers. Open **Archived** to view it or select **Restore** to make it available again. Restore an archived template before editing it.

### Delete and Access

Editors and administrators can add, edit, archive, and restore templates. Reviewers can view them. Only administrators can permanently **Delete** an archived template, after confirming their access. Deletion cannot be undone; sent messages, their template names, and Chron history remain available.

**Changes apply to future messages.** A draft already open in a composer keeps its reviewed text. If its template is archived

or deleted before sending, review the preserved draft as **Custom message** or choose another template. If another session changed a template while you were editing, keep a copy of your draft, reload, and review the latest version before saving. **Custom message** is always available, even when every saved template is archived.

## Review QR Code Activity

- In the **Presentations** tab, select **Statistics** beneath a code to see its visits. Open a speaker's record and choose **Statistics** for activity across that speaker's presentations.
- Choose a date range to focus on a recent event or a longer period. In the speaker view, use **Link Type** to focus on notes, donations, or **Custom Links**, then select **Apply Filters**.
- Use the charts to see when and where links were opened. Hover or tap for details, or expand the data tables for exact counts. These are visits to links, not an attendance count. Opening a shared QR link records a visit. Use **Copy Link** to share that same link; copying an image or link does not itself add a visit.

To change where an existing code leads, editors and administrators can open that code's **Statistics**, edit **Destination**, and select **Save Link**. The printed code continues to work. Clear **Link enabled** and save to stop access through that code. For Speaker Notes or PPT Slidedeck, replace the file on the presentation instead of editing a destination.

Select **Combined Presentation Statistics** in the upper-right of a presentation's pane to see total visits, activity over time, and combined referrer, browser, country, and operating system breakdowns. Date filters use the configured local time zone, and **Clear Filters** keeps the report scoped to that presentation. Disabled codes and previous speakers' codes retain their historical visits. A person opening multiple codes contributes multiple visits. Use **Statistics** on an individual code for its own report, or **Back to Presentation** to return to the presentation.

Editing a speaker's profile does not change destinations already shared with audiences. Previous speakers' links and uploaded files remain separate when you change a presentation's speaker.

## Send and Track Event Email

Editors and administrators can send email from an active engagement. Use **Send Email** near the page heading or **Send Message** in the Correspondence section. Every message remains easy to find there afterward.

- 01 Choose a starting template.** Choose an active template from the shared library, or **Custom message** to write from scratch. Event fields are filled from this engagement. Template text is only a starting point; edit the subject and body before sending. Use [Manage Email Templates](#) to learn how to maintain the library.
- 02 Select recipients.** Use the Primary host, On-site contact, Billing, Travel, Materials, or Speaker shortcuts, or select individual recipient cards. Speakers assigned to active presentations are optional and unchecked by default. Choose the Speaker shortcut or check a speaker card to include them. You may send to speakers alone. Changing templates keeps your speaker selection. Choose **To**, **Cc**, or **Bcc** in each selected card. To and Cc addresses are visible to everyone receiving the email; Bcc addresses stay hidden. Under **Send yourself a copy**, choose **Cc Me** or **Bcc Me** to include your account email. Only valid email addresses can receive a message. Matching addresses receive one copy; use the same recipient type for a shared address.
- 03 Review the routing marker.** The exact engagement marker is included in every template subject and is added automatically if removed. When inbound mail is enabled, replies return through the shared mailbox and the marker helps place them in the right engagement Chron.
- 04 Optionally append the event brief.** The share-safe brief includes the public event schedule, venue, description, and presentations. It deliberately excludes Chron, internal notes, compensation, giving, and financial-closeout information. Preview it before queuing.
- 05 Send and check the result.** Select **Queue Email**, then use the Correspondence list to see whether each recipient is waiting, sent, or failed. If a recipient remains failed, open the message and select **Retry Failed Deliveries**. If it says **Delivery Uncertain**, check with your mail provider or recipient before selecting **Retry Reviewed Deliveries**; the message may already have arrived.

## One Place to Check

Open the outbound message to review what was sent, who it was sent to, and the result for each address.

## Automatic Chron History

The message is added to the Engagement, Organization, and selected Contact Chron logs. Select **View Outbound Message** from a Chron entry to return to its delivery record.

## View, Share, and Close the Event

The event detail page shows its unique email routing marker. The built-in outbound composer inserts it automatically. When using another mail application, select the copy icon immediately beside the marker and keep it in the email subject or plain-text body when that message should route to the engagement's Chron log.

In the **Presentations** tab, open **Export Presentation** at the bottom of a presentation card. Briefs include that presentation's speaker, schedule, duration, and attendance, with its event and venue context.

### Copy Text

Copies a plain-text presentation brief for messages or notes.

### Copy MD

Copies a Markdown-formatted presentation brief for systems that support structured text.

### View PDF

Opens a branded brief for the selected presentation in your browser for viewing, saving, or printing.

### View QR Codes PDF

Lets you choose which of that presentation's QR codes to include, then opens a themed landscape sheet.

Editors and administrators can use **Financial Closeout** to save a receipt draft while work is still pending. Enter Giving Received, Lodging Received, Travel Received, and Book Table Received before finalizing. Leave unknown amounts blank while saving a draft; enter zero only when nothing was received. Drafts are excluded from finalized financial history. The original planning estimates remain unchanged. Every event task due on or before the last active presentation must first be marked Completed; canceled tasks still block until truthfully resolved, while later and undated tasks do not hold closeout. Confirm that the amounts are final to complete the engagement; later corrections retain the original close date and record the update.

### Archive and Delete Carefully

Archive removes the engagement from current views but keeps its history available for restoration. When deletion is permitted, it removes the event and its event-specific presentations, Chron, tasks, and contact role assignments. Finalized financial history prevents permanent deletion; archive that event to retain its history. Prefer archive unless removal is explicitly required.

## Inspect Tracked Visit Details

Presentation QR/resource cards show tracked visit totals. Open the event statistics and filter by Speaker, Link Type, From, and Through. Expand the detailed visits, group dates as offered, and select chart points or table rows to inspect the matching activity. Dates use the configured local time zone shown by the controls. A tracked visit is not proof that a person read a document; downloading a resource through its tracked link and directly opening an untracked file URL are different paths.

## Archive or Delete a Presentation

- 01 Open the right presentation.** Open the engagement, select **Presentations**, then **Edit Presentations**. Find the numbered presentation block and check its topic and speaker.
- 02 Choose the action at the bottom of that block.** **Archive** hides a saved presentation while keeping it available to restore. Editors and administrators can archive. **Delete** permanently removes that saved presentation and its associated resources and visit history; only administrators can delete. You can delete an active presentation directly; archiving first is not required.
- 03 Review and confirm.** For Delete, unlock administrator actions if prompted, then select Delete again and read the confirmation. Select **Delete Permanently** only after checking the presentation, or choose **Archive Instead** to keep a restorable record. Cancel leaves it in place. Archive and Delete are separate actions: they do not save other unsaved edits on the page.

To undo an archive, use **Restore Archived Presentations** for this engagement. Check that the restored presentation's date fits the event's current dates. Permanent deletion cannot be undone. Removing the last active presentation from a confirmed active engagement returns its confirmation to **Under Review**.

**Remove** on a newly added, unsaved presentation only removes that draft block. The file-removal checkboxes remove a PDF or PowerPoint when you save; they do not delete the presentation.

## Review Planning and Retained History

The engagement overview groups **Next Action**, **Workflow**, and **Readiness** so you can see the next step, event state, and missing essentials together. Use the tabs for Activity, Correspondence, Tasks, Presentations, Contacts, Logistics, and Financials. Edit Engagement groups related fields into cards; save with the persistent **Save Changes** bar.

Event contacts can retain the name and role they had when assigned even if their organization affiliation later changes. Historical contact details explain earlier work; they are not automatically offered as current email recipients. Final financial reports retain correction history. Enter a reason when correcting one; archive events and organizations whose finalized financial history prevents permanent deletion.

## Reset One QR Link or All Presentation Statistics

Administrators can use **Reset Link Statistics** beside a saved presentation's individual QR link to clear only that link's visits. **Reset All Presentation Statistics** at the bottom of the presentation block clears visits for all its links. Unlock administrator actions, check the named link or presentation on the review screen, and confirm the intended scope. Resetting visits keeps the presentation, files, and QR codes; cleared visit history cannot be recovered.

### Presentation reference and file history

Presentations record topic, date, time, speaker, duration, and expected attendance. Their dates must fit the engagement before it can be confirmed.

PDF Speaker Notes and PPT Slidedeck each show the current filename, size, upload time, and uploader where available. Each presentation can hold one PDF and one .ppt or .pptx file. Older files may have no recorded uploader.

Selecting a replacement PDF or PowerPoint, or checking Remove, is pending until you select Save Changes in the persistent bar at the bottom of the Edit Engagement window. This saves the entire engagement form. The notice beside the file identifies the pending change. Choose replacement or removal, not both. Cancel or leave without saving to keep the current file; after saving, check the updated filename and upload details.

Speaker Notes QR links open the PDF; PPT Slidedeck QR links download the PowerPoint. Both work without signing in. Copy link shares the encoded QR address, so visits follow the same link and appear in its statistics. Merely copying a link or

image adds no visit. Direct file URLs and internal QR sheets do not add visits.

Changing the speaker changes a presentation's current resources; previous-speaker codes remain in historical statistics. Archive or restore presentations separately from their engagement.

### Readiness, closeout, and lifecycle effects

Use readiness to find missing presentations, contact details, or planning information. Correct the source record and revisit the panel.

Canceling an event requires a reason and cancels its open tasks. Canceled tasks still block a closeout prerequisite that requires Completed.

Changing event dates reschedules active generated tasks unless their dates were manually overridden. Postponed/canceled events can link to replacements at the same organization; circular links are rejected.

### Reset presentation statistics

After fresh administrator confirmation, choose Reset All Presentation Statistics at the bottom of the presentation block, then Reset Statistics to Zero. This permanently removes all of its recorded link visits, including disabled and previous-speaker links. QR codes, destinations, uploaded PDFs and PowerPoints, and presentation details remain intact. Other presentations are unaffected; future visits start from zero.

### Restore archived presentations

In the engagement editor, choose Restore Archived Presentations, select presentations, adjust dates/times to fit the active event, and choose Restore Selected. Each selected speaker must be valid. Administrators can permanently delete an archived presentation from this view after fresh confirmation.

### Engagement Filters and Visit Reporting

Engagements provides start/end date filtering in addition to existing search/status controls. Links from dashboard upcoming-event and inquiry panes retain the relevant destination view. Clear or broaden filters before concluding a record is absent.

Short-link statistics offers Speaker, Link Type, From and Through dates in the configured local time zone, Apply Filters, totals, and Referrers/Browsers/Countries/Operating Systems charts. Detailed visit rows identify event/resource context and use date grouping and chart highlighting where available. Presentation resource/QR cards show their tracked totals.

Reset Statistics retains its separate administrator confirmation; viewing or filtering is read-only.

Network > Remote Document Responses adds response/timing measurements for PDF and PowerPoint traffic. These operational counts are not equivalent to tracked public-link visits. Direct downloads and tracked link opens have different analytics paths.

### Financial Closeout: Four Required Receipt Categories

Before finalizing an event, enter Giving Received, Lodging Received, Travel Received, and Book Table Received. Leave unknown amounts blank when saving a draft; enter 0 only after confirming no amount was received. The completion indicator counts all four categories, and the total includes book-table receipts.

Book-table amounts remain separate from giving in organization totals and appear in final reports and correction history. Older finalized reports have no recorded book-table amount; MOED shows Not recorded rather than inventing zero. When correcting a report, enter every receipt category and explain the correction. Earlier revisions retain their original amounts.

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Find an engagement

# Engagements

+ New Engagement

Manage event lifecycle, confirmation, schedules, and speaking commitments.

Active  
1

Postponed  
0

Canceled  
0

Completed  
1

CurrentArchived (0)

Lifecycle: 

AllActivePostponedCanceledCompleted

Sort: 

Organization ↑Date ↑Confirmation ↑Lifecycle ↑

| EVENT TITLE                   | EVENT DATE(S)   | LIFECYCLE | CONFIRMATION | CLOSEOUT | ACTIONS                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------|-----------------|-----------|--------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Summer Learning Day - Example | Aug 15, 2026    | Completed | under review | Closed   |     |
| Community Learning Weekend    | Oct 10–11, 2026 | Active    | under review | Open     |     |

Figure 16. Find an engagement. Actual preview screen; fictional records.

- 01 Start with All lifecycle states, or select Active, Postponed, Canceled, or Completed. Your choice is remembered for your account in this browser.

02 Current and Archived are separate from Lifecycle. Clear both filters when looking for a missing record.

03 Sort by organization, date, confirmation, or lifecycle. Open the event title or View action to continue planning.

Related chapters: [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Planning overview and record tabs

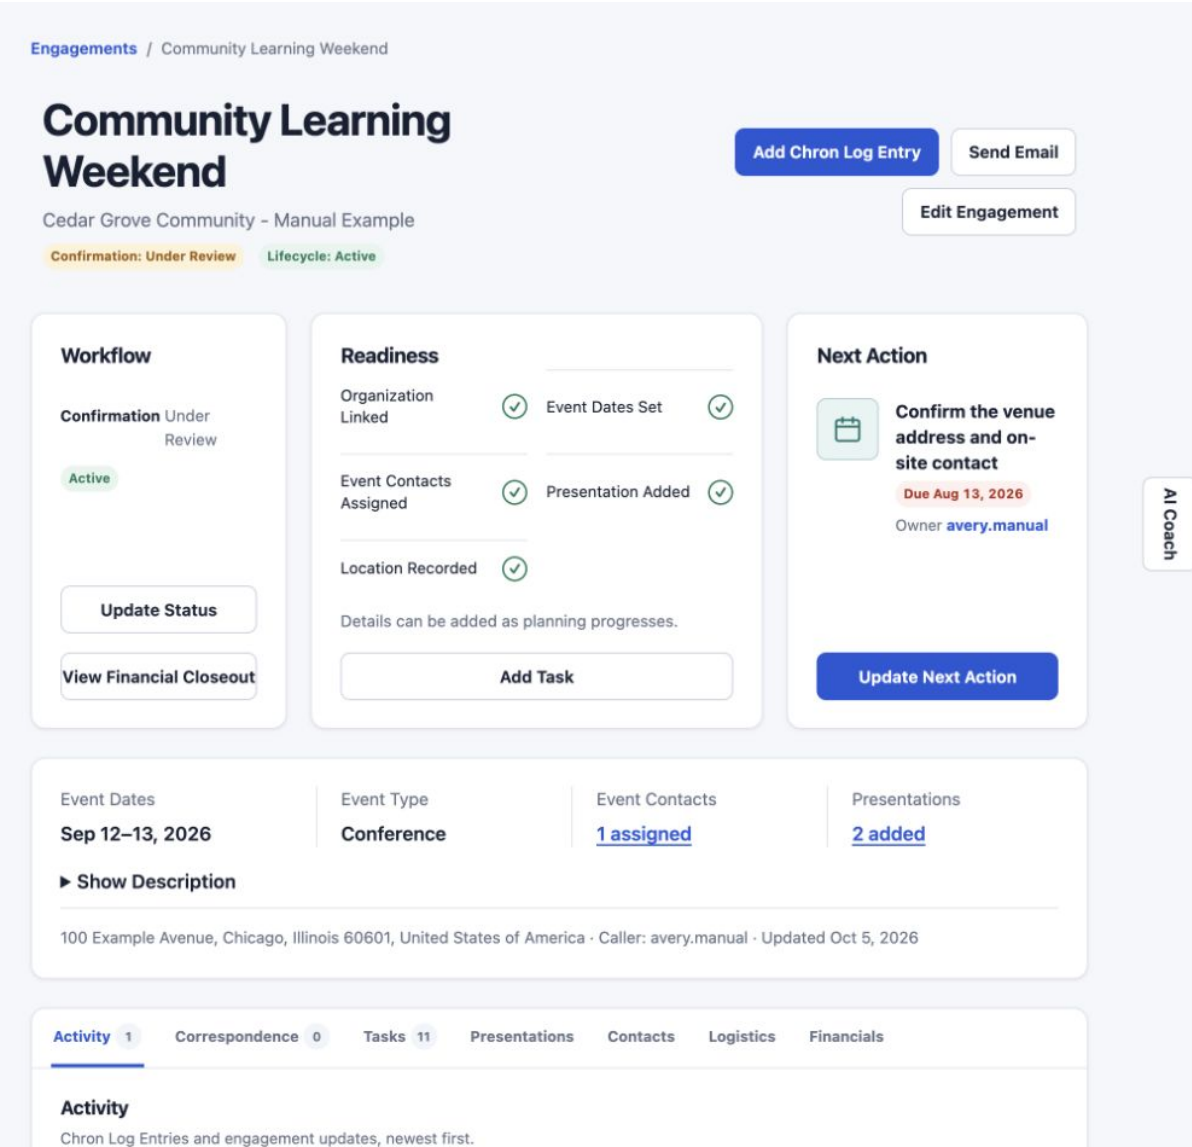


Figure 17. Planning overview and record tabs. Actual preview screen; fictional records.

01 Review Workflow, Readiness, and Next Action together.

02 Choose the relevant tab for activity, correspondence, tasks, presentations, contacts, logistics, or financials.

Related chapters: [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Edit an engagement in focused cards

Engagements / Edit Engagement

# Edit Engagement

Update event details, schedule, presentations, and logistics.

No saved draft

Save Draft

Drafts are saved for 30 days in this browser. Files must be selected again. Saving a draft does not save the record or send email.

\* Required fields

## Event Details & Schedule

Organization

Find an organization...

Cedar Grove Community - Manual Example

Start \*

09/12/2026

End \*

09/13/2026

Caller

avery.manual

Event Title

Community Learning Weekend

Event Type

conference

Event Description

Two practical sessions with discussion, a resource table, and time for host follow-up. Fictional manual example.

AI Coach

Figure 18. Edit an engagement in focused cards. Actual preview screen; fictional records.

01

Work through Event Details & Schedule and the related cards.

02

Keep unsaved changes in this browser with Save Draft where offered, or save the record using Save Changes.

Related chapters:

People and organizations (p. 61) / Work queue (p. 76) / Chron and email (p. 88) / Map and calendar (p. 95)

< Previous

Chapter start

34 / 187

Next >

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Read retained event contact assignments

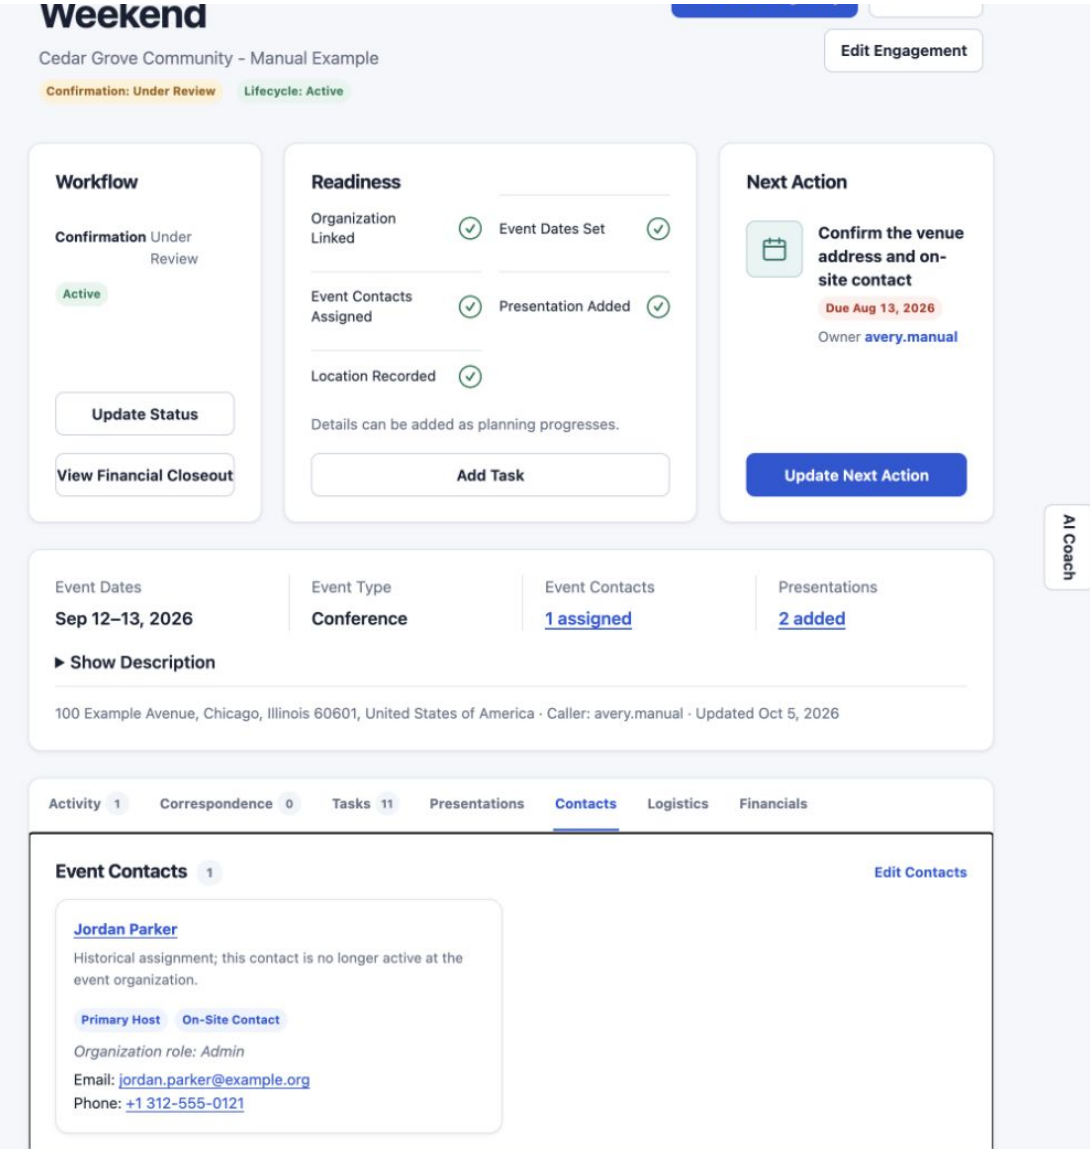


Figure 19. Read retained event contact assignments. Actual preview screen; fictional records.

- 01 Open Contacts on the engagement.
- 02 Historical assignment identifies a contact whose event role is retained after their organization affiliation changes.

- 03 Use current affiliations when choosing recipients or assigning new roles.
- Related chapters: [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Presentation details and audience resources

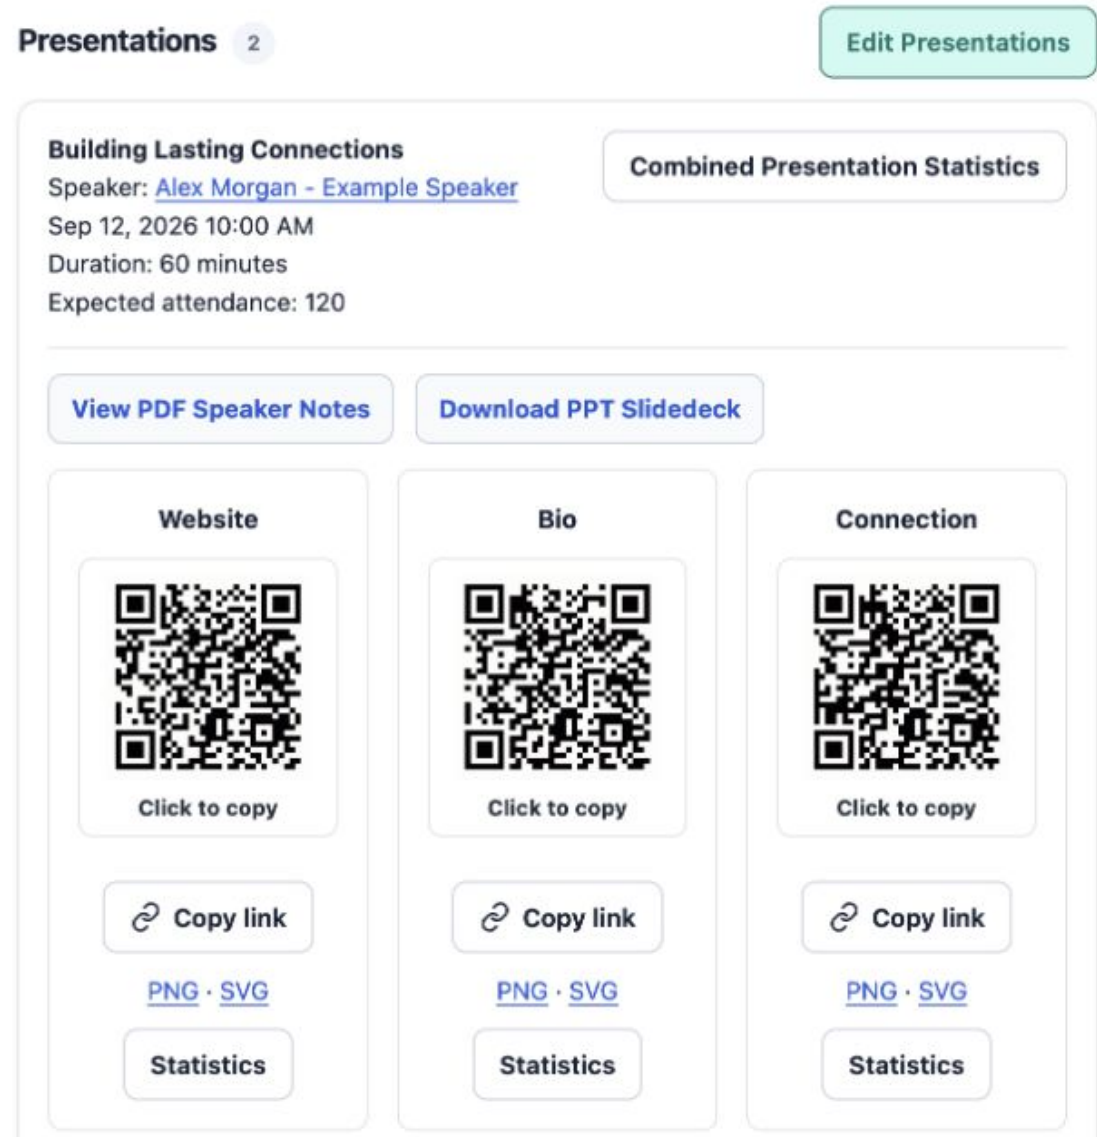


Figure 20. Presentation details and audience resources. Actual preview screen; fictional records.

- 01** Open Presentations and review the speaker, title, schedule, duration, and attendance. Use Edit Presentations to open the editing section.

**02** Select View PDF Speaker Notes to open the notes, or Download PPT Slidedeck to save the PowerPoint for a compatible presentation app.
- 03** Select Copy link beneath a QR image to share its web address. Select the image to copy the QR graphic, or PNG/SVG to save it.


**04** Combined Presentation Statistics covers all codes; Statistics beneath a code opens its own activity.

**Screenshot context:** The first row of resource codes is shown. Scroll down to find the file and custom-resource codes.

**Related chapters:** [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

## CHAPTER 05 / ILLUSTRATED WALKTHROUGH

## Share a PowerPoint download link

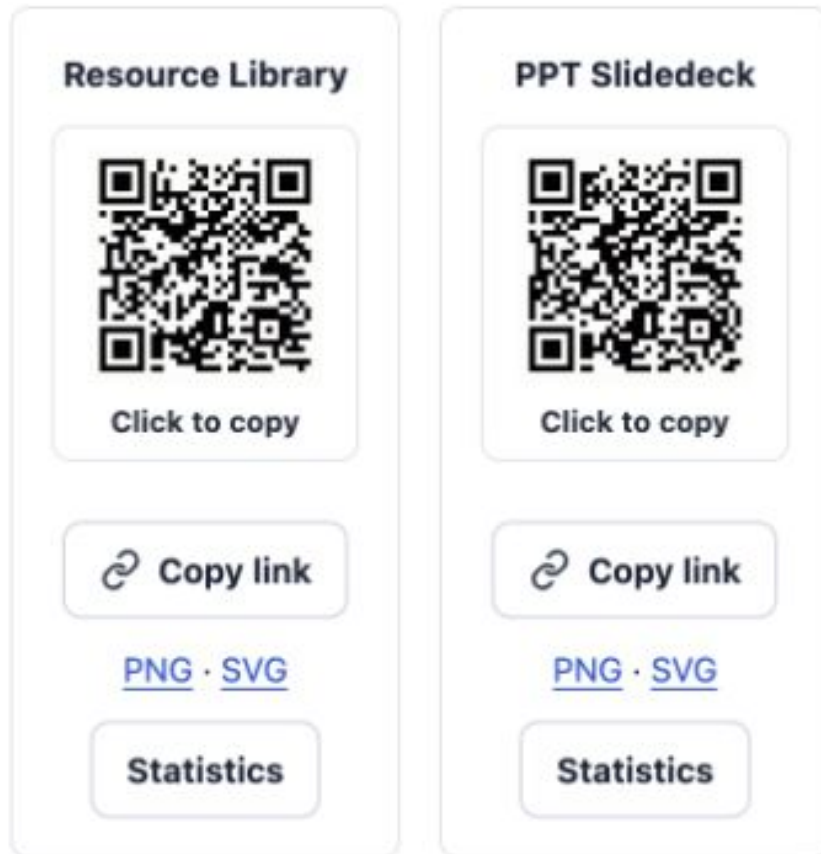

Each code is unique to this presentation. Select Combined Presentation Statistics for activity across all its codes, or Statistics on a code to review its visits and manage its destination. Speaker Notes and PPT Slidedeck codes are added after their files are uploaded. Use Copy link to copy the URL encoded in a QR code.

Figure 21. Share a PowerPoint download link. Actual preview screen; fictional records.

**01** Save a PPT Slidedeck to generate its presentation-specific code, then find the PPT Slidedeck card.

**02** Use Copy link to paste its download URL into a message or document. The same control appears on the presentation edit page.

**03** Use the QR image or PNG/SVG downloads in slides and handouts. Replacing the PowerPoint keeps these previously shared codes usable.

**Screenshot context:** Copying a link or image does not add a visit. Opening the shared QR link records activity before delivering the file.

**Related chapters:** [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

## CHAPTER 05 / ILLUSTRATED WALKTHROUGH

## Select and order QR codes for a PDF

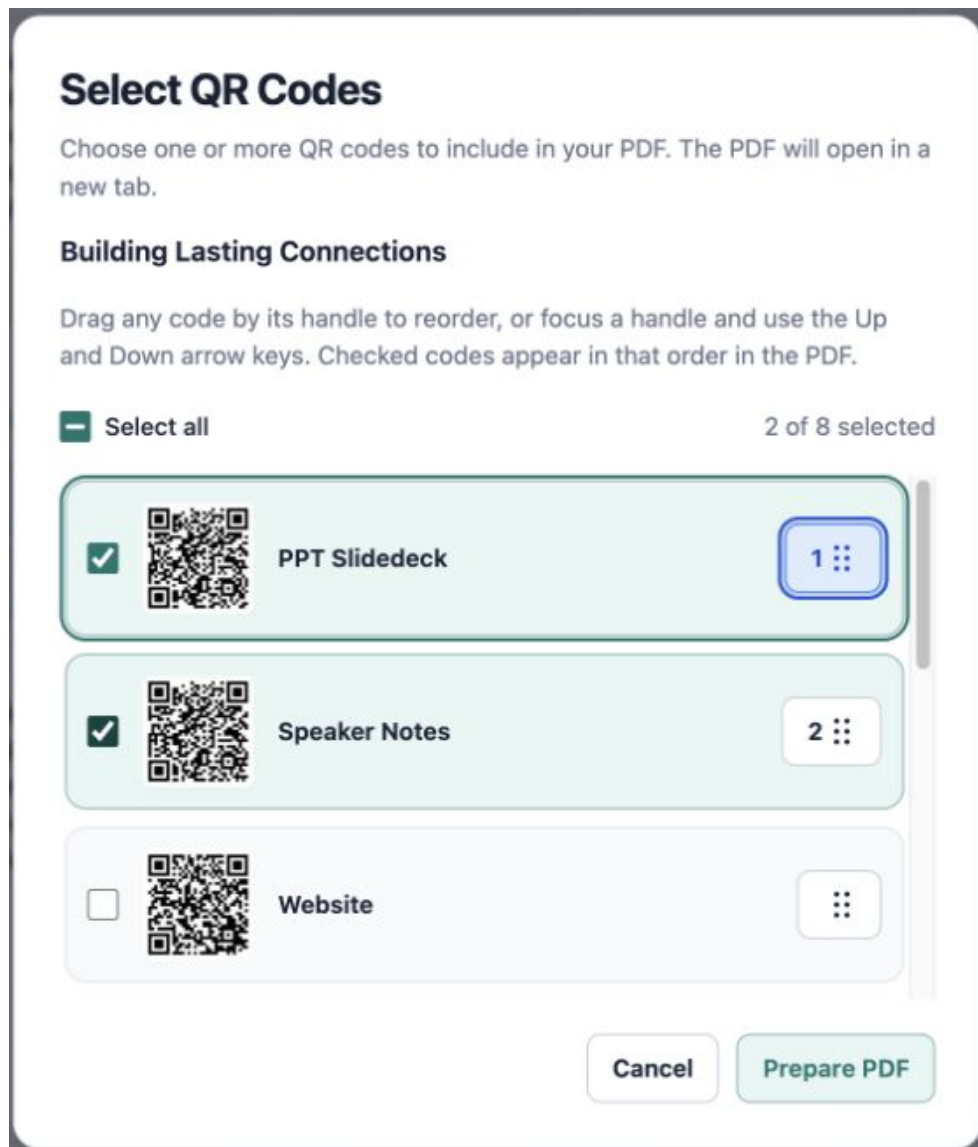


Figure 22. Select and order QR codes for a PDF. Actual preview screen; fictional records.

- 01 Expand Export Presentation and select View QR Codes PDF. Check one or more codes, or use Select all.
- 02 Drag any row by its handle, whether checked or unchecked. Only checked codes appear in the PDF, in list order from left to right and then top to bottom.

- 03 Keyboard users can focus a handle and use Up or Down to move a code. Select Prepare PDF to open the chosen sheet in a new tab, or Cancel to close the dialog.

**Screenshot context:** PPT Slidedeck and Speaker Notes are selected and moved to the top. Other available codes remain below the visible rows.

**Related chapters:** [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

# Edit presentation details

## Presentation(s)

Presentation details are optional and can be filled in after the event is created. Actual attendance can be recorded after the event. Add at least one presentation before setting the engagement status to confirmed.

[View or manage speakers \(opens in a new tab\)](#)

Topic/Title

Building Lasting Connections

Date

09/12/2026

Time

10:00

☒ AM ☐ PM

Speaker

Alex Morgan - Example Speaker — alex.morgan@example.c

Duration (minutes)

60

Expected Attendance

120

Actual Attendance

Figure 23. Edit presentation details. Actual preview screen; fictional records.

- 01 Find the intended numbered presentation, check its topic and speaker, and enter the date, time, duration, and expected attendance.

02 Record actual attendance after the event. Zero is valid when nobody attended.
- 03 Continue to Presentation Files & QR Codes below these fields to add PDF notes and a PowerPoint file.

04 Use Save Changes in the persistent bottom bar to save the whole engagement form, including other edits on the page.
- Screenshot context: The retained illustration shows the same presentation fields; the current view and editor also number each presentation section.

Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

## CHAPTER 05 / ILLUSTRATED WALKTHROUGH

## Upload or replace PDF notes and a PowerPoint

### PDF Speaker Notes

Anyone with the Speaker Notes QR code can open this PDF without signing in.

[View community-learning-speaker-notes.pdf](#) Uploaded Sep 22, 2026 7:31 AM CDT By avery.manual 0.0 MB

☐ Remove current PDF

**Replace PDF** No replacement selected

### PPT Slidedeck

Anyone with the PPT Slidedeck QR code can download this PowerPoint file without signing in.

[View community-learning-slides.ppt](#) Uploaded Sep 22, 2026 7:34 AM CDT By avery.manual 0.0 MB

☐ Remove current PPT

**Replace PPT** No replacement selected

Figure 24. Upload or replace PDF notes and a PowerPoint. Actual preview screen; fictional records.

- 01** In the intended numbered presentation, choose a file or drop one onto Drop PDF here or Drop PowerPoint here. PPT Slidedeck accepts .ppt and .pptx. Choosing or dropping a file does not save it.
- 02** PDF files may be up to 100 MB and PowerPoint files up to 500 MB. Save Changes uploads files in small chunks. Watch the progress indicator, keep the page open, and wait for saving to finish. Interrupted chunks retry automatically.

- 03** Use Replace PDF or Replace PPT to select an updated file. The pending notice remains until you select Save Changes in the persistent bottom bar, which saves the entire engagement form.
- 04** To stop sharing a file, select its Remove current checkbox, review Removal pending, then Save Changes. Choose replacement or removal, not both. The existing QR link and statistics are retained.

**Screenshot context:** Only upload files intended for the audience: anyone with the relevant QR link can open the notes or download the PowerPoint without signing in. The retained illustration shows the file controls; the current editor also provides separate PDF and PowerPoint drop areas.

**Related chapters:** [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Save a pending presentation-file change

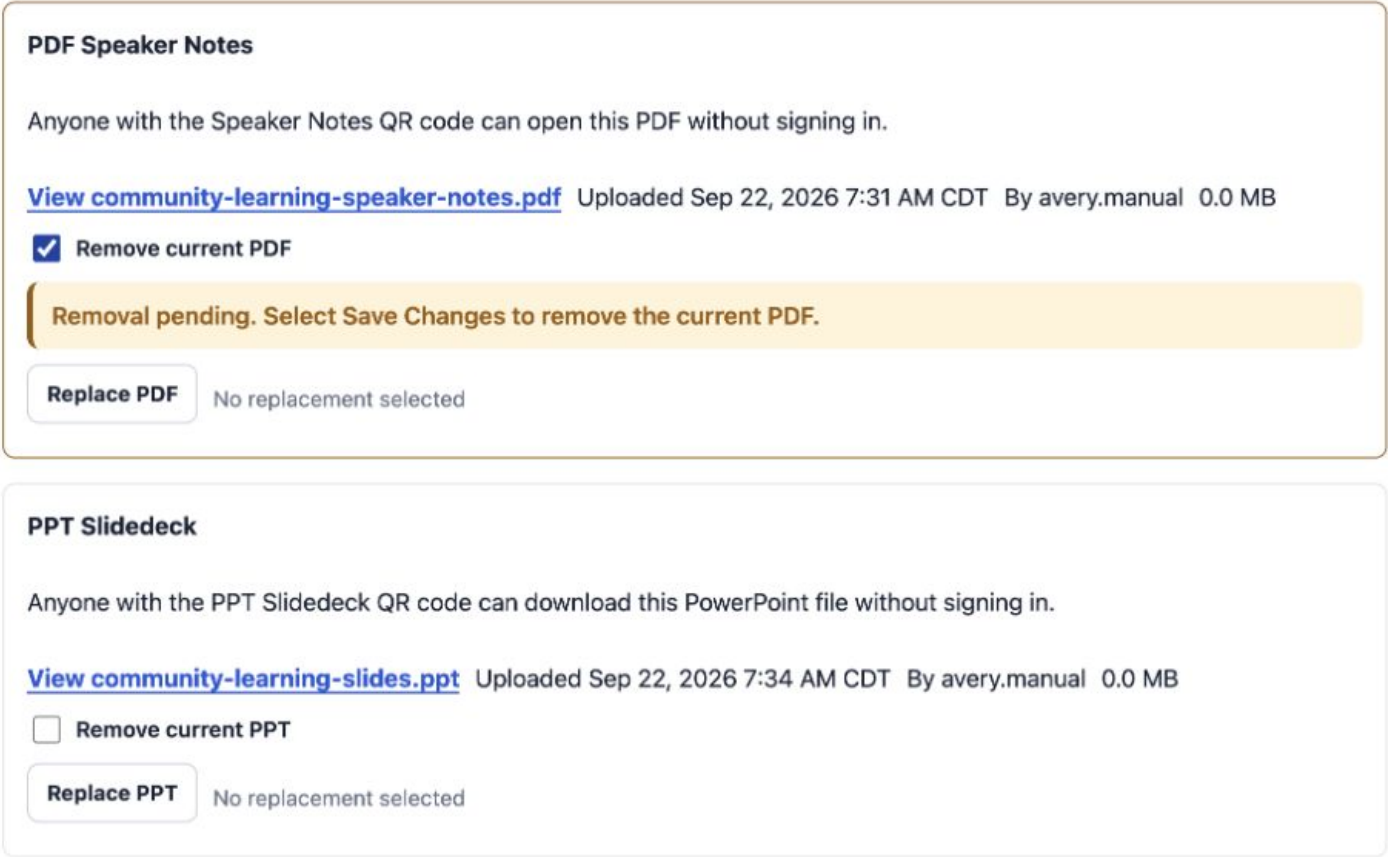


Figure 25. Save a pending presentation-file change. Actual preview screen; fictional records.

- 01** Use Replace PDF or Replace PPT for a new file, or check Remove current PDF/PPT to remove the current one. Choose only one action for each file.

**02** Read the pending notice. Selecting a file or checking Remove does not apply the change immediately.
- 03** Select Save Changes in the persistent bar at the bottom of the window. It saves the whole engagement form, including pending file changes.

**04** After saving, verify the file details and sharing links. Leave without saving to keep the existing file.

**Screenshot context:** Removal pending is illustrated with fictional speaker notes. The form was not saved and the file was kept.

**Related chapters:** [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Review event logistics

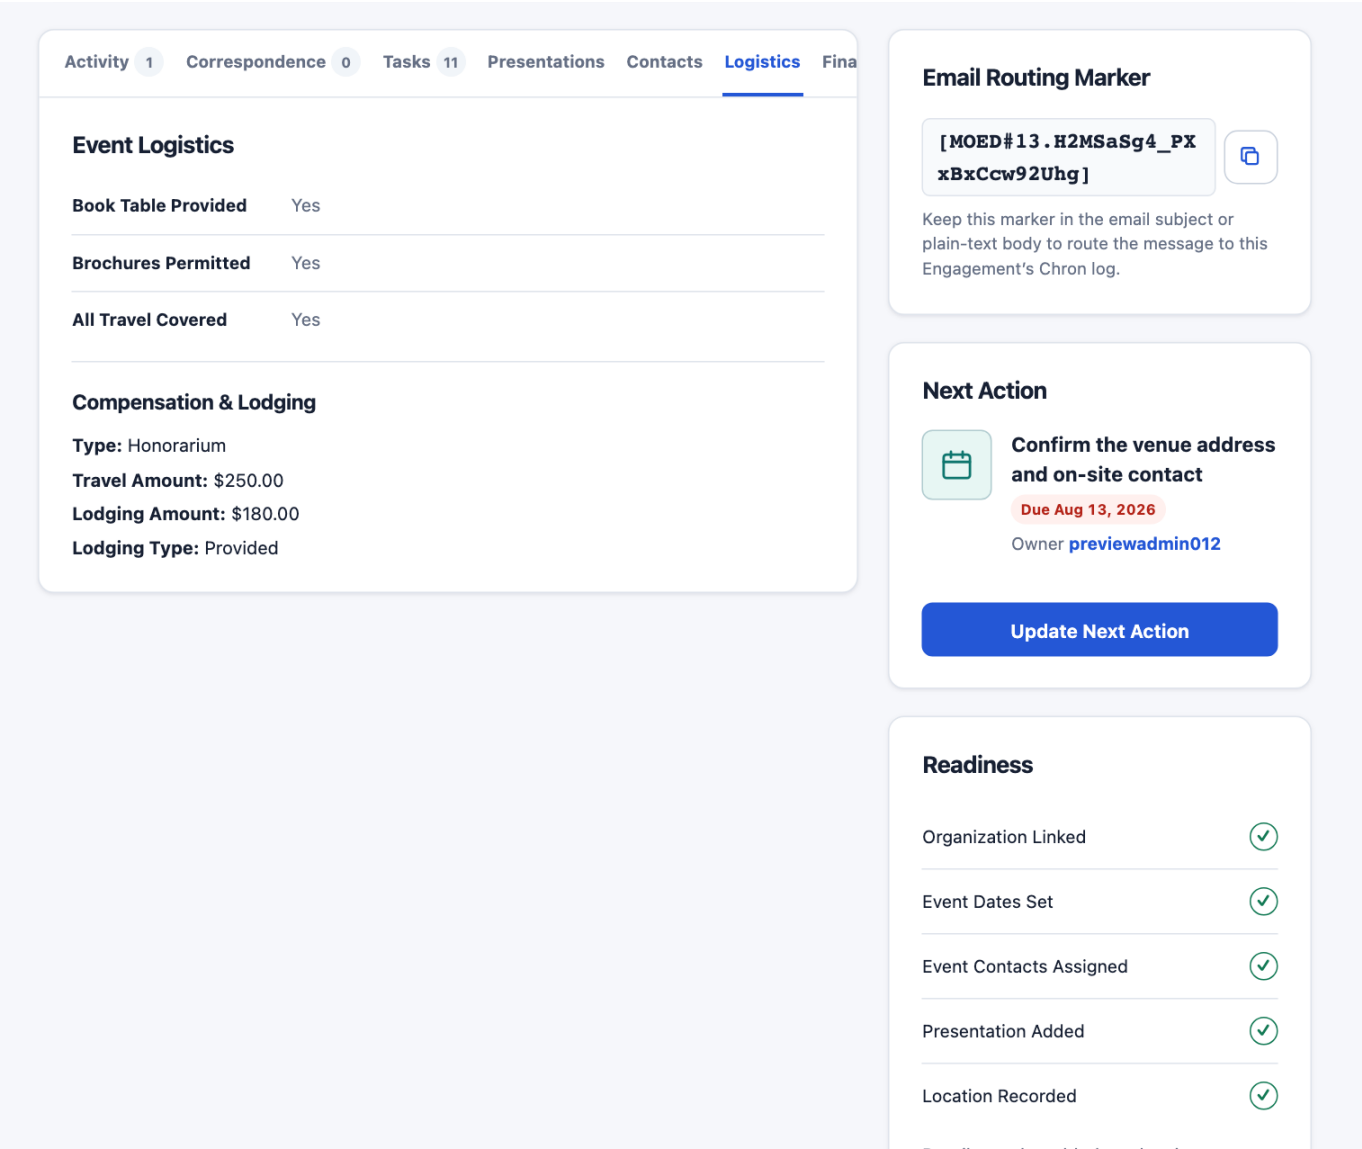


Figure 26. Review event logistics. Actual preview screen; fictional records.

- 01** Open Logistics to review the event address, materials, travel, compensation, and lodging.

**02** Planning estimates describe arrangements; actual received amounts belong in Financial Closeout.
- 03** Keep the physical event location accurate for the map and presentation exports.

**Related chapters:** [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Lifecycle and rescheduling

### Lifecycle

Track whether the event is operationally active, postponed, canceled, or completed. Confirmation remains a separate planning status.

Lifecycle state

Active

Confirmation status

Under Review

Active

Figure 27. Lifecycle and rescheduling. Actual preview screen; fictional records.

- 01

Use Active, Postponed, Canceled, or Completed to describe the operational state.

02

Keep Work in Progress, Under Review, or Confirmed as the separate planning confidence.
- 03

Provide a cancellation reason. When rescheduling, link the replacement event from the same organization.

Related chapters:

People and organizations (p. 61)

Work queue (p. 76)

Chron and email (p. 88)

Map and calendar (p. 95)
- < Previous
- Chapter start
- 43 / 187
- Next >

## CHAPTER 05 / ILLUSTRATED WALKTHROUGH

## Review combined presentation QR activity



Figure 28. Review combined presentation QR activity. Actual preview screen; fictional records.

- 01** Open Combined Presentation Statistics from the presentation pane. Totals combine its QR codes, including historical visits to disabled and previous-speaker codes.
- 02** Choose a UTC date range. Hover or tap the charts, or expand the data tables for exact daily, referrer, browser, country, and operating system counts.

- 03** Clear Filters stays within the presentation. Back to Presentation returns to its pane. A person opening multiple codes contributes multiple visits.

**Screenshot context:** The chart uses fictional, seeded visit counts to illustrate the report.

**Related chapters:** [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Review financial closeout

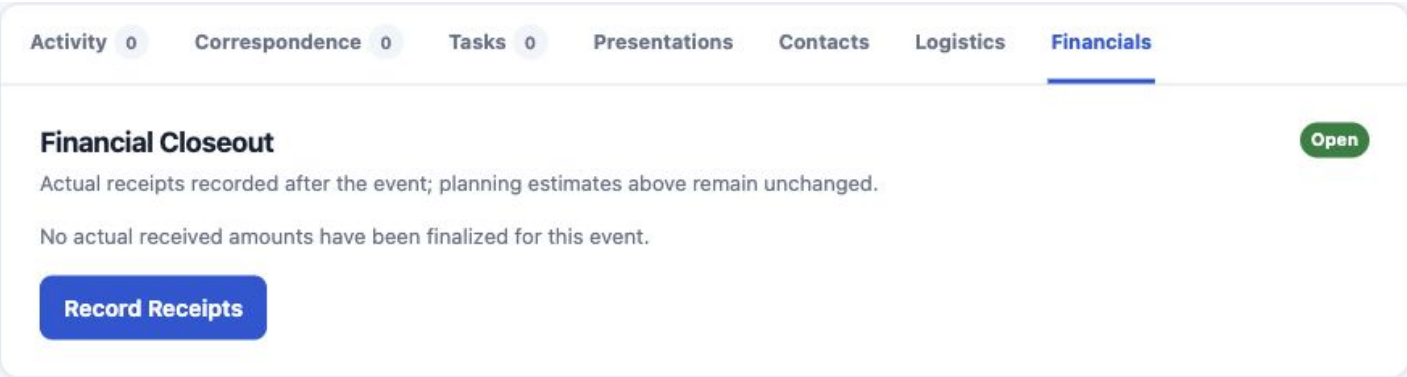


Figure 29. Review financial closeout. Actual preview screen; fictional records.

- 01** Open Financials to see whether a report is open, a draft, or final.

**02** Use Financial Closeout to enter giving, lodging, travel, and book-table amounts actually received.
- 03** A draft does not enter finalized organization financial history.

Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Draft and finalize received amounts

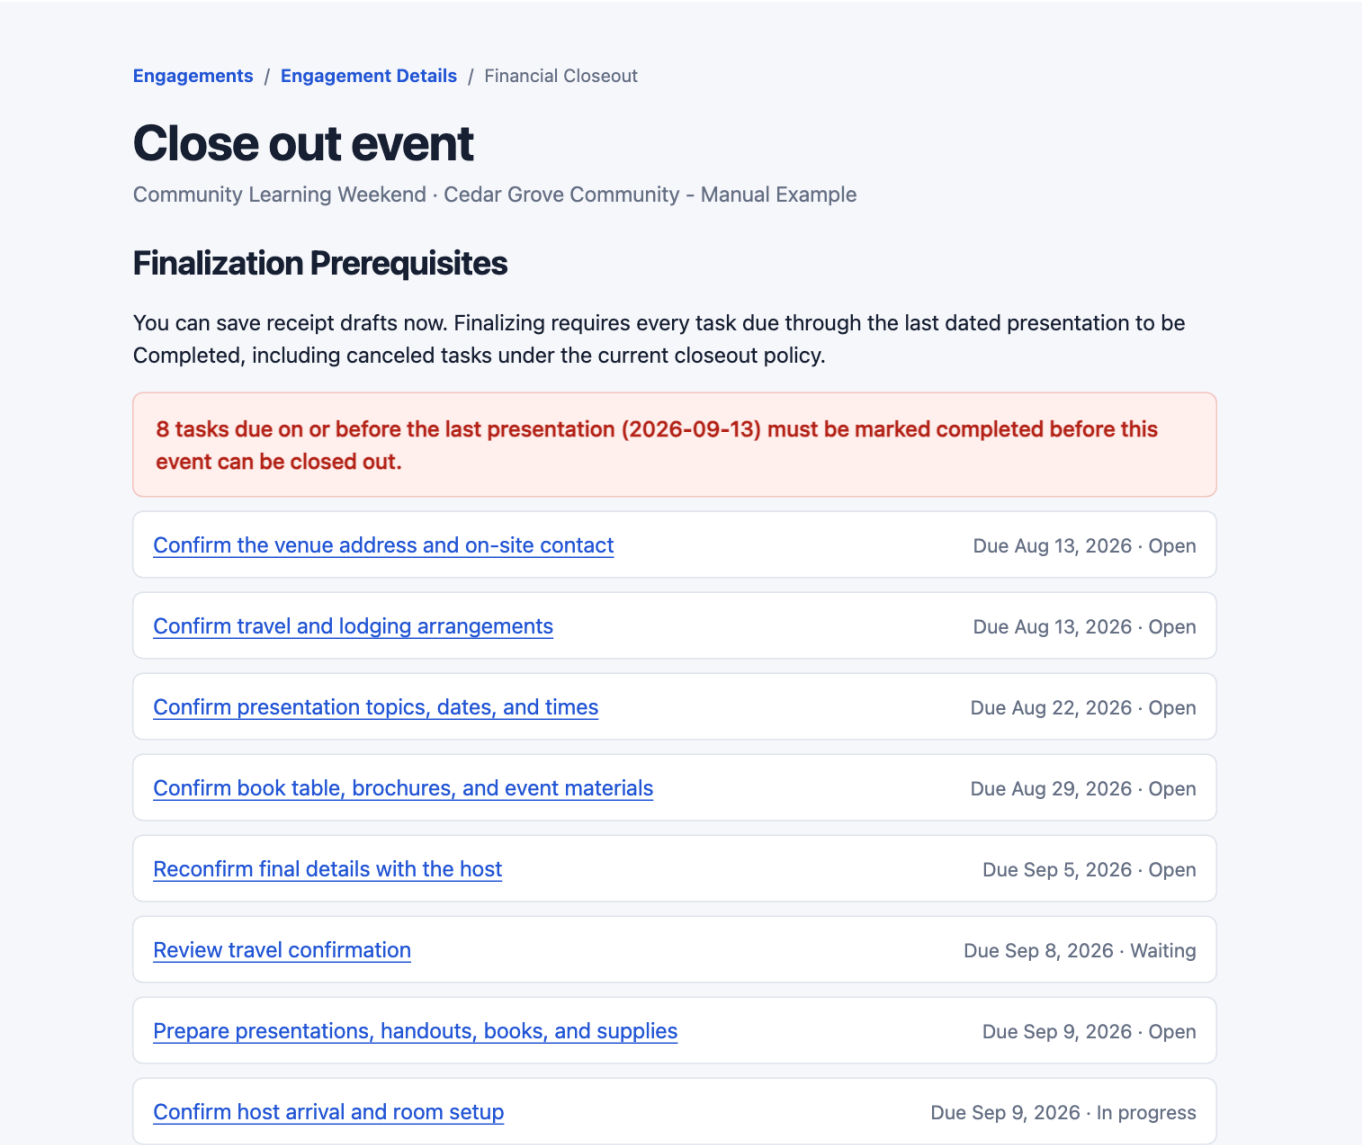


Figure 30. Draft and finalize received amounts. Actual preview screen; fictional records.

- 01

Leave unknown draft amounts blank; enter zero only when nothing was received.

02

Resolve every task due on or before the last active presentation by marking it Completed. Canceled tasks still hold closeout.
- 03

Check the final-amount confirmation, then Finalize and close event when prerequisites are satisfied.

04

For a final report, use correction to update amounts while retaining the original close date.
- Related chapters:

People and organizations (p. 61) / Work queue (p. 76) / Chron and email (p. 88) / Map and calendar (p. 95)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Manage the email template library

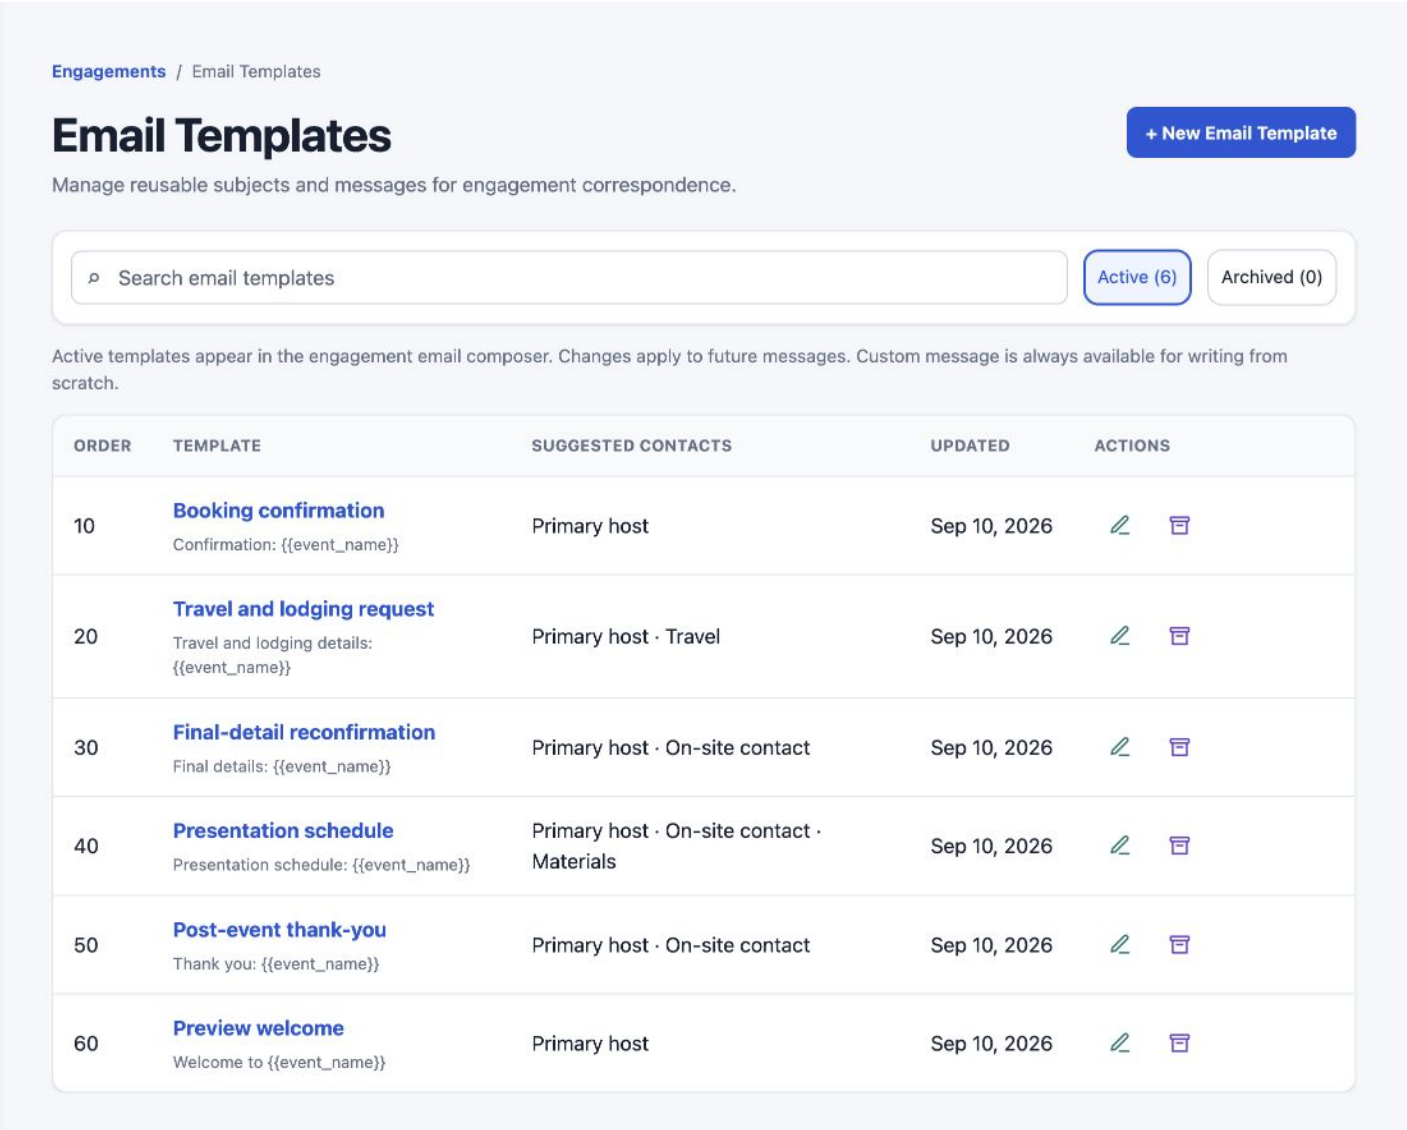


Figure 31. Manage the email template library. Actual preview screen; fictional records.

- 01** Open Email Templates under Work in the sidebar, or Manage Email Templates in an engagement email.

**02** Search by name or subject. Select + New Email Template, a template name, or its Edit action.
- 03** Archive removes a template from new messages. Open Archived and choose Restore to use it again.

**04** Only administrators can permanently delete an archived template after confirming access. Sent messages and history remain unchanged.

**Screenshot context:** Fictional records from the isolated template preview; no email was queued during capture.

**Related chapters:** [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

## CHAPTER 05 / ILLUSTRATED WALKTHROUGH

## Add or edit reusable email text

Email Templates / Edit Email Template

## Edit Email Template

Set the starting subject, message, and suggested contacts for engagement emails.

\* Required fields

### Template Details

**Template name**

**Subject**

The engagement routing marker is added automatically when composing the email.

**Plain-text message**

Hello,

Thank you for hosting {{event\_name}} on {{event\_dates}}.

Speakers: {{speaker\_names}}

► Personalize with event fields

Figure 32. Add or edit reusable email text. Actual preview screen; fictional records.

- 01** Enter a clear template name, a subject, and the starting plain-text message.
- 02** Use event fields such as `{{event_name}}` in the text. The engagement routing marker is added automatically when composing.

- 03** Existing templates can be edited too. Save Changes updates the template for future selections, leaving sent messages intact.
- 04** If another session changed the template, preserve your edits, reload, and review the current version before saving.

**Screenshot context:** Fictional records from the isolated template preview; no email was queued during capture.

**Related chapters:** [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Personalize fields and suggest recipients

▼ Personalize with event fields

These fields are filled from the engagement when you choose the template. Click in the subject or message, then choose a field to insert it.

Event name {{event\_name}}

Organization name {{organization\_name}}

Event date range {{event\_dates}}

Event start date {{event\_start\_date}}

Event end date {{event\_end\_date}}

Event location {{event\_location}}

Speaker names {{speaker\_names}}

Presentation schedule (message only) {{presentation\_schedule}}

Recipient Suggestions

Suggest event contacts when this template is selected. The sender can change recipients and include speakers before sending.

☒ Primary host ☐ On-site contact ☐ Billing ☐ Travel ☐ Materials

Display order

60

Lower numbers appear first in the template library and email composer.

Cancel

Save Changes

Figure 33. Personalize fields and suggest recipients. Actual preview screen; fictional records.

- 01

Expand Personalize with event fields. Place the cursor in the subject or message, then select a field button.
- 02

Presentation schedule is available in the message only. Speaker names inserts text; it does not select recipients.
- 03

Choose suggested event contact roles. Leave all clear to choose contacts when composing. Lower Display order numbers appear first.
- 04

Save the template. Open an engagement email, choose it, and review the filled text and recipients before queuing.
- Screenshot context:

Fictional records from the isolated template preview; no email was queued during capture.
- Related chapters:

[People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Copy or export a presentation brief



Figure 34. Copy or export a presentation brief. Actual preview screen; fictional records.

- 01** In Presentations, expand Export Presentation at the bottom of the card.

**02** Copy Text produces plain text; Copy MD produces Markdown. View PDF opens the branded presentation brief.
- 03** View QR Codes PDF opens a selection dialog. Choose and order the codes, then select Prepare PDF to view, save, or print the landscape sheet.

Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

# Change an existing QR destination

Building Lasting Connections · Alex Morgan - Example Speaker



Short URL

http://127.0.0.1:9087/surls/7a1e4e4e9af23319

[Download PNG](#) · [Download SVG](#)

Destination

https://example.org

☒ Link enabled

Save Link

Figure 35. Change an existing QR destination. Actual preview screen; fictional records.

- 01

Review the specific code and its activity.
- 02

Edit Destination and save to redirect an already-published resource code without changing its image.
- 03

Clear Link enabled and save to stop that code from opening its destination.
- 04

For Speaker Notes and PPT Slidedeck, replace the file on the presentation; its destination is managed automatically.
- Related chapters:

[People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Clear all links of one presentation

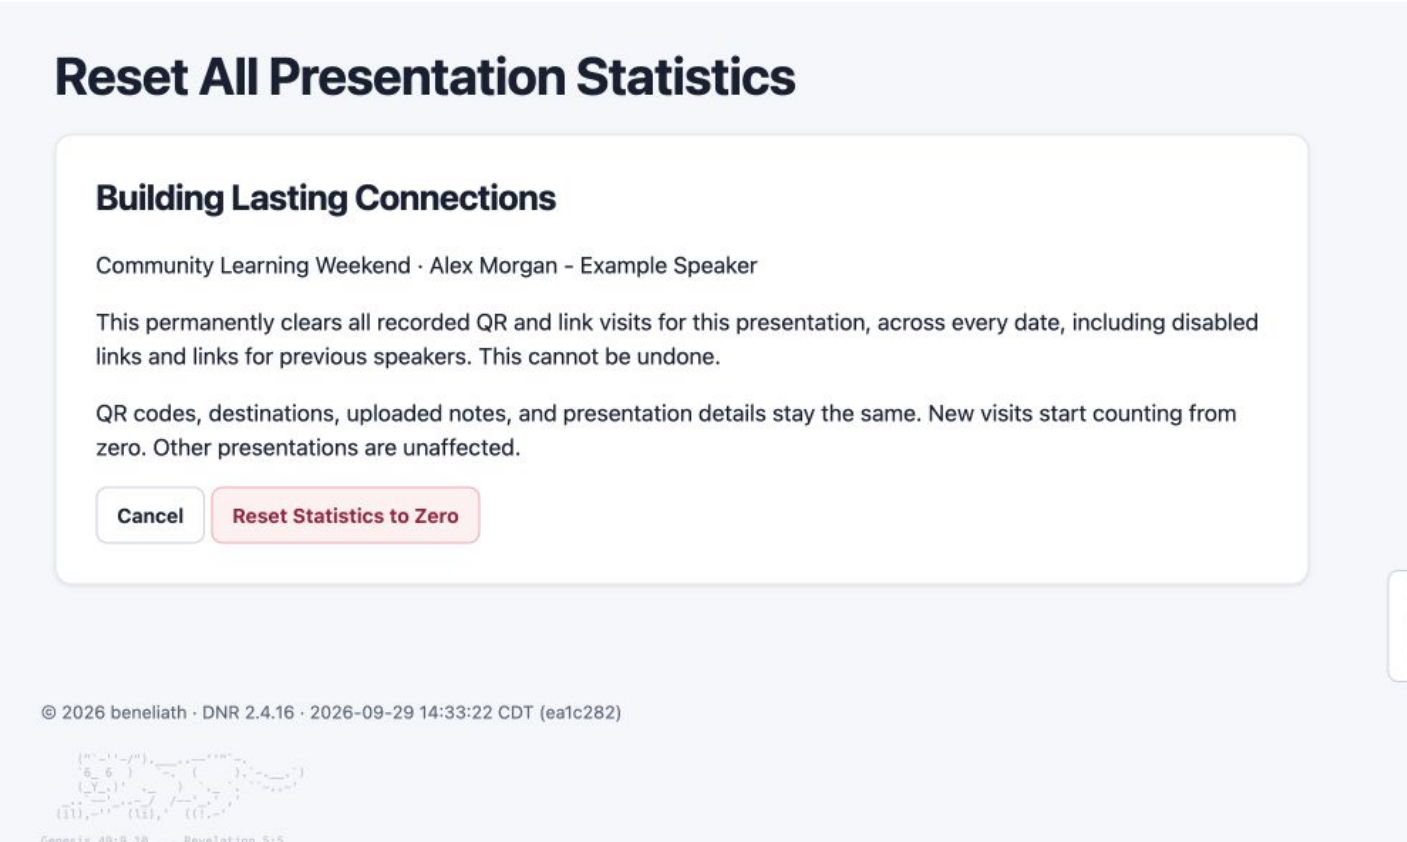


Figure 36. Clear all links of one presentation. Actual preview screen; fictional records.

- 01** Choose Reset All Presentation Statistics at the bottom of the presentation block.

**02** Review the scope: all visits for that presentation, including disabled and previous-speaker links.
- 03** Confirm only when the permanent loss of visit history is intended. Other presentations, files, and QR destinations stay intact.

**Related chapters:** [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Enter actual receipts

Engagements / Engagement Details / Financial Closeout

# Close Out Event

Book Table Receipt Preview · Book Table Preview

Enter actual amounts received. Planning estimates on the engagement are not copied into this final report.

Actual Receipts

Leave an amount blank when it is not known yet. Enter 0 only when you have confirmed no amount was received. Every category must be entered before finalizing.

Giving Received \*

\$ Not entered

Lodging Received \*

\$ Not entered

Travel Received \*

\$ Not entered

Book Table Received \*

\$ Not entered

Total entered: \$0.00

0 of 4 categories entered

Closeout Notes

Optional context, payment references, or correction reason

☐ I confirm these are the final received amounts and this event is ready to be financially closed

Cancel

Save Draft

Finalize and Close Event

Figure 37. Enter actual receipts. Actual preview screen; fictional records.

01

Enter known Giving, Lodging, Travel, and Book Table received amounts.

02

The draft total shows the entered values and completion state.

03

Save draft while prerequisites remain unresolved. Enter all four amounts and confirm they are final before finalizing.

Related chapters:

People and organizations (p. 61) / Work queue (p. 76) / Chron and email (p. 88) / Map and calendar (p. 95)

< Previous

Chapter start

53 / 187

Next >

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Read a finalized financial report

Activity 0Correspondence 0Tasks 0PresentationsContactsLogisticsFinancials

Financial Closeout

Actual receipts recorded after the event; planning estimates above remain unchanged.

Giving Received

\$1,500.00

Lodging received

\$180.00

Travel received

\$250.00

Book Table Received

\$85.00

Total Received

\$2,015.00

Finalized October 5, 2026 at 7:54 PM CDT by http-editor-booktable . Last corrected October 5, 2026 at 7:54 PM CDT by http-editor-booktable.

Closeout notes

Fictional receipts for the user guide.

Financial Revision History

Correct Final Report

Figure 38. Read a finalized financial report. Actual preview screen; fictional records.

01 Open Financials on the completed event to see its final received amounts.

02 The report contributes to the organization's finalized financial history.

03 Use the correction control when an amount needs to change; the original closer and close date are retained.

Screenshot context: This completed report contains fictional amounts.

Related chapters: [People and organizations](#) (p. 61) / [Work queue](#) (p. 76) / [Chron and email](#) (p. 88) / [Map and calendar](#) (p. 95)

< Previous

Chapter start

54 / 187

Next >

## CHAPTER 05 / ILLUSTRATED WALKTHROUGH

## Archive or delete the correct presentation

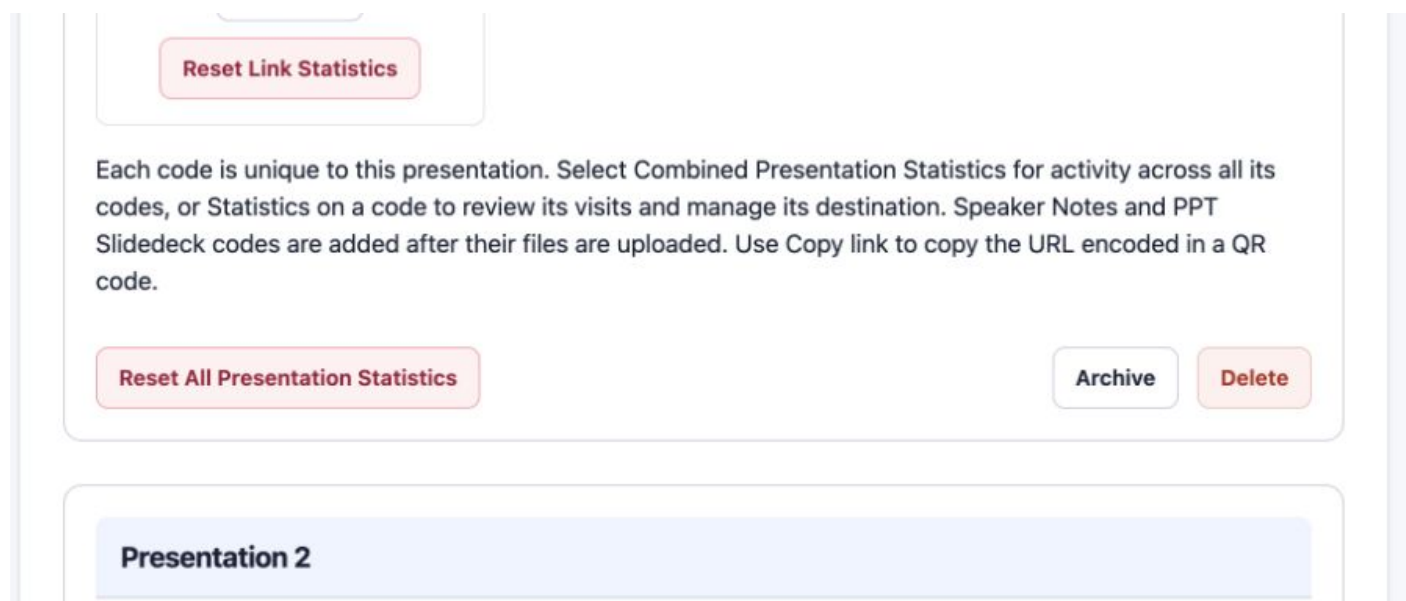


Figure 39. Archive or delete the correct presentation. Actual preview screen; fictional records.

- 01** Open Presentations, then Edit Presentations. Check the numbered block, topic, and speaker.
- 02** Find Archive and Delete at the bottom of that saved presentation block. Archive keeps a restorable record; Delete is permanent and requires administrator access.

- 03** These actions do not save other unsaved edits. Remove on an unsaved block and file-removal checkboxes are different actions.

Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

## CHAPTER 05 / ILLUSTRATED WALKTHROUGH

## Review permanent presentation deletion

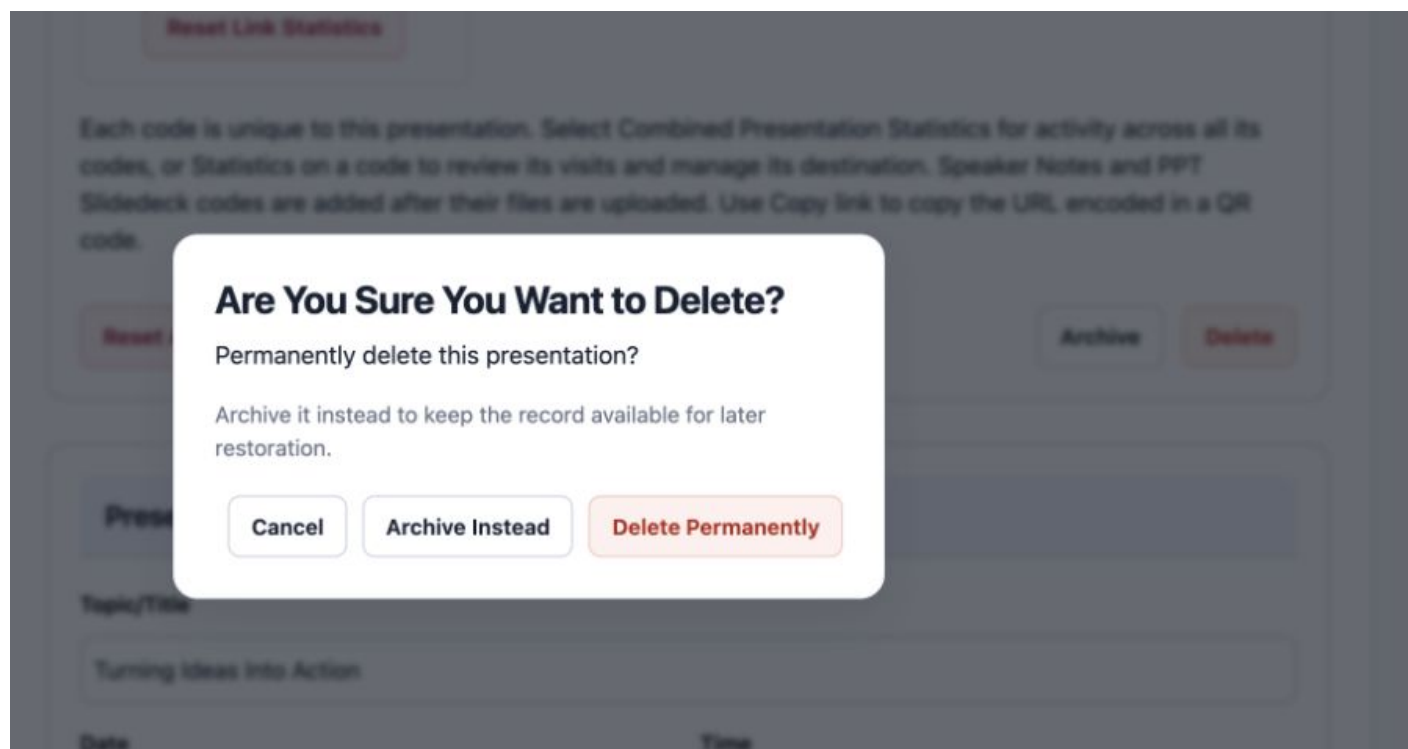


Figure 40. Review permanent presentation deletion. Actual preview screen; fictional records.

- 01** Select Delete on the intended saved presentation; unlock admin actions first if asked.
- 02** Read the dialog. Cancel leaves the presentation in place; Archive Instead keeps it restorable.

- 03** Select Delete Permanently only when its resources and visit history should also be removed. This cannot be undone.

**Related chapters:** [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Restore archived presentations

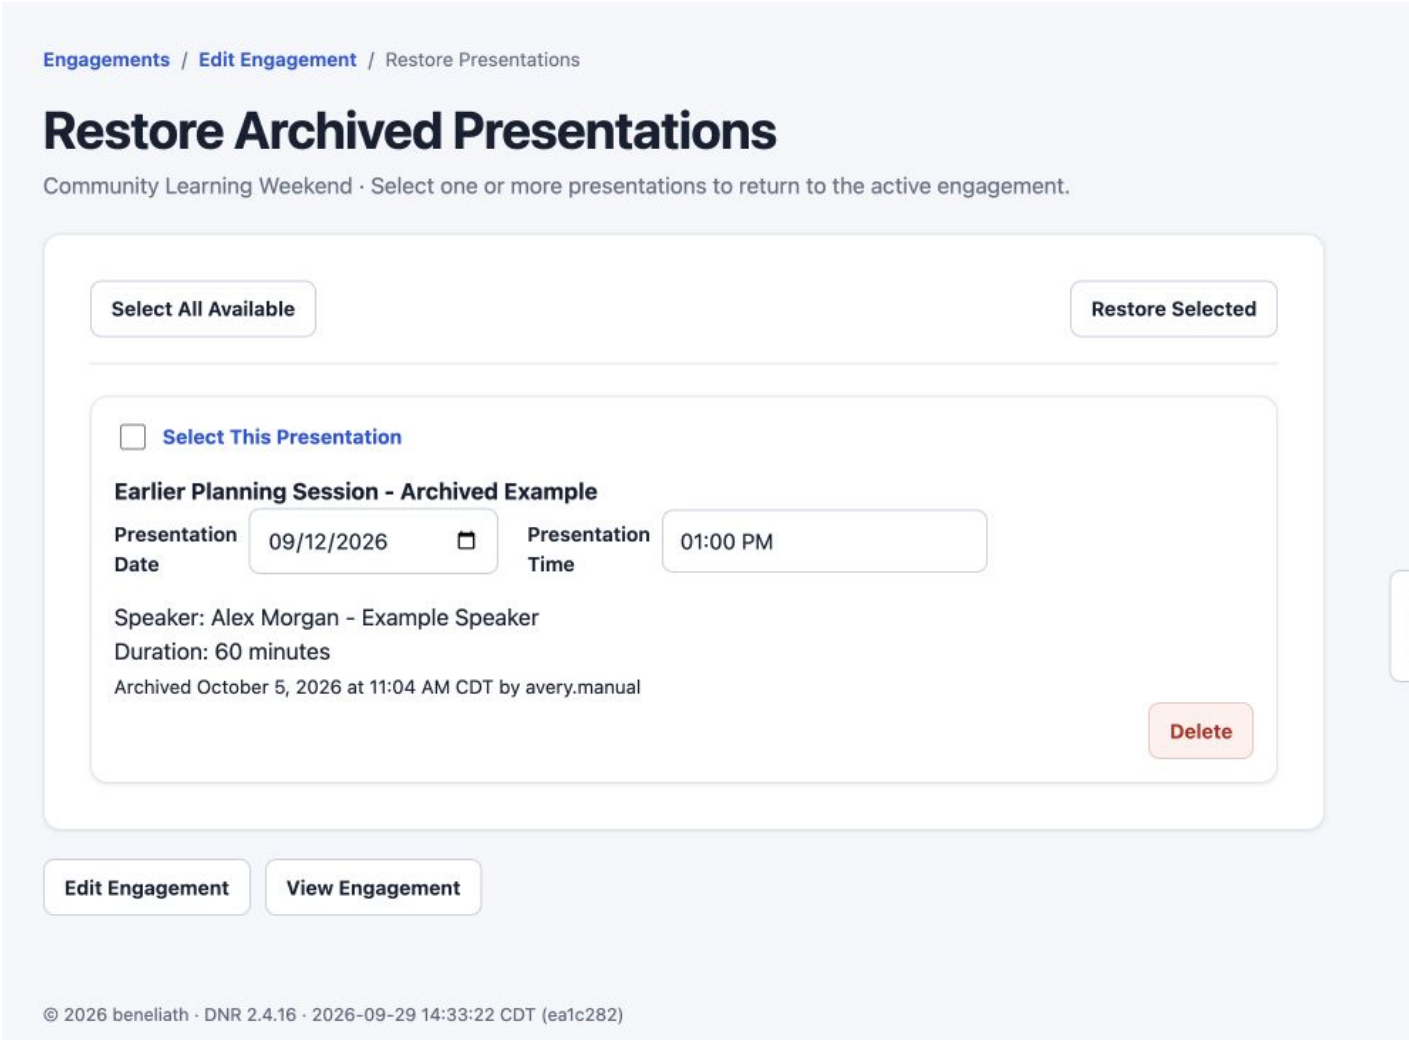


Figure 41. Restore archived presentations. Actual preview screen; fictional records.

- 01 Open Restore Archived Presentations from the engagement editor.
- 02 Select the intended presentation and check that its date/time fits the engagement. Choose Restore Selected.

- 03 An administrator can delete an archived presentation permanently; it has no restore path afterward.
- Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Clear visits for one QR link

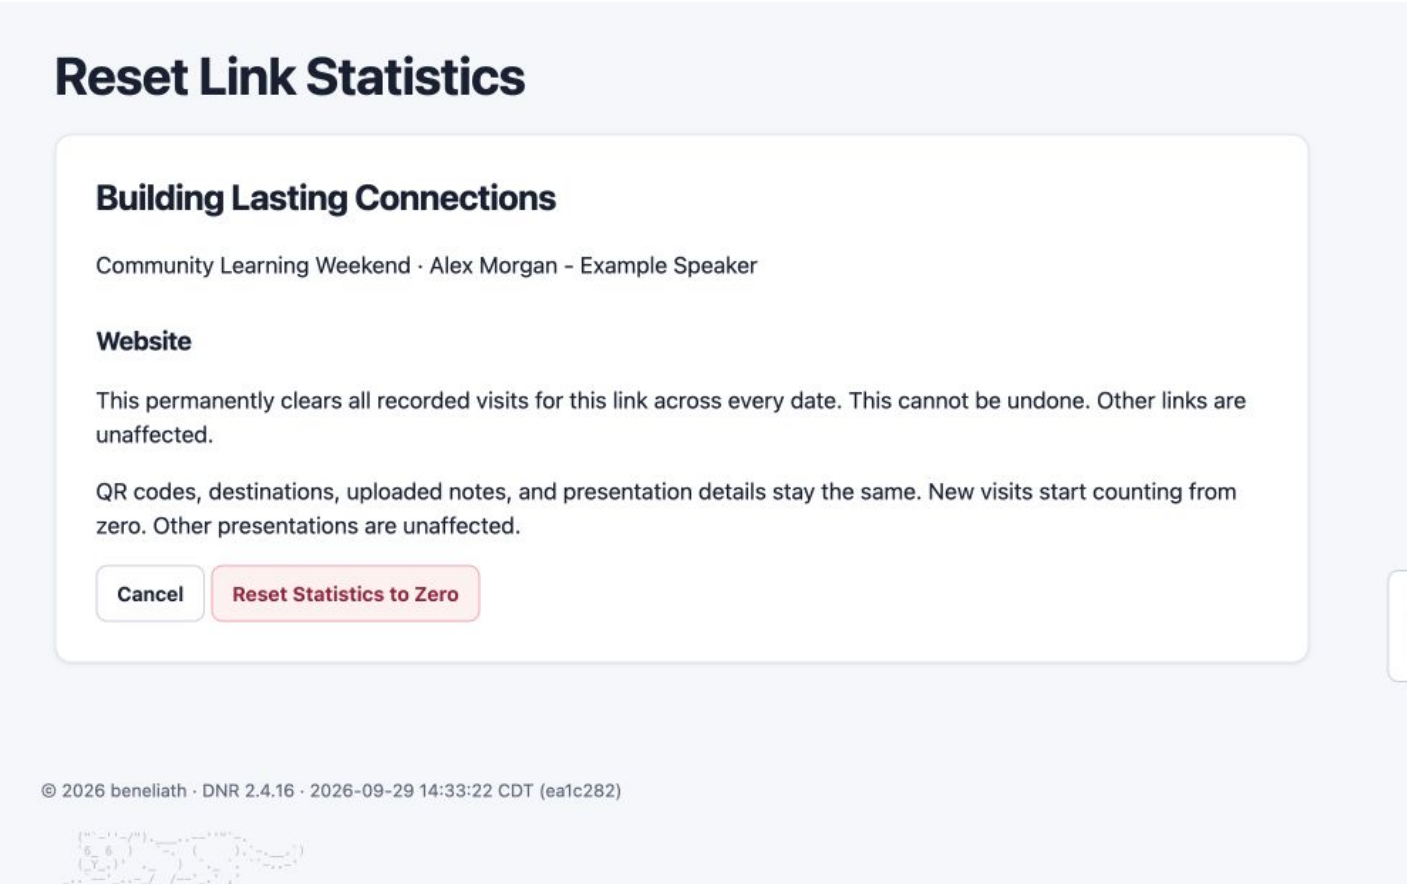


Figure 42. Clear visits for one QR link. Actual preview screen; fictional records.

- 01** Choose Reset Link Statistics for the intended resource.

**02** Review the named presentation and link. Other links remain unaffected.
- 03** Cancel or confirm Reset Statistics to Zero. This clears visit history permanently, while keeping the QR link and resource.

Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Inspect financial correction history

Activity0Correspondence0Tasks0PresentationsContactsLogisticsFinancials

Financial Closeout

Finalized

Actual receipts recorded after the event; planning estimates above remain unchanged.

Giving Received

\$1,500.00

Lodging received

\$180.00

Travel received

\$250.00

Book Table Received

\$85.00

Total Received

\$2,015.00

Finalized October 5, 2026 at 7:54 PM CDT by http-editor-booktable . Last corrected October 5, 2026 at 7:54 PM CDT by http-editor-booktable.

Closeout notes

Fictional receipts for the user guide.

▼ Financial Revision History

Completed reports and revisions are retained indefinitely.

| Date / Actor                                 | Giving     | Lodging  | Travel   | Book Table | Reason                               |
|----------------------------------------------|------------|----------|----------|------------|--------------------------------------|
| 2026-10-05 19:54 CDT · http-editor-booktable | \$1,500.00 | \$180.00 | \$250.00 | \$85.00    | Added a confirmed book-table receipt |
| 2026-10-05 19:54 CDT · http-editor-booktable | \$1,500.00 | \$180.00 | \$250.00 | \$75.00    | Initial closeout                     |

Most recent 100 revisions.

Correct Final Report

Figure 43. Inspect financial correction history. Actual preview screen; fictional records.

- 01 Open Financials, then expand Financial Revision History.
- 02 Compare the original and corrected totals and the recorded reason. Finalized history is retained; archive a protected event instead of deleting it.
- Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 05 / ILLUSTRATED WALKTHROUGH

Correct a final financial report with a reason

Engagements / Engagement Details / Correct Financial Report

### Correct Final Financial Report

Completed Book Table Example · Book Table Preview

Finalized October 5, 2026 at 7:54 PM CDT by http-editor-booktable . Saving here records a correction without changing the original close date.

Correction Reason \*

Actual Receipts

Leave an amount blank when it is not known yet. Enter 0 only when you have confirmed no amount was received. Every category must be entered before finalizing.

Giving Received \*

\$ 1500.00

Lodging Received \*

\$ 180.00

Travel Received \*

\$ 250.00

Book Table Received \*

\$ 85.00

Total entered: \$2015.00

4 of 4 categories entered

Closeout Notes

Fictional receipts for the user guide.

Cancel

Save Correction

Figure 44. Correct a final financial report with a reason. Actual preview screen; fictional records.

01

Open Correct Final Financial Report.

02

Enter Correction Reason and check each amount before Save Correction. Prior revisions remain available.

Related chapters: [People and organizations \(p. 61\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#) / [Map and calendar \(p. 95\)](#)

< Previous

Chapter start

60 / 187

Next >

## CHAPTER 06

# Organizations, Contacts, and Speakers

Organizations hold relationship history, contacts identify the people involved, and speaker profiles keep presentation details and audience resources ready to reuse.

**Related chapters:** [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

## Relationship Record

Store the organization name, notes, affiliation, distinctives, website, phone, fax, and physical and mailing addresses. You can use one address for both or maintain them separately.

Only the organization name is required; add address and relationship details when known. A new organization can create its first contact at the same time, and can add more contacts before saving.

## Person Record

Store first and last name, optional primary organization, additional organization affiliations with their own roles or titles, email, phone, incidental notes, and an optional JPEG, PNG, or WebP photo up to 5 MB. A contact can be saved without an organization. Use Create Organization in the contact form to add a missing organization without losing the contact details or selected photo.

The organization role is Pastor, Admin, or Other. When you choose Other, enter the custom description in **Describe Other Role** beside the Role field. Additional organizations each have their own role or title, such as Pastor at a church and Chairman at a research center. Event-specific roles are assigned separately on each engagement.

## Enter Organization Addresses

- Choose the country before the region. The Country picker includes countries worldwide and defaults to **United States of America** for a new address.
- For a United States address, the region field is labeled **State** and provides a dropdown of state names.
- For a Canadian address, the region field is labeled **Province** and provides a dropdown of province and territory names.

- For every other country, the field is labeled **State/Province** and accepts typed regional information.
- The same behavior applies to both physical and mailing addresses. Select **Same as Physical Address** when the mailing address does not differ.

## Lists, Details, and Financial History

- Search organizations by their details or active contacts; sort by name and switch between Active and Archived.
- The organization list shows location, active contacts, last giving, and lifetime giving from finalized reports.
- An organization detail page summarizes lifetime giving, last and average event giving, lodging, travel, and recent finalized reports.
- Search contacts by person or organization, sort by last name or organization, and choose 20, 50, or 100 records per page.
- A contact detail page links to all its organizations and shows that person's Chron and open follow-up work.

## Choose a Profile, Contact, or Speaker Photo

Use a JPEG, PNG, or WebP image up to 5 MB. Keep the face near the center: saved portraits use a centered square crop and appear in circular frames. The application creates compact list and detail images so contact directories and profile views load faster.

Review the selected picture before saving. Choose a different source image if the crop cuts off important detail, or use the remove-picture option to return to the default portrait. Administrators can also update a user's picture from the user editor after unlocking sensitive actions.

## Keep Speaker Profiles Ready to Use

- Open **Relationships > Speakers** to find a speaker by name, email, or phone. Select **Name** to switch alphabetical order, then open the speaker's name or View icon for their details. Administrators and editors can use **New Speaker** or **Edit Speaker**; reviewers can view profiles and statistics.
- Save the speaker's name, email address, and phone number once, then choose that speaker when adding presentations.
- Add a biography and an optional photo to make the profile useful and recognizable. Photos can be JPEG, PNG, or WebP, up to 5 MB.

- Add the speaker's website and other audience links. The written **Bio** is for the profile; **Bio URL** is the web page opened by the biography QR code.
- For videos, social pages, or other resources, use **Speakers > Edit Speaker > Custom Links**. Give each link a clear name and full web address; select **Add Custom Link** for more, then **Save speaker**.

Saving a new custom link adds a separate QR code to that speaker's existing presentations, and future presentations receive their own codes. Renaming or removing a profile link keeps already-published links and their statistics intact. To change or disable a shared code, select **Statistics** beneath that code on its presentation.

Speakers cannot be archived. Administrators can delete unused speakers individually or with the selection checkboxes. Speakers referenced by presentations, short links, notes, or slide decks remain protected.

### Organization Archive Rule

An organization cannot be archived while it still has active contacts, engagements, or inquiries. Archive those child records first, or move them to another active organization. Restoring a contact or engagement also requires its organization to be active.

## Find Relationships in Large Lists

Organization and related-record selectors show bounded search results. If the item is missing, type a more specific name and use the search controls rather than assuming it was deleted. Validation summaries link to fields needing attention; correct those fields and save again.

## Check Similar Records Before Creating Another

If a new contact or organization looks similar to an existing one, review the suggested matches before saving. Open the existing record if it is the same person or organization; confirm that yours is a distinct record only when it really is. A shared name alone does not prove that two records are the same.

Administrators can review a contact or organization merge, choose the surviving record and field values, and confirm after checking the relationships that will move. The merge screen also offers **Undo Merge** for eligible merges for up to 90 days. Later changes to either record or its affected relationships can

prevent undo. Ask an administrator to review a mistaken merge promptly.

## Birthdays and organization affiliations

A contact can also store an optional birthday.

Birthday-enabled calendar subscriptions create yearly all-day entries; they do not expose the birth year or internal contact notes.

Additional affiliations are independent relationships, each with its own role or title. A contact can remain associated with another organization when one organization is removed. Event-specific assignments belong to each engagement.

## Select records for permanent deletion

Administrators can use a row's individual Delete action or select checkboxes on Organizations, Contacts, Speakers, Engagements, Tasks, or Users and choose Delete selected. Editors and reviewers cannot delete records or access the selection controls.

The selected count and Select all on this page apply only to displayed rows, up to 100. Clear selection resets the checkboxes. Changing pages or filters starts a new selection, so finish one page before continuing to another.

Review the selected names and related data before confirming. Organization deletion can remove engagements and contacts that have no other organization; shared contacts are kept. Contact deletion removes affiliations, roles, tasks, and Chron. Engagement deletion removes its presentations, files, tasks, financial records, statistics, and Chron.

Unused speakers can be deleted individually or in a group. Presentations, short links, notes, or slide decks protect a referenced speaker. Tasks are deleted without deleting their related record or standard task definition.

Complete Admin Unlock if requested. The selection survives the redirect and expires after 30 minutes. The server rechecks the five-minute unlock at deletion time. After the Are you sure? dialog, the list reports how many selected records were deleted and how many were kept or failed. Review remaining items before retrying.

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Browse organizations

Organizations

+ New Organization

Keep organization details, locations, and related contacts together.

🔍 Cedar

Clear

Active

Archived

Sort:

Organization ↑

Last Giving ↓

Lifetime Giving ↓

Showing organizations matching "Cedar".

| ORGANIZATION                             | LOCATION | CONTACT(S) | LAST GIVING | LIFETIME GIVING | ACTIONS |
|------------------------------------------|----------|------------|-------------|-----------------|---------|
| No organizations match the current view. |          |            |             |                 |         |

© 2026 beneliath · DNR 1.11.11 · 2026-09-05 14:19:58 CDT (ec7dc08)

Figure 45. Browse organizations. Actual preview screen; fictional records.

- 01 Search by organization details or active contact information.

02 Review location, active contacts, last giving, and lifetime giving.
- 03 Use Active/Archived, sorting, and Records per page to manage a longer directory.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Organization record actions and follow-up

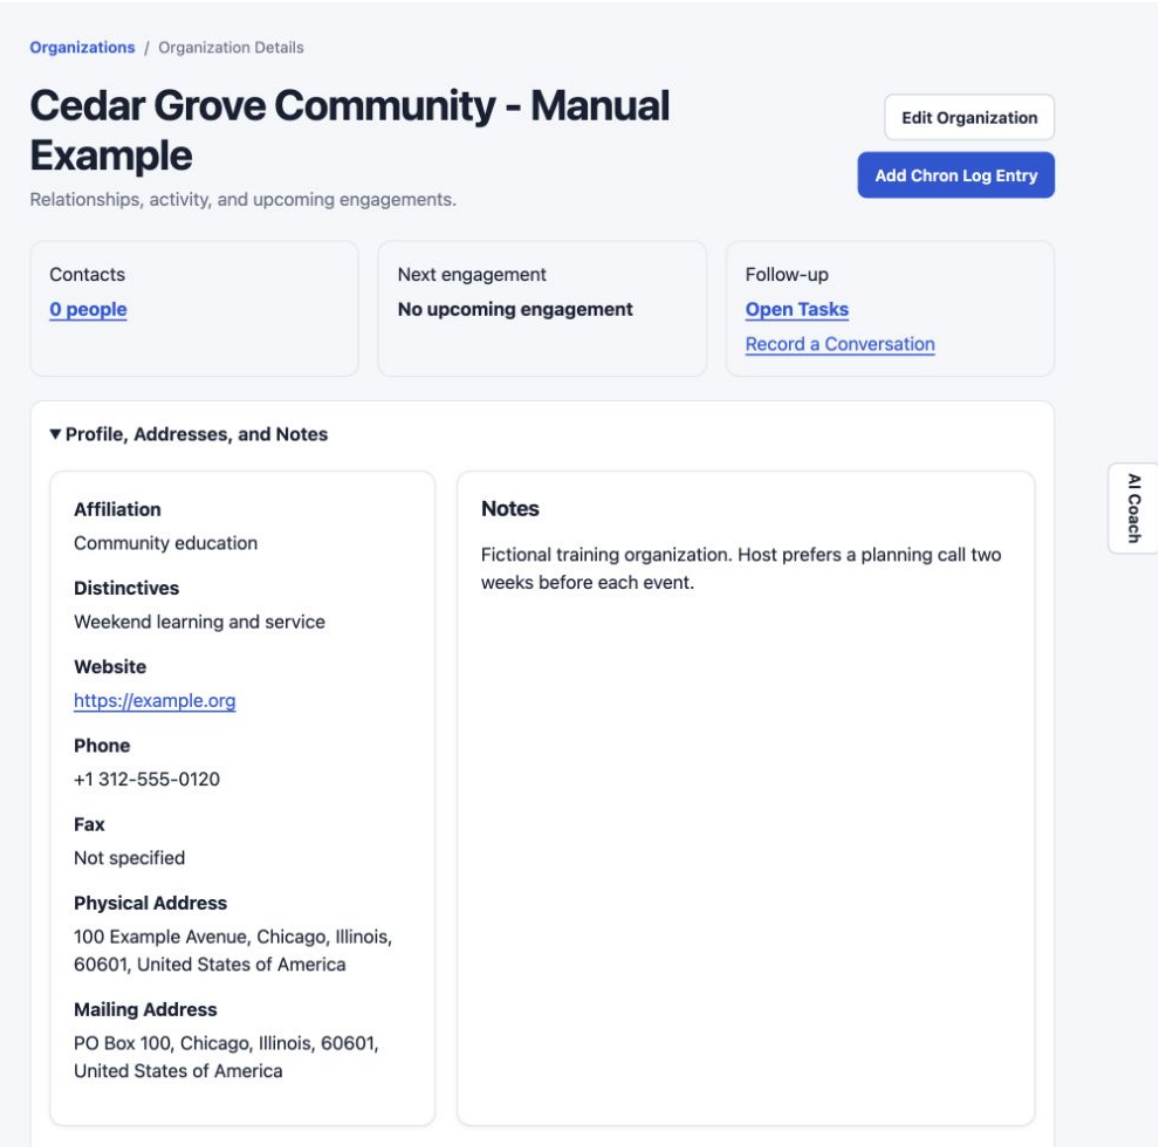



Figure 46. Organization record actions and follow-up. Actual preview screen; fictional records.

- 01** Use Edit Organization and Add Chron Log Entry at the top.
- 02** Open Contacts, Next engagement, or Open Tasks from the summary; record a conversation to keep context with the relationship.

**Related chapters:** [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Read organization financial history

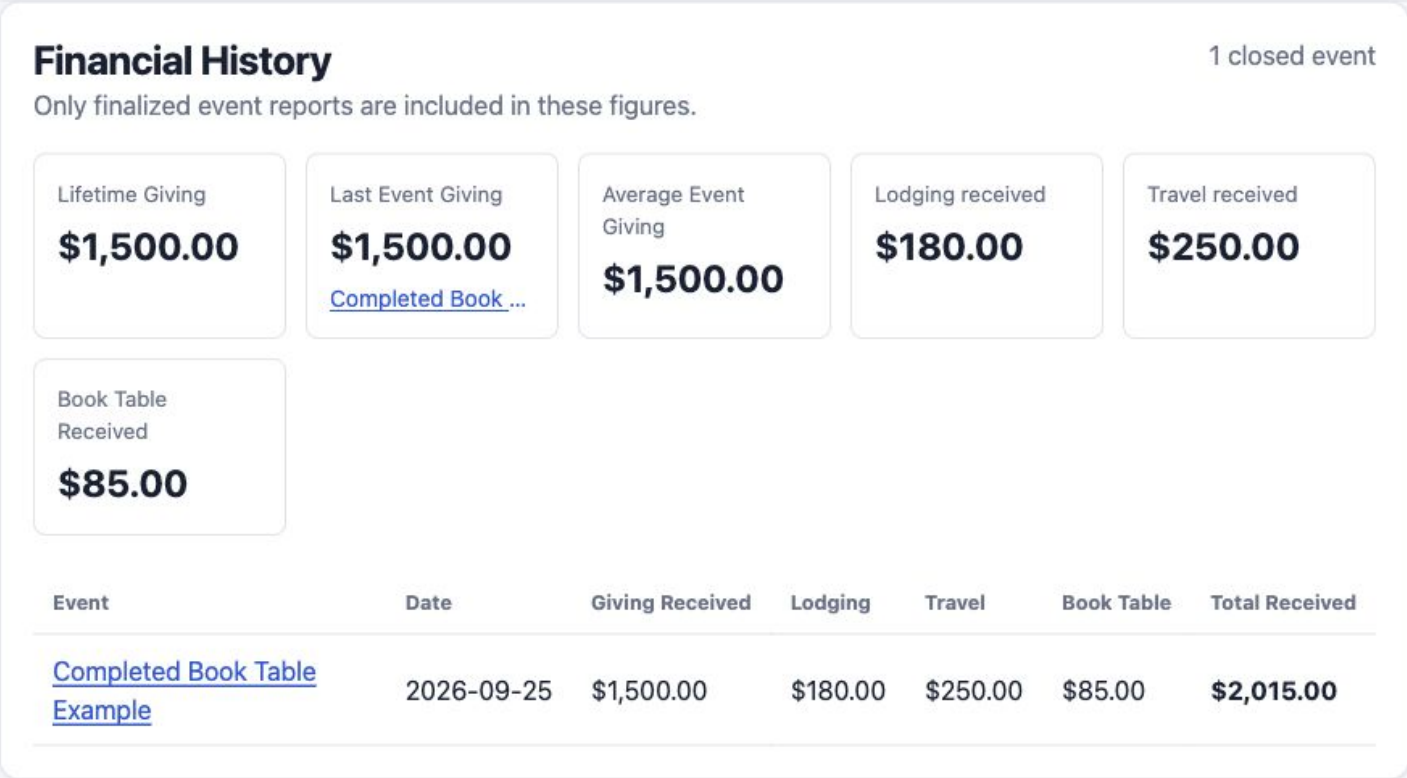

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Organization identity and addresses

[Organizations](#) / [Edit Organization](#)

## Edit Organization

Update organization information and addresses.

Organization Name \*

Cedar Grove Community - Manual Example

Notes

Fictional training organization. Host prefers a planning call two weeks before each event.

Affiliation

Community education

Distinctives

Weekend learning and service

Website URL

https://example.org

Phone

 +1 ▾

(312) 555-0120

Figure 48. Organization identity and addresses. Actual preview screen; fictional records.

- 01

Only the organization name is required. Add affiliation, distinctives, contact channels, and notes when known.
- 02

Choose country before state or province. US and Canadian regions use dropdowns; other countries accept typed regions.
- 03

Use Same as Physical Address when mailing details match.
- Related chapters:

[Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Browse contacts

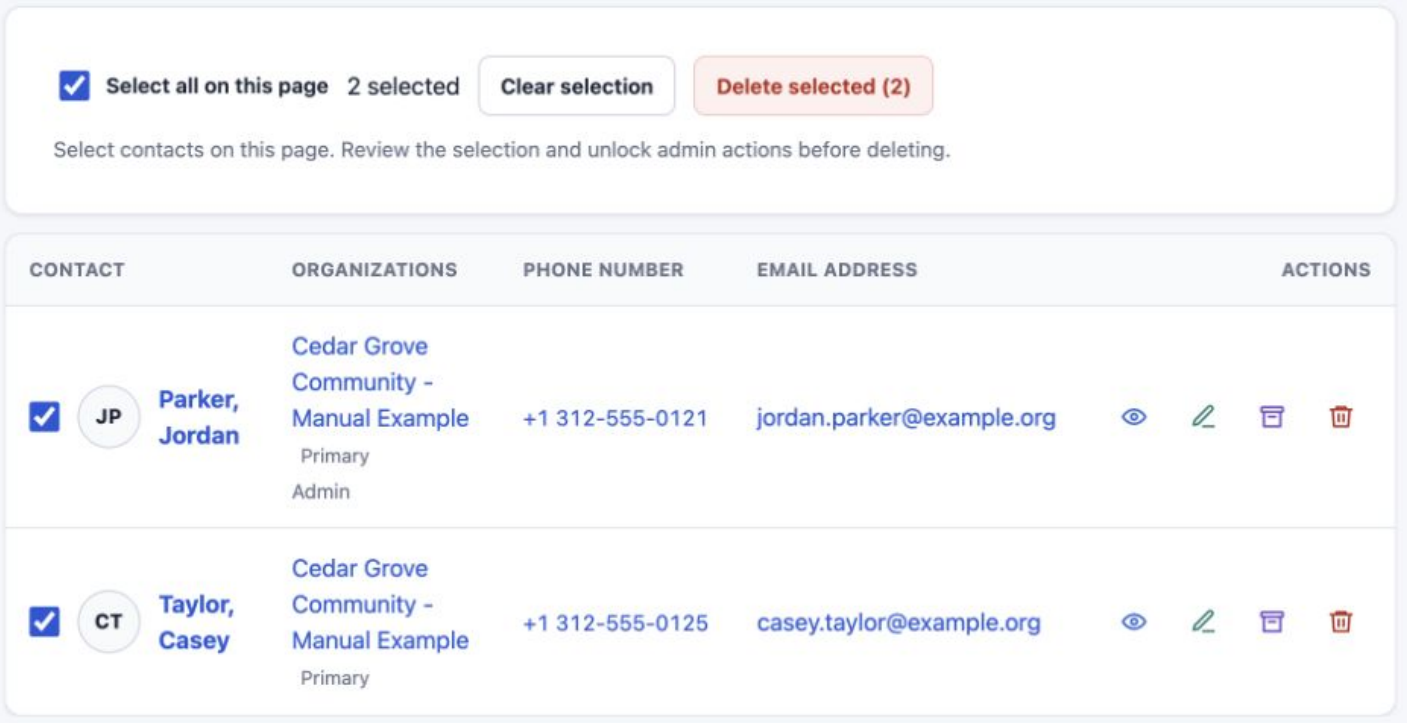


Figure 49. Browse contacts. Actual preview screen; fictional records.

- 01** Search by person or organization, sort the list, and adjust Records per page.

**02** Open a contact to review history and affiliations; the row action icons remain available.
- 03** Administrators can select aligned checkboxes and choose Delete selected. Select all applies only to this page; Clear selection starts over.

**04** Review the selected names and related data, unlock if required, then confirm the Are you sure? dialog.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Contact details and related work

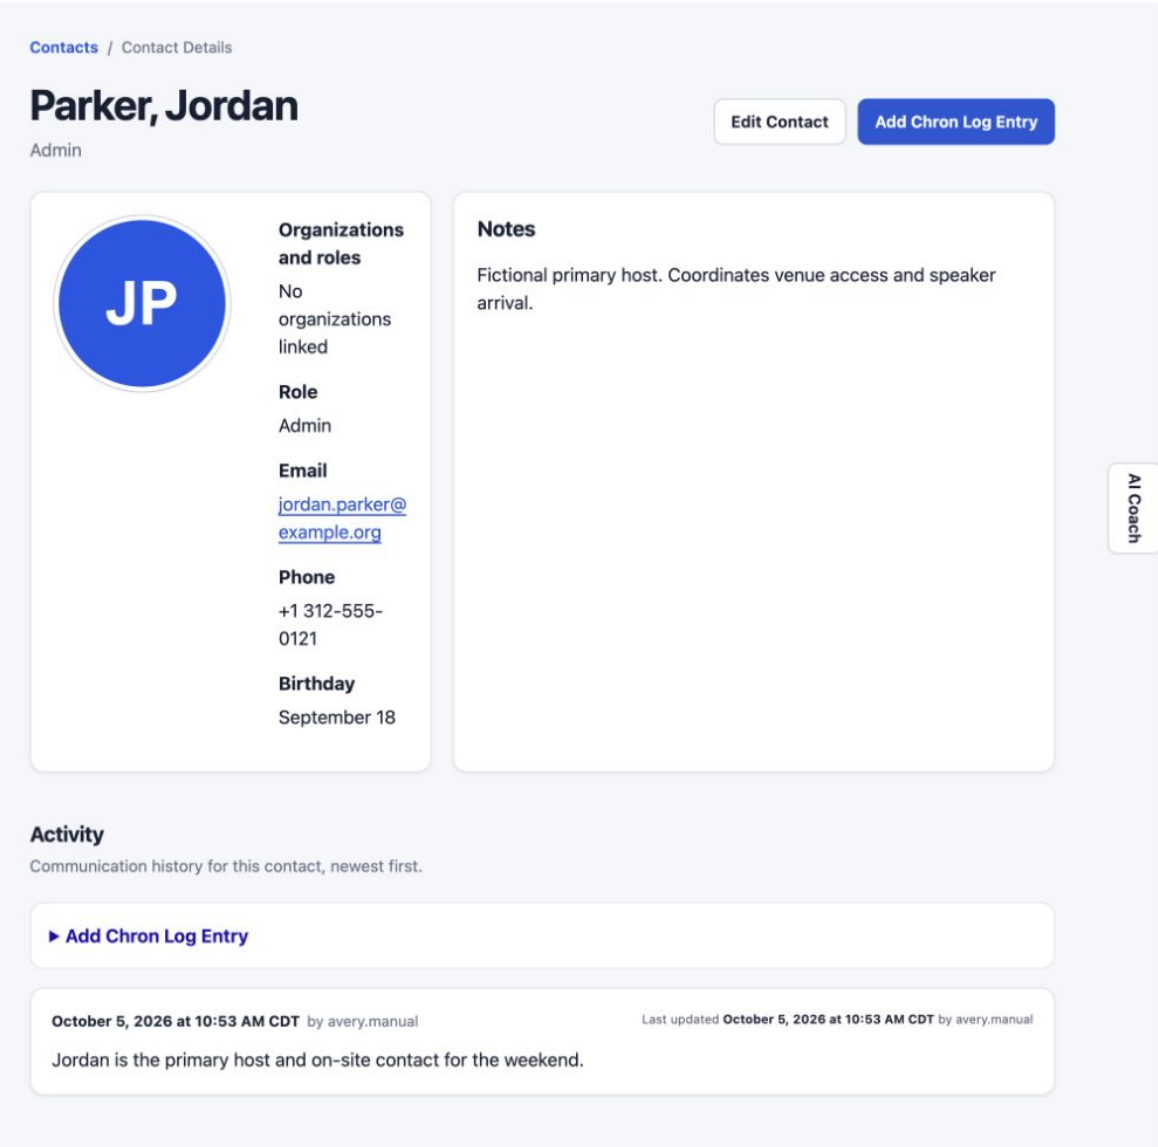


Figure 50. Contact details and related work. Actual preview screen; fictional records.

- 01 Use Edit Contact or Add Chron Log Entry from the header.
- 02 Review Organizations and roles before assigning the person to new work; historical event roles can remain after an affiliation ends.
- Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Maintain affiliations and a photo

[Contacts](#) / [Edit Contact](#)

## Edit Contact

Update contact information and roles at each organization.

\* Required fields

Primary organization

Cedar Grove Community - Manual Example

First Name \*

Jordan

Last Name \*

Parker

Primary role \*

Admin

Additional organizations

A person can serve several organizations. Add each organization and the role they hold there. Make primary switches their primary organization and keeps the previous organization and role in this list.

| Additional organization             | Role or title at this organization |                                           |
|-------------------------------------|------------------------------------|-------------------------------------------|
| Select an organization              | For example, Chairman              | <div>Make primary</div> <div>Remove</div> |
| <div>Add another organization</div> |                                    |                                           |

Figure 51. Maintain affiliations and a photo. Actual preview screen; fictional records.

01 Enter names and contact channels; an organization is optional.

02 Set the primary organization role and add additional organization affiliations with their own roles.

03 Use Other with Describe Other Role for a custom title.

04 Upload a JPEG, PNG, or WebP photo up to 5 MB and save. Create Organization preserves the contact draft.

Related chapters: [Booking pipeline](#) (p. 16) / [Engagements](#) (p. 26) / [Chron and email](#) (p. 88)

< Previous

Chapter start

69 / 187

Next >

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Find a saved speaker

☐ Select all on this page 0 selected

Delete selected

Select speakers on this page. Review the selection and unlock admin actions before deleting.

| SPEAKER                                                    | PHONE NUMBER    | EMAIL ADDRESS               | ACTIONS |
|------------------------------------------------------------|-----------------|-----------------------------|---------|
| <input type="checkbox"/> AS Alex Morgan - Example Speaker  | +1 312-555-0122 | alex.morgan@example.org     |         |
| <input type="checkbox"/> CS Casey Taylor - Example Speaker | +1 312-555-0125 | casey.taylor@example.org    |         |
| <input type="checkbox"/> OM Olivier Melnick                | +1 949-400-2892 | olivier@shalominmessiah.com |         |

Figure 52. Find a saved speaker. Actual preview screen; fictional records.

- 01 Search by name, email, or phone; use Name to reverse alphabetical order.

02 Open a profile, or use New Speaker to create one. Editors and administrators can maintain speaker details.
- 03 Administrators can use the individual Delete icon or select multiple speakers and choose Delete selected.

04 Referenced speakers are protected; only unused profiles can be permanently deleted.
- Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

## CHAPTER 06 / ILLUSTRATED WALKTHROUGH

## Review a selection with protected records

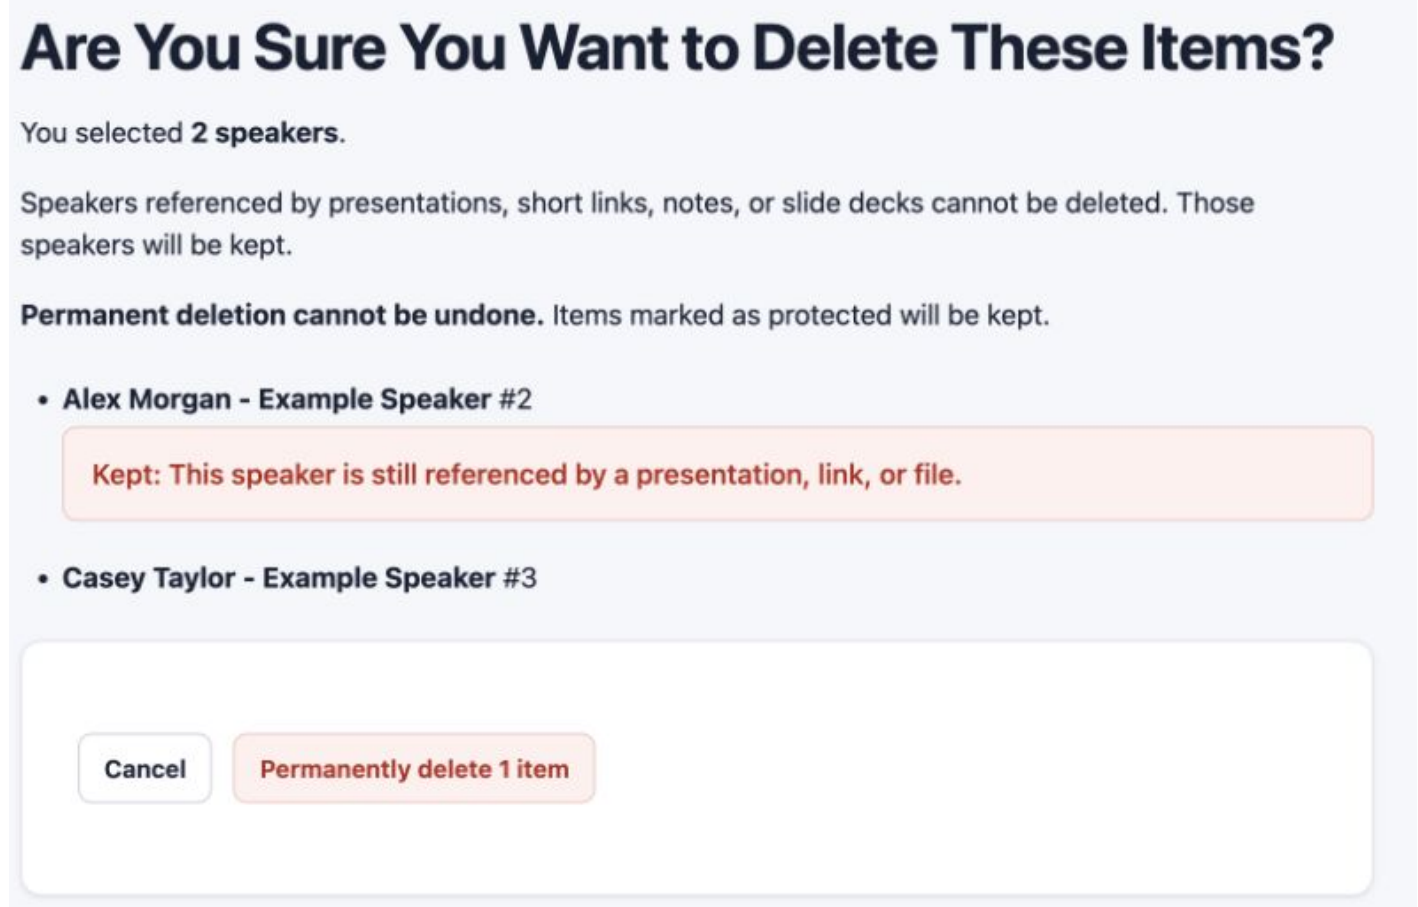


Figure 53. Review a selection with protected records. Actual preview screen; fictional records.

**01** Review every selected name and the permanent effects before continuing.

**02** A Kept notice explains why a referenced speaker is protected. The Delete button counts only eligible records.

**03** Complete Admin Unlock when requested, then confirm the Are you sure? dialog. Cancel abandons this review without deleting.

**04** After deletion, read the deleted and failed counts. Some eligible records may succeed while protected or failed records remain.

**Screenshot context:** The fictional linked speaker is protected; no speaker was deleted during capture.

**Related chapters:** [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Speaker profile and resources

Speakers / Speaker Details

Alex Morgan - Example Speaker

Speaker

Edit Speaker

Statistics



Email

[alex.morgan@example.org](mailto:alex.morgan@example.org)

Phone

[+1 312-555-0122](tel:+13125550122)

Bio

Alex is a fictional speaker used to demonstrate planning, presentation resources, and follow-up.

Links

Website URL

<https://example.org>

Donation URL

Not specified

Blog URL

<https://example.org/articles>

Resource Library

<https://example.org/resources>

Bio URL

<https://example.org/bio>

Connection URL

<https://example.org/connect>

Books URL

<https://example.org/books>

Back to Speakers

Figure 54. Speaker profile and resources. Actual preview screen; fictional records.

01

Review the reusable speaker identity, biography, and audience links.

02

Open Statistics to review activity across the speaker's presentations.

03

Edit the profile to maintain shared details. The written biography and Bio URL serve different purposes.

Related chapters:

[Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

< Previous

Chapter start

72 / 187

Next >

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Edit standard and custom resource links

Links

Website URL

https://example.org

Bio URL

https://example.org/bio

Donation URL

https://example.com

Connection URL

https://example.org/connect

Blog URL

https://example.org/articles

Books URL

https://example.org/books

Custom Links

Add named links for resources, videos, social profiles, or other pages. Saving creates a unique link and QR code for each associated presentation.

Published links keep their names, destinations, and statistics when you edit or remove a profile link. Manage a published destination from its Statistics page under Presentations.

| Link Name        | URL                           |        |
|------------------|-------------------------------|--------|
| Resource Library | https://example.org/resources | Remove |
| Add Custom Link  |                               |        |

Figure 55. Edit standard and custom resource links. Actual preview screen; fictional records.

- 01 Add full web addresses for audience resources.

02 Choose Add Custom Link, provide its name and URL, and save the speaker.
- 03 New links receive separate codes on existing and future presentations.

04 Removing or renaming a profile link preserves already-published codes. Manage an individual code in Statistics.
- Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Check possible existing records

Organizations / New Organization

# New Organization

Start with a name; add contacts and address details as the relationship develops.

\* Required fields

## Possible Existing Records

Review these matches before creating another record. A shared name or email does not necessarily mean the same person or organization.

- [Use Existing: Cedar Grove Community - Duplicate Example](#)
- [Use Existing: Cedar Grove Community - Manual Example](#) office@example.org · +13125550120 · Chicago, Illinois

☐ These Are Different Records — Create a New One

Organization Name \*

Cedar Grove Community - Manual Example

► Organization Details

► Addresses

► Contacts

Cancel

Create Organization

Figure 56. Check possible existing records. Actual preview screen; fictional records.

- 01

Review Possible Existing Records before creating another organization or contact.
- 02

Open Use Existing when a match is correct. If these are distinct records, explicitly acknowledge that before creating the new one.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

CHAPTER 06 / ILLUSTRATED WALKTHROUGH

Review a merge and its undo boundary

### Review Record Merge

Review both records and every relationship before merging. The source is archived and its relationships move to the surviving record. An encrypted undo snapshot is kept for 90 days. Undo is available only while the records and affected relationships remain unchanged.

#### Source: Cedar Grove Community - Duplicate Example (#2)

Surviving Record ID

1

Review

[Cedar Grove Community - Manual Example \(#1\)](#)

#### Survivor: Cedar Grove Community - Manual Example (#1)

| Field             | Source                                    | Survivor                                                                                   | Keep  |
|-------------------|-------------------------------------------|--------------------------------------------------------------------------------------------|-------|
| Organization Name | Cedar Grove Community - Duplicate Example | Cedar Grove Community - Manual Example                                                     | Sur ▾ |
| Notes             | Fictional duplicate for merge preview     | Fictional training organization. Host prefers a planning call two weeks before each event. | Sur ▾ |
| Affiliation       |                                           | Community education                                                                        | Sur ▾ |
| Distinctives      |                                           | Weekend learning and service                                                               | Sur ▾ |
| Website Url       |                                           | https://example.org                                                                        | Sur ▾ |
| Phone             |                                           | +13125550120                                                                               | Sur ▾ |
| Fax               |                                           |                                                                                            | Sur ▾ |

AI Coach

Figure 57. Review a merge and its undo boundary. Actual preview screen; fictional records.

- 01

An administrator compares the source and surviving record, chooses field values, and reviews relationships before merging.

02

Merge History offers Undo Merge for an eligible merge for up to 90 days. Later changes to either record or affected relationships prevent undo.
- 03

Review errors and reload if the record changed; do not assume a failed operation completed.

Related chapters:

[Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#)

## CHAPTER 07

# Work Queue

Tasks turn relationship context into an explicit next action with an owner, timing, priority, and state. They may stay attached to an Inquiry until selected work moves during booking.

Related chapters: [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

## My Reminders

The sidebar badge and Dashboard personal cards always count your own reminders. In the queue, choose Mine, Everyone, or Unassigned; every queue summary count uses that same ownership scope, search, and related-record filter.

## Queue Views

Choose an ownership scope, then filter Active, Overdue, Due Today, Next 7 Days, Waiting, or Completed. The Dashboard's My Overdue Work card opens Overdue limited to your assignments. Search matches task content, related records, and assignees.

## Due Dates and Overdue Pulses

The due date appears as a short date, such as **Sep 4**, with a second line showing the number of days overdue, **Due today**, **Due tomorrow**, or **Upcoming** for later dates. Days are counted by calendar date in the application's time zone. Priority and workflow status appear separately.

Active tasks **more than 3 days overdue** - starting at 4 days overdue - have a pulsing red row background. When several items qualify, the pulse moves down the list in a repeating cascade, with each pulse overlapping the next. Tasks 1-3 days overdue keep a steady red highlight; tasks due today have a blue highlight. Completed and canceled tasks do not pulse.

The same attention cues appear in the Dashboard's **My Work** and **Inquiry Next Actions** lists. An active inquiry qualifies when its **next-action due date** is more than 3 days overdue.

Hovering over a row, or moving keyboard focus to a control within it, shows an **orange highlight** over the pulse so you can clearly follow the item you are using. The pulse becomes visible again when the pointer and focus leave the row. If your device or browser prefers **reduced motion**, overdue items use a steady stronger red highlight instead of blinking.

## Create a Useful Task

- 01 Write a concrete title.** Use notes for supporting detail, not as a substitute for the next action.
- 02 Link the right record.** Search for an engagement, organization, or contact; choose General MOED work when no record applies.
- 03 Name an owner and due date.** Tasks may be unassigned or have no date, but explicit ownership keeps them out of limbo.
- 04 Set priority and status.** Choose Low, Normal, High, or Urgent and one of the workflow states below.

## Fast Actions and Record-Level Work

The green check-mark icon opens **Complete Task?** and asks, "Are you sure you want to mark this task complete?" Select **Complete Task** to save the change, or **Cancel** or **Esc** to leave the task unchanged. This confirmation applies in the Work Queue and in record-level Follow-Up Work.

From the queue, editors and administrators can assign an unowned task to themselves, start, complete, reopen, edit, or - administrators only - delete it. Engagement, organization, and contact detail pages show their open tasks in **Follow-Up Work**, where you can add a task or open a filtered queue.

Administrators can also select the trash icon beside a task in **Follow-Up Work**, including on an engagement's **Tasks** tab. If admin actions are locked, complete the unlock workflow first, then select the trash icon again. Confirm **Delete Task** to permanently remove the task and return to the record. Deletion cannot be undone.

Editors and administrators can select the **Archive task** box icon beside a task in Follow-Up Work or the Work Queue. Archiving removes it from active work, reminders, calendars, and digests while keeping its details and status. Use **View Archived Tasks** on the record or **Archived** in the Work Queue, then select **Restore task** to bring it back. Archived checklist tasks are retained when you add missing checklist tasks.

Archiving an engagement or inquiry also hides its tasks from active work and reminders. Restoring the record brings back its **Open**, **In Progress**, and **Waiting** tasks. Completed, canceled, and individually archived tasks stay out of active work; all task details and statuses are preserved.

| Status      | Use It When                                              | What Happens Next                                |
|-------------|----------------------------------------------------------|--------------------------------------------------|
| Open        | The task is known but not started.                       | Start it, complete it, or edit the owner/timing. |
| In Progress | Someone is actively working it.                          | Complete it or move it to Waiting if blocked.    |
| Waiting     | Progress depends on a person, organization, or decision. | The "Waiting on" description becomes required.   |
| Completed   | The action is finished.                                  | It moves to Completed and can be reopened.       |
| Canceled    | The action is no longer needed.                          | It leaves active views and can be reopened.      |

## Duplicate a Task to Another Event

- 01 **Open the task for editing.** Select **Duplicate to Another Event** at the bottom of the Edit Task page.
- 02 **Choose the destination event.** In **Search events**, type at least three characters and choose a different event from the results.
- 03 **Review the copied work.** Adjust the copied title, notes, assignee, due date, and priority. The duplicate starts **Open** with "Waiting on" cleared.
- 04 **Create the duplicate.** Select **Duplicate task**. The new task is added to the destination event; the original is unchanged.

## Standard Event Tasks

Standard tasks are reusable definitions copied when a new active engagement is first saved. Each has content, priority, display order, and a due date offset from event start or end.

Administrators can select **Also add this task to all active, open engagements** when creating a definition, or **Add to Active, Open Engagements** afterward. This generates its checklist item for existing unarchived engagements with an Active lifecycle and open financial closeout. Each copy follows the definition's due-date rule and goes to the active Caller, or to the administrator if none is active. Existing copies, including completed and canceled tasks, are not duplicated.

Initial standard tasks go to the selected **Caller**, or to the event creator when no Caller is selected. Changing the Caller later

does not reassign these tasks; each remains independently editable.

Changing an engagement's dates reschedules its active generated tasks from the standard schedule. A task whose due date was manually overridden keeps that date. Editing a standard definition does not rewrite an existing task's title, notes, priority, or current due date.

Editors and administrators manage definitions in **Standard Event Tasks**. **Add Missing Checklist Tasks** creates absent standard items on an active engagement and assigns them to the acting user. The built-in financial closeout reminder is due one week after event end and cannot be edited, archived, or deleted.

Sending a booking, reconfirmation, or thank-you message from an engagement does not complete its related checklist task automatically. Check the Correspondence result, then complete the task when the follow-up itself is finished.

## Filter Work and Update Several Tasks

Use the ownership and status/date filters to focus the Work Queue. Applied filters stay visible and are remembered in this browser; use **Clear Filters** to widen the view if an expected task is missing. Open a task to review its owner, due date, and status. **Waiting** work should name what or whom you are waiting for. For event work, check the related event and any scheduling rule before changing the date.

Editors and administrators can select eligible tasks and use **Complete**, **Reassign**, or **Change Due Date**. Choose **Preview Updates**, review the selected titles and proposed change, then apply it. Tasks that changed or became ineligible are skipped and reported. Bulk completion does not

send checklist emails. Use an individual task's email action when correspondence is needed, and check its delivery status.

### Archive tasks without changing their status

To archive a finished item, choose Completed or canceled in the Work Queue, then Archive task.

In Archived, review both badges. Restore task retains details, status, owner, and due date; completed work stays completed. An open overdue task becomes eligible for reminders again when its engagement or inquiry is also unarchived.

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Filter and select work

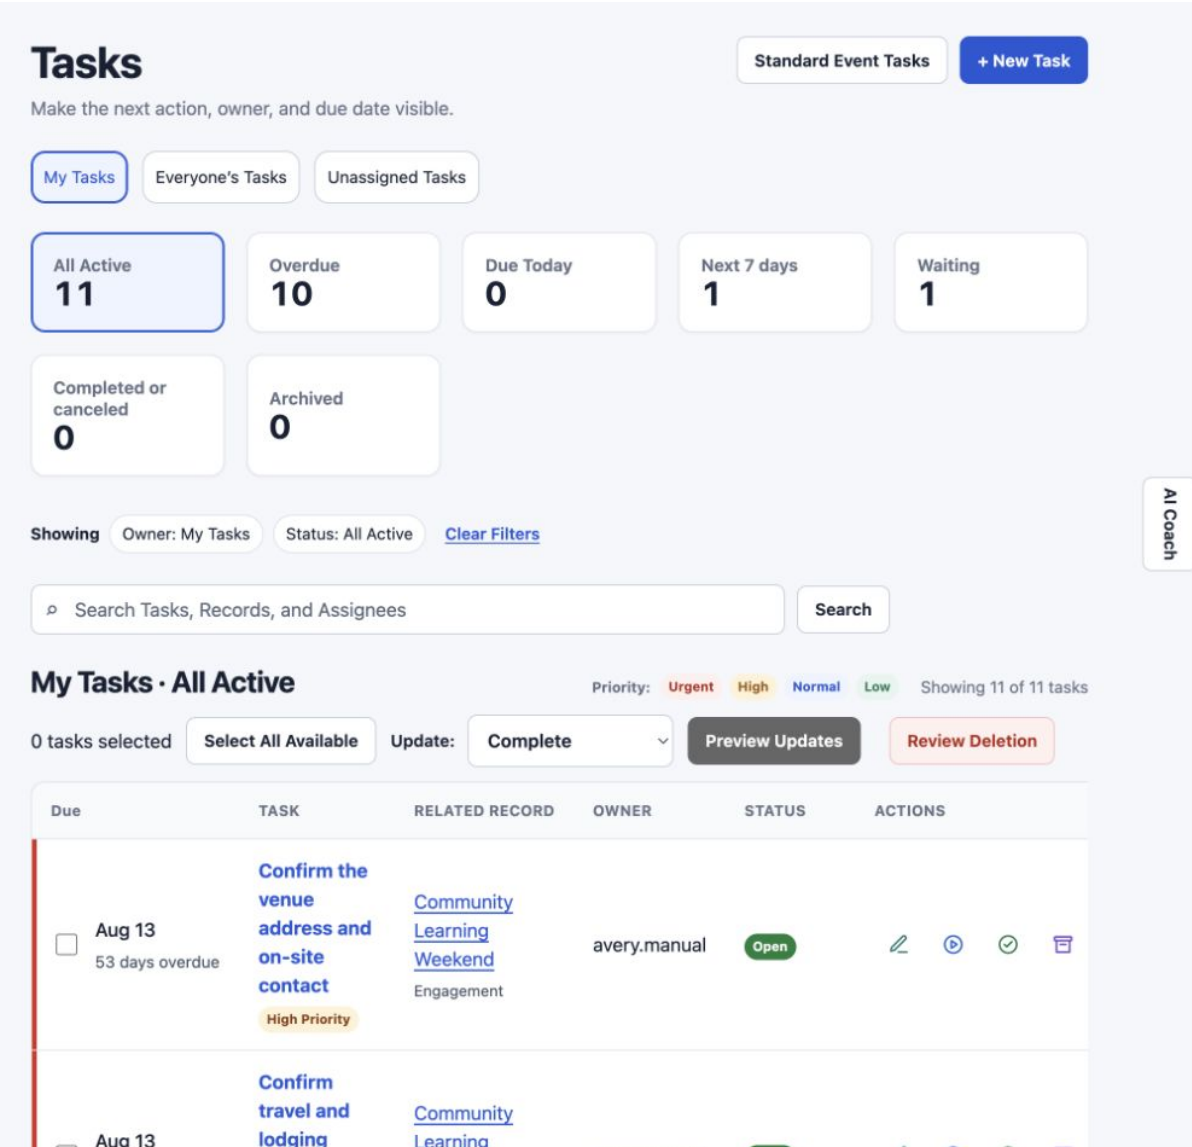


Figure 58. Filter and select work. Actual preview screen; fictional records.

- 01 Choose My Tasks, Everyone's Tasks, or Unassigned Tasks. Apply status/date filters and review the visible filter summary.
- 02 Filters are remembered in this browser. Use Clear Filters to return to the default view.

- 03 Select tasks for a bulk update and review the planned changes before applying.
- Related chapters: [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Edit a task

Tasks / Edit Task

Edit Task

Update the next action, owner, timing, or status.

\* Required fields

Task

Title

Review travel confirmation

Notes

Waiting for the host to confirm the pickup point.

Related Record

Selected record

Community Learning Weekend

Change Record

Clear Relationship

Type at least three characters, then choose a result. Searching does not change the selected record. Use General MOED work when no record applies.

Ownership & Timing

Assigned To

avery.manual · Admin

Due Date

09/08/2026

AI Coach

Figure 59. Edit a task. Actual preview screen; fictional records.

- 01

Choose or change a related record using the relationship picker.
- 02

Review owner, due date, priority, status, and Waiting On before Save Changes. Use Duplicate Task when separate follow-up is needed.

Related chapters: [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Duplicate a task to another event

Work Queue / Duplicate Task

Duplicate Task

Copy this task to a different event, then adjust its owner or timing.

\* Required fields

Task

Title

Confirm host arrival and room setup

Notes

Call Jordan, verify the arrival time, and record the agreed room layout in Chron.

Destination event

Selected record

No record selected

Change record

Figure 60. Duplicate a task to another event. Actual preview screen; fictional records.

01 Choose Duplicate to Another Event from the task editor.

02 Search events and select a destination different from the source event.

03 Review copied title and notes, ownership, due date, priority, and status before saving.

04 The original task remains unchanged.

Related chapters:

Daily dashboard (p. 13) / Engagements (p. 26) / Map and calendar (p. 95)

< Previous

Chapter start

81 / 187

Next >

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Manage reusable event checklists

Work Queue / Standard Event Tasks

Standard Event Tasks

Back to Work Queue

+ New Standard Task

Control the reusable work assigned automatically when new events are created.

Active (9)

Archived (0)

Every active definition is added and assigned to the creator automatically with each new event. "Add missing checklist tasks" remains available for older events. Existing event tasks remain unchanged.

| ORDER | STANDARD TASK                                                                                                                                                                  | DUE RULE                   | PRIORITY | GENERATED    | ACTIONS                                                                                                                                                                                                                                                         |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10    | Confirm the venue address and on-site contact                                                                                                                                  | 30 days before event start | High     | 1 event task |          |
| 20    | Confirm travel and lodging arrangements                                                                                                                                        | 30 days before event start | High     | 1 event task |          |
| 30    | Confirm presentation topics, dates, and times                                                                                                                                  | 21 days before event start | High     | 1 event task |          |
| 40    | Confirm book table, brochures, and event materials                                                                                                                             | 14 days before event start | Normal   | 1 event task |          |
| 50    | Reconfirm final details with the host                                                                                                                                          | 7 days before event start  | High     | 1 event task |          |
| 60    | Prepare presentations, handouts, books, and supplies                                                                                                                           | 3 days before event start  | High     | 1 event task |    |
| 70    | Send a post-event thank-you                                                                                                                                                    | 1 day after event end      | Normal   | 1 event task |    |
| 80    | Record attendance, feedback, and notable outcomes                                                                                                                              | 2 days after event end     | Normal   | 1 event task |    |
| 90    | <div>Complete the event financial closeout</div> <div>Required task</div> <div>Finalize the event financial report with all giving/income, lodging, and travel received.</div> | 7 days after event end     | High     | 1 event task |                                                                                                                                                                              |

Figure 61. Manage reusable event checklists. Actual preview screen; fictional records.

- 01

Editors and administrators open Work Queue > Standard Event Tasks to maintain the shared starting checklist.
- 02

Edit a definition's content, priority, display order, or due-date rule. Use + New Standard Task for another recurring item.
- 03

Archive a definition in Active to stop automatic creation for future events. Restore it from Archived to include it again. These changes apply to everyone creating events.
- 04

Existing event copies remain separate: archive an unnecessary copy in Follow-Up Work or the Work Queue. The required financial closeout reminder stays fixed at one week after event end.

Related chapters: [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Schedule a standard task for existing engagements

Scheduling

Priority

High

Due date relative to

Event start

Day offset

-3

Display order

62

Use a negative number for days before the event date and a positive number for days after.

Lower numbers are shown and generated first.

Existing Engagements

☒ Also add this task to all active, open engagements

Creates this task for every unarchived engagement with an Active lifecycle and an open financial closeout. Each copy uses the due-date rule above and is assigned to the engagement's active Caller, or to you if no active Caller is assigned. Existing copies are kept.

Cancel

Add standard task

Figure 62. Schedule a standard task for existing engagements. Actual preview screen; fictional records.

01

Enter the reusable title and notes above the Scheduling section. Choose priority, date anchor, day offset, and display order.

02

Administrators can check Also add this task to all active, open engagements before Add standard task. Editors can maintain definitions but cannot use bulk generation.

03

This adds the task to unarchived engagements with an Active lifecycle and open financial closeout. Copies use the date rule and go to the active Caller, or to the administrator if none is assigned.

04

On a saved definition, administrators can use Add to Active, Open Engagements. Existing copies, including completed or canceled tasks, are kept without duplication.

**Screenshot context:** The option is selected for illustration; the form was not submitted.

**Related chapters:** [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

< Previous

Chapter start

83 / 187

Next >

## CHAPTER 07 / ILLUSTRATED WALKTHROUGH

## Confirm task completion

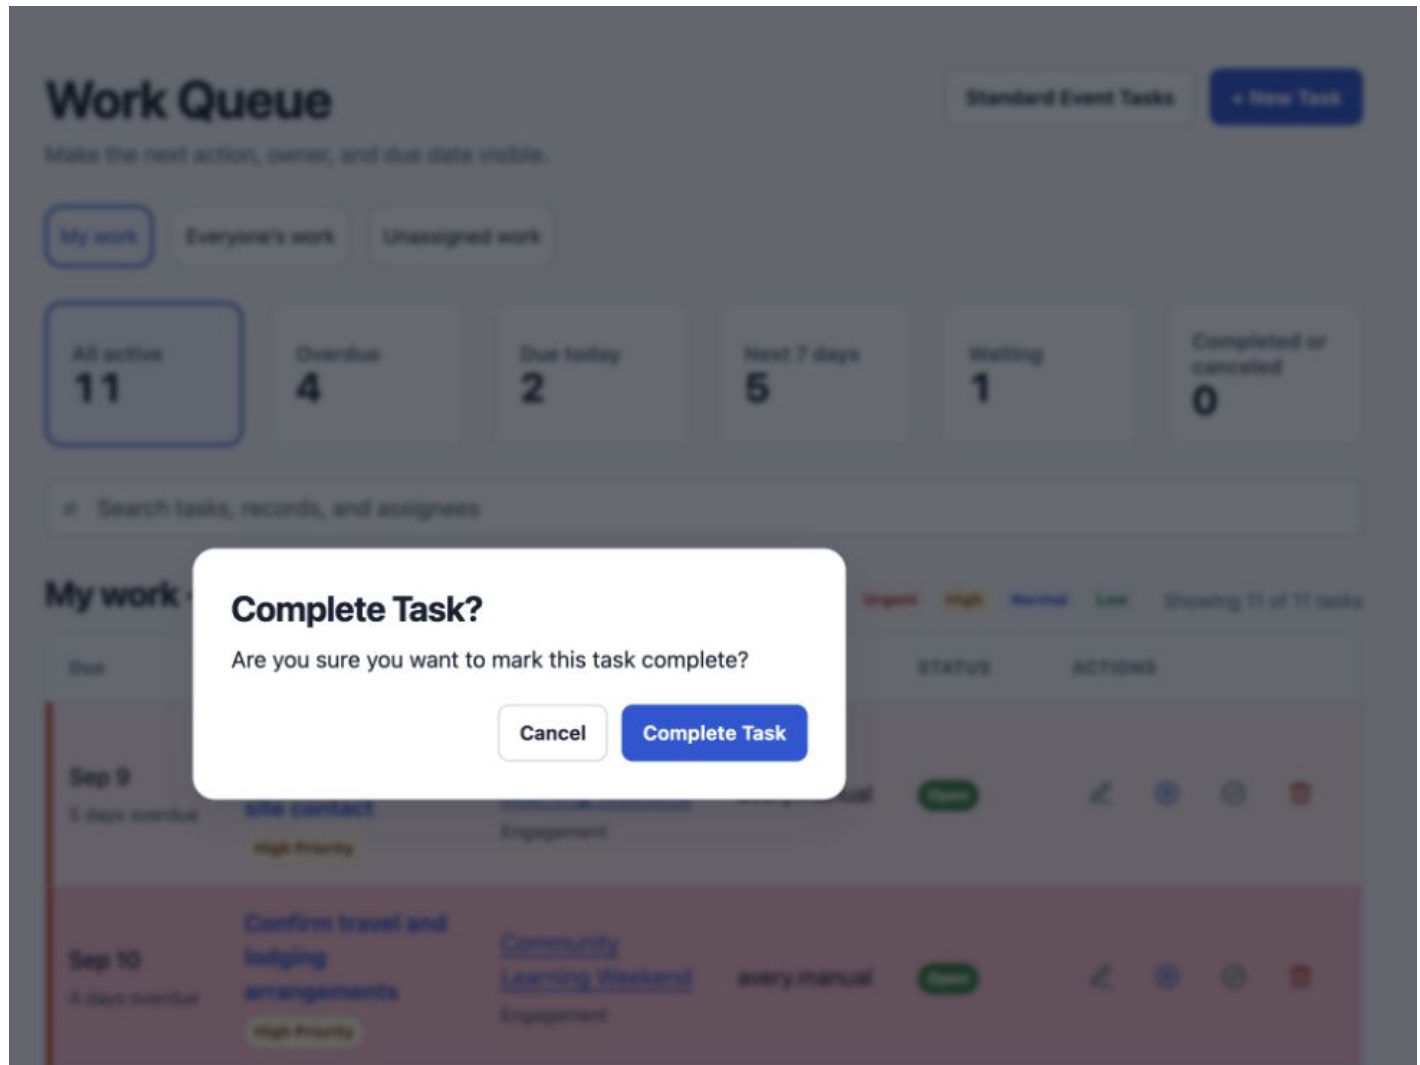


Figure 63. Confirm task completion. Actual preview screen; fictional records.

- 01** Select the check-mark Complete task action in the queue or a related record's task list.
- 02** Read Complete Task? and select Complete Task only when the work is finished.

- 03** Cancel or press Esc to return without changing the task.

**Screenshot context:** The confirmation was canceled; no task was completed during capture.

**Related chapters:** [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Restore a task with its original status

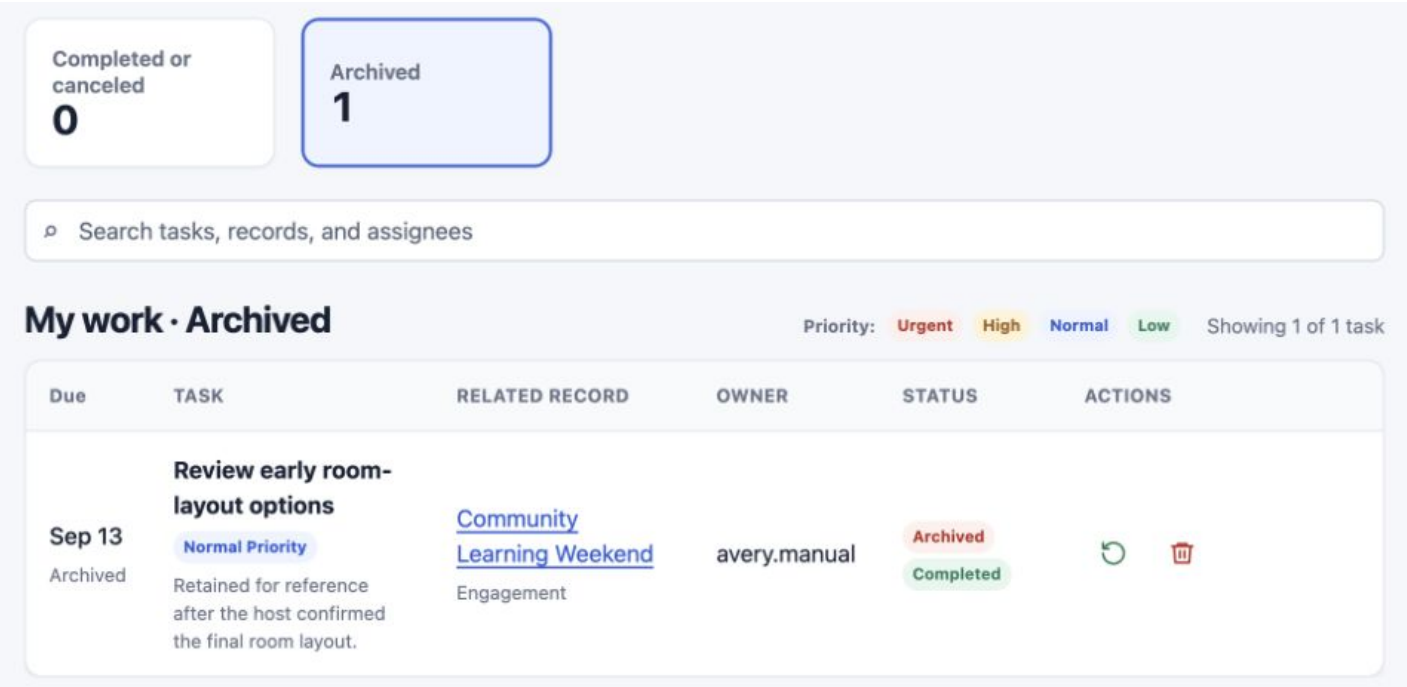


Figure 64. Restore a task with its original status. Actual preview screen; fictional records.

- 01

Select Archived in the Work Queue, or View Archived Tasks from a related record.
- 02

Review the status badge as well as the Archived badge. This example remains Completed.
- 03

Select the curved-arrow Restore task control. Details, status, owner, and due date are retained. An open overdue task becomes eligible for active reminders again.
- Related chapters:

Daily dashboard (p. 13) / Engagements (p. 26) / Map and calendar (p. 95)

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Review several task updates together

## Review Task Updates

Set status to completed for 11 selected tasks

Each task is checked again before applying. Changed, completed, or archived tasks are skipped and reported individually.

| Task                                                 | Current Owner | Current Due Date | Current Status |
|------------------------------------------------------|---------------|------------------|----------------|
| Confirm the venue address and on-site contact        | avery.manual  | 2026-08-13       | open           |
| Confirm travel and lodging arrangements              | avery.manual  | 2026-08-13       | open           |
| Confirm presentation topics, dates, and times        | avery.manual  | 2026-08-22       | open           |
| Confirm book table, brochures, and event materials   | avery.manual  | 2026-08-29       | open           |
| Reconfirm final details with the host                | avery.manual  | 2026-09-05       | open           |
| Review travel confirmation                           | avery.manual  | 2026-09-08       | waiting        |
| Prepare presentations, handouts, books, and supplies | avery.manual  | 2026-09-09       | open           |
| Send a post-event thank-you                          | avery.manual  | 2026-09-14       | open           |
| Record attendance, feedback, and notable outcomes    | avery.manual  | 2026-09-15       | open           |
| Complete the event financial closeout                | avery.manual  | 2026-09-20       | open           |
| Confirm host arrival and room setup                  | avery.manual  | 2026-10-06       | in_progress    |

Apply Updates

[Back to Tasks](#)

Figure 65. Review several task updates together. Actual preview screen; fictional records.

- 01

Select tasks and the bulk change, then preview.
- 02

Check each affected task, owner, status, and date. Apply Updates only when the review matches your intent.

Related chapters: [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

CHAPTER 07 / ILLUSTRATED WALKTHROUGH

Understand reusable event task timing

Tasks / Standard Event Tasks / Task Details

Confirm the venue address and on-site contact

Edit Standard Task

Reusable work definition for event checklists.

|                                                              |                                                   |
|--------------------------------------------------------------|---------------------------------------------------|
| <div>DUE RULE</div> <div>30 days before event start</div>    | <div>PRIORITY</div> <div>High</div>               |
| <div>DISPLAY ORDER</div> <div>10</div>                       | <div>GENERATED WORK</div> <div>1 event task</div> |
| <div>DEFINITION</div> <div>Configurable task</div>           |                                                   |
| <div>NOTES</div> <div>No notes</div>                         |                                                   |
| <div>INTERNAL KEY</div> <div>standard.confirm_location</div> |                                                   |

Active definitions are copied automatically when new events are created. Edits affect future copies only; existing event tasks are independent.

Back to Standard Tasks

Add to Active Open Engagements

Archive Standard Task

Figure 66. Understand reusable event task timing. Actual preview screen; fictional records.

- 01

Open a standard task to check its due rule, priority, and generated-work count.
- 02

Edits affect future copies. Existing event tasks remain independent; review them separately when timing changes.

Related chapters: [Daily dashboard \(p. 13\)](#) / [Engagements \(p. 26\)](#) / [Map and calendar \(p. 95\)](#)

## CHAPTER 08

# Chron and Email

Chron is the durable communication history. Add concise Chron Log Entries directly, send tracked engagement correspondence, or route copied inbound email into the relevant records.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Mattermost \(p. 132\)](#)

## Use the Chron Log

- Use **Add Chron Log Entry** on an inquiry, engagement, organization, or contact to save activity without editing the full record. Contact Chron records communication with that person only; Organization Chron records organization-level history; Engagement Chron records event-specific planning.
- Entries show created time and author, newest first. Edited entries also show the last update time and editor.
- Editors and administrators add, edit, and archive entries from the record's edit page. Administrators can permanently delete them.
- Restore archived entries in batches from the Restore page. An archived parent record must be active before its Chron can be restored.
- Email-generated entries link to their retained inbound or outbound source message while it exists.

## Start from an Engagement

Open an active engagement and select **Send Message**. Choose assigned contacts or speakers as **To**, **Cc**, or **Bcc** recipients, and optionally use **Cc Me** or **Bcc Me** for your account email. To and Cc addresses are visible; Bcc addresses stay hidden. Review the message, then queue it. The engagement marker and related Chron history are handled for you. Check the Correspondence section for the result.

## Route Outside Email

When using another mail application, copy the inbound address and keep the exact engagement marker in the subject or plain-text body: `[DNR#123.<signed-token>]`. Use the copy icon beside the marker on the engagement page.

## How Inbound Email Finds Its Records

Reading a message in your mail application does not prevent MOED from importing it. Importing leaves the original message and its read/unread state unchanged. If older mail is missing after mailbox setup or recovery, ask the deployment operator to review historical mail; marking it unread will not trigger an import.

One unique, valid signed engagement marker routes directly to that active engagement only when the sender also uniquely matches an active record. Unknown senders and unsigned legacy markers require review. When participant matching is uncertain, only the signed engagement receives the Chron entry.

## Address Matching

MOED matches exact email addresses for active verified users, contacts, and organizations. A unique contact participant routes to the Contact and its Organization. A direct organization address routes there. **Cc** and **Bcc** delivery both work.

## What Inbound Mail Retains

The Chron entry includes normalized headers, subject, timestamps, inert plain-text body, attachment names, and a source link. Attachment contents are not stored. Duplicate delivery of the same message ID is ignored.

## Review the Inbound Queue

Editors and administrators see messages grouped as Needs review, Pending, Processing, Failed, Processed, or Rejected. Without a valid signed marker, every message requires review. Unknown or ambiguous senders, shared addresses, messages with no unique target, and invalid, conflicting, unknown, or archived engagement markers also require review.

**01 Inspect the source.** Open Inbox in the sidebar. On a wide screen, the message list is on the left, the reader is in the middle, and the filing panel is on the right. Search by subject, sender, or content; use Order and the queue pages to find a message. Needs review starts oldest first. Selecting a message keeps Search messages visible at the same vertical position. Expand Message details for recipients, sent time, and attachment names, or Routing details for matching reasons. On a phone, use Back to messages to return to the list.

**02 Choose the Chron Logs.** In the filing panel, review the reason under Review needed. Select the intended Contact, Organization, or Inquiry suggestions when

available. Find an active engagement by name, ID, or email marker and choose it from the Engagement list. Check the count of selected Chron logs before saving.

**03 Choose an outcome.** **Save to Chron logs** saves the conversation to the selected records. **Find matches again** checks routing again after record corrections. Expand **Other actions** to **Reject message** while retaining the source without writing Chron. For a processed message, review **Message status** and **Saved to Chron** to confirm where it was filed.

### Treat Address Matching as a Routing Aid

An exact visible From address is not independent proof of identity. Respect the mailbox provider's spam and SPF/DKIM/DMARC signals. Leave suspicious messages for review. Administrators can expand Manage retained email below the reader and choose Purge Mail Entry after confirmation. Purge removes the retained MOED mail card and source links, but preserves Chron entries and never deletes the original IMAP message.

## Review Recipients, Message, and Follow-Up

The engagement email composer separates recipient choices, the message, and reply follow-up into cards. Choose an active template or **Custom Message**, then review each selected contact or speaker and its **To**, **Cc**, or **Bcc** setting. The copy-to-yourself choice is separate. Review the message and the optional event brief before **Queue Email**. Correspondence shows what was queued and its delivery result. To track a reply, select **Create a Task to Review the Reply** in **Reply Follow-Up** and check the **Follow-Up Date**. The task belongs to you. Receiving a reply does not complete it; review the correspondence before marking it complete.

In **Inbox**, read the message and check the filing panel before saving it to Chron logs. The divider separates the reader from the filing choices; on narrow screens, use the page's navigation to return to the message list.

### Email delivery states and retries

Queued messages can be Pending or Processing before becoming Sent, Failed, Delivery Uncertain, or partially delivered across recipients. Open the delivery record to inspect individual recipient outcomes and timestamps.

Retry Failed Deliveries retries the failures rather than re-sending successful recipients. Correct a bad destination before retrying. Inquiry delivery retries are available while the

inquiry is active. Delivery Uncertain means the message may already have arrived. Check the provider reference or recipient first; only then acknowledge the review and use Retry Reviewed Deliveries.

After booking conversion, replies to earlier inquiry email route into the resulting engagement. The original inquiry retains the pre-booking record and any tasks not moved.

The Inbox filing panel saves an email to existing destinations. Create a new booking request from New Inquiry in Booking Pipeline when needed, then return to the Inbox and review the appropriate destinations.

### Read mail and historical mailbox review

MOED tracks new mailbox messages independently of read or unread flags. Reading a message in your mail client does not prevent its import, and importing does not alter the original message or its read state.

The first mailbox scan, or recovery after a mailbox identity reset, can hold unfamiliar historical messages for operator review. Marking an older message unread does not request another import.

Ask the deployment operator to review pending historical mail and import or skip it deliberately. The README appendix contains the reconciliation commands. Use Inbox to route a message after it has been imported.

### Archive and restore Chron in batches

Open the parent record's edit/Chron controls to archive an obsolete entry. Archive preserves history; administrator-only deletion removes it permanently after fresh confirmation.

Open Restore Archived Chron Log Entries, select the entries to return, and choose Restore Selected. The parent must be active. Restored entries retain their historical authorship and dates.

CHAPTER 08 / ILLUSTRATED WALKTHROUGH

Add a Chron entry

▼ Add Chron Log Entry

Chron Log Entry

This Chron Log Entry will be added to this engagement’s activity.

Save Chron Log Entry

September 9, 2026 at 2:27 PM CDT by previewadmin012

Last updated September 9, 2026 at 2:27 PM CDT by previewadmin012

Host confirmed the venue and requested a resource table. Next step: review arrival arrangements on September 9.

Figure 67. Add a Chron entry. Actual preview screen; fictional records.

- 01

Use Add Chron Log Entry to record a decision without opening the complete edit form.
- 02

Include the context, outcome, and agreed next step.
- 03

Save the entry; its author and time appear in reverse chronological history.
- Related chapters:

[Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Mattermost \(p. 132\)](#)

CHAPTER 08 / ILLUSTRATED WALKTHROUGH

Compose an email and plan reply follow-up

Engagements / Engagement Details / Send Email

OUTBOUND CORRESPONDENCE

Send an Engagement Email

Cancel

Community Learning Weekend · Cedar Grove Community – Manual Example

Draft available from 10/5/2026, 11:02:22 AM

Save Draft

Restore Draft

Discard Draft

Drafts are saved for 30 days in this browser. Files must be selected again. Saving a draft does not save the record or send email.

01 Choose a Template

Templates provide a starting point; subject and message remain editable.

Message Template

Booking confirmation

[Manage Email Templates](#)

02 Reply Follow-Up

☒ Create a Task to Review the Reply

Follow-Up Date

10/08/2026

The task is assigned to you. Receiving a reply does not complete it; review the correspondence before marking it complete.

03 Select Recipients

Choose To, Cc, or Bcc for each selected recipient. To and Cc addresses are visible to everyone receiving the email; Bcc addresses stay hidden.

Primary Host

On-Site Contact

Billing

Travel

Materials

Speaker

All

Clear

☒ Jordan Parker  
jordan.parker@example.org  
Primary Host On-Site Contact

Send As:  
To

☐ Alex Morgan - Example Speaker  
alex.morgan@example.org  
Speaker

Send As:  
To

AI Coach

Figure 68. Compose an email and plan reply follow-up. Actual preview screen; fictional records.

01 Choose an active template or Custom Message.

02 In Reply Follow-Up, choose Create a Task to Review the Reply and check Follow-Up Date. The task is assigned to you; receiving a reply does not complete it.

03 Review recipients and message before Queue Email.  
Saving a browser draft does not send.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Mattermost \(p. 132\)](#)

CHAPTER 08 / ILLUSTRATED WALKTHROUGH

Review recipient visibility and sender copies

Draft available from 10/5/2026, 11:02:22 AM

Save Draft

Restore Draft

Discard Draft

Drafts are saved for 30 days in this browser. Files must be selected again. Saving a draft does not save the record or send email.

01 Choose a Template

Templates provide a starting point; subject and message remain editable.

Message Template

Booking confirmation

Manage Email Templates

02 Reply Follow-Up

☒ Create a Task to Review the Reply

Follow-Up Date

10/08/2026

The task is assigned to you. Receiving a reply does not complete it; review the correspondence before marking it complete.

03 Select Recipients

Choose To, Cc, or Bcc for each selected recipient. To and Cc addresses are visible to everyone receiving the email; Bcc addresses stay hidden.

Primary Host

On-Site Contact

Billing

Travel

Materials

Speaker

All

Clear

☒ Jordan Parker  
jordan.parker@example.org  
Primary Host On-Site Contact

Send As:  
To

☐ Alex Morgan - Example Speaker  
alex.morgan@example.org  
Speaker

Send As:  
To

Send yourself a copy  
avery@example.org  
1 recipient selected.

Your Copy:  
No Copy

Figure 69. Review recipient visibility and sender copies. Actual preview screen; fictional records.

- 01 Choose To, Cc, or Bcc for each selected person. To and Cc are visible; Bcc is hidden.

02 Set Your Copy separately. Check the message and optional share-safe event brief before queueing.
- Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Mattermost \(p. 132\)](#)

CHAPTER 08 / ILLUSTRATED WALKTHROUGH

Review copied inbound email

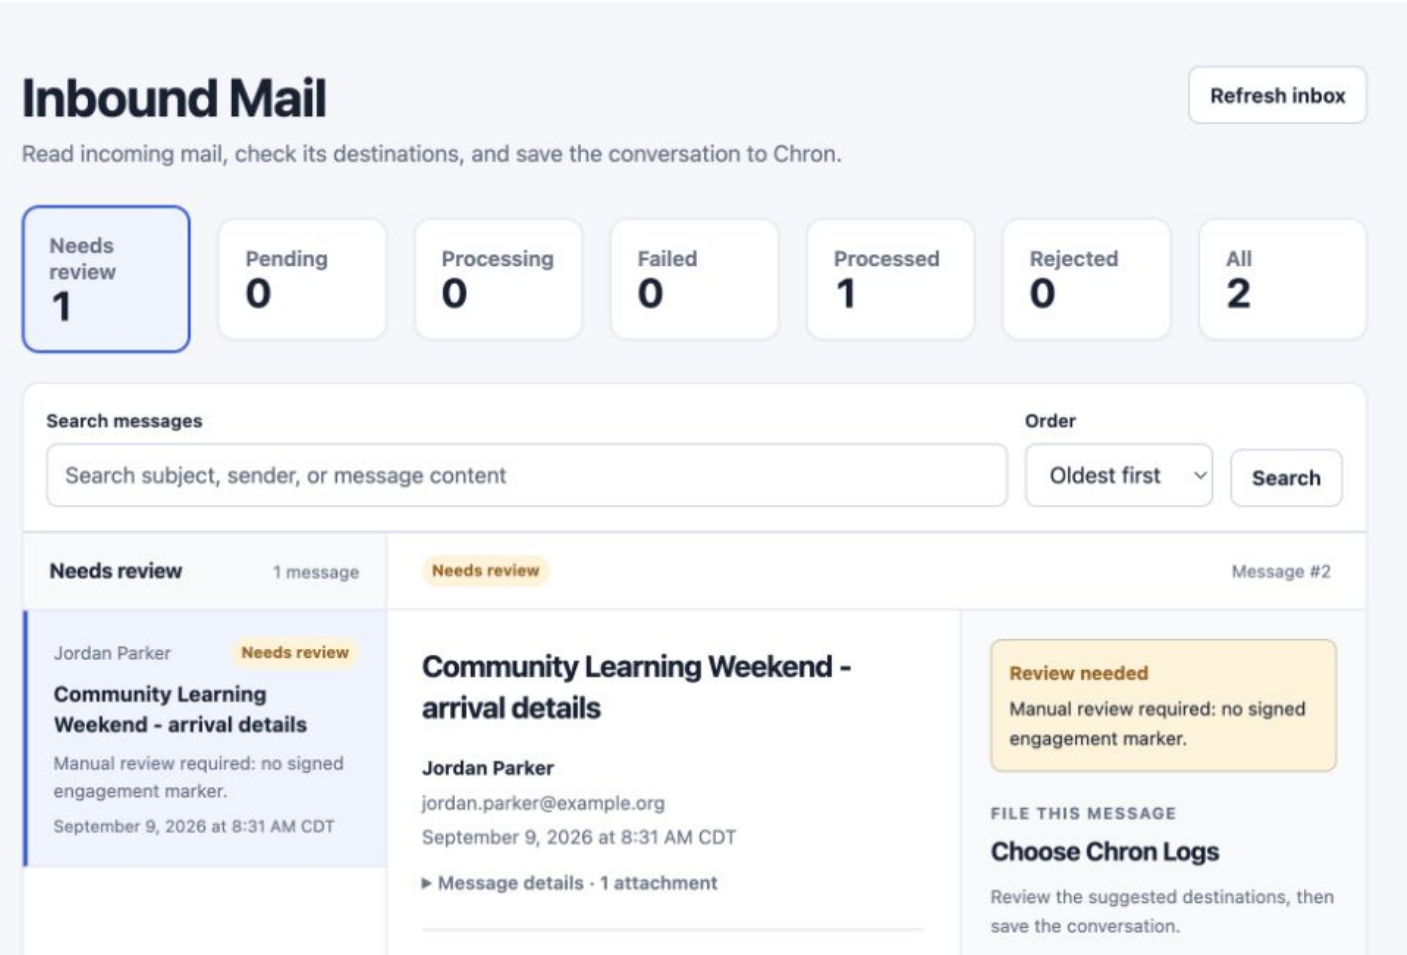


Figure 70. Review copied inbound email. Actual preview screen; fictional records.

- 01 Open Inbox in the sidebar. Use Needs review, Pending, Processing, Failed, Processed, Rejected, or All to choose a queue.

02 Search by subject, sender, or message content. Change Order or use the queue pages when needed. Needs review starts oldest first.
- 03 On a wide screen, the message list is on the left, the reader is in the middle, and the filing panel is on the right.

04 Select a message to read it. Search messages stays visible at a consistent vertical position. On a phone, use Back to messages to return to the queue.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Mattermost \(p. 132\)](#)

CHAPTER 08 / ILLUSTRATED WALKTHROUGH

Read an inbound message beside its filing choices

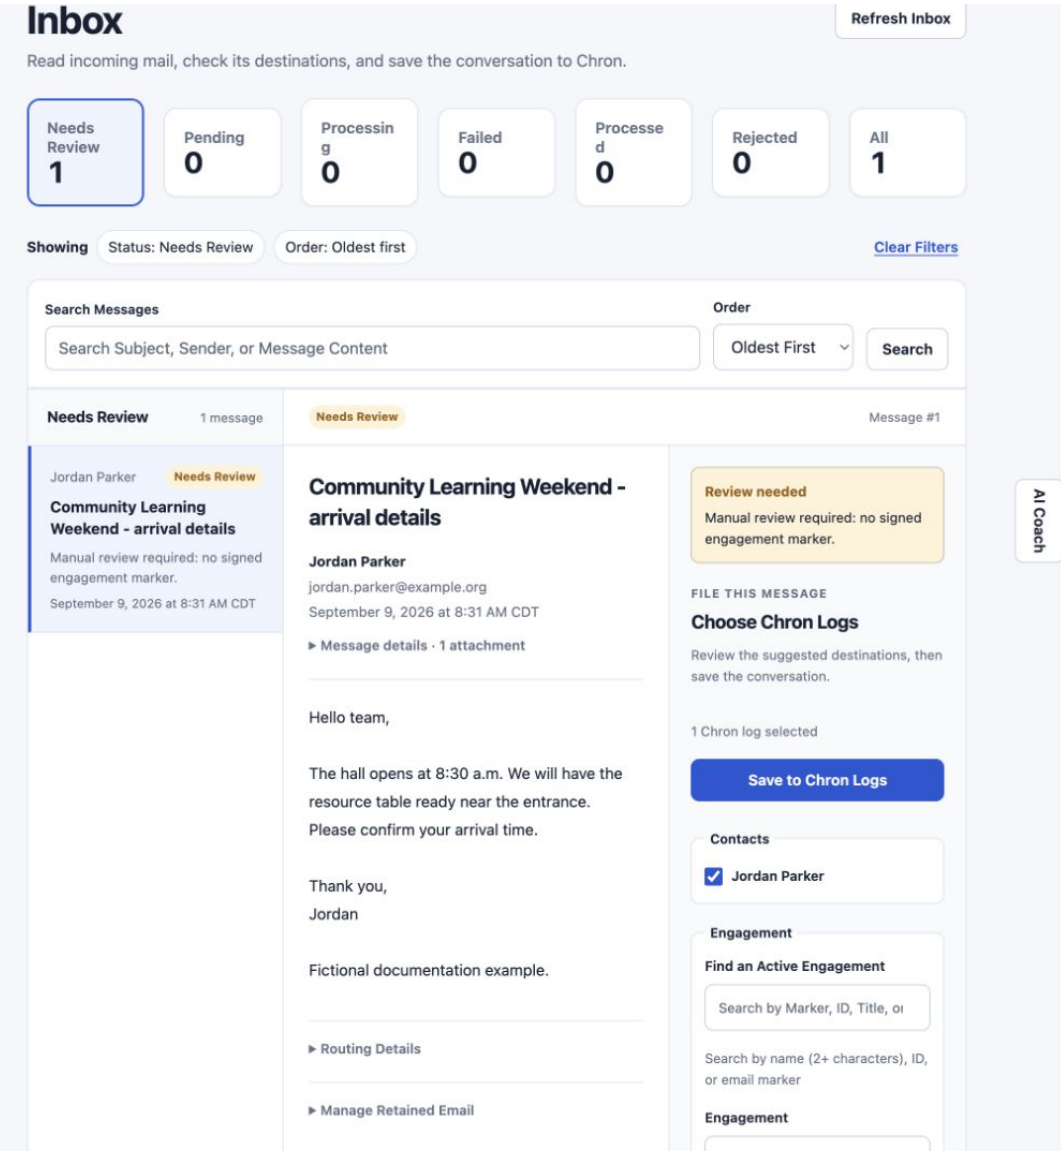


Figure 71. Read an inbound message beside its filing choices. Actual preview screen; fictional records.

**01** Choose a message in Inbox. The divider separates the reader from Message Filing.

**02** Read the message, review selected Chron logs, and correct destinations before Save to Chron Logs.

Related chapters: [Booking pipeline \(p. 16\)](#) / [Engagements \(p. 26\)](#) / [Mattermost \(p. 132\)](#)

## CHAPTER 09

# Map and Calendar

Use the map for geographic planning, the graphical month calendar for events and due work, and private subscription links for an external calendar application.

Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Profile and security \(p. 123\)](#)

## Engagement Map

The initial view shows active engagements in a bounded date window. Filter by lifecycle, confirmation, and date. Pin colors show confirmation, with lifecycle shown by the outline or symbol. Select a pin for the event, organization, dates, lifecycle, and a link to details.

Use **Fit visible pins** after filtering. The companion list includes On map, Needs address, Awaiting lookup, and Not located views for the current page, with Edit location links. Find missing addresses searches the selected date and lifecycle scope; Previous and Next reach additional pages. A new address may take time to resolve.

## Monthly Calendar

The Calendar page opens to the current month. On a desktop, scroll up or down inside the calendar to see consecutive weeks across month boundaries, such as late October beside early November. More weeks and their items load as you scroll; weekday headings stay visible. Use **Previous** or **Next** to show the complete month before or after the month named in the heading. **Today** returns to the current month from its first week.

The current day has its own rose-colored cell and **Today** badge, distinct from every event and task color. Your content filter stays selected while you browse. If more weeks cannot load, use **Retry loading weeks** or try the month controls again.

Select an event to open its details. Tasks with due dates link to task work; editors and administrators return to the same calendar view after editing.

## Private Calendar

Create a separate subscription for each device or service. The secret URL is shown only once; copy it or open it directly in a calendar app. Choose Events, Presentations, My Active Work, All Active Work, and/or Birthdays (from Contacts) for each link. All Active Work includes everyone's due-dated active tasks and disables My Active Work. Events, Presentations, and Birthdays are selected by default.

Revoke one link without affecting the others. Revoked token records can be purged. Share a subscription URL only with the intended device or calendar service: it grants access to the selected schedule, task titles, and contact birthday names. Internal Chron, travel, lodging, and compensation are excluded.

# Choose What the Month Calendar Shows

| Selector   | Calendar Content                                                       | Color Coding                                                                                     |
|------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Events     | Engagements that overlap the displayed dates.                          | Event color, with distinct border tones for tentative/postponed, canceled, and completed events. |
| My Tasks   | Your active tasks that have a due date in the displayed calendar grid. | Your task accent color.                                                                          |
| All Tasks  | Every active due-dated task in the grid, including unassigned work.    | Your tasks use the accent color; other or unassigned tasks use a contrasting color.              |
| Birthdays  | Annual birthday reminders from active contacts.                        | Birthday styling; open the contact for details.                                                  |
| Everything | Events, all active due-dated tasks, and contact birthdays.             | Event, task, and birthday colors appear together.                                                |

On a phone, the calendar becomes a daily agenda with previous/next day controls and Today. The selected filter remains active as you move between dates. The summary above the grid reports how many matching events and tasks fall in that month.

## Understand the Map Provider

The map uses Amazon Location when it is configured for the installation; otherwise the supported OpenStreetMap-based view remains available. Attribution identifies the actual provider. Expand map credits when needed. Date, lifecycle, confirmation, and location filters still control the same engagement records. An unavailable tile service is different from an event with a missing or unresolved address.

## Apply Map Filter Changes

When you change a map filter, the highlighted **Apply Filters** control reminds you that the map is still showing the previous selection. Apply the change, then use **Fit Visible Pins** if needed. Check the missing-address or unlocated lists for records that cannot appear as pins. Clear filters before assuming an event has disappeared.

## Choose the content of each private feed

Each new subscription has a Device or Service label and one or more content options: Events, Presentations, My Active Work, All Active Work, and Birthdays (from Contacts). The defaults are Events, Presentations, and Birthdays.

My Active Work includes assigned work; All Active Work includes everyone and unassigned work. Active work appears on its due date. A subscription can therefore reveal task titles and schedule context: share it only with the intended device or service.

The private URL is shown only once. Save it immediately or create a new subscription if it is lost. Revoke one link without changing others, and purge revoked token records when no longer needed.

The in-app month selector and a private feed are separate controls. Changing the month selector does not change the saved subscription content.

## Correct a map location

Use Edit location to correct the written event address. If the address is right but the lookup pin is wrong, open the pin editor, choose the intended coordinates, and save the manual confirmation.

A manual override is tied to the address it confirms. Check it again after changing the address. Clear the override to return to normal address lookup. The map/list can still show an event awaiting lookup or without enough address information.

## Birthdays and the mobile daily agenda

The month selector includes Birthdays. Everything includes events, active due-dated work, and birthdays. Enter contact birthdays as MM/DD; a birth year is not collected. February 29 birthdays recur on the last day of February in non-leap years.

On a phone-sized display the calendar becomes a daily agenda. Use the previous/next day controls or Today, keep the desired content selector, and open the linked record. Desktop uses the month grid. The agenda and month view preserve the chosen content scope.

## Amazon Location and Map Fallback

Configured deployments use Amazon Location maps; otherwise the supported OpenStreetMap-based view remains available. Expand the collapsed attribution/credits to identify the active provider. Date, lifecycle, confirmation, missing-address, pending-lookup, and unlocated-record controls retain their existing meaning. Fit Visible Pins adjusts the viewport; Edit Location changes the record location. Provider configuration belongs to the operator, not to the event location form.

CHAPTER 09 / ILLUSTRATED WALKTHROUGH

Locate engagements

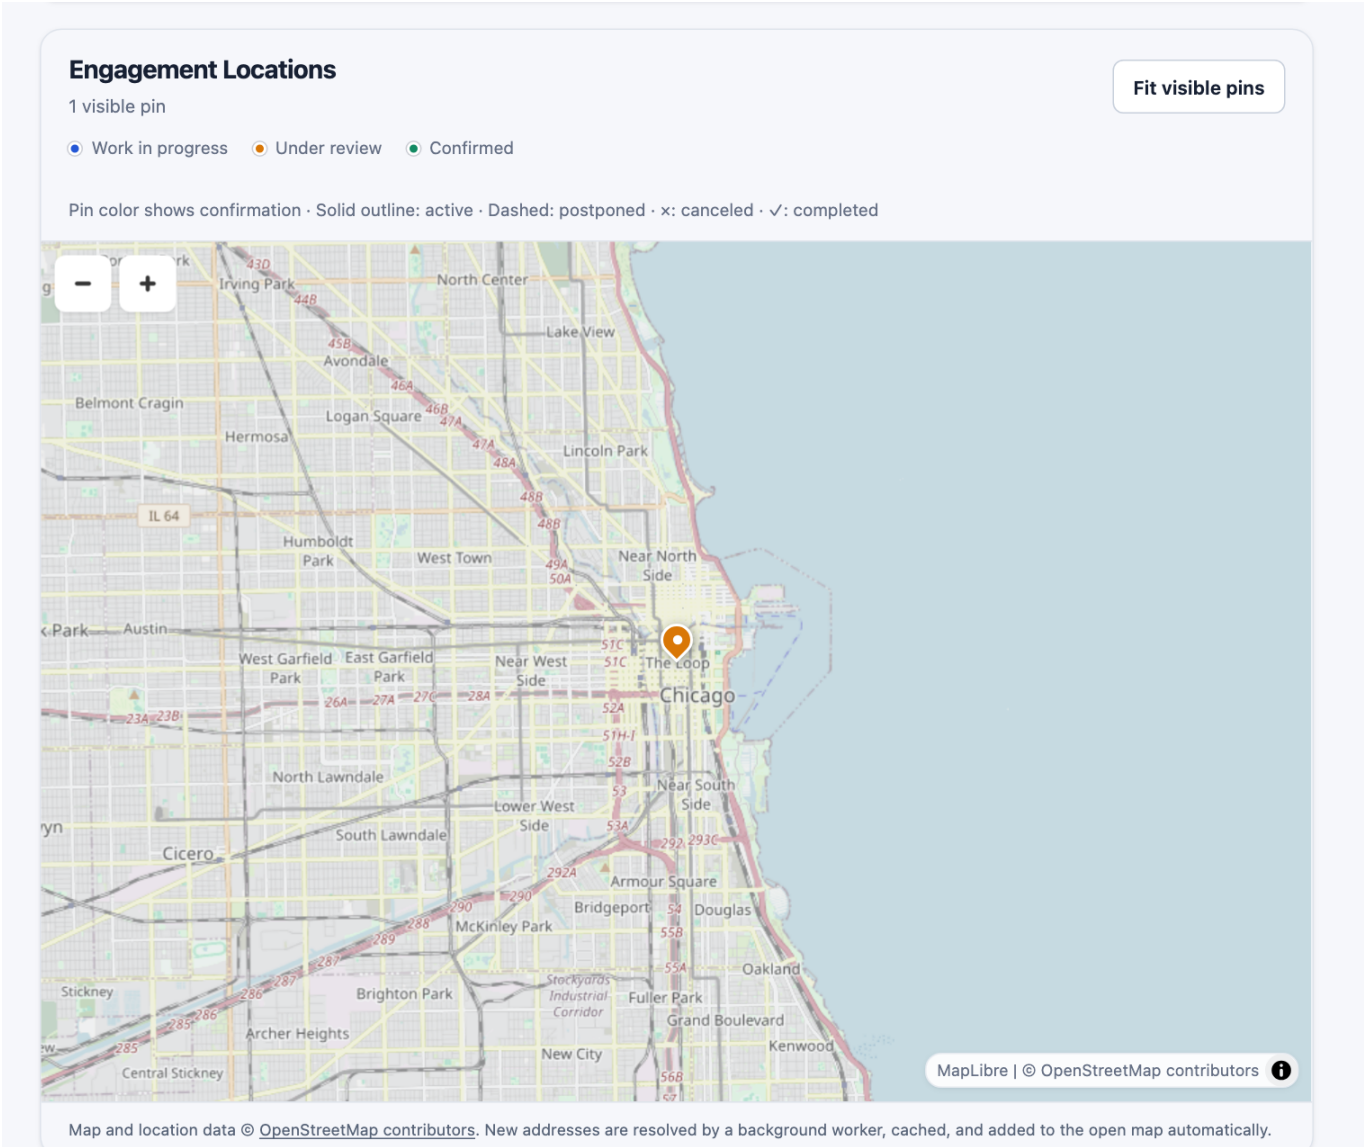


Figure 72. Locate engagements. Actual preview screen; fictional records.

- 01 Filter the date window, lifecycle, and confirmation state.
- 02 Select a pin for event context; use Fit visible pins after filtering.

- 03 Use the list views to find missing addresses, pending lookups, or unlocated records, then Edit location.
- Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Profile and security \(p. 123\)](#)

## CHAPTER 09 / ILLUSTRATED WALKTHROUGH

## Confirm an event pin

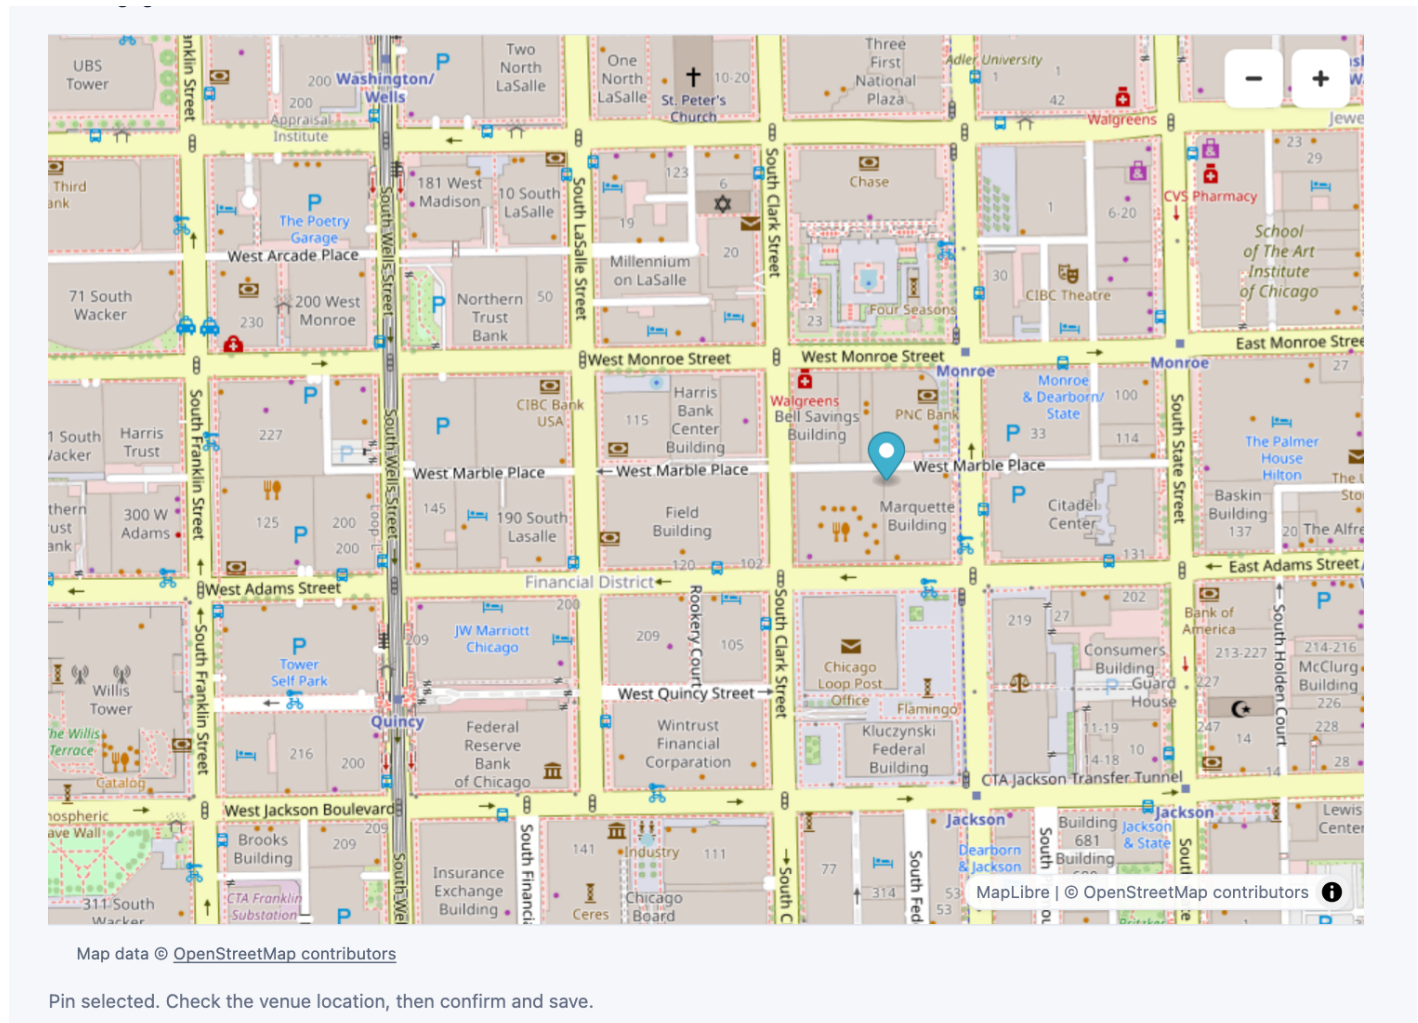


Figure 73. Confirm an event pin. Actual preview screen; fictional records.

- 01** Check the written event address before changing a pin.
- 02** Zoom and click the map, drag the pin, or enter latitude and longitude.

- 03** Check the venue confirmation, then Save confirmed pin.  
Use automatic lookup clears an override.

- 04** A later address change requires checking the pin again.

Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Profile and security \(p. 123\)](#)

CHAPTER 09 / ILLUSTRATED WALKTHROUGH

Browse the month calendar

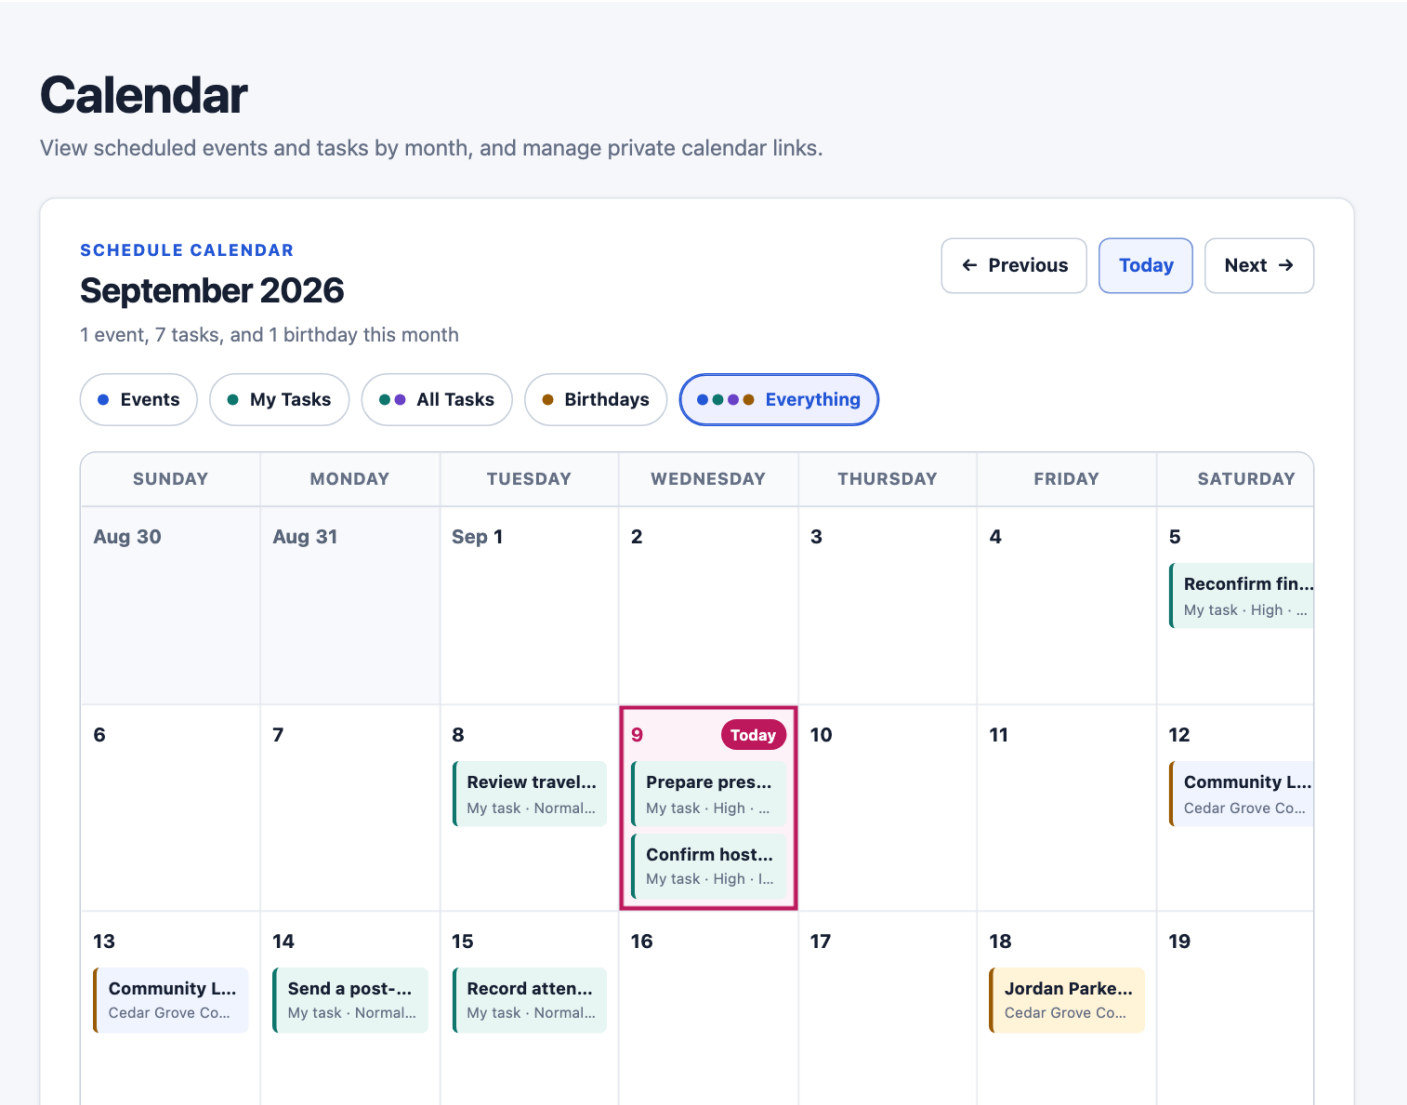


Figure 74. Browse the month calendar. Actual preview screen; fictional records.

- 01** Scroll inside the desktop calendar to browse consecutive weeks across months. Previous and Next show the complete adjacent month named relative to the heading; Today restores the current month from its first week.

**02** Choose Events, My Tasks, All Tasks, Birthdays, or Everything.
- 03** Tasks need an active status and a due date to appear.

**04** Click an event, task, or birthday to open its record. The rose Today cell is separate from event/task colors.

**Screenshot context:** The retained illustration shows one month. The current desktop calendar also scrolls continuously, loading adjacent weeks and their items; the phone view remains a daily agenda.

**Related chapters:** [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Profile and security \(p. 123\)](#)

CHAPTER 09 / ILLUSTRATED WALKTHROUGH

Private calendar subscriptions

### Calendar Subscriptions

Create independently revocable private calendar links.

#### Create Subscription

Use a separate link for each device or calendar service so a single subscriber can be revoked without disrupting the others.

Device or Service

Personal phone

Include in This Subscription

☒ Events

☒ Presentations

☐ My Active Work

☐ All Active Work

☒ Birthdays (from Contacts)

Choose one or more. Active work appears on its due date. My Active Work includes work assigned to you; All Active Work includes everyone's work, including unassigned work.

Create Private Link

#### Existing Subscriptions

| Label                                            | Created             | Last Used |
|--------------------------------------------------|---------------------|-----------|
| test2                                            |                     |           |
| Events, Presentations, Birthdays (from Contacts) | 2026-09-08 12:15:38 | Never     |
| test                                             |                     |           |
| Events, Presentations, Birthdays (from Contacts) | 2026-09-08 12:13:57 | Never     |

**Keep every link private:** it grants access to the content selected for that subscription, which may include event and presentation schedules, work titles, linked engagements, task owners, due dates, status and priority, and contact names and birthdays. Contact details, notes, travel, lodging, and compensation are excluded.

Figure 75. Private calendar subscriptions. Actual preview screen; fictional records.

01

Name each device or service, and choose Events, Presentations, My Active Work, All Active Work, and/or Birthdays (from Contacts).

02

Create the link, copy its private URL immediately, and add it in the calendar application as a subscribed calendar.

03

Treat the URL as an access credential for its selected content, including task information when work is selected.

04

Revoke one device link when no longer needed; purge revoked records separately.

Related chapters:

Engagements (p. 26) / Work queue (p. 76) / Profile and security (p. 123)

< Previous

Chapter start

101 / 187

Next >

CHAPTER 09 / ILLUSTRATED WALKTHROUGH

Use the daily agenda on a phone

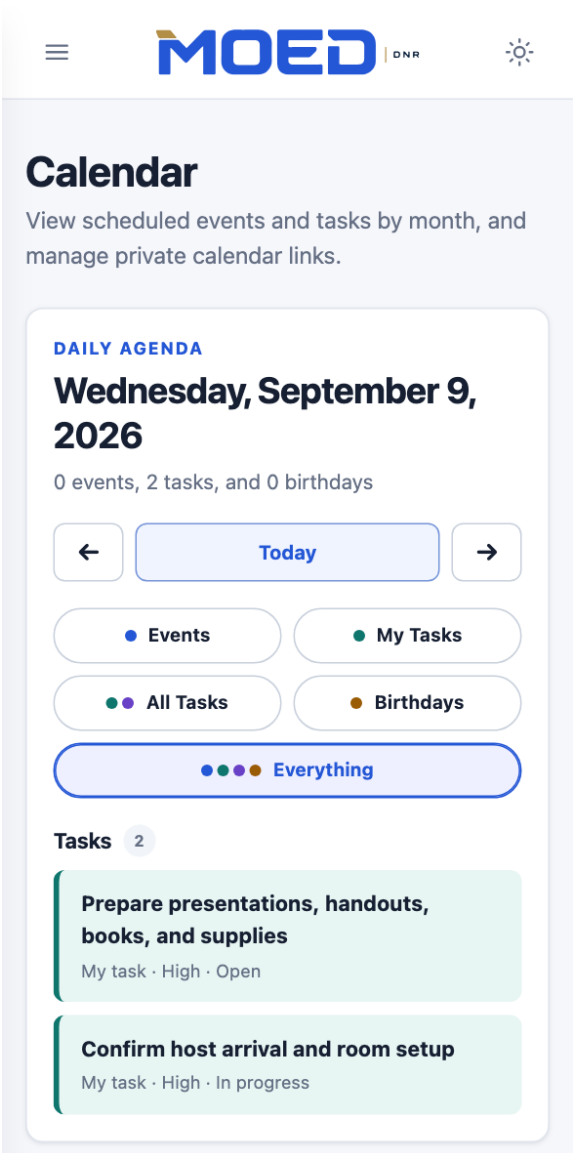


Figure 76. Use the daily agenda on a phone. Actual preview screen; fictional records.

- 01 On a narrow screen, Calendar presents a daily agenda.
- 02 Use the day arrows or Today to change dates and the content selector to focus the list.

- 03 Open an event, task, or contact birthday to continue with that record.

Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Profile and security \(p. 123\)](#)

CHAPTER 09 / ILLUSTRATED WALKTHROUGH

Apply pending map filter changes

# Map

Explore engagement locations and review missing addresses or unresolved lookups. Pins show located engagements from this page.

Lifecycle

All Lifecycle States

Confirmation

All Statuses

From

10/05/2026

to

01/05/2027

Through

Location

All Locations

Apply Filters

Clear

## Engagement Locations

No Matching Engagements

Work in progress

Under review

Confirmed

Pin color shows confirmation · Solid outline: active · Dashed: postponed · x: canceled · ✓: completed

No Matching Engagements

Change your filters to see engagement locations.

Reset Filters

## Locations to Review

0 matching engagements · Page 1 of 1

Show Missing Addresses

Figure 77. Apply pending map filter changes. Actual preview screen; fictional records.

01

Change Lifecycle, Confirmation, dates, or Location.

02

The highlighted Apply Filters button indicates that changes have not yet updated the results. Select it to refresh; Clear returns to the defaults.

Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Profile and security \(p. 123\)](#)

< Previous

Chapter start

103 / 187

Next >

## CHAPTER 10

# Reimbursements

Record expenses, review receipts, and submit a complete package to the bookkeeper.

Related chapters: [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

## Record Expenses

Enter the date, merchant, amount, and account. Upload, paste, or photograph the receipts, then save.

## Build a Draft

Select your available expenses, set the request dates, and check the totals and receipt filenames.

## Review and Submit

Check the recipients, email, and ZIP package. Confirm when ready, then follow the delivery history.

### After Submission

The request, expenses, and receipts are locked. Submitted is not a payment status. Check Email Delivery for email progress and coordinate corrections with the bookkeeper. Archive keeps the original package and history.

## Reimbursements at a Glance

Use **Reimbursements** in the sidebar to record your own expenses, attach receipts, and send a reviewed request to the bookkeeper. Start with **+ Add Expense**; select available expenses to create a draft; open **Requests** to review and submit it. Payment tracking stays in the bookkeeper's system.

Editors and administrators can create and edit their own expenses and drafts. Reviewers have read-only access to their own records. Administrators can view other owners and manage shared settings, but viewing another owner does not permit changing or submitting that person's expenses. Submitted expenses stay locked.

## Add an Expense and Receipts

- 01 Open **Reimbursements > + Add Expense**. Enter **Expense Date**, **Merchant or Payee**, **Amount (USD)**, and **Account**. Add a useful **Description or Purpose**.
- 02 Use **Upload Receipt**, drop files into the receipt area, select **Paste Image**, or use **Take a Receipt Photo** where available. If clipboard permission is denied, focus the paste area and use your normal paste shortcut.
- 03 Check the selected filenames, count, and size. Remove a staged file if it is wrong. Select **Save Expense** to store the expense and selected files. Selecting a file alone does not upload it.

JPEG, PNG, WebP, and PDF are supported. An expense may have up to 20 receipts and 15 MB of receipt files in total. If a save fails, check the message; files may need to be selected again. A duplicate warning is advisory. If another tab changed the expense, reload and reconcile your changes before saving again.

## Find and Select Expenses

Use **Search Expenses**, date filters, Active/Archived views, and sort controls to narrow the list. Administrators default to their own **Expense Owner** and can deliberately choose another owner or All Users. Open a row to view its expense; icons expose permitted View, Edit, Archive/Restore, and Delete actions.

Only your available active expenses can be included in a new draft. Draft and submitted entries are already assigned; submitted rows are light green. Use **Select All Available** to select eligible expenses across all pages of the current filters, or select individual checkboxes. Review the selected count, total, and missing-receipt count, and use **Clear Selection** above or below the list to start over. Selection can span pages in the same browser tab; changing filters clears it.

## Create and Edit a Draft Request

- 01 Select available expenses. Expand **Dates for New Request** if the proposed request dates need changing; these dates are separate from browsing filters.
- 02 Select **Create Draft Request from Selected Expenses**. It is disabled until an eligible expense is selected.
- 03 Open the draft and select **Edit Draft**. Use **Request Date Range > Update Dates**, **Add an Expense in This Date Range > Add Expense**, or **Remove** beside an included expense. The date range must cover all included expenses.

#### 04 Check **Download Report PDF** or **Download Package ZIP**, then select **Review and Submit**.

Removing an expense or deleting an eligible draft request keeps the expense and its receipts. Deleting an expense is a separate administrator action. Saving, editing, or downloading a draft does not send it.

## Review and Submit a Reimbursement

**01** From the Requests list, use the **Submit** icon beside your eligible draft reference, or open it and select **Review and Submit**.

**02** Review **Email Details**, **Email Preview**, **Submission Readiness**, and **Package Contents**. The bookkeeper is To; the owner, personal reviewer, and settings Cc address receive Cc copies. The settings Bcc address receives a hidden copy.

**03** Check the amounts and exact receipt filenames. The ZIP contains the expense report PDF, an expense CSV, and original receipts. Missing receipts are flagged; pending or rejected required security checks block submission.

**04** Select **I Have Reviewed the Recipients, Email, and Package**, then **Submit Reimbursement Request**. If details changed after preview, review the refreshed content before trying again.

Submission changes the request to Submitted and locks its expenses and receipts. Email delivery runs separately. Submitted does not mean paid, and **Accepted by SMTP** does not prove that the recipient read the email.

## Track Delivery and Handle Corrections

Open a submitted request to inspect **Email Delivery** and **Request History**. Known failures offer **Retry Failed Delivery**; accepted, uncertain, or cancelled copies may offer **Send Another Copy**. Read the history, check with the recipient/provider, enter a reason, and confirm before sending again. An uncertain copy may already have arrived.

**Record a Correction** saves a reason and cancels only copies that have not started sending. It cannot recall email or unlock submitted expenses. After agreement with the bookkeeper, use **Resolve Correction** and record the resolution. Neither action submits a replacement. Recovery uses the original approved message and package for up to 365 days; older messages may lack a recoverable snapshot. Use the original package and contact the bookkeeper if recovery is unavailable.

## Download Reports and Match Receipts

**Download Submitted Package** returns the original ZIP that was sent. The submitted PDF download comes from that same package. Later profile, account, settings, or template changes do not rewrite the original. Older records without a saved original package show an explanation rather than silently generating a substitute.

The report includes account subtotals, Total Amount Due, and Expense Detail. Each detail entry names its matching receipt files, including the expense number and amount. The **Receipt Files** index lists PDF and image originals; PDF receipt pages and image previews in the report do not replace the originals in the ZIP's receipts/ folder.

## Manage the Chart of Accounts

Editors and administrators open **Chart of Accounts** from Reimbursements or Requests. Search by COA number or description; choose **Active**, **In Use**, or **Archived**; sort by **COA Number**, **Description**, or **Expenses** in either direction. Use **Add Account**, Edit, Archive, or Restore as appropriate.

COA numbers must be unique even among archived accounts. Administrators may delete unused accounts; accounts linked to expenses must be archived instead. An expense may keep its previously assigned archived account, but new assignments must use an active account.

## Set Reimbursement Recipients

### To: Bookkeeper

The bookkeeper email in Reimbursement Setup receives the request for processing.

### Cc: Visible Copies

The submitting user, personal reviewer, and setup Cc address receive copies, when configured.

### Bcc: Hidden Copy

The setup Bcc address receives a hidden copy and is excluded from recipient-visible report content.

Administrators open **Reimbursement Setup** in the sidebar. Set the organization name, bookkeeper first/last name, bookkeeper email and phone, **Cc Email Address**, and **Bcc Email Address**; save with administrator actions unlocked. The Bcc address is not printed in recipient-visible reports or email bodies.

Each user can open **My Profile > Personal Details**, set **Reimbursement Reviewer Email**, and save the profile. This

person receives a Cc copy when that user submits. Verify the actual recipients on every submission preview. Settings changes affect new submissions, not previously approved messages.

## Review the Request and Its Downloads

Follow the four steps at the top: **Select Expenses**, **Review Request**, **Review Email**, and **Submit**. The count and total help you check the current selection. **Select All Available** includes eligible expenses across pages within the browsing filters; check the selection before creating the draft. Browsing filters and the new request's date range serve different purposes.

In the draft, add an optional **Note to the Bookkeeper** and save it before reviewing the email. Expense links open a read-only detail view; use **Edit Expense** when it is yours and still editable. A submitted request locks its expenses and receipts.

Download the report PDF or package ZIP when available; the CSV is inside the ZIP. The email carries one ZIP containing the PDF, CSV, and original receipts. The CSV has one row per expense. The PDF includes receipt previews, including supported PDF receipt pages; the original files remain in the ZIP. Match receipt filenames to the report's receipt list.

On **Review Reimbursement Email**, verify recipients, note, amounts, and package contents. The size gauge shows usage of the 18 MB ZIP limit. The line below checks the complete encoded email against 25 MB, including message, headers, and encoding. A request also allows up to 100 receipts and 15 MB of original files. Reduce large receipts or split the request if it is over a limit. After submitting, wait for the progress message instead of clicking repeatedly. Check the request's delivery result afterward; Submitted does not mean paid.

### Screen Reference: Expenses

Open Reimbursements from Work in the sidebar. + Add Expense opens entry; Requests opens the request register; Chart of Accounts opens the shared account list for editors and administrators. Search Expenses matches the available expense search fields; use Start Date, End Date, and Apply to set the browsing range. Administrator Expense Owner defaults to the signed-in user; All Users is an explicit choice. Active and Archived switch visibility. Date, Merchant, Owner, Account, Amount, and Status sorting toggle direction; page-size and pagination controls limit displayed rows.

The table shows Include, Date, Merchant / Payee, Owner where permitted, Account, Receipts, Amount, Status, and Actions. Hovering a row reveals its view link; explicit icons

and links remain usable. Available means unclaimed and eligible for the current owner; Draft or Submitted links to its request. Submitted rows are green. The mobile disclosure exposes additional owner/account/receipt detail.

Include checkboxes are available only for the signed-in owner's active unclaimed expenses. Create Draft Request from Selected Expenses appears above and below the list. Selected count, amount, and missing-receipt count reflect selections across pages in this tab; filtering or successful creation clears stale selection. Clear Selection appears at both ends when applicable. Dates for New Request exposes Request Start Date and Request End Date independently of list filters. Server validation rechecks every selection.

View opens an expense without edit controls. Edit is limited to the owner's editable expense. Archive and Restore preserve the record; Delete is administrator-only and requires confirmation and current administrator unlock. Expenses associated with requests have additional restrictions: submitted items are locked and draft items are managed through their request.

### Screen Reference: Expense Entry and Detail

Expense Date, Merchant or Payee, Amount (USD), and Account are required. Description or Purpose provides supporting context. Choose an Account lists active chart-of-accounts entries; an existing archived assignment may be retained. Amounts are stored in integer cents. Save Expense saves all fields and staged receipts; Back to Expenses or Back to Request returns to the originating context.

Expense Receipts accepts Upload Receipt, the drop area, Paste Image, the keyboard paste area, and Take a Receipt Photo when the device supports it. A camera prompt depends on browser/device support. Clipboard reads may require a user gesture and permission; keyboard paste is the fallback. New picks append to staged files; review filename, count, and byte totals and remove unintended selections before saving. An expense allows 20 receipts with 15 MiB combined originals, and each receipt must also satisfy the 15 MiB limit. Formats: JPEG, PNG, WebP, PDF.

The saved Receipts pane shows image or first-page PDF previews, filenames, Open Original Receipt, and Delete Receipt where permitted. Preview failure does not by itself mean that the original is missing. Original downloads require authorization. If scanning is enabled, queued/scanning/rejected files cannot be previewed, downloaded, or submitted until they are clean; installation status determines whether scanning is required. Rejected files should be replaced with a safe original.

Delete Expense is outside the Receipts pane and deletes the whole eligible expense and its receipts. Delete Receipt removes only that attachment. Both require the applicable permissions and confirmation; submitted records expose neither mutation. Expense History records changes. Duplicate detection is an advisory; version conflicts reject stale saves and preserve text values. File inputs may need reselecting after errors. Repeated creation with the same save token does not create duplicate expenses.

### Screen Reference: Requests Register

Open Requests from Reimbursements. Search Requests accepts a request reference or owner search; administrators can filter Owner. Status offers All Statuses, Draft, or Submitted. Expense Dates From and Through filter overlapping request date windows. Sort By offers Created, Submitted, Total, Owner, and Request; Direction chooses ascending or descending. Apply refreshes the list. Active/Archived and pagination retain the selected context.

Columns are Request (hash and readable request number), Owner, Expense Dates, Expenses, Receipts, Total, Status, Status Set, and Actions. Status Set is the creation time for Draft and submission time for Submitted; this screen currently labels these timestamps UTC. Submitted rows are green. Hover/click opens a read-only view; the View icon does the same.

The paper-plane Submit icon appears only for the signed-in owner's eligible active draft. Edit opens that draft. Archive/Restore changes visibility, preserving record links and locks. Delete is available only for an eligible draft with the required role; an administrator cannot delete a submitted request to free its expenses.

### Screen Reference: Request View and Edit

The header identifies owner, date range, and status. Download Report PDF and Download Package ZIP are available when items exist; submitted requests use Download Submitted Package. Expenses, Back to Requests, Chart of Accounts, Edit Draft, and Review and Submit appear according to role, ownership, state, and view mode. Back to Requests preserves an allowed originating list URL.

Edit Draft places Request Date Range and Add an Expense in This Date Range in equal-width panels that stack on narrow screens. Set Start Date and End Date and choose Update Dates. The range must encompass every included expense. Available Expense contains the owner's eligible unclaimed expenses inside that range; choose one and Add Expense. The add panel is absent when none are available.

Expenses lists Date, Merchant / Payee, Account, Receipt Files, Amount, and Remove in editable drafts. Merchant links always open permitted read-only expense detail. Remove

frees that expense from the draft without deleting its receipt files. Total Amount Due sums the items. Delete Request sits directly on the page background; it removes only the draft and preserves its expenses and receipts.

Submitted views add delivery summary/history, correction controls for authorized users, and Request History. Archive does not cancel mail or unlock content. Reviewers cannot edit; editors and administrators cannot change another owner's expense content merely because it is visible.

### Screen Reference: Email Review and Submission

Review Reimbursement Email shows Email Details (subject and recipients), a readable Email Preview in either app theme, Submission Readiness, and Package Contents. Check each listed expense, amount, receipt count, scan state, filename, and original-file size. Missing receipts are advisory; unresolved required security checks, configuration errors, or oversized packages prevent submission.

To is the configured bookkeeper. Cc includes the submitting owner, optional Reimbursement Reviewer Email, and optional Cc Email Address. Bcc Email Address receives a hidden copy. Recipient addresses are validated and duplicate routing is resolved by the application; the preview is the authoritative list. Bcc recipients are absent from recipient-visible report content. The message uses the MOED email header and footer.

The attached ZIP includes the Expense Report PDF, CSV, and every original receipt in receipts/. It is the same package represented by the download. Each receipt filename begins with expense and receipt identifiers; the report's Expense Detail and Receipt Files sections match those names. Image receipt pages are convenient previews; PDF receipt pages are embedded in the report where supported; PDFs and images also remain separate original files in the ZIP.

A request is limited to 100 receipts and 15 MiB of originals; the finished ZIP has an 18 MB limit and the complete encoded email has a 25 MB limit. Base64 email encoding adds roughly one third plus headers. Split a large request or reduce source image sizes before review. Select I Have Reviewed the Recipients, Email, and Package, then Submit Reimbursement Request. The app rechecks the review fingerprint, records the original package, queues delivery, sets Submitted, and locks the associated content. Merely opening the preview sends nothing.

## Screen Reference: Delivery Recovery and Correction

Email Delivery distinguishes Pending/Queued, Sending, Retry, Accepted by SMTP, Failed, Delivery Uncertain/Needs Review, and Cancelled. It lists recipient type/address when retained, attempts, and last acceptance. Exact labels may describe the worker state rather than the request state. Submitted means the request was recorded and locked; it does not mean delivered, read, approved, or paid.

Retry Failed Delivery applies to known failures. Send Another Copy applies to accepted, uncertain, or cancelled copies when the approved snapshot is available, the request is active, and no correction remains unresolved. Enter a reason, confirm you have checked the prior delivery, and confirm sending. Recovery reuses the original approved recipient, message, and package; changing settings does not redirect that copy. Never repeatedly resend an uncertain copy without checking whether it arrived.

Record a Correction requires a reason. It keeps the submitted record and expense links, records the actor/time, and cancels pending/retry copies only. Sending, accepted, and uncertain copies cannot be recalled. Resolve Correction requires a Resolution Note documenting agreement with the bookkeeper. It neither sends mail nor unlocks an expense. Coordinate replacements externally to avoid duplicate reimbursement.

Exact-message recovery is retained for 365 days. Some legacy records have no approved-message snapshot or original package; the UI explains what is unavailable. Downloaded originals are immutable, including any historical formatting. Request History records submission, archive, correction, and recovery actions. The app does not track payment status.

## Screen Reference: Chart of Accounts

Editors and administrators can open Chart of Accounts. Add Account or Edit Account contains required COA Number (up to 20 characters) and Description (up to 120). Save/Add persists the entry; Cancel abandons edit mode. The COA number is globally unique across active and archived entries.

The list provides Search Chart of Accounts, Active/In Use/Archived, and ascending/descending sort on COA Number, Description, or Expenses. In Use means active accounts referenced by at least one expense. Each row shows those values and Edit, Archive/Restore, and administrator Delete icons where allowed. Search/sort/view context is preserved while editing. Delete requires an unused account, confirmation, and administrator unlock. Archive is the safe way to retire an account with history.

## Screen Reference: Reimbursement Setup and Profile

Reimbursement Setup is administrator-only in the sidebar. Organization Name identifies the report/email organization. Bookkeeper First Name and Last Name personalize the recipient; Bookkeeper Email Address is the destination; Bookkeeper Phone Number appears in the report context. Cc Email Address adds a visible copy; Bcc Email Address adds a hidden copy. Save Reimbursement Setup requires current administrator unlock. Validation errors preserve entries. Saved settings apply to future submissions.

My Profile > Personal Details includes Reimbursement Reviewer Email, an optional personal Cc recipient. Save the profile to persist it. The verified account email also receives a copy. The reviewer field is independent of recovery-email verification and does not grant the reviewer application access. The app records reviewer-setting changes without exposing the address in the audit message.

## Reimbursement Troubleshooting and Access

No Include checkbox or a disabled Create Draft Request button: check that the expense is yours, active, unclaimed, and selected. A dash for a Draft/Submitted expense protects it from inclusion twice. Administrator All Users visibility does not transfer ownership.

No Submit/Edit icon: confirm the request is your active draft and that you have an editor or administrator role. Submitted and archived requests are not editable drafts. A missing Add Expense panel means no eligible available expense is in that request's date range.

Paste Image fails: use the button after copying an image, allow browser permission if prompted, or use the focused paste area and normal keyboard shortcut. Pasted text is not a receipt. Save Expense is still required. If files fail size/type checks, keep valid selections and remove or replace the rejected file.

Delivery is queued indefinitely or reports a development transport: ask the deployment administrator to verify the real SMTP worker and transport; changing the request to another draft is not a delivery fix. Accepted by SMTP is not a receipt. For uncertain delivery, check the recipient/provider before any intentional resend.

Cannot modify a submitted expense or receipt: this is an intentional content lock. Record a correction and coordinate with the bookkeeper. Chart-of-accounts edits and profile changes do not rewrite the original PDF. Original package missing on a legacy record: preserve the received package if available and contact the administrator; do not submit the same expenses again.

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Expenses, saved selection, and workflow progress

Reimbursements

+ Add Expense

Requests

Record expenses and receipts, then prepare a dated request for the bookkeeper.

Chart of Accounts

1 Select Expenses

2 Review Request

3 Review Email

4 Submit

2 expenses · \$57.05 selected

Expenses

Active Archived

Showing

Archive: Active

State: All

Owner: Avery Morgan

From: 2026-01-01

Through: 2026-10-05

Clear Filters

Search Expenses

Start Date

End Date

Expense Owner

⌕ See

Search

01/01/2026

10/05/2026

Avery Morgan

Apply

State: All Available Draft Submitted

Sort: Date ↓ Merchant ↑ Owner ↑ Account ↑ Amount ↓ State ↑

Select your unclaimed expenses below to make a draft request. An expense already in a draft or submitted request cannot be selected again.

Create Draft Request from Selected Expenses

► Dates for New Request

2 expenses selected

Select All Available

Clear Selection

Selected Total: \$57.05 · 2 Without Receipts (rechecked when creating the draft)

| Include                             | Date       | Merchant / Payee                     | Owner        | Account        | Receipts | Amount  | State     | Actions                           |
|-------------------------------------|------------|--------------------------------------|--------------|----------------|----------|---------|-----------|-----------------------------------|
| <input checked="" type="checkbox"/> | 2026-10-02 | Example Stationery Workshop supplies | Avery Morgan | 5478 · Lodging | 0        | \$19.80 | Available | <div><div></div><div></div></div> |
| <input checked="" type="checkbox"/> | 2026-      | Example Fuel                         | Avery        | 5478 · Lodging | 0        | \$37.25 | Available |                                   |

Figure 78. Expenses, saved selection, and workflow progress. Actual preview screen; fictional records.

- 01

Follow Select Expenses, Review Request, Review Email, and Submit at the top.
- 02

Apply owner/date/state filters and check the current summary. View opens read-only detail; Edit returns through the allowed expense list.

Related chapters:

Roles and access

(p. 11)

/

Profile and security

(p. 123)

/

Administration

(p. 137)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Select available expenses across pages

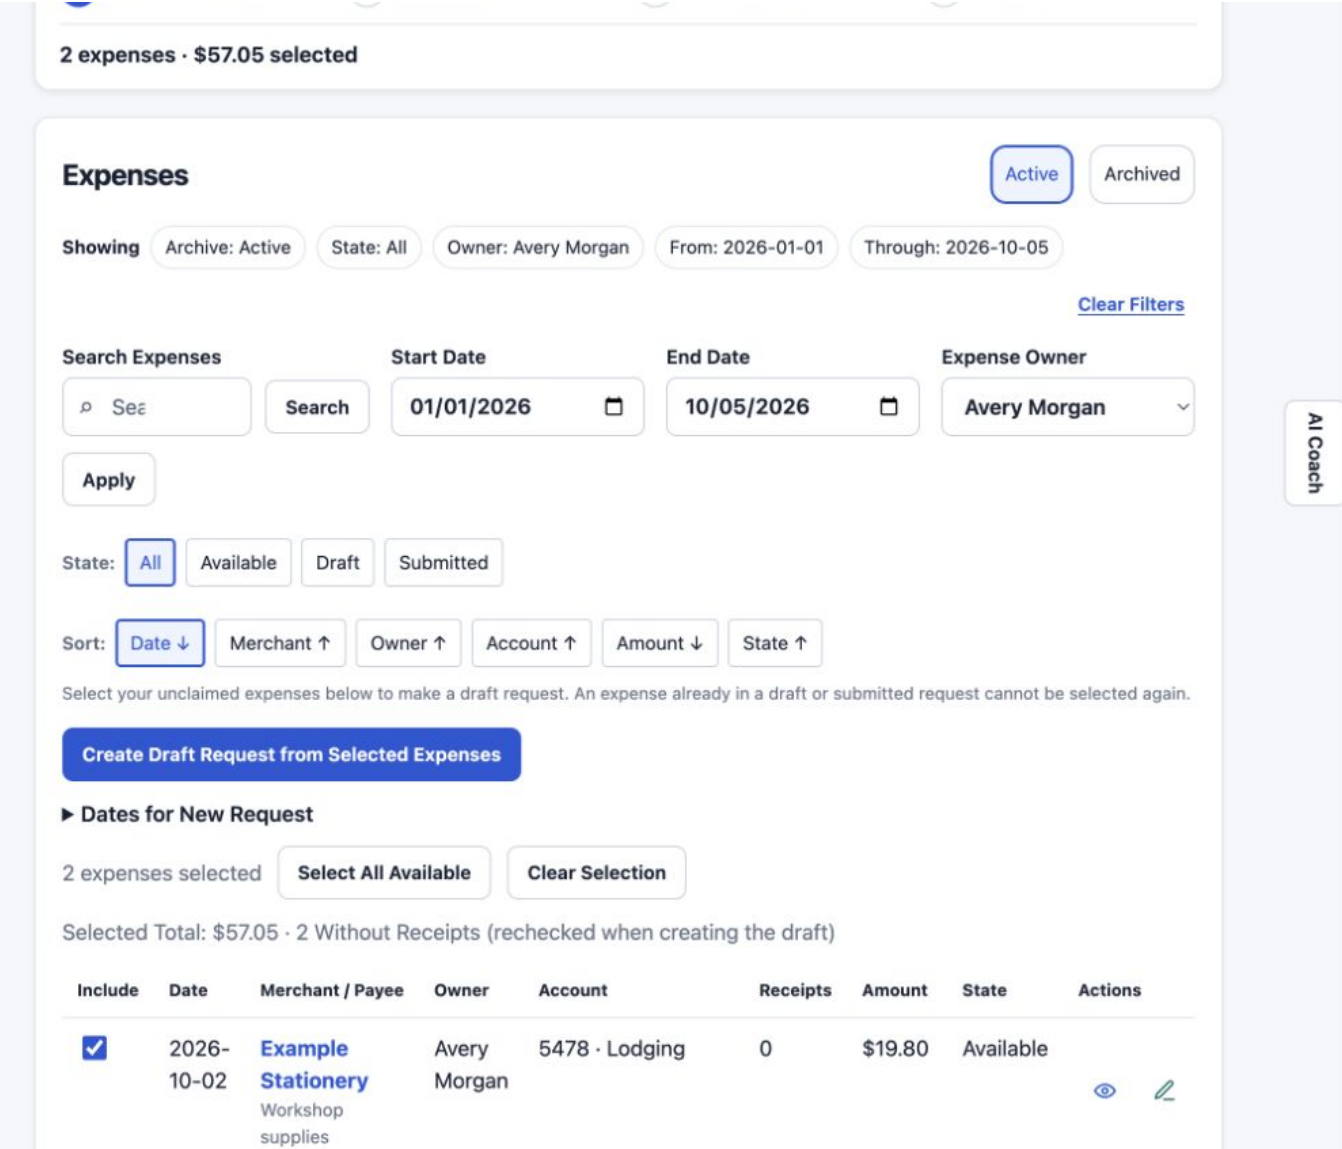


Figure 79. Select available expenses across pages. Actual preview screen; fictional records.

- 01** Choose Select All Available to include eligible expenses across pages of the current filters.

**02** Check selected count, total, and missing-receipt count. Changing filters clears selection; Clear Selection starts over.
- 03** Review Dates for New Request before Create Draft Request from Selected Expenses.

Related chapters: [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Enter Expense Details

Reimbursements / Expense #3

# Expense

Enter the expense details and attach one or more receipt files.

Expense Date

09/15/2026

Merchant or Payee

Example Office Supply

Amount (USD)

42.50

Account

5284 · Supplies Office

Description or Purpose

Workshop supplies

Figure 80. Enter Expense Details. Actual preview screen; fictional records.

01

Enter Expense Date, Merchant or Payee, Amount (USD), Account, and Description or Purpose.

02

Use an active account for a new assignment. An existing expense can retain its previously assigned archived account.

03

Continue to Expense Receipts below these fields, then select Save Expense. Only the owner can edit an eligible expense.

Screenshot context:

Fictional documentation records. The screen continues below the illustrated area.

Related chapters:

[Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

< Previous

Chapter start

111 / 187

Next >

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Attach and Review Receipts

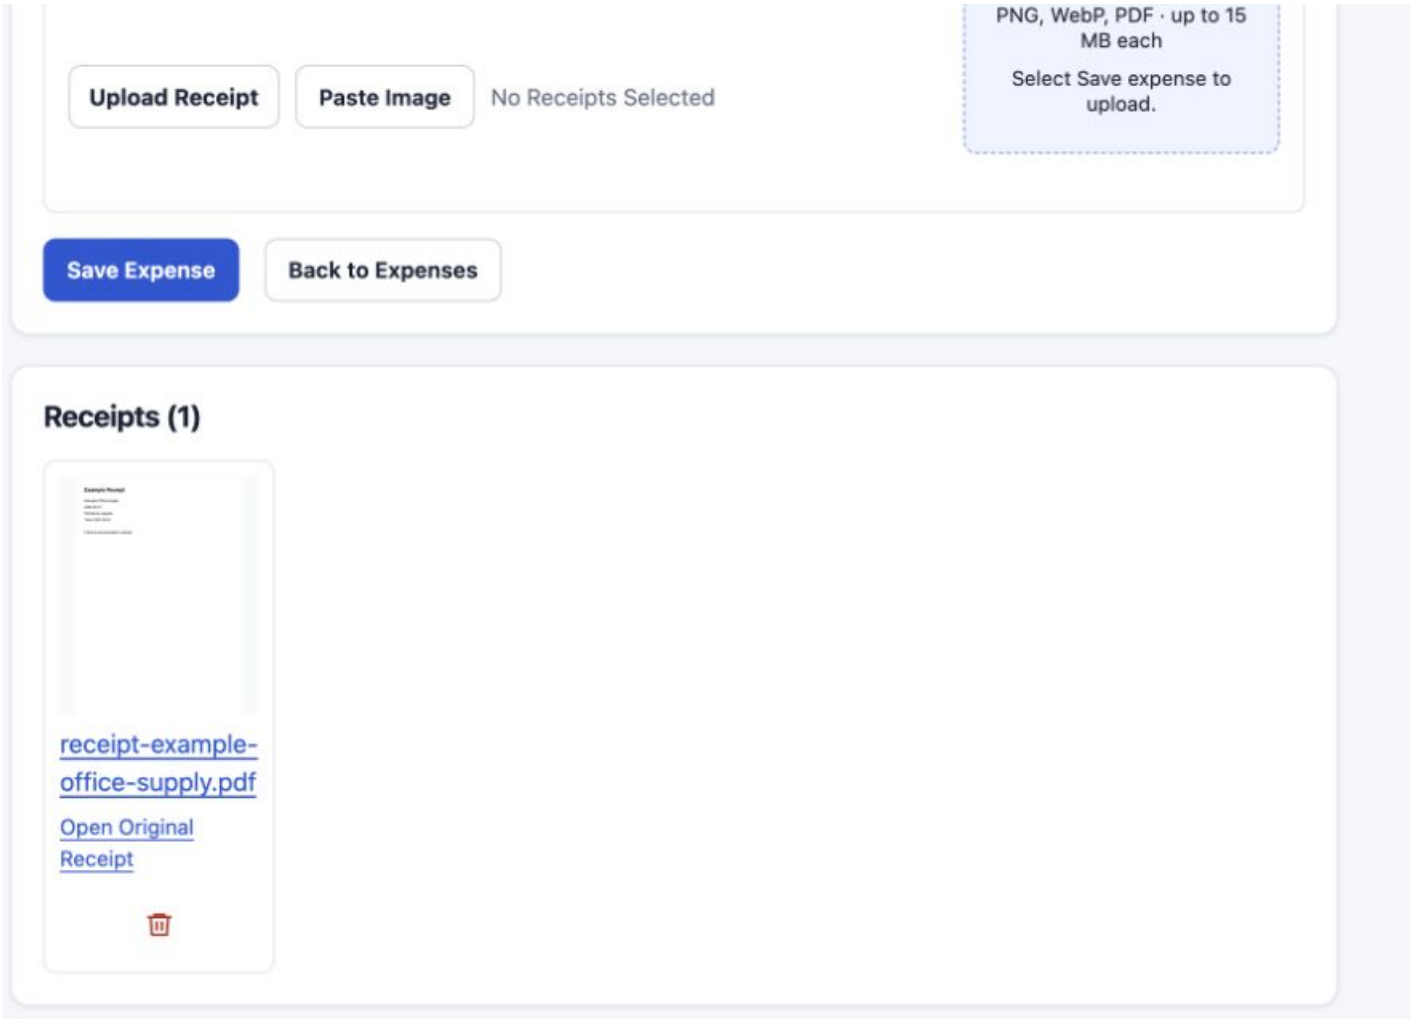


Figure 81. Attach and Review Receipts. Actual preview screen; fictional records.

- 01 Use Upload Receipt, drag-and-drop, or Paste Image; on supported phones, the camera option captures a photo. If clipboard access is blocked, use the keyboard paste shortcut or upload.
- 02 Select Save Expense to store selected files. The Receipts panel shows saved previews and original filenames; select a receipt to open the original.

- 03 Supported formats are JPEG, PNG, WebP, and PDF. Each expense allows at most 20 receipts totaling 15 MB. Submitted receipts stay locked.

**Screenshot context:** Scrolled expense editor. Preview is a fictional PDF receipt; the original remains downloadable.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Find Draft and Submitted Requests

Reimbursements / Requests

Requests

ExpensesChart of Accounts

Review draft and submitted reimbursement requests.

Search Requests

Reference or Owner

Owner

All Users

Status

All Statuses

Expense Dates From

mm/dd/yyyy

Through

mm/dd/yyyy

Sort By

Created

Direction

Descending ↓

Apply

Reimbursement Requests

ActiveArchived

|                                                                                                                           | Request     | Owner                    | Expense Dates | Expenses | Receipts | Total | Status           | Status Set |
|---------------------------------------------------------------------------------------------------------------------------|-------------|--------------------------|---------------|----------|----------|-------|------------------|------------|
|  <b>7a5c7c35efde90ed</b><br>Request #1 | Alex Morgan | 2026-09-01 to 2026-09-30 | 2             | 2        | \$97.65  | Draft | 2026-09-29 01:00 |            |

Figure 82. Find Draft and Submitted Requests. Actual preview screen; fictional records.

- 01 Open Requests. Filter by search text, owner, status, and expense dates; choose sort field and direction, then Apply.

02 Switch between Active and Archived. The request identifier or hovered row opens its detail view.

03 Use the available Submit, View, Edit, Archive, Restore, or protected Delete actions. Eligibility and ownership determine which actions appear; submitted rows use light green.
- Screenshot context: Fictional documentation records. The screen continues below the illustrated area.

Related chapters: [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Edit dates, expenses, and a bookkeeper note

Reimbursements / Requests / Request 5851821d/5e2a985

Reimbursement Request

Download Report PDFDownload Package ZIP

Avery Morgan · 2026-10-01 to 2026-10-05 · Draft

1 Select Expenses

2 Review Request

3 Review Email

4 Submit

1 expenses · \$48.50

Review the expenses, report, and receipt package. Downloading does not change this draft.

ExpensesBack to RequestsChart of AccountsReview and Submit

Note to the Bookkeeper

Brief note or comment (optional)

Workshop printing for the October planning visit. Please use the attached receipt.

The saved note appears in the bookkeeper's email.

Save NoteDelete Note

Request Date Range

Start Date10/01/2026

End Date10/05/2026

Update Dates

Add an Expense in This Date Range

Available ExpenseChoose an Expense

Add Expense

Expenses

Receipt filenames match the files in the receipts/ folder of the package ZIP.

AI Coach

Figure 83. Edit dates, expenses, and a bookkeeper note. Actual preview screen; fictional records.

- 01

Save the optional Note to the Bookkeeper before reviewing the email.
- 02

Use Update Dates, Add Expense, or Remove as needed. Removing an expense preserves its original receipts.
- 03

Download Report PDF or Download Package ZIP for review, then Review and Submit.
- Related chapters:

Roles and access (p. 11)

Profile and security (p. 123)

Administration (p. 137)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Read expense details and preview a PDF receipt

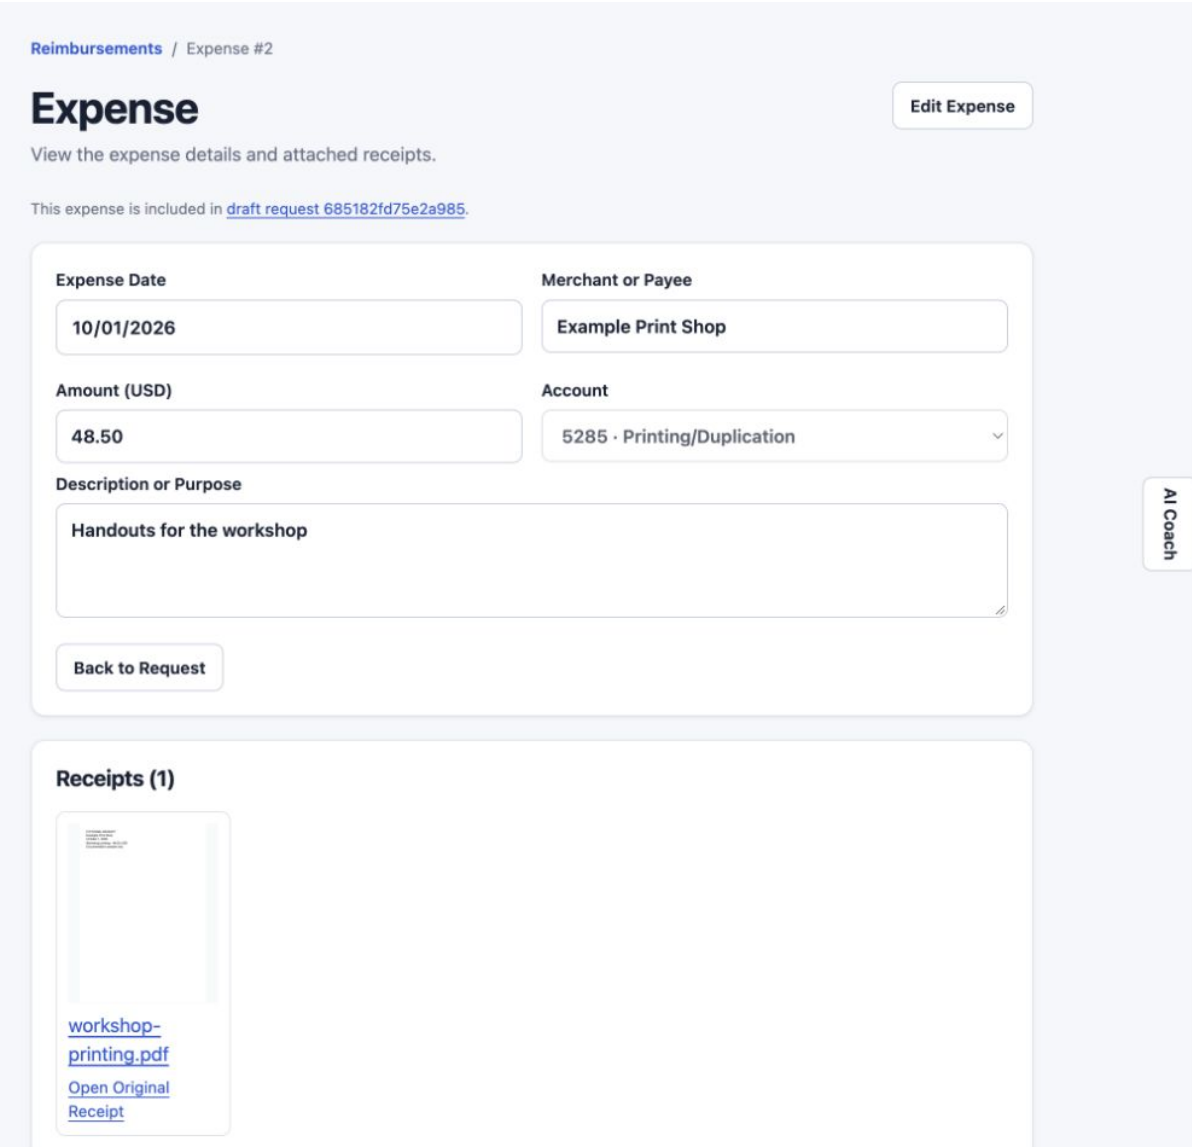


Figure 84. Read expense details and preview a PDF receipt. Actual preview screen; fictional records.

- 01 Expense links open read-only details and receipt previews.
- 02 Open Original Receipt for the complete file. Choose Edit Expense only when you own the editable expense.
- Related chapters: [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Review the email and ZIP attachment

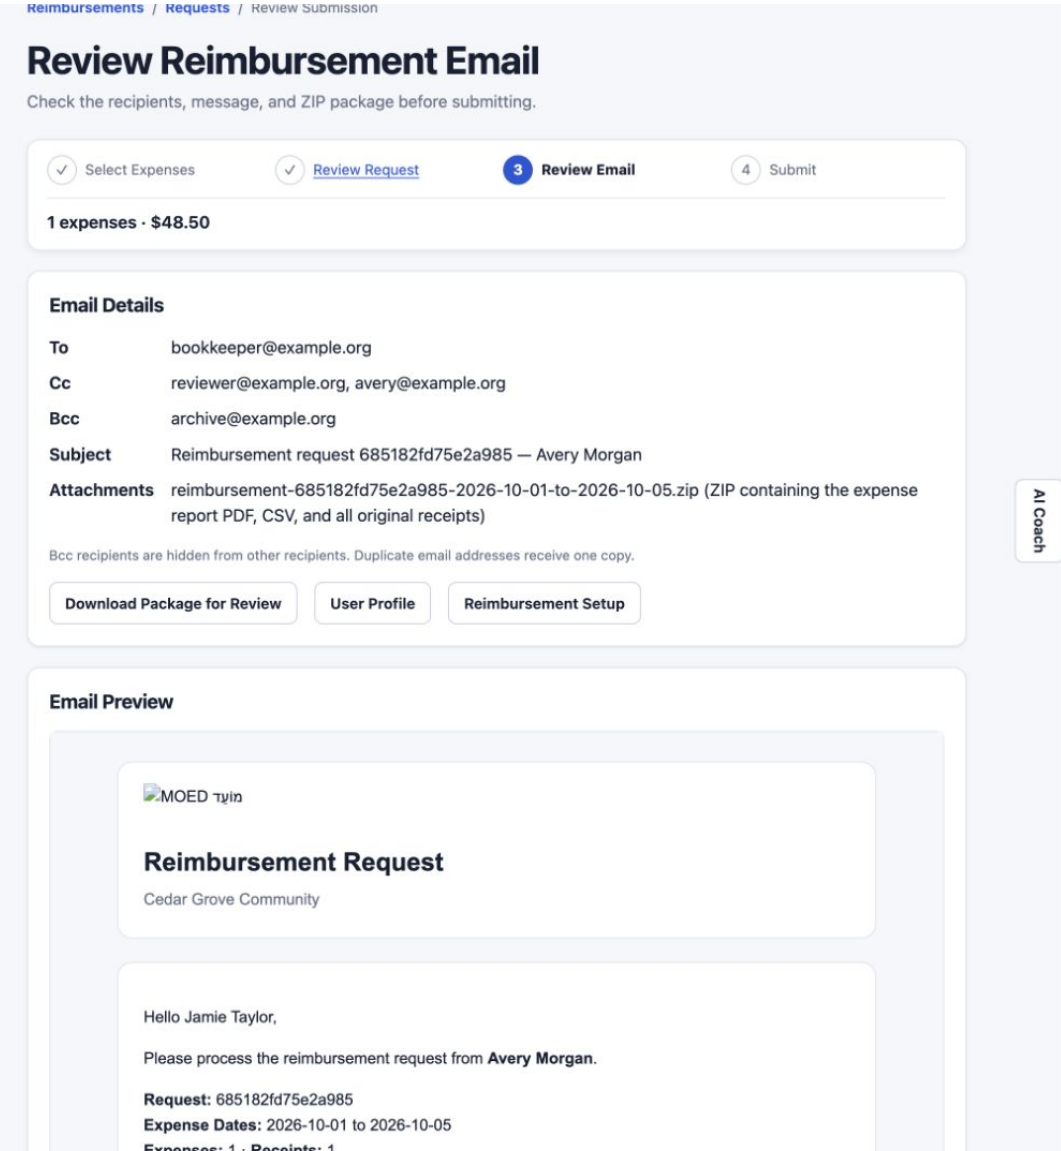


Figure 85. Review the email and ZIP attachment. Actual preview screen; fictional records.

**01** Check To, Cc, Bcc, and the readable Email Preview, including your saved note.

**02** Only one ZIP is attached; it contains the report PDF, expense CSV, and original receipts. Download it before submitting.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

## CHAPTER 10 / ILLUSTRATED WALKTHROUGH

## Check package contents and both email limits

1 expenses · \$48.50

Only the ZIP package is attached. It contains the expense report PDF, CSV, and all original receipts. The complete email must fit within 25 MB, including the message, headers, and email encoding; the ZIP is limited to 18 MB to leave room for encoding and message content. Download the package to review its contents before submitting.

### Email Attachment Size

0.6% of the 18 MB ZIP limit · 0.12 MB / 18 MB



0% 0.6% 100%

Total encoded email: 0.17 MB / 25 MB, including headers, message, and encoding.

Within both size limits.

### Package Contents

reimbursement-685182fd75e2a985-2026-10-01-to-2026-10-05.pdf  
 reimbursement-685182fd75e2a985-2026-10-01-to-2026-10-05.csv (one row per expense; receipt filenames are separated by semicolons)

▼ Example Print Shop · \$48.50

- receipts/expense-2-receipt-1-workshop-printing.pdfOriginal: workshop-printing.pdf · 7 KB · Unscanned

☐ I have reviewed the recipients, email, and package

Submitting queues the email for delivery and locks this request's expenses and receipts. Downloads alone do not submit the request.

Submit Reimbursement Request
Back to Draft

Figure 86. Check package contents and both email limits. Actual preview screen; fictional records.

- 01** The gauge shows usage of the 18 MB ZIP limit. The encoded email, including headers and message, must also fit within 25 MB.
- 02** Match the PDF, CSV, and original receipt filenames to the expense list. The request also limits original files to 15 MB and 100 receipts.

- 03** Check I Have Reviewed the Recipients, Email, and Package, then Submit Reimbursement Request. Wait for progress and check delivery afterward; Submitted does not mean paid.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Check Delivery and Record Corrections

Email Delivery

Submitted records remain locked regardless of email delivery. SMTP acceptance does not confirm receipt, reading, or payment. Recovery uses the exact original recipients, message, and package for up to 365 days.

| Recipient                   | Delivery Status | Attempts | Last Acceptance | Action |
|-----------------------------|-----------------|----------|-----------------|--------|
| To: bookkeeper@example.org  | Queued          | 0        | —               |        |
| Cc: reviewer@example.org    | Queued          | 0        | —               |        |
| Cc: archive@example.org     | Queued          | 0        | —               |        |
| Cc: alex.morgan@example.org | Queued          | 0        | —               |        |
| Bcc: finance@example.org    | Queued          | 0        | —               |        |

► Record a Correction

Figure 87. Check Delivery and Record Corrections. Actual preview screen; fictional records.

- 01

Open a submitted request and inspect Email Delivery for each recipient. Queued, failed, uncertain, or accepted delivery is separate from reimbursement payment.
- 02

For a known failure, use Retry Failed Delivery where offered. Before Send Another Copy, review prior delivery and check whether it already arrived; a duplicate may otherwise be sent.
- 03

Expand Record a Correction to record an issue, then coordinate with the bookkeeper. Corrections keep original records locked; Resolve Correction records the agreed outcome.
- Screenshot context:

The fictional request is queued in an isolated environment with no mail worker. No email was sent.
- Related chapters:

[Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Search and Manage the Chart of Accounts

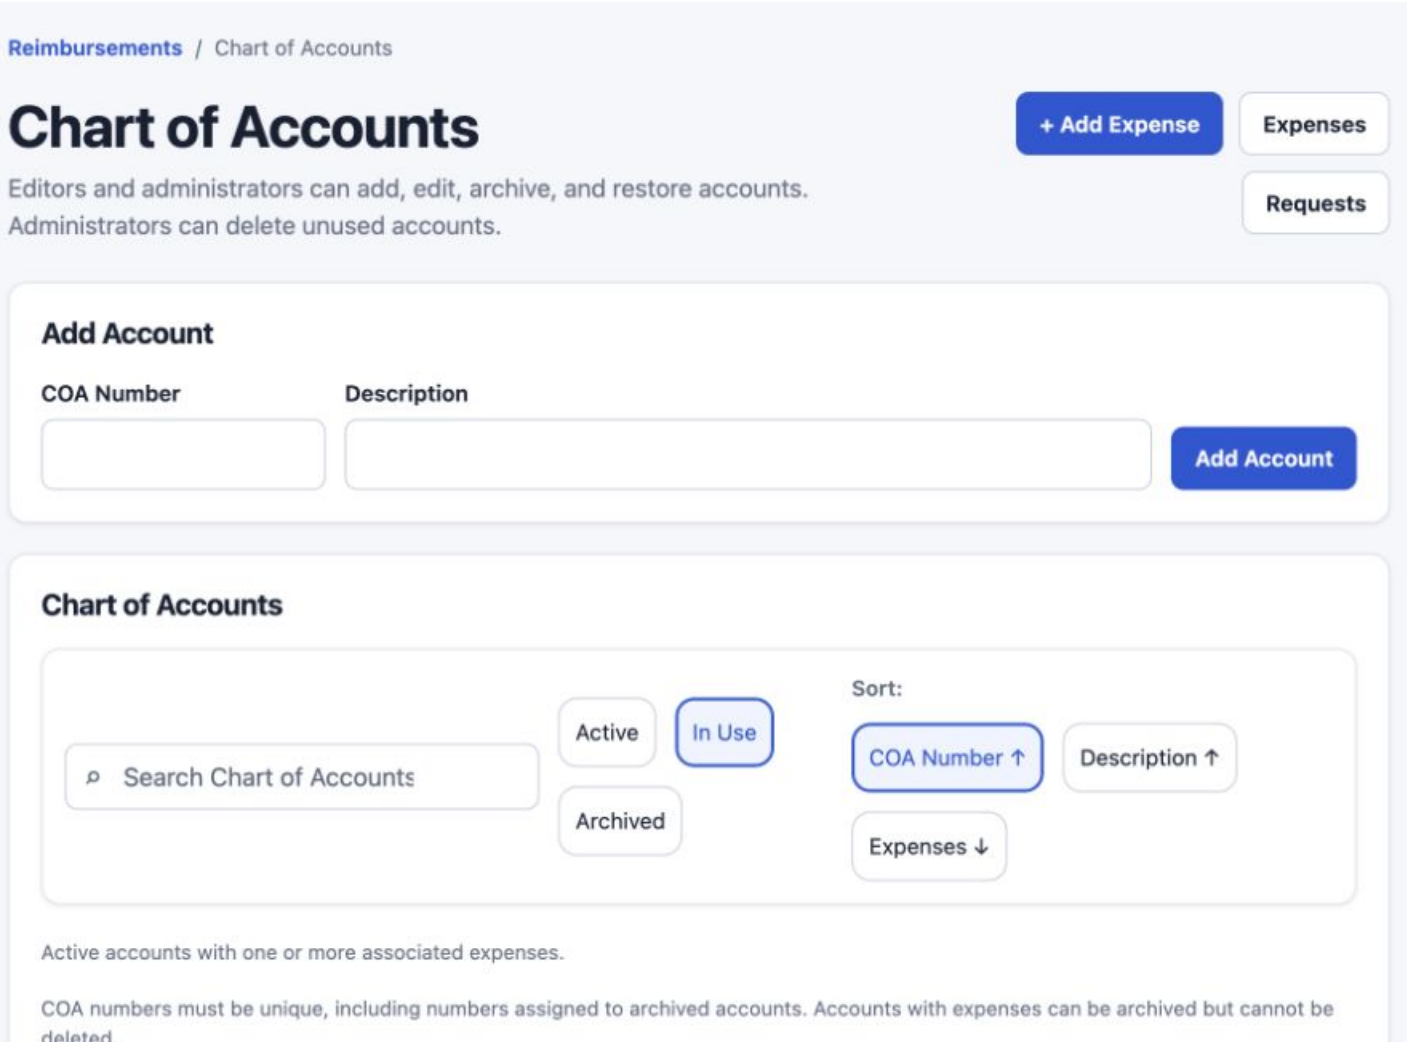


Figure 88. Search and Manage the Chart of Accounts. Actual preview screen; fictional records.

- 01** Use Add Account with a unique COA Number and Description. Archived accounts still reserve their numbers.

**02** Search the Chart of Accounts, then choose Active, In Use, or Archived. Sort COA Number, Description, or Expenses in either direction.
- 03** The table below offers Edit, Archive, and Restore as appropriate. Only administrators can delete unused accounts; accounts associated with expenses must be archived.

**Screenshot context:** Fictional documentation records. The screen continues below the illustrated area.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

Set Organization and Shared Recipients

# Reimbursement Setup

Set the organization and bookkeeper details shown in downloaded reimbursement reports.

Organization Name

Cedar Grove Community

Bookkeeper First Name

Jordan

Bookkeeper Last Name

Parker

Bookkeeper Email Address

bookkeeper@example.org

Bookkeeper Phone Number

+1

(312) 555-0120

Bcc Email Address

finance@example.org

Cc Email Address

archive@example.org

Saved details apply to drafts and future submissions. Submitted packages retain their original content. The Catalog address is used only as Bcc and is never printed in the report.

Save Reimbursement Setup

Figure 89. Set Organization and Shared Recipients. Actual preview screen; fictional records.

- 01

Administrators open Reimbursement Setup and enter Organization Name and the bookkeeper name, email, and phone.
- 02

Set Bcc Email Address for a hidden copy and Cc Email Address for a visible shared copy. Check the resulting recipients on each submission review.
- 03

Select Save Reimbursement Setup and complete administrator confirmation when requested. Changes affect drafts and future submissions, not saved original packages.
- Screenshot context:

Fictional documentation records. The screen continues below the illustrated area.
- Related chapters:

[Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

## CHAPTER 10 / ILLUSTRATED WALKTHROUGH

## Set Your Personal Reimbursement Reviewer

**Personal Details**

**First Name**  
Alex

**Last Name**  
Morgan

**Reimbursement Reviewer Email**  
reviewer@example.org

Receives a Cc copy when you submit a reimbursement request.

**Email Address**  
alex.morgan@example.org

Verified for password recovery.

Figure 90. Set Your Personal Reimbursement Reviewer. Actual preview screen; fictional records.

**01** Open My Profile from the sidebar and find Personal Details.

**02** Enter Reimbursement Reviewer Email. This address receives a Cc copy of requests you submit and is separate from your account email.

**03** Select Save Changes below the profile panels. Verify the actual recipients again before submitting a reimbursement.

**Screenshot context:** Personal Details crop from the current profile screen, with fictional example.org addresses.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

CHAPTER 10 / ILLUSTRATED WALKTHROUGH

PDF receipt pages within the report

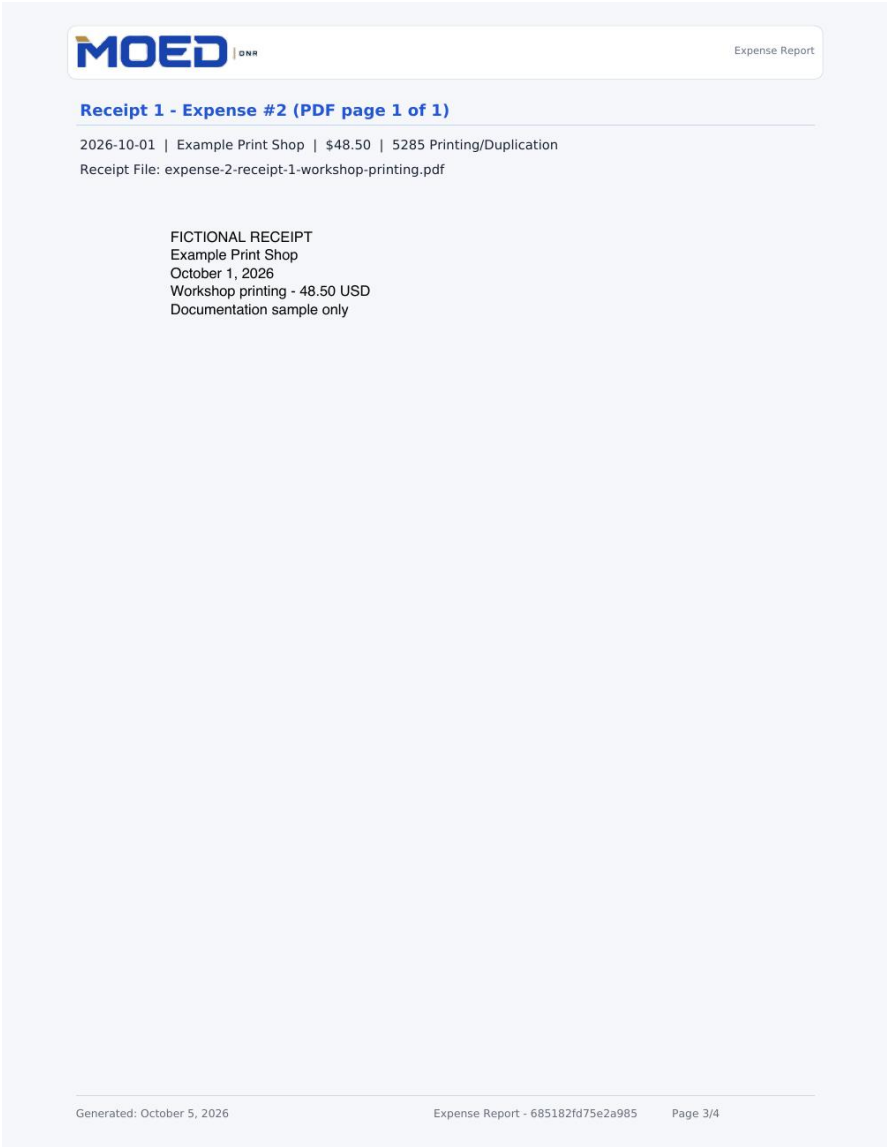


Figure 91. PDF receipt pages within the report. Actual preview screen; fictional records.

- 01** This page is rendered from the actual fictional request report. The receipt heading identifies its expense, amount, account, original filename, and PDF page.
- 02** Review embedded receipt pages alongside Expense Detail and Receipt Files. The original receipt and CSV remain inside the ZIP.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Administration \(p. 137\)](#)

## CHAPTER 11

# Profile and Security

Your profile makes ownership recognizable; the security controls protect your identity and provide safe recovery paths.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Map and calendar \(p. 95\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

## Profile and Notifications

Maintain your name, phone, optional profile picture, and notification schedule. Use the separate Change Recovery Email panel to verify a new address; the current recovery address remains active until verification succeeds. Successful verification signs out all sessions and pauses the daily digest. Resending verification preserves the profile draft and chosen photo; disabled digest schedules do not require a delivery time or day.

A verified email enables password recovery and a Dashboard-style Daily Digest of upcoming engagements, My Work, event readiness, and financial closeouts. Overdue and due-today tasks are highlighted, and editor/admin digests also include inbound mail awaiting review. The digest defaults to enabled on weekdays at 7:00 a.m.; disable it or choose a different time and set of days at any time.

To adjust Daily Digest delivery, open My Profile and find Notification Preferences. Dashboard and record links in the message remain available.

## Password Rules

To change your own password, open **Account Security** in the sidebar, then find **Change Password**. Enter **Current Password**, **New Password**, and **Confirm New Password**, then select **Change Password**. Use at least 12 characters and no more than 72 UTF-8 bytes. Other sessions are signed out. If prompted, sign in with two-factor authentication again. The **Change Recovery Email** form on My Profile changes the recovery address, not your password. A temporary password must be replaced before using other areas.

## Set Up Two-Factor Authentication

Two-factor authentication is required for Administrators, Editors, and Reviewers. Complete setup when prompted at sign-in, then save your recovery codes.

**01 Confirm your password.** If replacing an existing authenticator, also enter a current code.

**02 Add the account.** Scan the QR code in your authenticator app or enter the manual setup key.

**03 Verify enrollment.** Enter the six-digit code generated by the app.

**04 Save recovery codes.** Each code works once and the page will not show them again. Store them in an approved password manager or another secure location.

At sign-in, enter either the current six-digit authenticator code or one unused recovery code. Generating new recovery codes invalidates all old ones. Every account type must keep 2FA enabled. If your account does not have an authenticator yet, your next successful password login will open setup before you can access the application. New invitations and accounts whose 2FA was reset follow the same setup process. Existing password-only sessions must sign in again.

## Recover Access

- **Forgotten password:** choose "Forgot your password?" on sign-in and enter the verified email on the active account. The single-use link lets you set a new password and invalidates existing sessions.
- **Lost authenticator:** use one saved recovery code at the 2FA prompt, then replace the authenticator and generate a fresh set of codes.
- **No recovery factor:** contact an administrator. They can issue a temporary password or reset another user's 2FA after elevated confirmation; they cannot reveal an old password or recovery code.
- **New account:** open the invitation link within seven days, create a private password, and complete required authenticator enrollment.

## Choose a Reimbursement Reviewer

In **My Profile > Personal Details**, set **Reimbursement Reviewer Email** and save. The address receives a Cc copy of your reimbursement submission. It is separate from your verified account/recovery email, and entering it does not create a MOED login.

### Change the recovery email securely

Use the separate Change Recovery Email panel. Enter the new address, current password, and a fresh authenticator code when 2FA is enabled, then select **Verify New Email Address**.

The current address stays in use while the new address is pending. Follow the verification message sent to the new address to finish. Successful verification signs out all sessions

and pauses the daily digest. Sign in again and review notification preferences.

Cancel Pending Email Change abandons a pending request. Resend email verification requests a new message while preserving the profile draft and chosen photo. Editing the ordinary profile form does not directly replace the recovery destination.

CHAPTER 11 / ILLUSTRATED WALKTHROUGH

Manage your personal profile

# My Profile

Manage your personal details and profile picture.

## Profile Picture

Choose a new picture

Choose File

No file chosen

JPEG, PNG, or WebP. Maximum file size: 5 MB.

## Personal Details

First name

Last name

Avery

Morgan

Email address

avery.morgan@example.org

Verified for password recovery.

Phone number

+1

(555) 555-0123

**Username** avery.manual

**Role** Admin

Figure 92. Manage your personal profile. Actual preview screen; fictional records.

- 01

Open My Profile from your name at the bottom of the sidebar. Update your name, phone, or optional picture.
- 02

Use JPEG, PNG, or WebP for a photo, then review the crop before saving. The maximum upload is 5 MB.
- 03

The recovery email is displayed here. Use the separate Change Recovery Email form to verify a new address.
- 04

Scroll to Notifications to choose Daily Digest delivery time and days, then select Save Changes.

Related chapters: [Roles and access \(p. 11\)](#) / [Map and calendar \(p. 95\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 11 / ILLUSTRATED WALKTHROUGH

Choose Daily Digest time and days

Notifications

☒ Daily work digest

Email me on the selected days with a Dashboard-style snapshot of upcoming engagements, My Work, event readiness, and financial closeouts, plus inbound mail awaiting review. Overdue and due-today tasks are highlighted

Delivery time

07:00

Uses America/Chicago time.

Delivery days

Weekdays

Weekends

Every day

M

T

W

Th

F

Sa

Su

Delivery begins at the selected time. The mail worker may send a few minutes later.

Cancel

Save Changes

Figure 93. Choose Daily Digest time and days. Actual preview screen; fictional records.

- 01

Open My Profile and scroll to Notifications. Enable Daily work digest to receive the Dashboard summary by email.
- 02

Choose Delivery time in the displayed business timezone and select the days. Weekdays, Weekends, and Every day provide shortcuts.
- 03

Select Save Changes. Delivery starts at the selected time; the mail worker may send a few minutes later.
- 04

To change delivery settings later, return to My Profile. The email footer contains plain text; Dashboard and record links remain available in the message.
- Related chapters:

[Roles and access \(p. 11\)](#)

[Map and calendar \(p. 95\)](#)

[Administration \(p. 137\)](#)

[Reimbursements \(p. 104\)](#)

CHAPTER 11 / ILLUSTRATED WALKTHROUGH

Manage account security

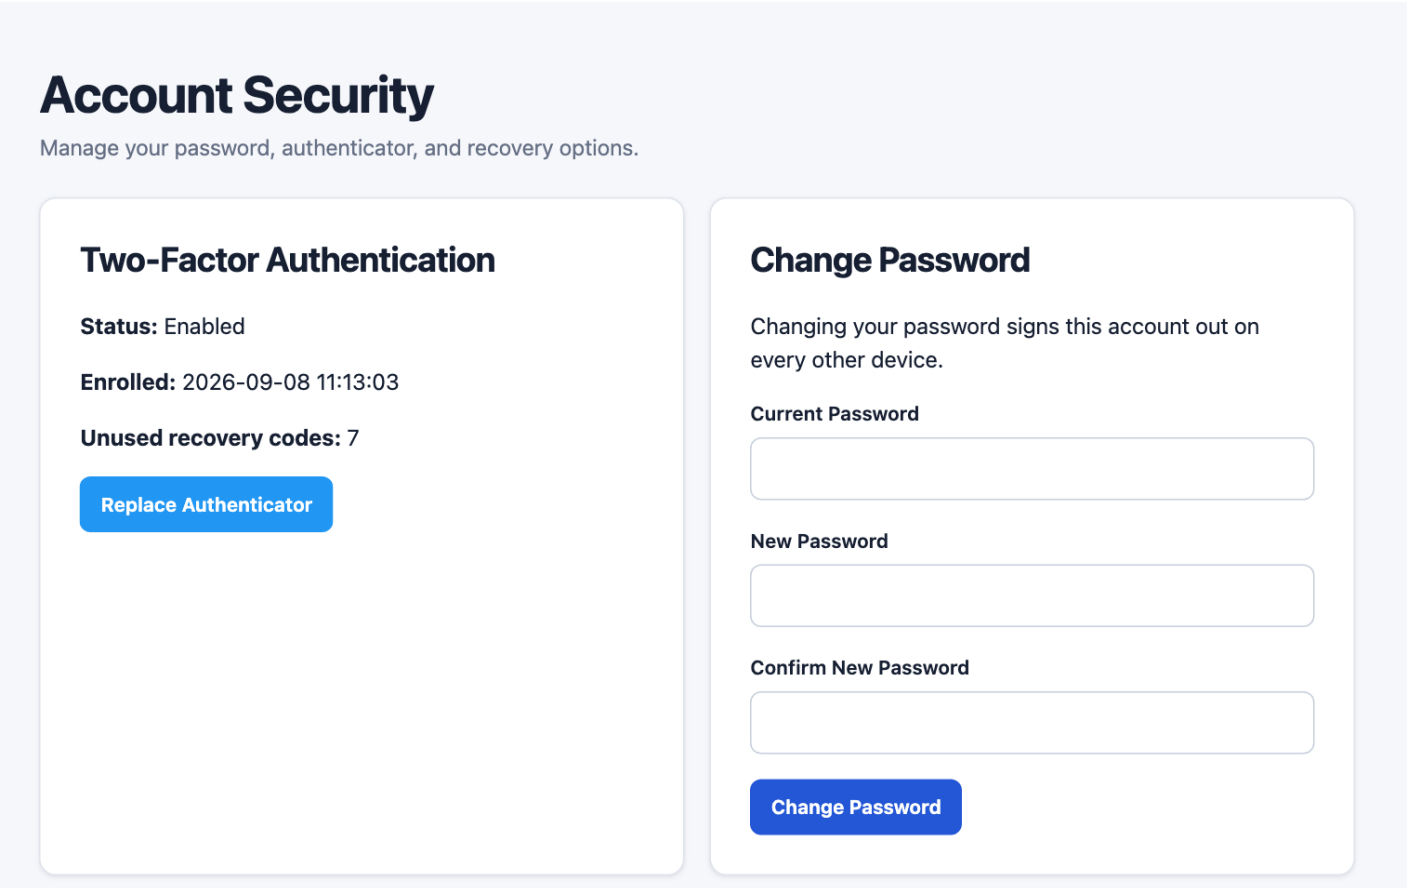


Figure 94. Manage account security. Actual preview screen; fictional records.

- 01 Every account type must use 2FA. Accounts without it enroll at their next successful password login. Replace the authenticator from Account Security when needed.

02 Change your password with the current password and required factor.
- 03 Generate fresh recovery codes when needed; save them securely because each works once.

04 Administrator resets and password changes can invalidate other sessions.

Related chapters: [Roles and access \(p. 11\)](#) / [Map and calendar \(p. 95\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 11 / ILLUSTRATED WALKTHROUGH

Start authenticator replacement

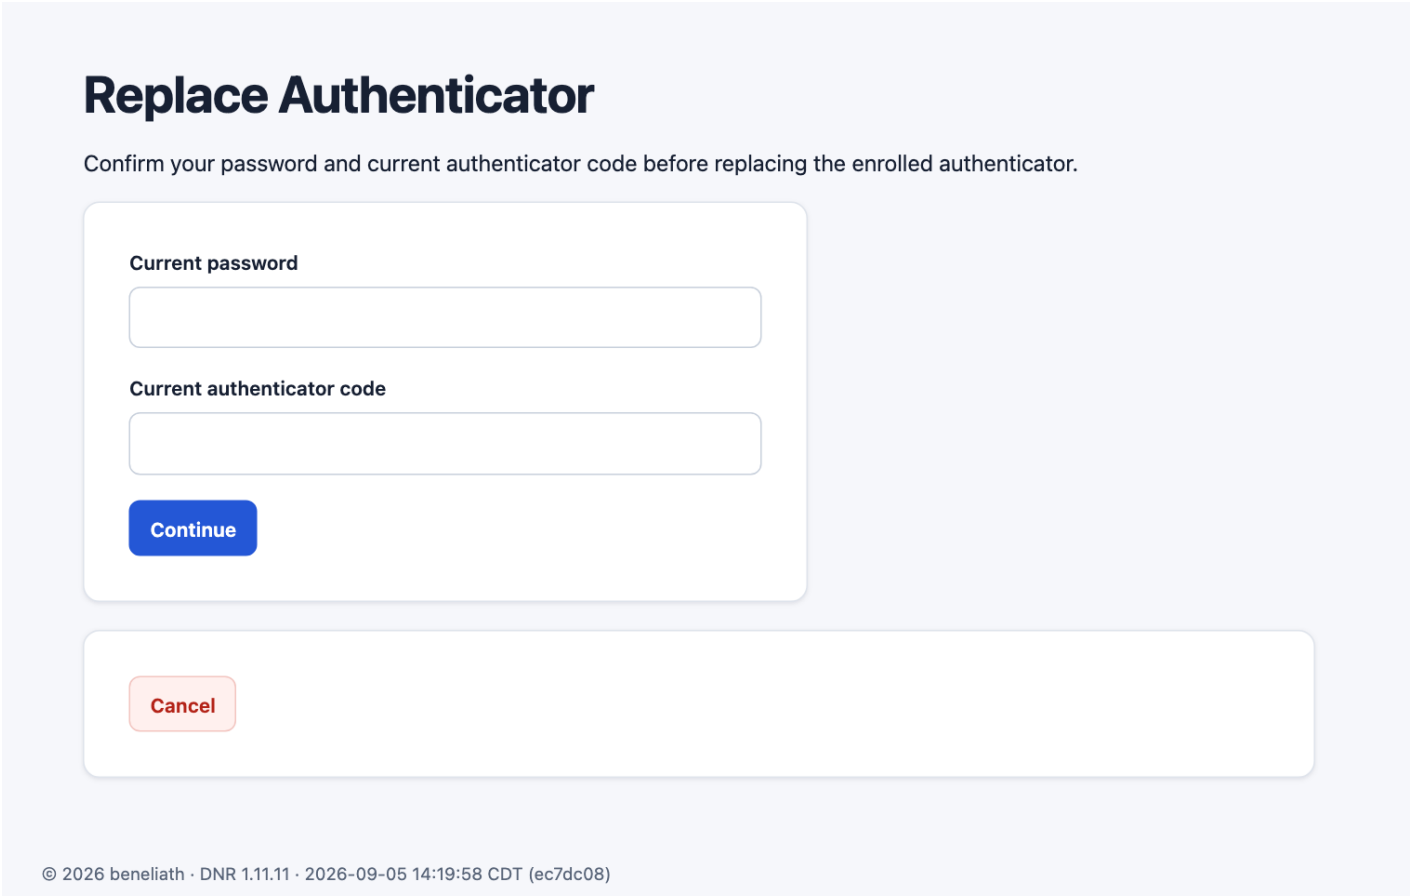


Figure 95. Start authenticator replacement. Actual preview screen; fictional records.

- 01 Confirm your password and, when replacing an enrolled factor, your current authentication code.
- 02 Scan the enrollment QR code in an authenticator or enter its setup key.

- 03 Enter the generated six-digit code to verify enrollment, then store the recovery codes.

**Screenshot context:** Only the initial confirmation screen is illustrated. Enrollment secrets and recovery codes are intentionally absent.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Map and calendar \(p. 95\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 11 / ILLUSTRATED WALKTHROUGH

Verify a new recovery email

### Change Recovery Email

Your current address stays in use until the new address is verified. Verification signs out all existing sessions and pauses the daily digest.

New email address

Current password

Fresh authenticator code

Verify New Email Address

Figure 96. Verify a new recovery email. Actual preview screen; fictional records.

- 01** In Change Recovery Email, enter the new address, then the current password and a fresh authenticator code when required.

**02** Select Verify New Email Address, then follow the verification message at the new address.

**03** Your old address stays active until verification. The change signs out all sessions and pauses the digest.

**04** Cancel a pending change or resend verification from My Profile if needed.

**Screenshot context:** The retained illustration shows the earlier field arrangement. The current form places the new address on its own row, with the password and authenticator code below it.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Map and calendar \(p. 95\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 11 / ILLUSTRATED WALKTHROUGH

## Sign in to MOED

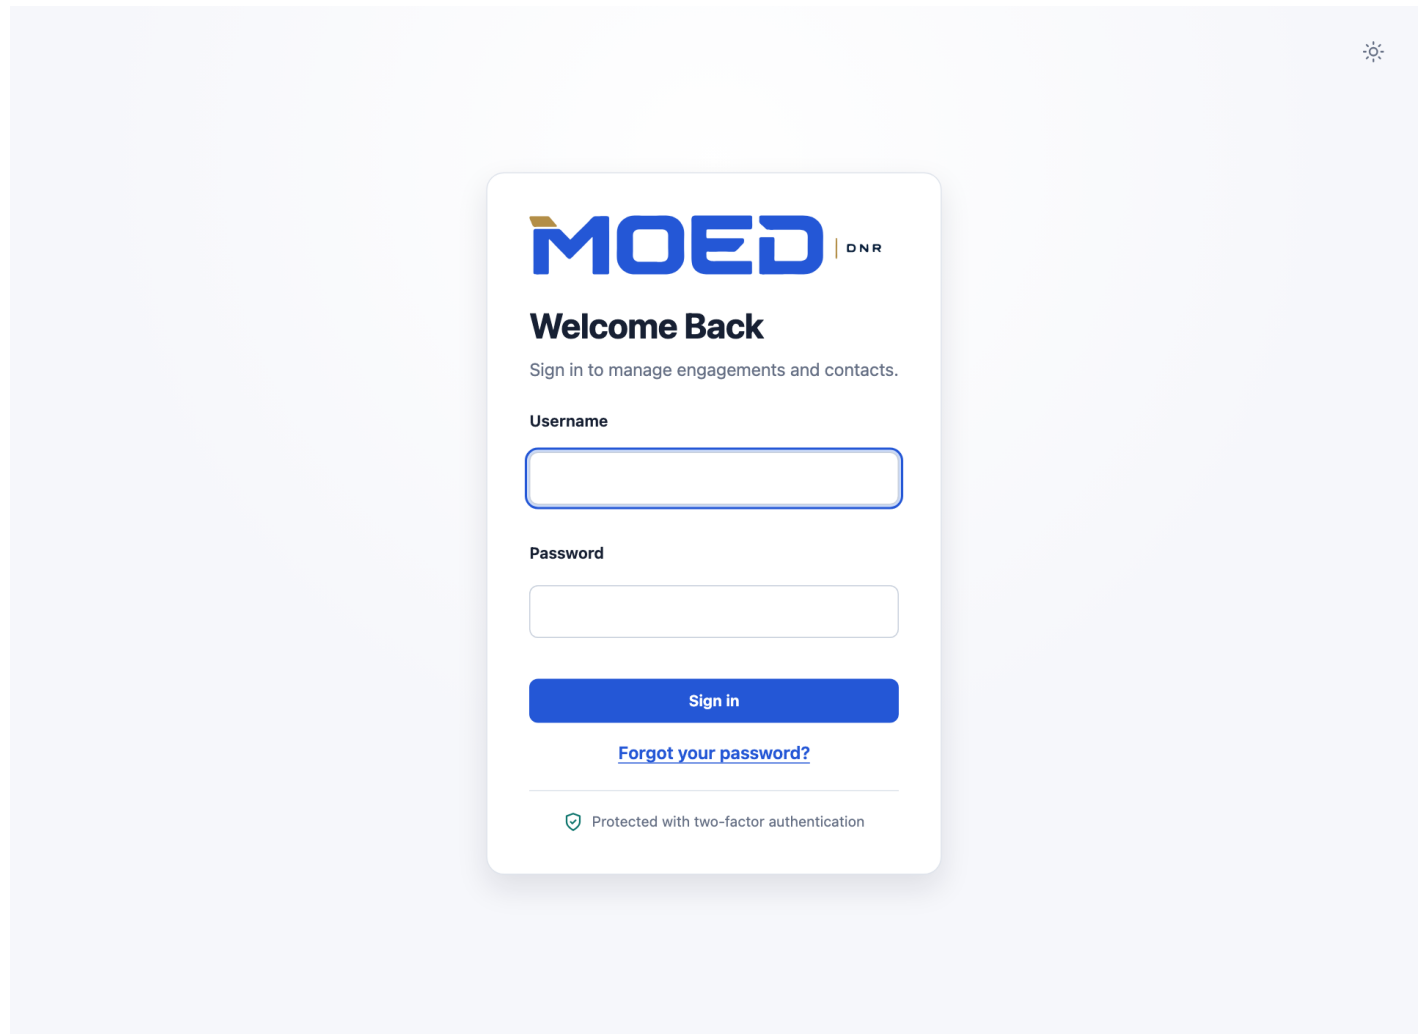


Figure 97. Sign in to MOED. Actual preview screen; fictional records.

- 01** Enter the username and your private password.
- 02** Complete the required authenticator or recovery-code challenge. If your account is not enrolled yet, complete authenticator setup before accessing the application.

- 03** If prompted to change a temporary password or enroll an authenticator, complete that step before continuing.

- 04** Use the account menu to sign out when finished.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Map and calendar \(p. 95\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 11 / ILLUSTRATED WALKTHROUGH

# Request password recovery

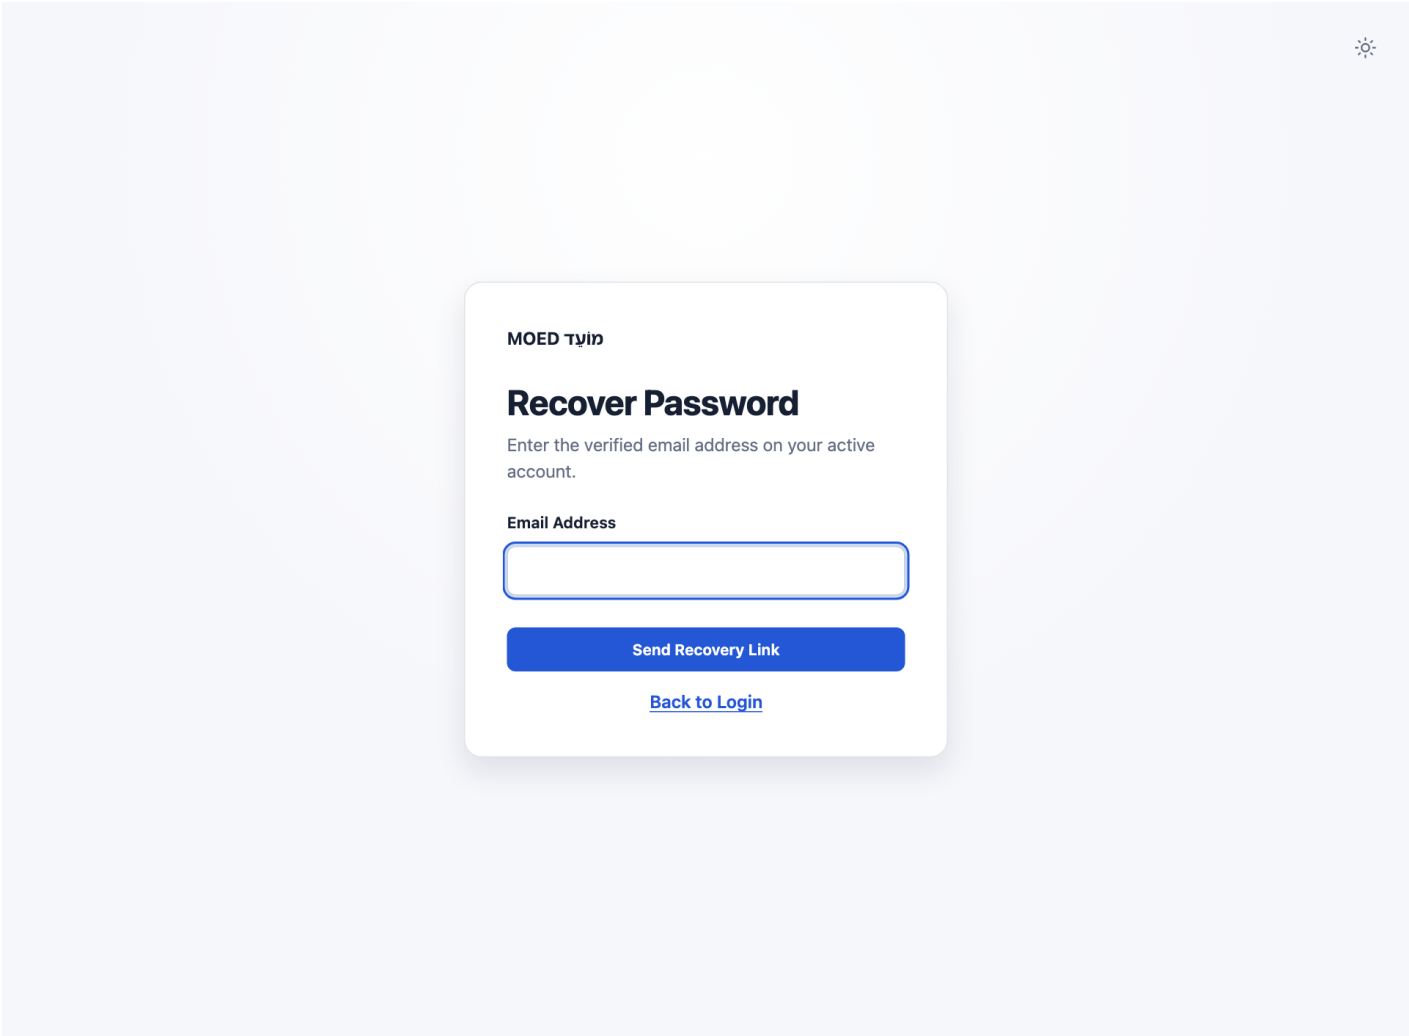


Figure 98. Request password recovery. Actual preview screen; fictional records.

- 01** Choose Forgot your password? on sign-in.

**02** Enter the verified email address on the active account and request a reset link.
- 03** Follow the single-use link to choose a new password. Existing sessions are invalidated.

**04** If no verified email or recovery factor is available, contact an administrator.

Related chapters: [Roles and access \(p. 11\)](#) / [Map and calendar \(p. 95\)](#) / [Administration \(p. 137\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 12

# Mattermost

The MOED plugin brings daily summaries, engagement context, follow-up actions, and carefully reviewed engagement email into Mattermost while MOED remains the system of record.

Related chapters: [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

## Link Your Account First

Open Mattermost in MOED and generate a one-time code. The code is shown once, expires after 10 minutes, and becomes invalid after use. In Mattermost, run `/moed connect CODE`. Command responses are private to you. Never paste the code into an ordinary channel message.

## Commands

| Command                              | What It Does                                                                                                                                | Who Can Use It                                                                   |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <code>/moed help</code>              | Shows the command reference and account-linking reminder.                                                                                   | Everyone                                                                         |
| <code>/moed status</code>            | Checks the plugin connection and reports which MOED account is linked.                                                                      | Everyone                                                                         |
| <code>/moed connect CODE</code>      | Consumes a one-time code from the MOED Mattermost page and links your identities.                                                           | Everyone                                                                         |
| <code>/moed today</code>             | Shows a private dashboard with Overdue, Due today, Next 7 days, and Waiting counts, active assigned tasks, and a link back to MOED.         | Linked users                                                                     |
| <code>/moed tasks</code>             | Shows the same task dashboard with up to 15 active tasks assigned to you. Editors and administrators also receive permitted action buttons. | Linked users                                                                     |
| <code>/moed event search TEXT</code> | Searches active and historical non-archived engagements by event or organization name.                                                      | Linked users                                                                     |
| <code>/moed event show ID</code>     | Shows a private engagement card with dates, status, location, work counts, and an email routing marker you can copy.                        | Linked users                                                                     |
| <code>/moed link-event ID</code>     | Binds the current channel to an engagement, adds its routing marker to the channel name, and posts its card.                                | Editors and administrators with native channel-management and posting permission |
| <code>/moed unlink-event</code>      | Removes the channel's engagement binding and its channel-name marker.                                                                       | Editors and administrators with native channel-management and posting permission |

## Engagement Cards

Run `/moed event show ID` for a private engagement card. Linking a channel posts the same useful engagement context for the channel. Both cards show the email routing marker with a **Copy** control so it can be kept in a related email subject or message. Use **Open in MOED** for the complete record.

## Task Buttons

Editors and administrators can assign an unowned task to themselves, start it, complete it, or reopen it. Each button checks the task version before changing MOED; if someone already changed the task, refresh with `/moed tasks`. Waiting details, reassignment to someone else, editing, cancellation, and deletion remain in MOED.

## Recognize the Engagement Linked to a Channel

On desktop and mobile, a linked channel's sidebar label begins with a compact marker such as `[MOED#17]`, leaving more room for the channel title. The full signed routing marker remains available in engagement cards and email tools wherever it is needed for routing. The colored chain control provides the same link signal; select it, or choose **MOED engagement** from the channel menu, to see the engagement, open it in MOED, copy its routing marker, or begin an email. Unlinking removes the marker from the channel name.

## Send Engagement Email from Mattermost

- 01 Start from the right engagement.** In a linked channel, select the MOED chain icon and choose **Send MOED email**. To include a particular conversation, open that post's **Message actions** and choose **Send via MOED email**.
- 02 Choose a starting point.** Select an active template from the shared Email Templates library, or Custom message, then choose from the contacts already assigned to the engagement. To include an assigned speaker, use the engagement email composer in MOED. Each unique address receives a separate message.
- 03 Decide what to include.** Edit the subject and message. You may append the share-safe event brief and, when you started from a post, the selected post or a short thread excerpt.
- 04 Review before sending.** Check the recipients, routing marker, subject, message, and any added context on the review screen. Nothing is sent until you choose **Send and add to Chron**.
- 05 Confirm the result.** The form shows whether each delivery is pending, sent, or failed and links to the full delivery record in MOED. The message is also recorded in the Engagement, Organization, and selected Contact Chron logs.
- 06 Watch for replies.** When a marked reply is routed back to the engagement, the MOED bot privately notifies the Mattermost user who most recently emailed that person about the engagement. Open the notification to continue in the engagement Chron.

## Turn a Mattermost Post into MOED Work

- 01 Link the channel.** An editor or administrator runs `/moed link-event ID`. The link establishes which engagement receives work from that channel.
- 02 Open Message actions.** Hover over a channel post and choose **Message actions** using the grid/apps icon - not the three-dot menu. Then choose **Add MOED task**, **Add to MOED Chron**, or **Send via MOED email**.
- 03 Review before saving or sending.** Confirm the task, Chron entry, or email details in the form. Nothing changes in MOED and no email is sent until you submit the final review.
- 04 Continue in MOED.** The resulting task, Chron entry, or email delivery record appears on the linked engagement, with the selected Mattermost context when you chose to include it.

## Create Follow-Up Work

**Add MOED task** creates follow-up work on the engagement linked to the channel. MOED suggests a title and notes from the post. Review them, choose a due date and priority if needed, then save. The task appears with the engagement's other work in MOED.

## Preserve Context as History

**Add to MOED Chron** adds the post to the linked engagement's history. Review or edit the suggested entry, then choose **Save to Chron**. Use this for decisions, outcomes, commitments, and useful conversation context that should remain with the engagement.

## Continue the Conversation

**Send via MOED email** creates a reviewed message to assigned engagement contacts. You can include the selected post or a short thread excerpt, and MOED keeps the routing marker, delivery result, and Chron history together.

## Read the Receipt Reactions

- **Chron Chron receipt:** the MOED bot adds the `:memo:` reaction after **Add to MOED Chron** successfully writes the selected post to the linked engagement.
- **Email Email receipt:** the MOED bot adds the `:email:` reaction when a MOED email includes the selected post or thread and at least one recipient delivery succeeds.

- **Both may appear:** the reactions are independent, so one post can show both. They are visual receipts rather than counters; MOED remains the authoritative record.
- **New actions only:** reactions appear for Chron saves and email deliveries completed after this feature is deployed. Earlier Chron entries and emails are not marked retroactively.

## Before You Save

Task, Chron, and email actions all show what will be saved or sent. They are available in channels linked to a MOED engagement when your account has permission. Opening, reviewing, or canceling a form changes nothing.

## Permissions, Privacy, and Unlinking

- **MOED decides access:** linking does not grant a new role. Reviewers stay read only; editors and administrators receive only the task actions their MOED role permits.
- **Private by default:** personal summaries, searches, email forms, delivery results, reply alerts, errors, and action confirmations are visible only to the requesting user. [link-event](#) deliberately posts a channel-visible engagement card, including its routing marker and Copy control.
- **MOED is authoritative:** task, Chron, and email actions use MOED's permissions, delivery service, and records. The plugin does not connect to the MOED database or keep a second copy of engagement email.
- **Post actions are scoped:** the plugin verifies that you can read the selected post and obtains the engagement from the channel's link. MOED permits task, Chron, and email actions only for linked editors and administrators.
- **Remove access:** open [Mattermost](#) in MOED and choose **Unlink**. The Mattermost account immediately loses command access until it is linked again.

## CHAPTER 12 / ILLUSTRATED WALKTHROUGH

## Connect MOED and Mattermost

## Mattermost

Link your Mattermost identity to use MOED summaries, engagement cards, and follow-up actions in chat.

### Integration Not Configured

An administrator must install the Mattermost plugin and configure the matching MOED service secret before accounts can be linked.

### Linked Mattermost Accounts

No Mattermost account is linked.

### Available Commands

`/moed today` shows your daily summary; `/moed tasks` shows assigned work; and `/moed event search TEXT` or `/moed event show ID` finds safe engagement details.

Editors and administrators can bind a channel with `/moed link-event ID`, remove that binding with `/moed unlink-event`, and use task action buttons. Reviewers keep read-only access.

[Read the Mattermost User Guide](#)

Figure 99. Connect MOED and Mattermost. Actual preview screen; fictional records.

**01** When configured, generate a one-time linking code here and run `/moed connect CODE` in Mattermost.

**02** Use `/moed today`, `/moed tasks`, and event search/show for private context.

**03** Editors and administrators may link channels and review task, Chron, and email actions.

**04** Unlink an account here to revoke its Mattermost command access.

**Screenshot context:** The disposable preview is not connected to Mattermost. The chapter explains the configured plugin workflow; this screen shows its setup prerequisite.

**Related chapters:** [Engagements \(p. 26\)](#) / [Work queue \(p. 76\)](#) / [Chron and email \(p. 88\)](#)

## CHAPTER 13

# Administration

Administrator tools control identity, accountability, continuity, and deployment health. Use them deliberately and keep a second administrator available.

Related chapters: [Roles and access](#) (p. 11) / [Profile and security](#) (p. 123) / [Troubleshooting](#) (p. 156) / [Reimbursements](#) (p. 104)

## Review AI Coach Requests

Administrators can open **ai coach Requests** under Administration in the sidebar when the coach is enabled. The log shows each question and originating page, the requesting user and role, the date and time, the result and response duration, and the administrator's assessment. **Completed** describes processing, not a guarantee that the answer was correct.

**01 Find a request.** Use **Search questions or corrections** and the **Assessment** filter, then select **Filter**. Open the linked question to inspect its original answer, manual sources, user feedback, and page or walkthrough context.

**02 Record the assessment.** Under **Review and correction**, choose an Assessment, describe what worked or needs improvement, and add **Correct step-by-step guidance** if you have verified it. Start from the user's page, name the next visible control, and explain how to confirm success. Select **Save review**.

**03 Choose the follow-up.** The original response is preserved. The administrator assessment is separate from the user's helpful or needs work rating. Saving review notes alone does not replace future answers. Use **Create improvement case** for guidance that should be checked and reused, or **Guidance improvements** to inspect the wider review queue.

## Turn Coach Feedback into Verified Improvements

On **ai coach Improvements**, the **Feedback review queue** collects ratings, missing-control reports, failed answers, and responses taking more than 15 seconds. Related requests are grouped for investigation; a group does not imply that every question needs the same answer. **Recent development reviews** records completed investigations as Fixed, Verified, or Deferred with a summary and date.

**01 Create a case from evidence.** Open a request and select **Create improvement case**, or select **New improvement** on the improvements page. Remove names and private record details from the Question. Select the category, user role, page, guided step, and expected workflow that apply.

**02 Verify the correct guidance.** Follow the real application controls and check the Comprehensive Manual. Enter **Verified expected guidance**. Use **Find current Comprehensive Manual topic IDs** to locate source topics. Add required or forbidden words or phrases where they will help detect a recurring error.

**03 Save a draft or approve.** Keep the Status as Draft while investigating. To approve, choose Approved and confirm both that you checked the current application and manual and that the case contains no private information. Select **Save improvement**. Approved guidance can be reused for a matching question in the same role, page, and guided-step context.

**04 Recheck after changes.** When the application guidance changes, an approved case can show **Needs revalidation**. Recheck and approve it before its answer can be reused. **Export approved test cases** downloads reviewed cases for development regression checks; redact private details before approval and export.

The improvement process is to investigate a real request, verify the intended workflow, correct the manual or application guidance, and test the result. Development reviews are performed by the maintainer or a separately configured review automation. The queue itself does not run a development agent, publish changes, or retrain the language model.

## Delete an AI Coach Request

Administrators can select **Delete** beside an entry in ai coach Requests, or **Delete request** on its detail page. Review the identified request, then select **Delete request** to confirm or **Cancel** to keep it.

Deletion permanently removes that question, its answer, feedback, review notes, and corrections. Linked improvement cases are kept. If the request is still being answered or has changed since confirmation, reload it before trying again. Deleting an entry does not clear the whole log, end an open conversation, or train the model.

## Clear the AI Coach Request Log

On the request list, select the red **Clear request log** button and review the number of entries in the confirmation. The final **Delete entries** button includes that count; select it to confirm or **Cancel** to keep the log.

This permanently removes the requests included in the confirmation and their answers, review notes, and corrections for **all users**, regardless of the current search or assessment filter. Requests still being answered and newly submitted requests are kept. Improvement cases and development-review records are preserved. Clearing the log does not clear anyone's open conversation or change the model; new requests continue to be recorded.

## Unlock Sensitive Actions

On Users, or when a sensitive action directs you to confirmation, enter your administrator password plus a fresh authenticator or recovery code. Select **Unlock Sensitive Actions** to return to the requested page. Locked user controls appear after confirmation succeeds.

The **Administrator actions unlocked** banner shows the remaining time beside **Automatically locks in**. Unlock starts with five minutes in the current signed-in session; select **Add 5 Minutes** in the banner while it is unlocked to extend the deadline. The countdown updates to the new deadline; another administrator or browser session does not inherit it. Moving between pages preserves the current deadline. At expiry the banner disappears and the server requires a new unlock for sensitive actions. Deactivating or deleting users preserves the current deadline without restarting the countdown.

Select **Admin Unlock** under **Administration** to unlock before choosing a sensitive action and return to your current page. Select **Lock Admin Actions** in the center of the orange banner to end the unlock immediately while staying signed in. Protected delete and sensitive-action confirmations check your current session first. If it is locked, complete **Confirm Administrator Access**, then select the action again to review its confirmation.

## Users

Invite a username, verified-on-acceptance email, and Reviewer, Editor, or Admin role. Review account status, profile, email verification, 2FA, password-change requirement, and activity timestamps.

Each user card shows the **Daily Digest** delivery days and whether delivery is off or paused. Use **Edit** after unlocking administrator actions to review its time, time zone, and days;

users can also adjust their own Notification Preferences in My Profile.

Elevated actions can resend invitations, edit profile details, username, role, and daily work digest settings, set a temporary password, reset another user's 2FA, deactivate/activate, or delete an invited or inactive account. Deactivation revokes sessions and calendar links and unassigns tasks; activation does not restore those links or assignments.

## Audit Log

Inspect login, security, and database-change activity with actor, affected record, IP address, and local time. Filter by category, text, date range, and exact IP. Entries are newest first and append-only during normal use; individual records cannot be edited or deleted.

In the Retention panel, administrators choose how many days to keep and preview the exact local cutoff and affected count. Pruning requires freshly confirmed administrator access, the literal **PRUNE** phrase, and a final themed in-app confirmation. The completed operation is recorded in the log.

## Encrypted Backup

The encrypted backup includes application records and uploaded files, including PDF Speaker Notes, PPT Slidedecks, and profile, contact, and speaker photos. The backup page shows current files, retained replacements, and storage health. Ask your administrator to resolve any storage warning before relying on a new backup.

Confirm the administrator password and a fresh factor, then choose and confirm a unique backup password of at least 16 characters. MOED downloads the encrypted snapshot as a **.dnrbackup** file.

While the export runs, the page shows **Creating Encrypted Backup** and asks you to keep it open. A success message identifies the file, updates **Last backup created**, and confirms that the download started. Check your browser's Downloads to verify the file finished saving. If confirmation is delayed, check Downloads before retrying with a fresh authenticator or recovery code.

Keep the file, its password, and the separate DNR 2FA encryption key securely backed up. None can be recovered from the others. Ask the deployment operator to restore records and uploaded files together; restoration is handled outside the web application.

## Operations

The internal operations view summarizes task backlog, geocoding retries, inbound mail review/failures, recent authentication failures, migration readiness, and the last encrypted backup. Use it to identify operational work that needs attention before it becomes a user-facing problem.

**Mail Ingestion** shows the latest mailbox check and import separately, plus failures and historical messages awaiting review. Ask the deployment operator to resolve a failing scan or review historical mail; use Inbox for messages already imported that need routing.

## Edit a User's Profile

User cards group editing and security actions separately from account access and deletion. Amber **Deactivate** suspends access; red **Delete user** permanently removes an inactive or invited account. Active accounts and your own account remain protected from deletion.

**01 Unlock and choose the account.** Open Users, unlock sensitive actions, and select the account's Edit control.

**02 Review identity and contact details.** Edit the first name, last name, country-aware phone number, username, and role. Upload, replace, or remove the profile picture; JPEG, PNG, and WebP files up to 5 MB are supported.

**03 Review the daily digest.** Adjust notification preferences and save. A paused digest remains paused when you only change profile details. Recovery-email changes still use the account holder's separate verification flow.

The updated name and portrait appear wherever that account is shown. Profile edits retain the user's authentication and recovery protections and are recorded in the audit history.

## Compare Remote Network Performance

Administrators open **Network** in the sidebar to view **Remote Network Performance**. It compares measured page loads from signed-in public IPv4 and IPv6 clients. Choose a data window from 1 to 7 days, then select **Apply**. Select **Refresh** for current results; the page also refreshes every 30 seconds.

- **IPv4 and IPv6 cards:** review the median page-load time, sample count, 75th percentile, median TTFB (time to first byte), and most-seen Cloudflare edge when available. Lower durations mean faster observed loads.
- **Contact images:** compare the median duration of the slowest contact image on pages that loaded at least one

contact photo. The accompanying count is the number of those pages.

- **Slowest Observed Pages:** compare each page's IPv4 and IPv6 75th-percentile load times and sample counts. On narrow screens, each page becomes a labeled card.
- **Assessment:** the banner highlights a material gap between the two families. Compare sample counts and page mix as well as timing; the samples come from ordinary traffic on different devices and connections.

Local and private-address sessions are excluded. An empty card means no sample from that public address family has arrived; it does not establish whether the connection is healthy or broken. The server determines the family from the trusted client connection. Measurements store page names and timings without client IP addresses or user identities. Samples older than 30 days expire automatically; the dashboard shows the newest 24 hours.

## Reset Network Traffic Statistics

**01 Choose Reset Statistics.** Select the rose button beside Refresh on Remote Network Performance. If access is locked, confirm your administrator password and a fresh authenticator or recovery code, then return to Network.

**02 Check the countdown and scope.** The shared unlock banner shows the remaining time; use Add 5 Minutes before it expires if you need more time. Select Reset Statistics again to review the confirmation. It clears all recorded IPv4 and IPv6 samples, including page and image timings outside the 24-hour dashboard window.

**03 Confirm or cancel.** Select Reset Statistics in the dialog to clear the measurements, or Cancel to keep them. The reset is permanent and recorded in the audit log. QR and presentation-link statistics are preserved.

**04 Watch new traffic arrive.** A success message appears and the dashboard loads current results. New public page loads begin accumulating immediately, so a fresh sample may already appear. If the unlock expired, authenticate again before resetting.

## Permanent Means Permanent

Deleting an organization preserves contacts who have another organization affiliation, and removes its remaining contacts and engagements together with their Chron, tasks, presentations, contact assignments, and financial reports. Deleting an engagement removes the same event-specific data. Deleting a contact removes that contact's Chron, tasks, and event role assignments. Active users must be deactivated before deletion; pending invitations can be deleted directly. Use archive for ordinary record retirement.

Administrators can use individual Delete actions or select multiple items on the Organizations, Contacts, Speakers, Engagements, Tasks, and Users lists. Select all applies only to the current page. Review the selected names and related data, complete admin unlock when needed, and confirm the "Are you sure?" dialog. For inactive or invited users, type DELETE USER for an individual account or DELETE USERS for a batch.

## Review Document and Recovery Health

Network diagnostics includes **Remote Document Responses** for PDF and PowerPoint activity as well as page/image measurements. Read the response and timing labels before comparing servers. Operations shows deployment and ingestion status; failures require diagnosis, not repeated submission of financial records. Browser backups include uploaded files and report capacity issues. Follow the displayed recovery instructions if the browser cannot hold the backup.

### User lifecycle effects

Deactivating a user revokes their sessions and private calendar links and leaves their assigned work unassigned. Reactivating them does not recreate subscriptions or restore task ownership; review both explicitly.

An administrator can issue a temporary password or reset another user's authenticator after fresh confirmation. The old password, authenticator secret, and recovery codes cannot be displayed.

Active accounts must be deactivated before deletion. Pending invitations may be deleted directly. Account removal is distinct from archiving operational records.

## Deployment notices and recovery boundaries

When a deployment is announced, finish or preserve your current work and follow the on-screen preparation/countdown message. Wait for service to return before retrying a save.

The PDF documents browser operations. Deployment, secret management, database restoration, migration repair, and infrastructure configuration belong to the deployment operator. Use the Exact database restore runbook in README.md and docs/release-workflow.md for those procedures.

The internal operations/readiness views help diagnose service state. They are not a substitute for a verified recovery backup or a successful restore check.

### Understand mailbox health

Mail Ingestion separates the most recent mailbox check from the most recent new import. A current check with no new import can simply mean that no new mail arrived.

A failed or overdue check, historical review backlog, or quarantined message needs operator attention. These are separate from messages already in Inbox waiting for a user to select the correct Chron logs.

### Reset and retire an account

Unlock sensitive actions on Users before selecting a reset or lifecycle control. Reset User Password asks for a new temporary password and confirmation. The user must replace it at sign-in.

Reset 2FA uses the explicit RESET 2FA confirmation phrase. Resetting another user's factor is an account recovery action; the old secret and recovery codes remain unavailable.

Review the deactivation confirmation before proceeding. To delete an invited or inactive account, use its Delete action and the requested confirmation phrase. Do not use deletion as the ordinary way to suspend access.

### Delete inactive users individually or in a group

On each user card, editing and security actions are grouped together; activation and deletion controls are grouped separately. Amber Deactivate suspends access. Red Delete user permanently removes the account. Active accounts and the account you are using cannot be deleted.

To suspend an active account, unlock administrator actions, select Deactivate, and confirm. The current unlock countdown continues from its current deadline; it does not restart or end early. Deletion also preserves the same deadline.

For one inactive or invited account, select Delete user, unlock if prompted, and type DELETE USER in the Are you sure? confirmation. Review the account name before submitting.

For several accounts, select their checkboxes, choose Delete selected, and review the names. Type DELETE USERS, then select Permanently delete or press Enter to open the final Are you sure? dialog. Cancel leaves the accounts in place. Confirm only when permanent removal is intended.

Active accounts and your own account have no deletion checkbox and remain protected on the server. A failed or newly protected item is kept while other eligible selections may be deleted. Read the result counts before repeating the action.

### Backups include uploaded files

PDF Speaker Notes, PPT Slidedecks, and profile, contact, and speaker photos are saved in persistent file storage. Application records retain their metadata and associations. Uploading and replacing them uses the same forms as before.

The encrypted .dnrbackup export contains both the database and the uploaded files needed by those records. Keep the whole backup together and give the deployment operator the matching backup password and separately protected 2FA encryption key when arranging recovery.

Restoring an older database-only backup cannot recover files it never contained. The operator should follow the current README restore procedure and verify the restored attachments before reopening the application.

### Recent Administration and Recovery Changes

Network diagnostics compares remote page, image, PDF and PowerPoint response measurements, with Refresh and administrator Reset Statistics. Loading or empty measurements are not proof that an upload failed. Operations shows current deployment and ingestion health. Follow the runbook if document scanning or delivery workers are unhealthy.

Backups include uploaded files; the browser backup workflow detects capacity problems and gives an actionable error rather than silently producing a partial download. Keep backup encryption/recovery material secure and follow the application's restore validation. Sensitive deployment secrets are not fields in Reimbursement Setup.

The deployment has bounded data/file maintenance, encryption-key rotation support, and optional private document scanning. These are operator services, not extra end-user buttons. Scanner requirements are configuration-dependent; pending/rejected required checks

prevent protected file use. Local development may deliberately leave scanning disabled.

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Review users and access state

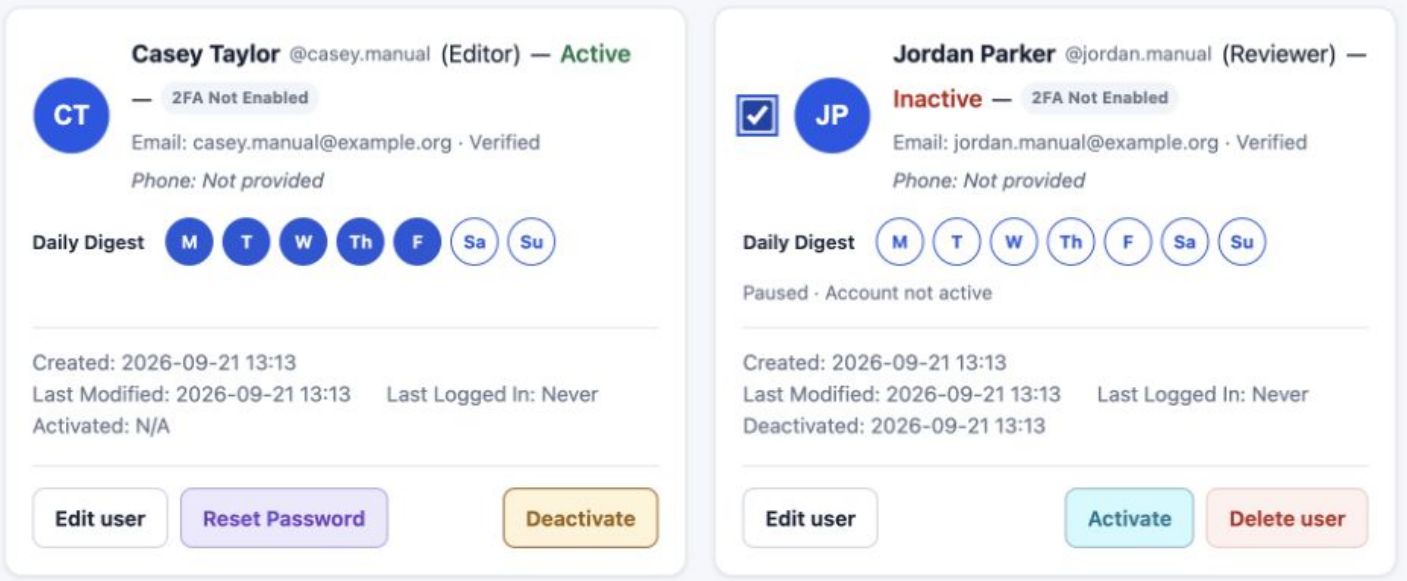


Figure 100. Review users and access state. Actual preview screen; fictional records.

- 01 Review the identity, account state, 2FA, contact details, and Daily Digest days on each card.

02 Use the lower action bar: Edit user and security controls are grouped separately from account access and deletion.
- 03 Amber Deactivate suspends an active account; red Delete user permanently removes an inactive or invited account after confirmation.

04 Only eligible accounts have deletion checkboxes. Individual Delete user remains available alongside Delete selected.

**Screenshot context:** Fictional accounts illustrate active and inactive states. No account was deactivated or deleted during capture.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 13 / ILLUSTRATED WALKTHROUGH

## Delete one inactive user

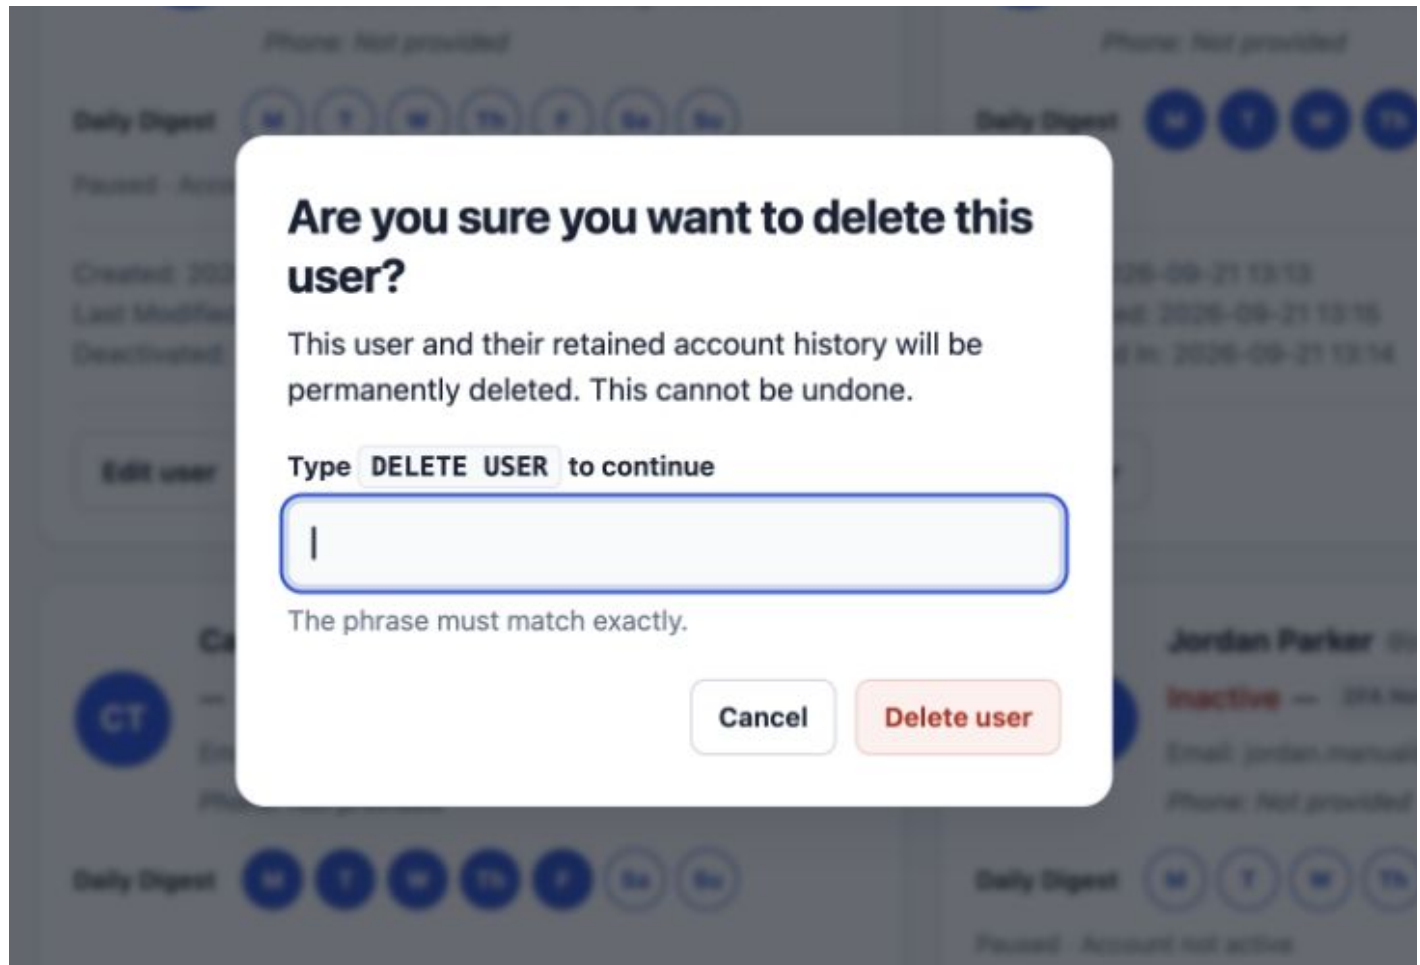


Figure 101. Delete one inactive user. Actual preview screen; fictional records.

- 01 Find the inactive or invited account and select its red Delete user button.
- 02 Unlock administrator actions if prompted. Check that you selected the intended account.

- 03 Type DELETE USER exactly and select Delete user, or press Enter in the phrase field. Cancel keeps the account.

**Screenshot context:** The confirmation is illustrated without submitting the deletion.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 13 / ILLUSTRATED WALKTHROUGH

## Review several inactive users before deletion

## Are You Sure You Want to Delete These Items?

You selected **2 inactive users**.

Only inactive or invited accounts can be deleted. Active accounts and your own account are protected. Account history is permanently removed according to the existing user-deletion rules.

**Permanent deletion cannot be undone.** Items marked as protected will be kept.

- alex.manual #4
- jordan.manual #3

Type **DELETE USERS** to confirm

DELETE USERS

Cancel

Permanently delete 2 items

Figure 102. Review several inactive users before deletion. Actual preview screen; fictional records.

- 01** On Users, select eligible account checkboxes, or use Select all on this page, then Delete selected.
- 02** Review the account names. Active users and your own account are protected. The selection survives an unlock redirect and expires after 30 minutes.

- 03** Type DELETE USERS. Select Permanently delete or press Enter to open the final confirmation.

- 04** Cancel returns to the user list without deleting. Changing the list page or filters starts a new selection.

Related chapters: [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 13 / ILLUSTRATED WALKTHROUGH

## Confirm or cancel the batch

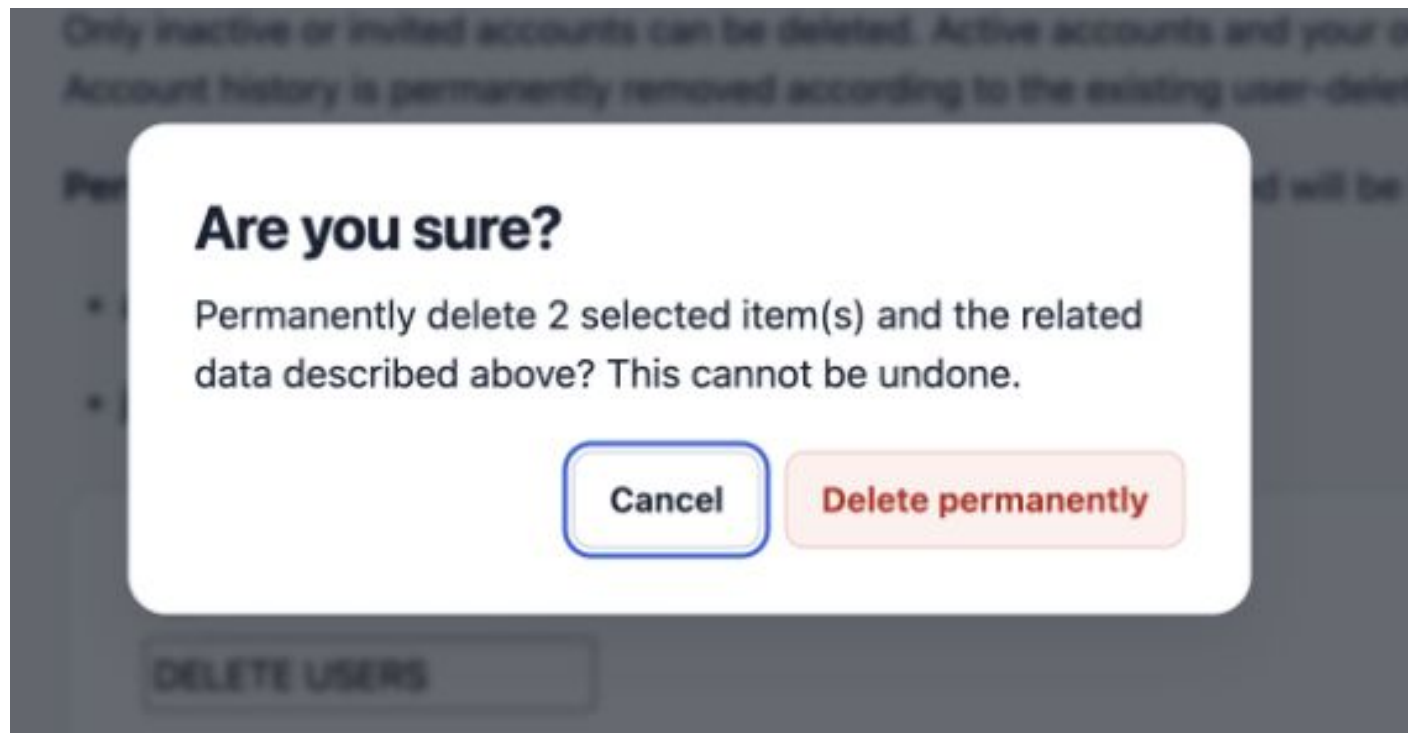


Figure 103. Confirm or cancel the batch. Actual preview screen; fictional records.

- 01** The Are you sure? dialog appears after the review, including when you use Enter in the confirmation field.
- 02** Select Delete permanently only when ready. Cancel closes the dialog without deleting accounts.

- 03** Read the result counts on the user list. Deletion checks administrator access and the current unlock deadline again.

**Screenshot context:** Enter was verified to open this dialog. The batch was canceled; no accounts were deleted.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Invite a new user

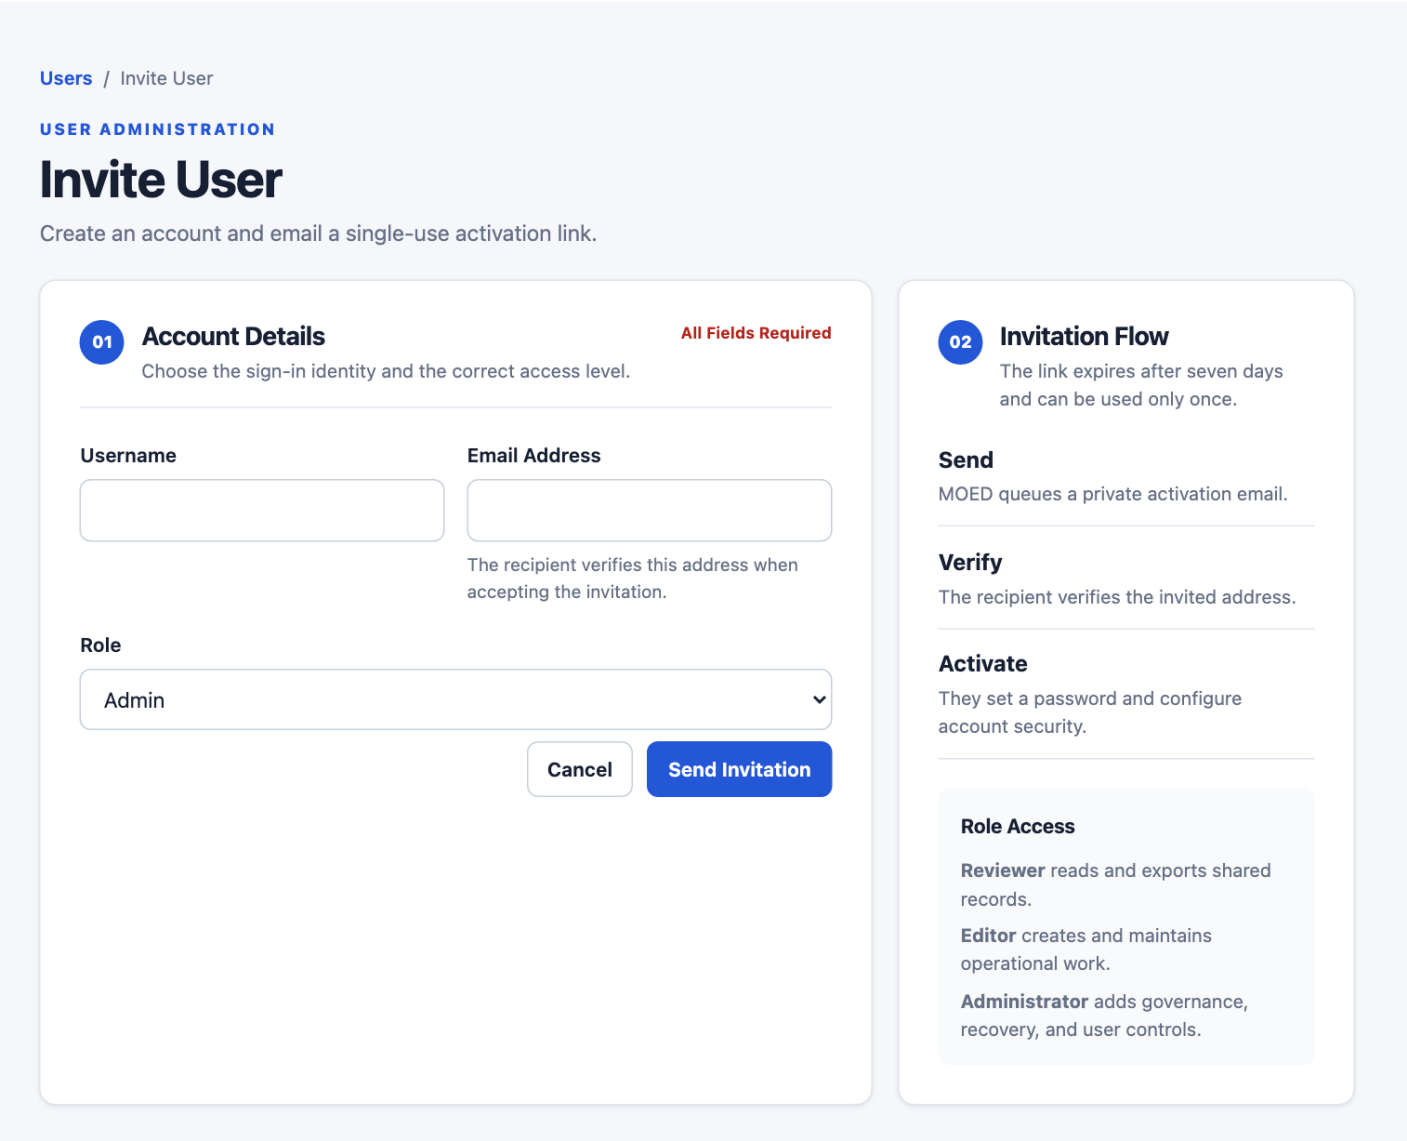


Figure 104. Invite a new user. Actual preview screen; fictional records.

**01** Confirm administrator access, then choose a unique username, email address, and role.

**02** Review the recipient and access level before sending the invitation.

**03** The recipient creates their own password through the activation link. Configure digest preferences from the user editor afterward.

**Screenshot context:** This form is shown without submitting an invitation.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Confirm administrator access

# Confirm Administrator Access

Enter your current password and a fresh authenticator or recovery code. Sensitive administrator actions remain unlocked for five minutes.

Administrator password

Fresh authenticator code or recovery code

Unlock Sensitive Actions

Cancel

Figure 105. Confirm administrator access. Actual preview screen; fictional records.

- 01

Select Admin Unlock in the sidebar, or open a protected action. Users also provides its own unlock panel.
- 02

Enter your current administrator password and a fresh authenticator or unused recovery code.
- 03

Select Unlock Sensitive Actions to return to the requested page. The five-minute unlock applies only to this signed-in session.
- Related chapters:

[Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Inspect the audit trail

# Audit Log

Login, logout, and database activity. Newest entries appear first.

Audit records remain append-only during normal application use. Administrators can preview and prune expired entries below; deployment operators can use the equivalent terminal command.

Back to Users

RETENTION

Fresh confirmation required to prune

## Prune Old Entries

Keep the most recent number of days you choose and permanently delete only older entries.

Days to keep

365

Preview Pruning

Search audit log

mm/dd/yyyy

mm/dd/yyyy

Exact IP

Apply

All

Login

Database

Security

Records per page: 

2050100

< Previous

1

2

3

4

...

27

Next >

Showing 1–20 of 525 entries

| TIMESTAMP               | CATEGORY | USER   | EVENT   | RECORD                   | IP ADDRESS |
|-------------------------|----------|--------|---------|--------------------------|------------|
| 2026-09-09 14:36:42 CDT | Database | System | Created | User: casey.manual (#24) | —          |
| 2026-09-09 19:36:42 UTC |          |        |         |                          |            |

Figure 106. Inspect the audit trail. Actual preview screen; fictional records.

- 01 Filter by category, search text, date range, and exact IP address.

02 Review actor, action, affected record, and local/UTC timestamps.
- 03 Individual audit records cannot be edited or removed through ordinary record controls.

Related chapters: [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Preview audit retention

RETENTION

Fresh confirmation required to prune

### Prune Old Entries

Keep the most recent number of days you choose and permanently delete only older entries.

Days to keep

365

Preview Pruning

Search audit log

mm/dd/yyyy

mm/dd/yyyy

Exact IP

Apply

All

Login

Database

Security

Records per page:

20

50

100

< Previous

1

2

3

4

...

27

Next >

Showing 1–20 of 525 entries

| TIMESTAMP                                          | CATEGORY | USER   | EVENT   | RECORD                                                               | IP ADDRESS |
|----------------------------------------------------|----------|--------|---------|----------------------------------------------------------------------|------------|
| 2026-09-09 14:36:42 CDT<br>2026-09-09 19:36:42 UTC | Database | System | Created | User: casey.manual (#24)                                             | —          |
| 2026-09-09 14:36:42 CDT<br>2026-09-09 19:36:42 UTC | Database | System | Created | Engagement_financial_report:<br>Engagement 14 financial report (#14) | —          |
| 2026-09-09 14:36:42 CDT<br>2026-09-09 19:36:42 UTC | Database | System | Created | Engagement: Summer Learning Day -<br>Example (#14)                   | —          |

Figure 107. Preview audit retention. Actual preview screen; fictional records.

- 01

Open the retention panel and choose the number of days to keep.
- 02


Preview the UTC cutoff and affected count before pruning.
- 03

Fresh administrator confirmation, the exact PRUNE phrase, and the final in-app confirmation are required.
- Related chapters:

[Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 13 / ILLUSTRATED WALKTHROUGH

## Export an encrypted backup with uploaded files

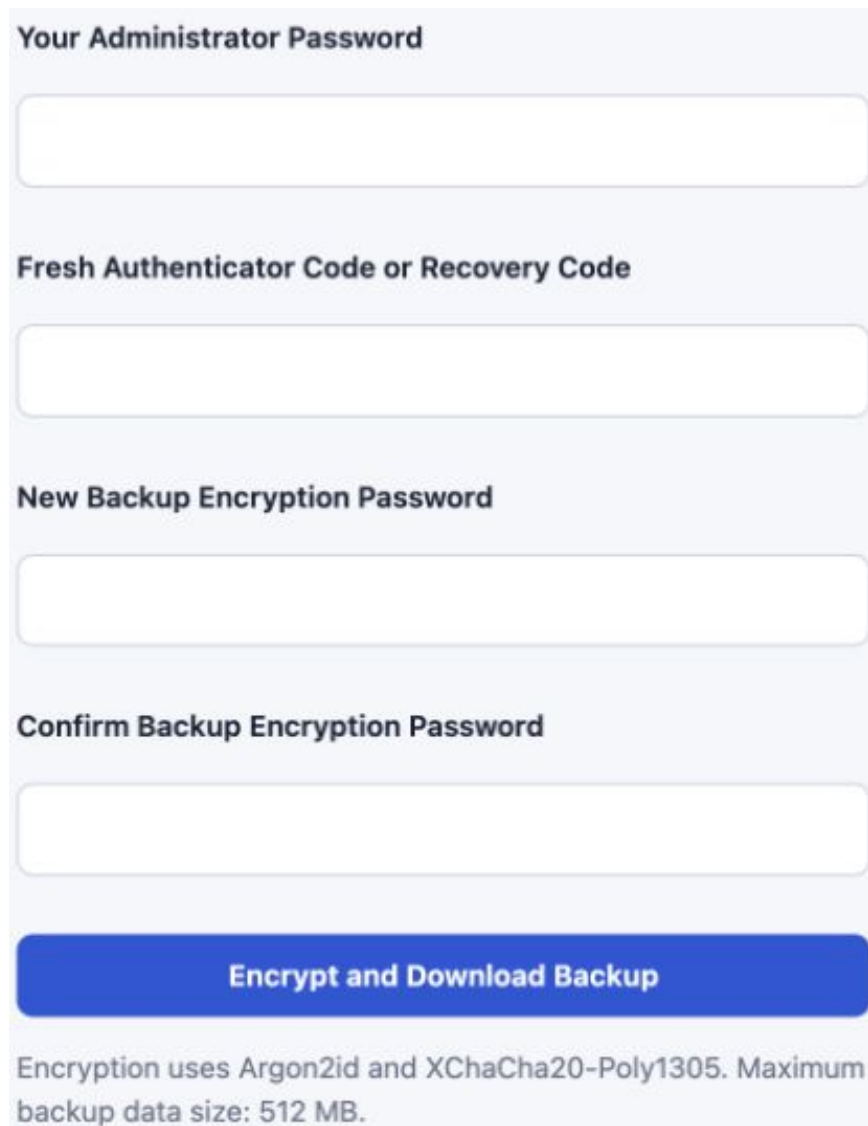

Your Administrator Password

Fresh Authenticator Code or Recovery Code

New Backup Encryption Password

Confirm Backup Encryption Password

**Encrypt and Download Backup**

Encryption uses Argon2id and XChaCha20-Poly1305. Maximum backup data size: 512 MB.

Figure 108. Export an encrypted backup with uploaded files. Actual preview screen; fictional records.

- 01** Open Database. The encrypted snapshot includes application records, PDF notes, PowerPoint files, and uploaded portraits.
- 02** Enter your administrator password and a fresh factor. Choose and confirm a unique backup password of at least 16 characters, then Encrypt and Download Backup.

- 03** Keep the page open while the export runs. Check the success message, Last backup created, and browser Downloads for completion.
- 04** Keep the complete .dnrbackup file, its password, and the separate 2FA key securely backed up. Ask the deployment operator to restore records and files together.

**Screenshot context:** The credential and download section is shown with empty fields. No backup was exported during capture.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Review data and recovery health

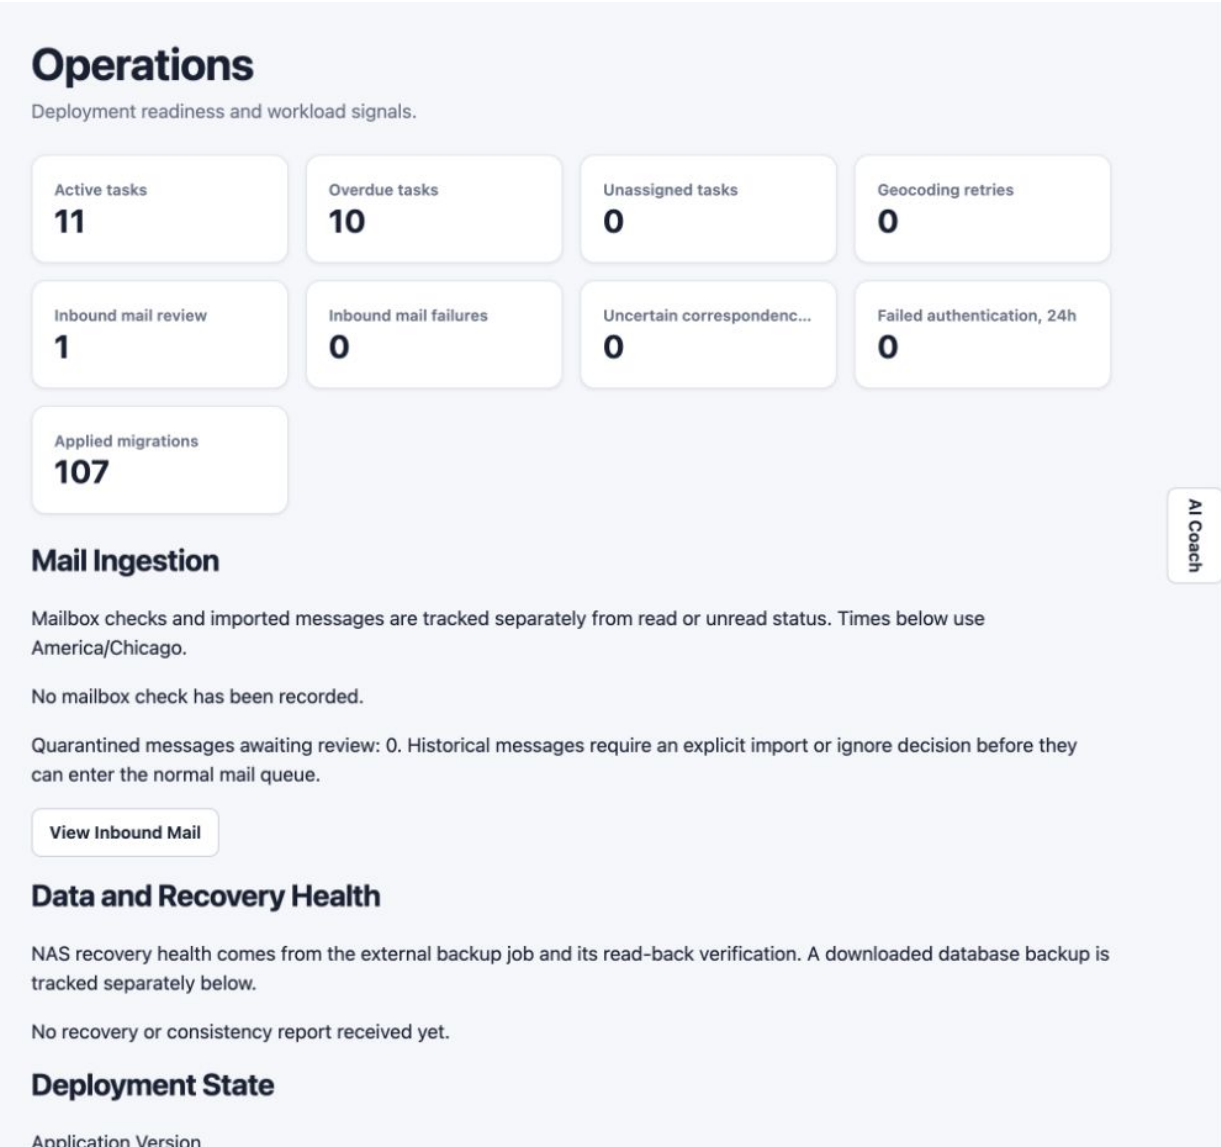


Figure 109. Review data and recovery health. Actual preview screen; fictional records.

- 01 Administrators can inspect workload, Mail Ingestion, and Data and Recovery Health.
- 02 No report received means no reported result. A downloaded database backup is tracked separately; an operator must verify recovery before treating it as ready.
- Related chapters: [Roles and access](#) (p. 11) / [Profile and security](#) (p. 123) / [Troubleshooting](#) (p. 156) / [Reimbursements](#) (p. 104)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Edit a user's profile and digest preferences

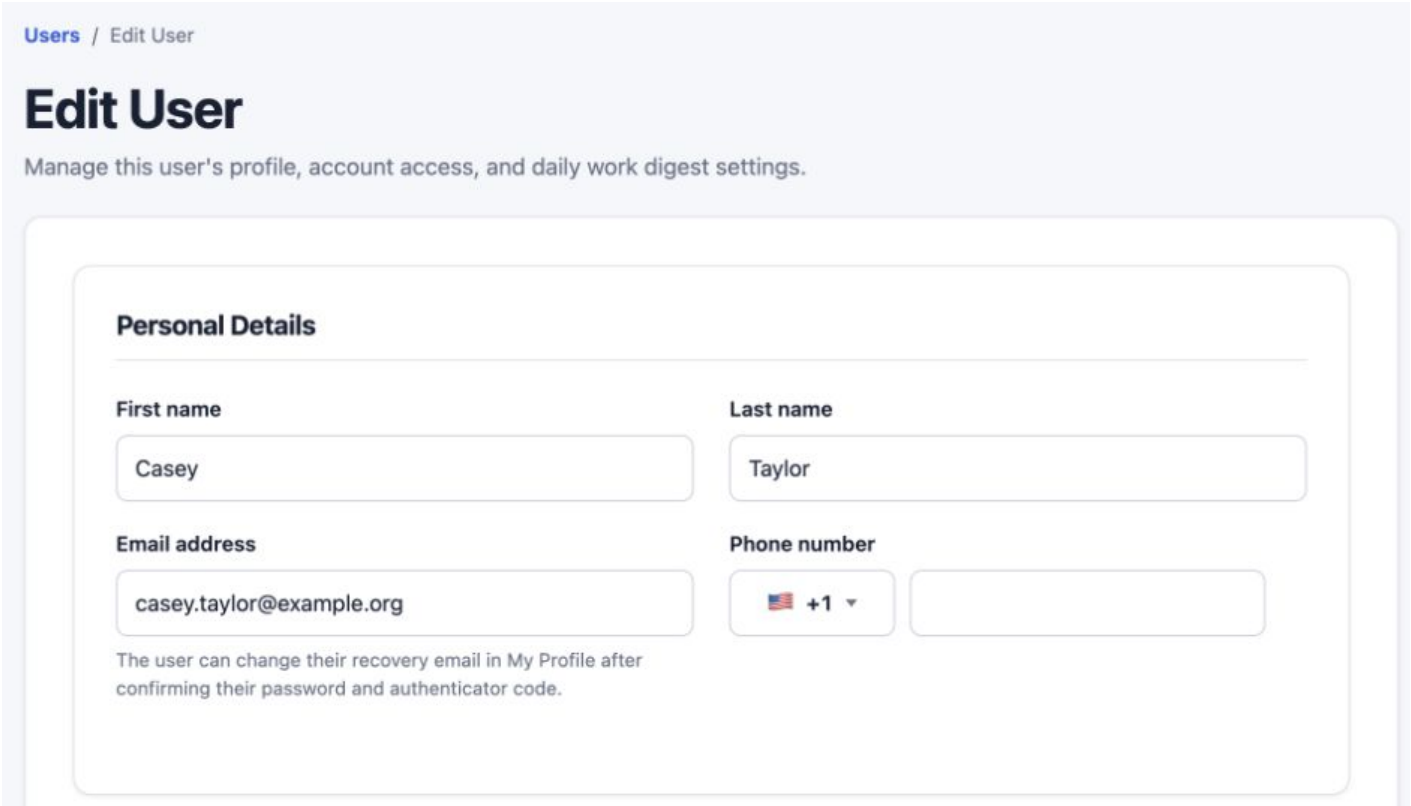


Figure 110. Edit a user's profile and digest preferences. Actual preview screen; fictional records.

- 01** Unlock sensitive administrator actions, then select Edit user on the Users page.

**02** Edit first/last name, country-aware phone, username, and role. Replace or remove the profile picture; JPEG, PNG, and WebP uploads allow up to 5 MB.
- 03** Review daily digest settings and save. Ordinary profile edits preserve a paused digest.

**04** The account holder changes recovery email through the separate verification flow in My Profile.

**Screenshot context:** The current form groups personal details together. Scroll to profile picture, username, role, digest preferences, and Save changes. No profile changes were saved.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Choose the network comparison window

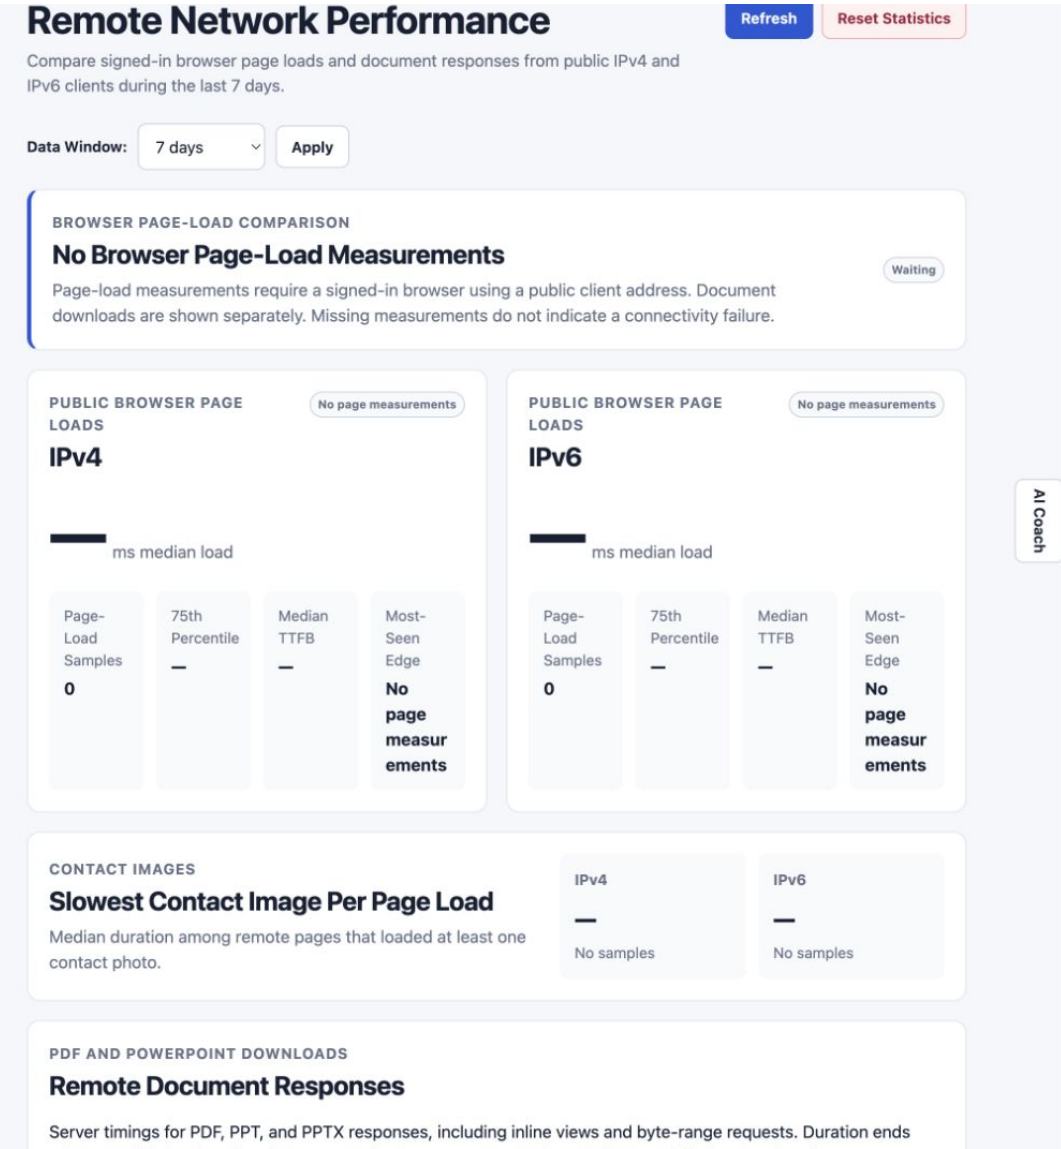


Figure 111. Choose the network comparison window. Actual preview screen; fictional records.

- 01 Choose a Data Window from 1 through 7 days and select Apply.
- 02 Browser page-load and document-response measurements are separate. No public-client samples in this isolated preview is not evidence of a network failure.

Related chapters: [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Extend or lock administrator actions

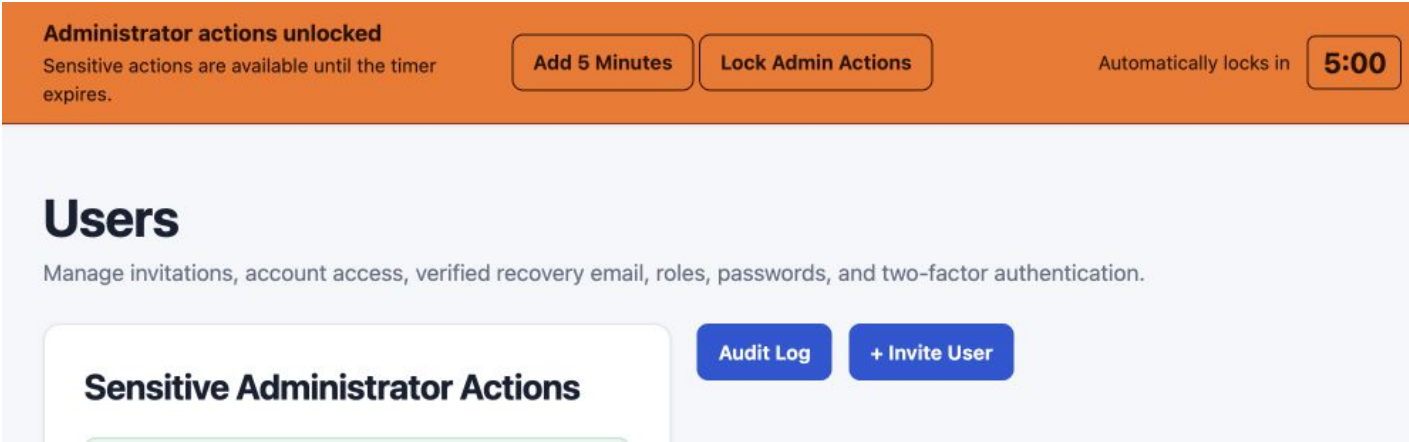


Figure 112. Extend or lock administrator actions. Actual preview screen; fictional records.

- 01** Fresh confirmation begins a five-minute unlock in this signed-in session.
- 02** While unlocked, Add 5 Minutes extends the current deadline. Lock Admin Actions ends access immediately; expiration requires fresh confirmation.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

CHAPTER 13 / ILLUSTRATED WALKTHROUGH

Reset network traffic statistics

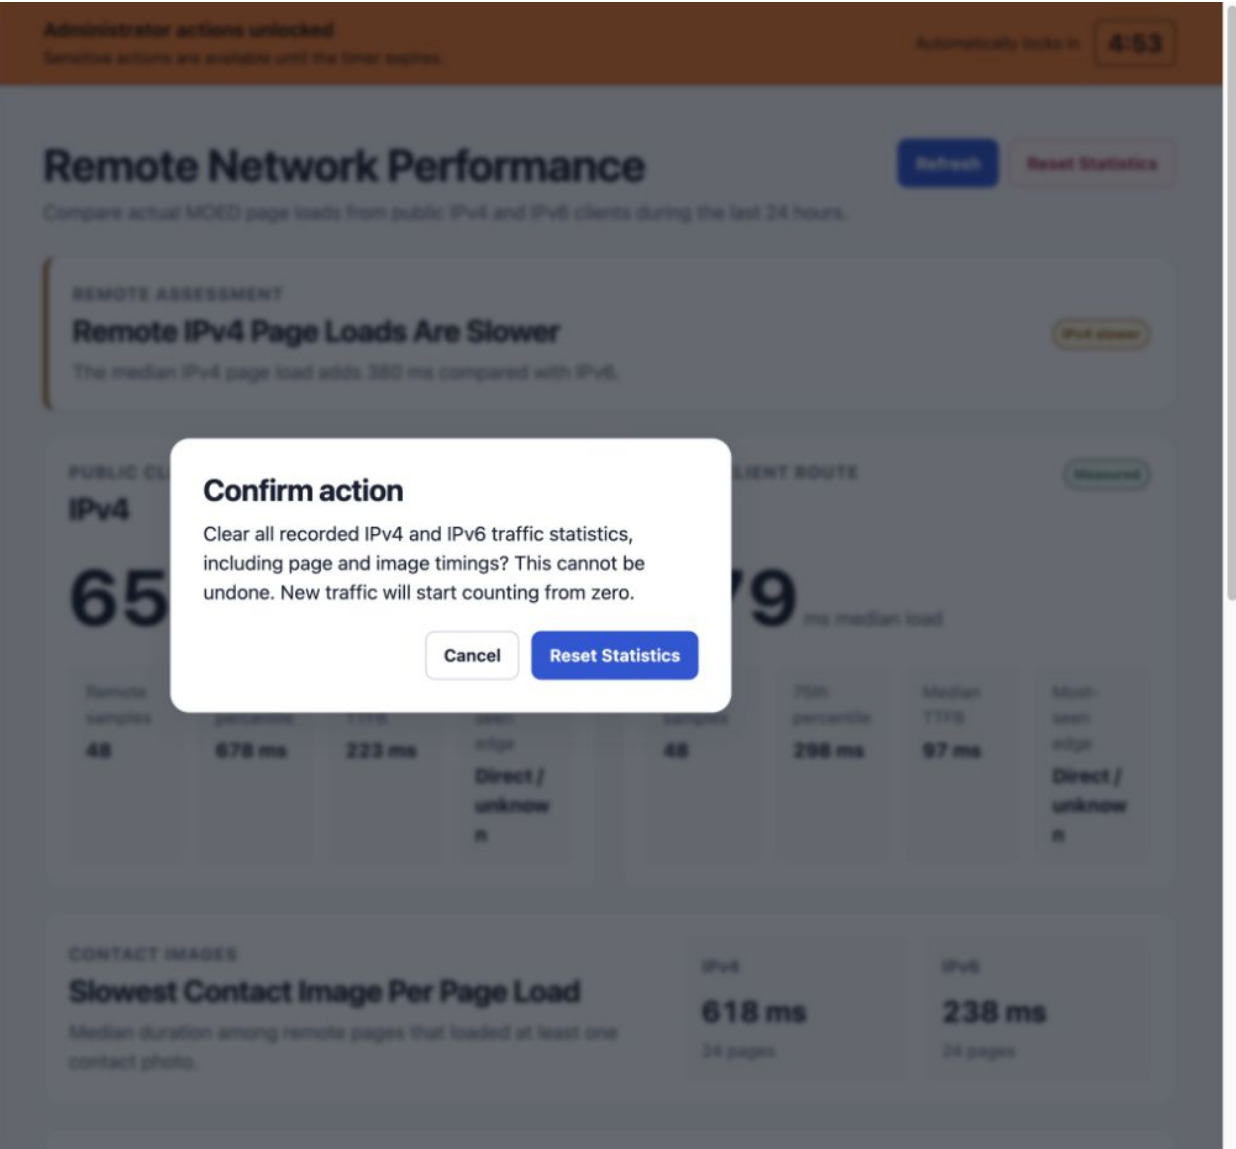


Figure 113. Reset network traffic statistics. Actual preview screen; fictional records.

- 01** Select the rose Reset Statistics button next to Refresh. If locked, authenticate and select Reset Statistics again after returning.

**02** Review the confirmation: all recorded IPv4/IPv6 page and image timings across every date will be cleared.
- 03** Confirm Reset Statistics before the unlock expires, or Cancel to keep the samples. New traffic starts counting from zero; presentation QR visits are unaffected.

**Screenshot context:** The confirmation was canceled; no statistics were reset during screenshot capture.

**Related chapters:** [Roles and access \(p. 11\)](#) / [Profile and security \(p. 123\)](#) / [Troubleshooting \(p. 156\)](#) / [Reimbursements \(p. 104\)](#)

## CHAPTER 14

# Troubleshooting and Good Practice

Most surprises come from role limits, archived parent records, delayed background work, or intentionally strict safety checks.

Related chapters: [Getting oriented \(p. 4\)](#) / [Engagements \(p. 26\)](#) / [Chron and email \(p. 88\)](#) / [Administration \(p. 137\)](#)

## AI Coach Is Slow or Cannot Answer

Keep the panel open or move to another MOED page in the same browser tab while the answer is being prepared. Use **Stop answer** if you want to cancel it. If it reports that it cannot answer, try the question again after the service recovers. The User Manual and supported guided walkthroughs remain available even when conversational answers are unavailable.

A failed answer does not mean your event or file was not saved; check the application's own save confirmation. Administrators can open the request to inspect its result, duration, and failure details. If the ai coach button is absent throughout the application, ask an administrator whether the feature is enabled.

## The Coach Names a Control I Cannot See

Check the page and selected tab. For example, **Edit Presentations** appears under the event's **Presentations** tab. Creating an event starts at **Engagements > + New Engagement**, not Organization Details. Editing also requires an editor or administrator role.

Use **i can't see that control** on the walkthrough card to report the mismatch, or rate the answer **needs work**. Open its Comprehensive Manual source for the complete procedure. The coach cannot make a hidden or unauthorized control available.

## The Coach Answer Is Wrong or Does Not Fit My Question

Select **needs work** on the answer. You can ask a follow-up describing the task you are trying to complete; a new question ends any current walkthrough. Use **New conversation** if the earlier discussion is no longer relevant.

Feedback is recorded for investigation; it does not correct the model immediately. Follow the actual application controls and check the linked manual before making a change. You do not need to supply training material or write the corrected procedure to report a problem.

## Network Shows Only IPv4 or Only IPv6

The dashboard needs signed-in public traffic from both address families. Local or private-address browsing does not add samples. Wait for public page loads, then select Refresh; a missing family alone is not evidence of a network failure. After Reset Statistics, previous samples have been cleared and new traffic must arrive.

## The Administrator Countdown Has Ended

Unlock sensitive actions again with your password and a fresh factor. The current unlock deadline is shared by pages in your session and does not restart when you navigate. While unlocked, Add 5 Minutes extends it. Another browser session needs its own unlock.

## I Cannot See an Edit or Delete Button

Reviewers are read only. Editors can edit and archive but cannot permanently delete. Administrators must freshly unlock sensitive access before many delete and user-management controls appear. Archived records are viewed separately and generally must be restored before editing.

## An Organization Will Not Archive

Archive or move every active contact, engagement, and inquiry belonging to it first. MOED prevents archiving the parent while active child records would become stranded.

## Search Did Not Find an Engagement

Use terms of at least three characters. Remove quotation marks to match any word; quote a group when all its words must match. Check the Archived view and the lifecycle filter. Search indexes active Chron entries, not archived ones.

## A New Address Has No Map Pin

Confirm that the engagement contains a usable location and fits the current lifecycle/date filters. New addresses are processed asynchronously; keep the Map page open and the pin will appear automatically when the lookup finishes. If it remains pending, ask an administrator to check the geocoding queue and provider health.

## An Email Still Needs Review

Confirm the sender or participant address exactly matches one active record. Correct missing contact/organization email data, preserve a single valid `[DNR#ID.<signed-token>]` marker in the subject or plain-text body where applicable, then choose **Find matches again**, or select the intended destinations and choose **Save to Chron logs**.

## An Outbound Email Failed or Cannot Be Queued

Confirm that the engagement has a selected contact or a speaker assigned to an active presentation with a valid email address. Open the outbound message to see which recipient failed. Correct the address if needed, then select **Retry Failed Deliveries**. If sending is unavailable for every message, ask an administrator to check the mail setup.

## A Template Is Missing or My Changes Cannot Be Saved

Clear the library search and check **Archived**. Restore a template to make it available for new emails; permanently deleted templates cannot be restored. If another session changed the template, keep a copy of your edits, reload, and compare with the current version. Use only the listed event fields with matching double braces; Presentation schedule is allowed in the message only.

## A Speaker Is Missing from Email Recipients

Check that the speaker is assigned to an active presentation on this engagement. Add or correct their email on the speaker record, then reload the composer and select the speaker. Archived presentations do not supply recipients. Putting a speaker's name in template text does not select that person as a recipient.

## A Calendar Stopped Refreshing

Check whether that device's subscription is still Active. A revoked URL cannot be recovered; create a new device-specific link and replace the old subscription in the calendar application.

## An Event or Task Is Missing from the Month Calendar

Confirm the displayed month and selector. **Events** does not include tasks, **My Tasks** includes only work assigned to you, and task views include only active tasks with due dates. Use **Everything** when you want events and all due-dated work together.

## Every New Event Includes Tasks We Do Not Need

**Standard Event Tasks** are a customizable starting checklist. Editors and administrators can go to **Work Queue > Standard Event Tasks** to adjust it to the team's workflow.

**Edit** a standard task to change its title, notes, priority, display order, or due-date rule. Due dates can be relative to the event's start or end; for example, select Event start and enter a Day offset of **-7** for seven days before the start. Use **+ New Standard Task** to add a recurring checklist item.

In the **Active** list, use a standard task's **Archive** action when it should no longer be created automatically for new events. Use **Restore** in the **Archived** tab to include it in future events again. This is the shared checklist: changes apply to everyone creating events, so agree on the team's recurring needs before changing it.

If a task is unnecessary for just one event, archive that event's copy in **Follow-Up Work** or the **Work Queue**. Archiving an individual event task does not disable its standard template. Likewise, archiving a standard task does not remove copies already created on existing events; archive those copies individually when appropriate.

The exception is the required built-in **financial closeout reminder**, due one week after the event ends. It cannot be edited, archived, or deleted.

## Changing the Caller Did Not Move Existing Tasks

The Caller is used only to choose the owner of the initial standard checklist when the engagement is created. Later Caller changes do not alter existing task ownership. If responsibility changes, reassign those tasks in the Work Queue.

## A QR Code Will Not Copy

Use the PNG or SVG download links to save a generated code. You can also select the QR preview to copy it; if clipboard access is unavailable, the application opens a preview. To share a web address instead of an image, use the **Copy Link** icon beneath the code's image. If copying is blocked, allow clipboard access for this site and retry. Save the presentation first if its QR codes are not yet available.

## A Presentation File or Its QR Code Is Missing

Open **Edit Presentations** on the event's Presentations tab and check the selected speaker. Choose a PDF for Speaker Notes or a .ppt or .pptx file for PPT Slidedeck. PDF files may be up to 100 MB and PowerPoint files up to 500 MB; keep all files in one save under 600 MB total.

Choosing a file or selecting Remove only prepares a change. Select **Save Changes** in the persistent bottom bar, then check the saved filename and upload details. The corresponding QR code appears after the file is saved successfully. Removing the file hides its code until a replacement is saved.

## A Save Reports an Expired Request

Reload the page and repeat the change. MOED rejects stale or missing request tokens, and concurrent edits may require you to reopen the newest record before saving.

## I Was Signed Out Unexpectedly

Password changes, password recovery, administrator resets, account changes, deactivation, and database restoration invalidate existing sessions by design. Sign in again with the current credentials or contact an administrator if the account is unavailable.

## Record the Why

Chron should preserve the decision and context a future teammate needs, not just "called."

## Name the Next Action

Turn commitments into tasks with an owner and date while the conversation is fresh.

## Archive Before Deleting

Relationship history and event outcomes are usually more valuable than a perfectly tidy active list.

## Protect Private Links

Calendar URLs, invitation links, verification links, recovery links, and recovery codes are credentials.

CHAPTER 14 / ILLUSTRATED WALKTHROUGH

Search for presentation deletion

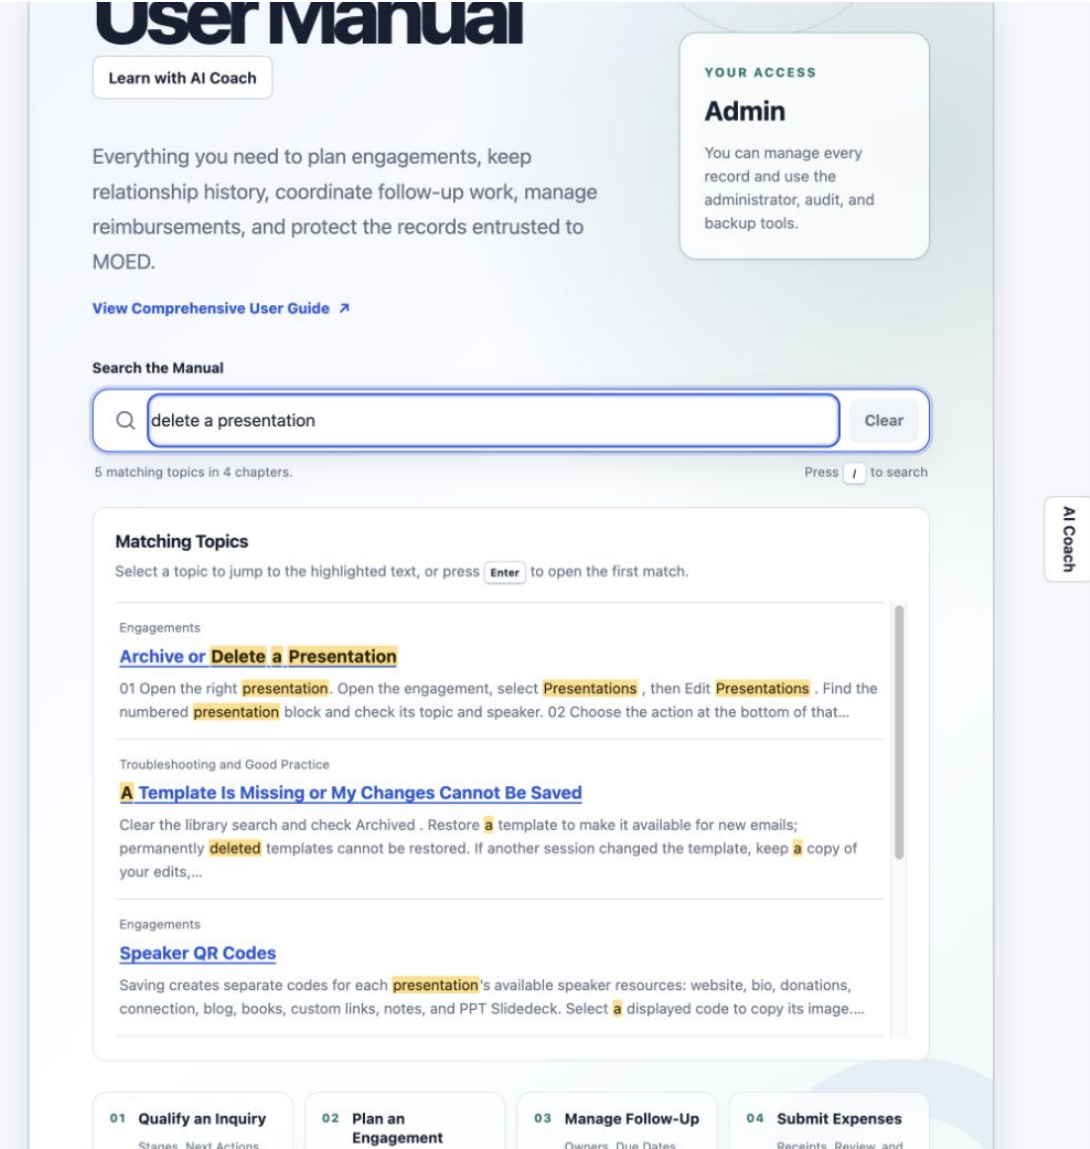


Figure 114. Search for presentation deletion. Actual preview screen; fictional records.

01 Search the Manual for delete a presentation.

02 Choose Archive or Delete a Presentation to jump to instructions for the buttons within each saved presentation block.

Related chapters: [Getting oriented](#) (p. 4) / [Engagements](#) (p. 26) / [Chron and email](#) (p. 88) / [Administration](#) (p. 137)

# Topic finder

Select a topic to open the relevant procedure. Use the PDF bookmarks for the full section and screenshot outline.

[Account activation and invitations](#) - p. 146

[Account recovery](#) - p. 123

[Add a standard task to active, open engagements](#) - p. 83

[Administrator confirmation](#) - p. 147

[Administrator five-minute countdown](#) - p. 138

[Administrator profile editing](#) - p. 139

[ai coach: ask and follow up](#) - p. 4

[ai coach: clear the request log](#) - p. 138

[ai coach: helpful, needs work, and missing controls](#) - p. 5

[ai coach: interactive walkthroughs](#) - p. 4

[ai coach: request history and assessment](#) - p. 137

[ai coach: slow or unavailable answers](#) - p. 156

[ai coach: stop or start a conversation](#) - p. 5

[ai coach: verified guidance and feedback review](#) - p. 137

[Archive and restore inquiries](#) - p. 24

[Archive and restore tasks](#) - p. 85

[Archive, restore, and permanent deletion](#) - p. 29

[Archived inquiry search and export](#) - p. 25

[Audit log and retention](#) - p. 148

[Backup and restoration](#) - p. 150

[Birthdays](#) - p. 96

[Booking conversion](#) - p. 22

[Booking stages and board filters](#) - p. 18

[Bulk deletion and protected records](#) - p. 62

[Calendar content selectors](#) - p. 100

[Calendar subscriptions and revocation](#) - p. 101

[Caller and generated task ownership](#) - p. 76

[Cc, Bcc, and sender copies](#) - p. 91

[Change recovery email](#) - p. 123

[Chron log entries](#) - p. 90

[Closeout prerequisites](#) - p. 46

[Combined presentation statistics](#) - p. 44

[Confirm task completion](#) - p. 84

[Confirmation vs. lifecycle](#) - p. 43

[Contact affiliations and event roles](#) - p. 69

[Contact photographs](#) - p. 69

[Copy a QR link for sharing](#) - p. 36

[Countries, addresses, states, and provinces](#) - p. 66

[Customize the shared standard event checklist](#) - p. 157

[Daily digest](#) - p. 125

[Daily digest delivery days on user cards](#) - p. 142

[Dashboard and readiness](#) - p. 14

[Dates, rescheduling, and task offsets](#) - p. 76

[Decline and reopen an inquiry](#) - p. 19

[Delete inactive users individually or in a group](#) - p. 140

[Deployment notices](#) - p. 140

[Due tomorrow task labels](#) - p. 79

[Duplicate a task](#) - p. 81

[Email delivery and retry](#) - p. 89

[Email recipients and templates](#) - p. 91

[Email routing and signed markers](#) - p. 94

[Email templates: add and edit](#) - p. 48

[Email templates: archive, restore, and delete](#) - p. 47

[Engagement lifecycle filter memory](#) - p. 32

[Enter key in searches and confirmations](#) - p. 6

[Event contacts](#) - p. 35

[Event fields in email templates](#) - p. 49

[Event logistics and planning estimates](#) - p. 42

[Financial drafts and final reports](#) - p. 46

[Financial history by organization](#) - p. 65

[Fixed sidebar logo and profile](#) - p. 7

[Historical mailbox review](#) - p. 89

[Inbound mail triage](#) - p. 93

[Inquiry correspondence](#) - p. 23

[IPv4 and IPv6 performance](#) - p. 153

[Keyboard navigation](#) - p. 4

[Lock administrator actions now](#) - p. 154

[Mail ingestion health](#) - p. 151

[Manual map pin](#) - p. 99

[Map and missing addresses](#) - p. 98

[Mattermost commands and account linking](#) - p. 132

[Mattermost message actions](#) - p. 134

[Missing presentation file or QR code](#) - p. 157

[Mobile sidebar and theme](#) - p. 9

[Network statistics reset](#) - p. 155

[Next action on an inquiry](#) - p. 21

[Operations and readiness](#) - p. 151

[Passwords and 2FA](#) - p. 127

[PDF speaker notes](#) - p. 40

[Photo cropping and thumbnails](#) - p. 61

[PPT Slidedeck: upload, replace, and download](#) - p. 40

[Presentation export: text, Markdown, PDF](#) - p. 36

[Presentation schedule and attendance](#) - p. 39

[QR code resources and downloads](#) - p. 36

[QR code selection and PDF order](#) - p. 38

[QR code statistics and link controls](#) - p. 44

[Recovery codes](#) - p. 123

[Reimbursement Troubleshooting and Access](#) - p. 108

[Roles: reviewer, editor, administrator](#) - p. 11

[Save presentation file changes](#) - p. 30

[Screen Reference: Chart of Accounts](#) - p. 108

[Screen Reference: Delivery Recovery and Correction](#) - p. 108

[Screen Reference: Email Review and Submission](#) - p. 107

[Screen Reference: Expense Entry and Detail](#) - p. 106

[Screen Reference: Expenses](#) - p. 106

[Screen Reference: Reimbursement Setup and Profile](#) - p. 108

[Screen Reference: Request View and Edit](#) - p. 107

[Screen Reference: Requests Register](#) - p. 107

[Search and records per page](#) - p. 4

[Search the manual and jump to page ends](#) - p. 159

[Speaker biography and links](#) - p. 72

[Speaker custom resource links](#) - p. 73

[Speaker email recipients](#) - p. 91

[Standard event checklists](#) - p. 82

[Task status, ownership, priority, and due date](#) - p. 80

[Troubleshooting](#) - p. 156

[Uploaded files and encrypted backups](#) - p. 141

[User deactivation and deletion](#) - p. 140

[Work queue and reminders](#) - p. 79

## Edition and source notes

Application version: MOED / DNR 2.4.18. Guide updated: October 5, 2026. This refresh covers application changes from 2.4.1 through 2.4.18: presentation archive/delete and scoped visit resets, planning cards, retained event contacts and financial corrections, dashboard timing, task filters and bulk updates, local browser drafts, duplicate acknowledgement and bounded merge undo, email reply follow-up and recipient cards, Inbox filing layout, pending map filters, reimbursement selection, notes, CSV/receipt packages and size limits, progress steps, network date windows, and administrator unlock extension. Unchanged workflows retain their previous illustrations. Current figures use fictional records in an isolated preview; capture dates are recorded per figure. The report receipt illustration comes from an actual generated sample PDF. Source basis: src/help.php, current application forms/controllers, and the Mattermost integration guide.

The PDF follows the sidebar guide, including private-calendar content options, birthdays, recovery-email verification, account editing, and network diagnostics. The PDF adds illustrated walkthroughs and operational details, omitting decorative application footers and their associated lines. Infrastructure-only procedures are referenced at the point where a deployment operator is required.

Document build and screenshots: scripts/manual/ and docs/user-manual/. Rebuild with the included instructions when the application changes. Navigation is internal to this PDF; links do not depend on the sample preview being available.

[Return to contents](#)

APPENDIX A / CURRENT REPOSITORY README

# README.md

## Complete README for application source 2.4.18

The following pages reproduce the full current README, including deployment procedures and command examples. Long code lines wrap to fit the page. The original, unmodified README.md is also embedded as a PDF attachment for copying commands exactly.

Source: README.md · 108,441 bytes · October 5, 2026. The build records its SHA-256 checksum. Select a section below, or expand Appendix A in the PDF bookmarks.

- |                                         |                                         |
|-----------------------------------------|-----------------------------------------|
| Getting started and deployment - p. 163 | Security and operations - p. 181        |
| Application workflows - p. 166          | Development and contributing - p. 186   |
| Email and integrations - p. 170         | License - p. 187                        |
| Configuration reference - p. 176        | Storage and delivery hardening - p. 187 |

## DNR: MOED מודע

DNR (MOED מודע) is a web-based application for managing speaking engagements, presentations, and organizational contacts.

Under active development.

Use the sidebar **User Manual** for day-to-day application help, or download the Comprehensive Guide (src/assets/docs/moed-comprehensive-user-manual.pdf). This README covers installation, workflows, configuration, operations, and development.

- Getting started and deployment (#getting-started-and-deployment)
- Application workflows (#application-workflows)
- Email and integrations (#email-and-integrations)
- Configuration reference (#configuration-reference)
- Security and operations (#security-and-operations)
- Development and contributing (#development-and-contributing)
- License (#license)

For a release or upgrade, start with the release and recovery workflow (docs/release-workflow.md). For database recovery, use the exact restore runbook (#exact-database-restore-runbook).

## Getting started and deployment

### Installation

To set up the project on your local machine, follow these steps:

#### 01 Clone the repository

Copy the clone URL from the repository's **Code** menu and replace <repository-url> below:

```
git clone '<repository-url>' DNR
```

#### 02 Navigate to the project directory

```
cd DNR
```

#### 03 Create deployment secrets

```
cp .env.example .env
install -d -m 700 secrets backups
umask 077
openssl rand -hex 32 > secrets/mysql_root_password
openssl rand -hex 32 > secrets/mysql_app_password
openssl rand -hex 32 > secrets/mysql_backup_password
openssl rand -hex 32 > secrets/mysql_maintenance_password
openssl rand -hex 32 > secrets/mysql_geocoder_password
openssl rand -hex 32 > secrets/mysql_mail_ingest_password
openssl rand -hex 32 > secrets/mysql_mail_dispatch_password
openssl rand -base64 32 > secrets/dnr_2fa_encryption_key
openssl rand -base64 32 > secrets/dnr_inbound_routing_key
openssl rand -hex 32 > secrets/deployment_backup_password
: > secrets/backup_password
chmod 600 secrets/*
```

Store protected offline copies of dnr\_2fa\_encryption\_key and deployment\_backup\_password separately from database backups. Do not rotate these keys casually: enrolled factors and encrypted deployment archives depend on them. The separate empty backup\_password file is populated only for a one-shot browser-format restore and is removed afterward.

#### 04 Build and run the application using Docker Compose

```
# Load the images.env from the qualified release
artifact first.
set -a
. /path/to/release/images.env
set +a
./scripts/compose_with_provenance.sh production
```

Production mode requires HTTPS from a trusted reverse proxy and uses only source code baked into the immutable image. For local HTTP development, run ./scripts/compose\_with\_provenance.sh development and browse to http://localhost:8080. The published port binds to 127.0.0.1 even when the production DNR\_BIND\_ADDRESS is configured for a LAN interface. Exposing plaintext development mode remotely requires both a non-loopback DNR\_DEV\_BIND\_ADDRESS and DNR\_DEV\_ALLOW\_REMOTE\_HTTP=1; use that opt-in only on an explicitly trusted network, never as production ingress. A one-shot migrator applies the baseline and every forward migration before the web or worker services can start, so no separate fresh-install migration command is required.

#### 05 Create the first administrator on a fresh database

```
docker compose exec web dnr-create-admin admin
```

The command securely prompts for a password. The administrator must enroll an authenticator during the first login. DNR no longer installs accounts with known default passwords.

A server administrator can securely reset an existing account password from the container console:

```
docker compose exec web dnr-set-password USERNAME
```

## Upgrading an existing database

Follow the release and recovery workflow

(docs/release-workflow.md). On s1, scripts/deploy\_s1.sh pauses writers, creates and restore-verifies a fresh encrypted database backup, and only then advances the application checkout, database image and schema. Manual upgrades must enforce the same backup-before-upgrade directive (.cursor/rules/backup-before-database-upgrade.mdc). Verify the recovery copy before changing any active version; a successful dump command alone is not a restore test.

For the one-time upgrade from a legacy installation that still exposes database passwords through container environment variables, run:

```
# Production deployment (default)
sh scripts/secure_existing_deployment.sh

# Local development deployment
DNR_COMPOSE_MODE=development sh
scripts/secure_existing_deployment.sh
```

The helper makes a timestamped database backup, generates private database credentials, writes the ignored .env with mode 600, rotates the root account and six service-specific MySQL accounts, applies tracked migrations and grants, and rebuilds the services with immutable footer provenance. An existing .env is accepted only when it has the two recognized legacy MySQL password variables. The file is never sourced: only an explicit allowlist of non-secret application settings is copied to the replacement. Deprecated password and calendar-token values are discarded. The helper refuses an already-secured, unrecognized, or partially migrated setup. This legacy credential-conversion helper is not the release deployment command. Before using it for a structural or database-version upgrade, complete the fresh, restore-verified backup procedure in the runbook; do not rely on its unverified SQL dump alone.

The migration runner obtains database-administrator access only in the isolated migrator/database services. It holds a MySQL advisory lock, records applying, applied, or failed state plus each filename and SHA-256 checksum, and refuses to guess after interrupted DDL. Fresh installs and upgrades both start with migrations/20260813\_baseline.sql and then follow the same ordered forward migrations. Add a new migration instead of editing an applied file. All account roles must enroll 2FA after their next successful password login before accessing application data.

If the upgraded database predates password hashing and still contains plaintext user passwords, run the one-time CLI migration. It leaves recognized password hashes unchanged, invalidates sessions for migrated accounts, and requires those users to choose a new password after login:

```
docker compose exec web php
/opt/dnr/bin/migrate_passwords.php
```

There is intentionally no browser-accessible password migration page.

The audit-log and Chron-entry migrations use the database administrator account because they install triggers; MySQL requires elevated privileges for that operation when binary logging is enabled. The application continues to connect with the restricted dnruser account. The migrations record successful logins, security events, and row-level inserts, updates, and deletes for users, organizations, contacts, engagements, Chron entries, and presentations. Administrators can review this history from **Users > Audit Log**. Audit entries identify the actor, affected record, IP address, and UTC timestamp without storing passwords, authentication secrets, recovery codes, Chron contents, or before/after field values.

## Ubuntu 24.04 deployment with Proton Mail

The Linux deployment is supported on the existing Ubuntu 24.04 host; it does not require an Ubuntu release upgrade. Proton Bridge runs as a non-root, headless sidecar built from Proton's checksum-verified official Debian package. Only mail-ingest shares its network namespace, so Bridge's IMAP listener remains on 127.0.0.1 and is never published to the host, LAN, or Internet. Its account, keychain, and generated credentials persist in the proton\_bridge\_data volume.

Outbound mail should use a Proton SMTP submission token (<https://proton.me/support/smtp-submission>) directly at smtp.protonmail.ch:587 with STARTTLS. This keeps mail-dispatch independent of Bridge and leaves Bridge responsible only for inbound IMAP.

The Ubuntu ingress also differs from the Docker Desktop deployment: it publishes no host port. Traefik and MOED share a dedicated /29 network, while Cloudflared receives one stable address on the existing proxy network. DNR trusts those exact hops. Do not replace the exact Cloudflared address with the entire shared proxy subnet; another container on that subnet could otherwise present forged Cloudflare client headers.

Prepare the network and merge the tracked proxy overlay with the existing Traefik stack. Replace /path/to/traefik with that stack's directory:

```
docker network create --driver bridge --subnet
172.29.255.0/29 moed_edge
install -m 600 deploy/traefik-moed-edge.yaml \
/path/to/traefik/docker-compose.moed-edge.yml
cd /path/to/traefik
docker compose -f docker-compose.yml -f
docker-compose.moed-edge.yml config --quiet
docker compose -f docker-compose.yml -f
docker-compose.moed-edge.yml up -d traefik cloudflared
```

Use both Traefik Compose files for every future update to that stack. The overlay pins Traefik to 172.29.255.2 on moed\_edge and Cloudflared to 172.18.0.254 on proxy; the matching defaults are already in .env.example. If either subnet conflicts on another host, change all matching values together before creating the network.

Those commands preserve the current MOED host layout. For a separate deployment, merge deploy/traefik-edge.yaml instead and set the same DNR\_EDGE\_NETWORK, Traefik address, and Cloudflared address in both Compose projects; its defaults match the generalized Ubuntu overlay.

Create the normal database/application secrets, an empty mode-600 IMAP password file, and a mode- 600 SMTP token file. Copy .env.example to .env, set the public URL and mail identities, and leave DNR\_TRAEFIK\_ENABLE=false during staging. Native Linux Compose mounts local secrets with their host ownership, while MOED deliberately drops the capability that would bypass file modes. Run ./scripts/prepare\_linux\_secrets.sh after creating or replacing any secret. It keeps the host directory private and grants read-only ACLs only to the container root and www-data identities; do not make the secret files world-readable. For Proton SMTP Submission, set:

```
DNR_MAIL_FROM=dnr@example.org
DNR_SMTP_HOST=smtp.protonmail.ch
DNR_SMTP_PORT=587
DNR_SMTP_ENCRYPTION=starttls
DNR_SMTP_USERNAME=dnr@example.org
DNR_SMTP_PASSWORD_SECRET_FILE=./secrets/smtp_password
DNR_IMAP_USERNAME=
DNR_IMAP_PASSWORD_FILE=./secrets/imap_password
DNR_TRAEFIK_ENABLE=false
```

Put the SMTP token - not the Proton account password - in secrets/smtp\_password. Then initialize the Bridge volume and sign in interactively:

```
./scripts/proton_bridge_cli.sh configure
```

At the Bridge prompt run login, complete Proton authentication, run updates autoupdates disable, and run info. Put the generated IMAP username in DNR\_IMAP\_USERNAME and its generated password in secrets/imap\_password; do not use the Proton account password. Exit the prompt and start the staged stack:

```
./scripts/compose_with_provenance.sh
production-ubuntu-proton up -d --build
```

```
./scripts/proton_bridge_cli.sh status
./scripts/proton_bridge_cli.sh logs
```

Before cutover, restore and verify the encrypted DNR backup on Ubuntu and confirm Traefik can reach the staged ingress with docker exec traefik wget -qO- http://172.29.255.3/health.php. The final cutover has two coordinated changes: remove the old moed-router and moed-service entries from Traefik's file-provider configuration, then set DNR\_TRAEFIK\_ENABLE=true and recreate the Ubuntu ingress service. Keeping the label disabled until that moment prevents the staged router from competing with the live Mac route. Rollback is the reverse: disable the label and restore the old file-provider route.

Database initialization uses only the ordered files under migrations/. The Compose migrator service applies the minimal baseline and every forward migration, records immutable checksums and state, and then applies the single privilege manifest. There is no independent schema snapshot to drift from the upgrade path.

## Deploying the tracked MOED release to s1

Follow Release and recovery workflow (docs/release-workflow.md) to prepare the version, merge through the six protected checks, qualify immutable images, and verify main and the release tag on both remotes. Then deploy the exact final commit:

```
./scripts/deploy_s1.sh "$(git rev-parse HEAD)"
```

The command targets the configured s1 deployment and uses the complete production-ubuntu-proton-mattermost topology. It creates and restore-verifies a fresh encrypted database backup before changing the checkout, database image/schema, or application version. This is a standing deployment directive (.cursor/rules/backup-before-database-upgrade.mdc), including for manual structural/version upgrades.

Configure the private s1 backup password file first (DNR\_S1\_BACKUP\_PASSWORD\_FILE, default secrets/deployment\_backup\_password under the deployment's project directory). Deployment holds a host lock through backup, migration and public readiness; it uses CI-qualified digests with rebuilding disabled and retains an explicit recovery record. DNR\_S1\_USER, DNR\_S1\_HOST, DNR\_S1\_PROJECT\_DIR and DNR\_S1\_PUBLIC\_BASE\_URL can override the deployment user, host, project directory, and public URL.

## Build provenance

Use `scripts/compose_with_provenance.sh` instead of invoking a Compose build directly. It derives the checked-out commit and UTC commit timestamp, validates both values, exports them as Docker build arguments, and then runs Compose. It refuses a dirty worktree because a footer commit would not accurately identify uncommitted source files.

```
# Local HTTP development
./scripts/compose_with_provenance.sh development

# Production behind the configured HTTPS proxy
./scripts/compose_with_provenance.sh production

# Production with the inbound IMAP worker
./scripts/compose_with_provenance.sh production-mail

# Local HTTP development with the inbound IMAP worker
./scripts/compose_with_provenance.sh development-mail

# Production with encrypted queued SMTP delivery
./scripts/compose_with_provenance.sh production-smtp

# Production SMTP with a private pinned trust anchor
./scripts/compose_with_provenance.sh
production-smtp-ca

# Production with both inbound IMAP and outbound SMTP
workers
./scripts/compose_with_provenance.sh
production-mail-smtp

# Ubuntu production with private Traefik ingress and
headless Proton Bridge
./scripts/compose_with_provenance.sh
production-ubuntu-proton

# Production IMAP and SMTP with a private pinned SMTP
trust anchor
./scripts/compose_with_provenance.sh
production-mail-smtp-ca

# Local equivalents
./scripts/compose_with_provenance.sh development-smtp
./scripts/compose_with_provenance.sh
development-smtp-ca
./scripts/compose_with_provenance.sh
development-mail-smtp
./scripts/compose_with_provenance.sh
development-mail-smtp-ca

# Forward a specific Compose command or service
selection
./scripts/compose_with_provenance.sh development up
-d --build web ingress

# Display the metadata without running Docker
./scripts/compose_with_provenance.sh --print-metadata
```

For CI source archives without `.git`, export a complete 40-character `DNR_BUILD_COMMIT` and a UTC `DNR_BUILD_TIMESTAMP` in `YYYY-MM-DDTHH:MM:SSZ` format before invoking the wrapper. Both values must be supplied together.

## Application workflows

### Daily operations dashboard

The application root and completed sign-ins open **Dashboard**, a role-aware daily operations view. It combines active engagements in the configured upcoming window, the signed-in user's active and overdue work, event-readiness gaps, and ended events that still need a financial closeout. Readiness flags identify unconfirmed events, missing venue addresses, missing presentations, and organizations without an assigned event contact. The greeting uses the signed-in user's first name when it is available. Administrators and editors also see inbound messages awaiting routing review and quick actions for creating engagements and tasks; reviewers receive the same operational context without write controls.

### Inquiry and booking pipeline

Potential events begin as first-class **Inquiries** instead of incomplete Engagements. The Booking Pipeline organizes active records across **New**, **Contacted**, **Qualified**, **Awaiting Details**, and **Proposal Sent**, with separate **Booked** and **Declined** outcomes. Each Inquiry can retain an optional Organization and primary Contact, preferred and alternate date ranges, request and location details, source, owner, priority, next action, Chron, outbound correspondence, stage history, and linked follow-up work. Declining requires a reason and remains reversible until the Inquiry is booked.

Create inquiries with **New Inquiry** in the Booking Pipeline. Inquiry email templates cover the initial response, request for details, date options, and proposal follow-up. Messages use the existing isolated delivery worker and add a signed Inquiry reply marker; matching replies return to the active Inquiry Chron. Delivery history is visible on the Inquiry and is also recorded on the selected Contact and Organization when present.

**Review booking** validates the required Organization, title, and preferred dates; surfaces overlapping active Engagements and qualified Inquiries; and lets the user choose which open Inquiry tasks should move. Acknowledged warnings do not become unexplained hard blocks. Conversion runs in one transaction: it creates the Engagement, assigns the primary Contact as Primary host when available, moves selected tasks, generates the standard event checklist, marks the Inquiry Booked, and preserves the Inquiry as a read-only source record linked to the new Engagement.

Administrators and editors can select **Archive Inquiry** on a declined Inquiry or a booked Inquiry that has been converted to an Engagement. Archived inquiries leave every Booking

Pipeline view and its Dashboard count. **Archived Inquiries** provides search, filters, export, and read-only access to the retained details, outcome, history, correspondence, tasks, and Engagement link. **Restore Inquiry** returns the record to its previous outcome; restore a declined inquiry before editing or reopening it. Archiving an Inquiry does not archive its Engagement or follow-up tasks.

## Work queue and standard event tasks

Authenticated users can open **Work Queue** to review assignable follow-up work. Tasks may be general or linked to one inquiry, engagement, organization, or contact. Each task supports an owner, due date, priority, notes, and the states **Open**, **In progress**, **Waiting**, **Completed**, and **Canceled**. The queue provides personal, overdue, due-today, next-seven-days, waiting, unassigned, completed, and all-active views. Reviewers can inspect tasks; administrators and editors can create, edit, assign, and complete them; permanent deletion remains limited to administrators.

Archiving an engagement or inquiry hides its associated tasks from active Work Queue views, counts, reminders, calendars, and digests without changing any task fields. Restoring the parent returns its **Open**, **In progress**, and **Waiting** tasks automatically. Completed, canceled, and individually archived tasks remain outside active work. Task history stays available, and archiving an inquiry does not affect tasks already moved to its engagement.

The navigation badge and the **My reminders** panel summarize only the signed-in user's actionable work: overdue, due today, next seven days, and waiting tasks. Administrators and editors also see their open financial closeouts. Each count links to the matching personal queue. Users with a verified email address can enable the optional daily email version under **My Profile > Notifications**.

Engagement, organization, and contact detail pages show their open follow-up work. Active engagements also offer an optional, idempotent standard checklist covering location, travel, presentations, materials, host reconfirmation, post-event thanks, outcome capture, and financial closeout. Every active standard item is automatically added and assigned to the creator when a new engagement is saved; re-running **Add missing checklist tasks** on an older engagement only adds missing active items. Open **Standard event tasks** from the Work Queue to add, view, or edit the reusable task content, priority, event-relative due rule, and order. Archived definitions are excluded from future checklists and may be restored; administrators can permanently delete archived definitions after fresh authentication. Editing, archiving, or deleting a definition does not rewrite tasks already generated for events. The required built-in **Complete the event financial closeout** task cannot be edited,

archived, or deleted; it is due seven days after the event end date and directs staff to finalize giving/income, lodging, and travel received.

## Task-backed follow-up and recoverable drafts

Inquiry next actions are linked Tasks. Editing their title, owner, due date, or status updates the pipeline summary; completing or archiving the task clears the active next action. Inquiry editing can designate another active linked task. Clearing the next-action fields removes the designation without deleting the task. Booking can carry the same task forward or resolve it with a reason. Existing active inquiry next actions are migrated into tasks and included in task totals.

In either email composer, **Create a Task to Review the Reply** creates a waiting task assigned to the sender with a chosen follow-up date. The Tasks page and outbound message show **Awaiting reply** or **Reply received - review needed**. Reply detection requires a processed message filed to the same record, from an outbound recipient, with matching In-Reply-To or References headers. A reply never completes the task automatically; forwarded messages without those headers require manual review.

Tasks supports bulk reassignment, due-date changes, and completion with a preview. Each task is checked again on Apply; changed, archived, or completed tasks are skipped and reported. Clearing a bulk due date removes dates, and manual due-date changes override checklist rescheduling. Selection buttons affect only the current page. Administrative bulk deletion retains its separate review and unlock.

Engagement, inquiry, and email forms offer **Save Draft**, **Restore Draft**, and **Discard Draft**. Drafts are scoped to the signed-in user in this browser, expire after 30 days, and are cleared after a successful save or send. Changed record versions block automatic restoration and expose saved values for manual recovery. Uploaded files must be selected again; values from removed or newly added repeat rows are retained for manual recovery when matching controls are unavailable. Drafts do not save records or send mail, and browser storage must be available for recovery.

New Contact and New Organization forms warn about likely existing records by name, email, and phone. Choose **Use Existing** or acknowledge that the matches are different records. The server repeats the check on Save; shared contact details do not cause automatic merging.

## Event contacts and roles

Engagement create and edit forms can assign multiple contacts with one or more event-specific roles: **Primary host**, **On-site contact**, **Billing**, **Travel**, and **Materials**. Search the contact directory to add existing people, or use **Add new contact** repeatedly without leaving the event. New people and additional organization affiliations are saved together with the event; validation errors leave the draft available for correction.

A contact can belong to several organizations, each with its own role or title. Contact forms retain a primary organization and allow additional affiliations, such as Pastor at one church and Chairman at a research center. Organization contact lists, event pickers, searches, and event exports use the matching affiliation. Removing an affiliation clears only the event assignments that depended on it; assignments at other organizations remain intact. Deleting an organization retains shared contacts and promotes a remaining affiliation to primary.

PDF exports carry the configured digest-email wordmark on a white masthead for consistent graphical branding. They include only active work linked to the exported event and mirror the Work Queue's labeled overdue and due-today colors and semantic edge.

## Engagement lifecycle

Engagements track operational lifecycle separately from planning confirmation. Lifecycle states are **Active**, **Postponed**, **Canceled**, and **Completed**; confirmation remains **Work in progress**, **Under review**, or **Confirmed**. Canceling an engagement requires a reason, and a postponed or canceled engagement may link to a replacement event from the same organization. Replacement links cannot point to the same event or form a cycle.

Canceling an engagement also cancels its open, in-progress, and waiting follow-up tasks while preserving completed work. Postponed and canceled events cannot receive a new standard checklist or financial closeout. Finalizing the first financial report marks an active event completed, and an event with a final report cannot be moved back to another lifecycle state. Engagement lists, exports, maps, calendar feeds, and detail screens expose lifecycle and confirmation independently; daily operational queues default to active events so postponed, canceled, and completed records do not appear as current work.

## Speaker records

Under **Relationships > Speakers**, all signed-in users can view speakers; administrators and editors can add and edit their name, email address, telephone number, and optional bio. The bio uses the same six-row text field and safe link rendering as Contact Notes. Telephone numbers use the Contacts country picker and formatting and are stored in E.164 format. Speakers also have optional website, bio, donation, connection, blog, and books URLs. These accept HTTP/HTTPS links up to 2,048 characters and appear on the speaker detail page. Speaker photos can be uploaded, replaced, or removed with the same JPEG/PNG/WebP validation, 5 MB limit, resized originals, and thumbnails as contact photos. The Speakers directory shares the Contacts theme, search/sort controls, view/edit icons, and upper/lower pagination rules. Speakers cannot be archived. Administrators can delete unused speakers individually or in bulk after admin unlock; references from presentations, short links, notes, and slide decks prevent deletion. Presentation forms select a saved speaker from a dropdown. Edits to a speaker apply to all associated presentations, including their calendar entries and exports.

The 20260907\_add\_speakers.sql migration creates an initial speaker record and assigns **every existing presentation**, including archived records, to that speaker. It then replaces the old free-text speaker name with a required foreign key. Apply it through the normal backed-up migration workflow together with the application changes. The application database account receives SELECT, INSERT, UPDATE, and DELETE rights for speakers. The 20260921\_add\_speaker\_delete\_audit.sql migration audits speaker deletion; restrictive foreign keys preserve linked history. The offline exact-restore account retains its recovery access.

## Individual and bulk deletion

Administrators can keep using individual Delete actions, or select checkboxes on the Organizations, Contacts, Speakers, Engagements, Tasks, and Users lists and choose **Delete selected**. **Select all on this page** selects only the displayed items (up to 100); changing pages or filters starts a new selection. Only inactive or invited users other than yourself can be selected. The review page lists the selected records and related data that deletion removes. Selections survive admin unlock and expire after 30 minutes. User deletion additionally requires typing **DELETE USERS** for a batch or **DELETE USER** for an individual account.

Every deletion rechecks administrator access and the existing five-minute unlock on the server. Deactivating or deleting a user keeps the original unlock deadline; it does not restart the

timer or lock the administrator out early. Active accounts, your own account, and referenced speakers remain protected. Each selected record is processed independently, with deleted and failed counts reported on return to the original list and filters. Permanent deletion cannot be undone.

## Presentation QR codes

See Presentation QR Codes (docs/qr-code-system.md) for generated speaker links, public notes downloads, statistics, and country-detection configuration.

## Financial closeout and giving history

Editors and administrators can close an active event from its detail page by finalizing the actual giving/income, lodging, and travel amounts received. These actual receipts are stored separately from the anticipated travel, lodging, and compensation fields used during planning. Before the first report can be finalized, every event task due on or before the last active presentation must be marked Completed. Tasks due after that presentation and tasks without due dates do not hold the closeout. A report can be corrected later without changing its original closer or close timestamp; concurrent corrections are rejected rather than silently overwriting newer figures. Every insert and correction is captured by the database audit log.

Organization detail pages calculate lifetime giving, latest-event giving, average giving per closed event, and aggregate lodging and travel receipts from finalized reports only. "Latest event" follows the event end date, even if its report was entered later, and archived events remain part of the historical totals. The organization list also shows latest-event and lifetime giving for quick review.

## Map and venue locations

Authenticated users can open **Map** in the primary navigation to view engagements on an interactive, zoomable map. The initial view contains active lifecycle records; lifecycle, confirmation, and date filters can include other records when needed. Active pins use confirmation colors, while postponed, canceled, and completed pins display their lifecycle state. Selecting a pin opens the event summary and a link to the full engagement. Events without an address are counted but cannot be placed.

The web request never calls the geocoder. New or changed addresses enter a database queue; the dedicated egress-enabled worker resolves them at no more than one request per 1.1 seconds and caches results by normalized address, so events at the same address share one result. The initial map window and result count are bounded. The tile URL and attribution are supplied by the selected deployment

profile; geocoding uses its separately allowlisted worker endpoint.

## Calendar and private subscriptions

Authenticated users can open **Calendar** in the navigation to create, label, copy, and revoke private subscription URLs per device. The feed includes non-archived engagements in the configured bounded calendar window, regardless of lifecycle. Entries are all-day events covering the event date range and include lifecycle, confirmation, organization, title, type, and location. Canceled events use the calendar-standard CANCELLED status; postponed and canceled entries are marked transparent, and their descriptions include any cancellation reason and replacement event. Calendar clients choose their own refresh schedule, so database changes may not appear immediately.

When creating a link, choose any combination of **Events**, **Presentations**, **My Active Work**, **All Active Work**, and **Birthdays (from Contacts)**. Select at least one category. Each link keeps its own content settings, displayed beneath its label. All Active Work disables My Active Work and includes everyone's active work, including unassigned tasks. My Active Work uses the subscription owner's assignments. Open, in-progress, and waiting tasks with a due date appear as transparent all-day reminders within the feed window; completed, canceled, and undated tasks do not appear. Task changes invalidate cached feeds. Existing links retain events, presentations, and birthdays without adding work automatically.

Each subscription URL contains a revocable bearer token and does not use a browser login. Treat it as a password; revoke only the affected device token if it is disclosed. DNR stores only a SHA-256 token digest and redacts all query strings from Apache access logs. Depending on the selected content, a feed can include contact names and birthdays or work titles, due dates, status, and priority. Contact details, task details, chronological notes, travel, lodging, and compensation remain excluded.

## Email and integrations

### Outbound email and task digests

Invitation, verification, and recovery messages use an encrypted transactional outbox. Creating a token and its queued message is one database change; a dedicated mail-dispatch worker owns the SMTP credential and the only SMTP egress path. The web service never connects to SMTP. A previous single-use link remains valid while its replacement is pending and is invalidated only after the relay accepts the new message. Failed deliveries retry with bounded exponential backoff, and the encrypted payload is erased after success or terminal failure.

#### Daily digests

Verified users receive a daily work digest by default on weekdays at 7:00 a.m. under **My Profile > Notifications**. Each user can disable it, choose a different local delivery time, or select any combination of days; weekday, weekend, and every-day presets are available. After the selected time on a selected day, the same worker queues at most one message per user and business date with a light-only HTML snapshot of the Dashboard: upcoming engagements, My Work, event readiness, financial closeouts, and, for administrators and editors, inbound mail awaiting review. Overdue and due-today rows retain the Dashboard's semantic highlighting, and every record includes the same role-appropriate navigation link as the Dashboard. A matching plain-text alternative is included for clients that do not render HTML. Digests use a separate encrypted notification\_outbox so account-token delivery remains isolated; messages are discarded if the recipient opts out, changes their email, becomes inactive, no longer has a verified address, or removes the queued day from their schedule. Sent and terminal payloads are erased. `scripts/generate_daily_digest_preview.php` refreshes the deterministic sample at `docs/daily-digest-preview.html` through the production renderer.

The email PNG uses a transparent background with a thin white outline around the artwork, so clients that force dark message backgrounds do not leave a white rectangle behind the logo. Its original colors and dimensions are preserved, and compositing it onto the white masthead reproduces the light-mode artwork exactly. Keep the outline when replacing this asset: the small dark lettering needs it for contrast. The email logo URL includes an artwork revision to refresh cached images independently of the application version.

Administrators with fresh elevation can also manage any user's digest enablement, delivery time, and delivery days from **Users > Edit User**.

### Reusable email templates

Email Templates in the sidebar lets editors and administrators create and edit reusable engagement email subjects and messages, suggest event contact roles, and set the display order. The five original templates are seeded into the library and can be edited, archived, or restored. Archived templates are excluded from both the web and Mattermost composers. Administrators can permanently delete an archived template after confirming their access. Reviewers can view the library. **Custom message** remains available for writing from scratch. Template names and reviewed content are retained with sent messages even if a template is later edited or deleted; overlapping edits are rejected instead of overwriting newer changes.

Templates support `{{event_name}}`, `{{organization_name}}`, `{{event_dates}}`, `{{event_start_date}}`, `{{event_end_date}}`, `{{event_location}}`, `{{speaker_names}}`, and `{{presentation_schedule}}` (message only). Use the editor's **Personalize with event fields** buttons to insert them. Values are filled when composing; the sender can still edit the subject, message, and recipients before sending. The engagement routing marker is added automatically. Apply `20260910_add_email_message_templates.sql` and the corresponding application-table grant before deploying this feature.

## Tracked engagement correspondence

Editors and administrators can also send tracked plain-text correspondence from an active Engagement. The composer provides booking-confirmation, travel/lodging, final-reconfirmation, presentation-schedule, post-event thank-you, and custom starting templates. Recipients are selected from the Engagement's assigned Primary host, On-site contact, Billing, Travel, and Materials roles, plus speakers assigned to its active presentations. Speakers are optional and unchecked by default; select their recipient cards or use the Speaker shortcut to include them. Each speaker appears once, even when assigned to multiple presentations, and can also receive a message without any event contacts. Choose To, Cc, or Bcc for each selected recipient, and optionally Cc or Bcc the signed-in user's account email. To and Cc addresses are visible in the email headers; Bcc addresses are hidden. Every unique address receives an independent delivery, and conflicting types for a shared address must be resolved before queuing. Saved recipient types and headers are preserved on retries. The authoritative Engagement marker is appended to the subject automatically, allowing a reply that preserves the subject to return through the normal inbound-mail routing workflow when `DNR_INBOUND_ADDRESS` is configured. In that mode, tracked Engagement messages set the shared inbound mailbox as their Reply-To address; other application email keeps the ordinary sender.

The optional share-safe event brief contains only the public event schedule, location, description, and presentations. It deliberately excludes Chron entries, internal notes, compensation, giving, and financial-closeout data. Queuing a message creates linked source entries in the Engagement and Organization Chron logs and in each selected Contact's Chron log. The retained correspondence record stores the reviewed plain-text subject and body as business history, consistent with Chron and retained inbound mail. The separate SMTP delivery payload is sealed with the application key while pending and erased after successful or terminal delivery. Each recipient retries independently with bounded exponential backoff; editors and administrators can explicitly reconstruct and re-queue a terminal failed delivery from the retained source record.

## SMTP setup

Create `secrets/smtp_password`, configure the sender and relay in `.env`, and use `production-smtp` or `development-smtp`. Combine inbound and outbound mail with `production-mail-smtp` or `development-mail-smtp`.

SMTP relays with a private or self-signed certificate can be pinned without disabling TLS verification. Put only the relay's public certificate in `secrets/smtp_ca.pem`, set

`DNR_SMTP_PEER_NAME` to a name or IP address covered by that certificate, and use the matching `*-smtp-ca` Compose mode. The trust anchor is mounted only into `mail-dispatch`; the web and other workers cannot read it. If the relay rotates its certificate, delivery fails closed until the pinned certificate is replaced.

For Proton Mail Bridge on Docker Desktop, use the Bridge-generated username and password - not the Proton account password - and keep Bridge bound to the host loopback interface. Bridge's exported public TLS certificate covers 127.0.0.1, while the container reaches the same-Mac listener through `host.docker.internal`, so a typical combined configuration is:

```
DNR_SMTP_HOST=host.docker.internal
DNR_SMTP_PORT=1025
DNR_SMTP_ENCRYPTION=starttls
DNR_SMTP_PEER_NAME=127.0.0.1
DNR_SMTP_CA_SECRET_FILE=./secrets/smtp_ca.pem
```

Export Bridge's TLS files under **Settings > Advanced > Export TLS certificates**, retain the private key outside DNR, and copy only the public certificate to `secrets/smtp_ca.pem`. Start both mail workers with `./scripts/compose_with_provenance.sh production-mail-smtp-ca`. Do not publish the Bridge IMAP or SMTP ports to the LAN or Internet.

## Inbound email to Chron

DNR can poll a dedicated IMAP mailbox and turn messages copied to it into Contact, Organization, and Engagement Chron entries. It uses exact email-address rules plus an explicit Engagement marker; it does not send message content to an AI service.

The routing policy is deliberately conservative:

- The sender must uniquely match an active DNR user with a verified email address, an active Contact, or an active Organization.
- DNR considers the message's From, To, and Cc addresses, excluding the configured gateway address and recognized internal users. A unique Contact match adds the message to that Contact and the Contact's Organization. A direct Organization email match adds it to the Organization.
- Put the exact signed marker shown on the Engagement page in the subject or plain-text body to route the message. In the tracked MOED deployment profile its shape is `[MOED#123.<signed-token>]` for Engagement 123. A valid signed marker routes automatically only when the visible sender also uniquely matches an active DNR user, Contact, or Organization. Unknown

senders, unsigned or altered markers, unknown or archived Engagements, and messages containing multiple different markers require review. Participant mismatches route only to the signed Engagement; clean exact-address matches retain the usual Contact and Organization routes too.

- Duplicate delivery of the same RFC Message-ID is idempotent. Without a valid signed marker, all messages remain in **Inbound Mail** for review; ambiguous senders, shared email addresses, unknown senders, and messages with no matched target go to **Inbound Mail** for an administrator or editor to review. Reviewers may choose any active Engagement from the searchable selector, in addition to approving matched Contact and Organization routes. If an address is missing from DNR, update the record and use **Retry routing**.
- The Chron entry contains the normalized headers, subject, timestamps, plain-text body, attachment names, and a link to the retained inbound record. Attachment contents are not stored. When an HTML body is available, it is converted to inert text, retaining HTTP(S) link destinations next to their labels. Otherwise the plain-text body is used. Retained web URLs are clickable in both Inbound Mail and the activity entry; email HTML itself is never rendered.

- Automatic routing requires authenticated sender results by default. The bundled Proton Bridge adapter supplies signed assertions from Proton's API metadata for internal mail and external mail that passed DMARC, as described in Proton sender authentication (#proton-sender-authentication-incident-fix-and-verification). For other IMAP providers, list the exact trusted mailbox authserv-id values in DNR\_INBOUND\_TRUSTED\_AUTH\_SERVERS; until then, messages remain in **Inbound Mail** for review. The topmost Authentication-Results header must come from a listed server and report an aligned dmarc=pass for the visible From domain. Missing, forged, failing, or mismatched results fail closed. Set DNR\_INBOUND\_REQUIRE\_AUTHENTICATED\_FROM=0 only as an explicit compatibility exception for a trusted mailbox that cannot expose provider-generated results. DNR intentionally does not trust a later sender-supplied Authentication-Results header.

## Worker setup and retained mail

An Engagement marker is a signed routing capability, so do not expose it outside the intended correspondence. Unsigned legacy markers intentionally require review after this upgrade. Exact address matching remains a routing aid, not proof of sender identity, and inbound entries are always attributed to the Email Gateway rather than the visible From identity. The mailbox provider should still enforce its normal spam and SPF/DKIM/DMARC checks.

Both Cc and Bcc delivery to the configured DNR\_INBOUND\_ADDRESS work. A Bcc delivery normally omits the gateway address from the stored message headers, which is expected; DNR routes using the remaining participants. For example, mail from a verified DNR user to a unique Contact routes to the Contact and its Organization, while a reply from that Contact is recognized from From.

Apply the tracked database migration before enabling the worker. Then create the ignored IMAP password secret, set the inbound variables in .env, and start a mail-enabled Compose mode:

```
install -m 600 /dev/null secrets/imap_password
# Put the exact IMAP/Bridge password in
secrets/imap_password without committing it.
./scripts/compose_with_provenance.sh production-mail
```

For local development, use development-mail. The worker discovers new messages by IMAP UID, regardless of their read/unread flags. It saves a mailbox checkpoint identified by the server, account, folder, and UIDVALIDITY. Each bounded batch fetches with BODY.PEEK[], leaving the source message and its flags unchanged. Durable storage and the checkpoint commit in the same database transaction; a failed fetch or storage write is retried without skipping that message. Routing then uses the existing retryable queue. Oversized or unparseable messages advance the checkpoint only after an inbound\_email\_quarantine entry is stored, so they cannot starve later messages.

Content-free import receipts survive source purges and retention cleanup. The migration seeds receipts from currently retained mail, but cannot reconstruct records purged before the upgrade. Consequently, the **first mailbox scan**, and any

later **UIDVALIDITY reset**, hold unknown existing messages for explicit reconciliation instead of automatically importing them. Known receipts prevent reimport; new arrivals beyond that initial snapshot enter the normal queue automatically. The Operations page shows the last successful mailbox check/import, failures, and counts of historical and quarantined messages awaiting review. The mailbox remains a recoverable source of record.

After starting the upgraded worker, list historical candidates from the running mail-ingest service (append the deployment's usual Compose override files as needed):

```
docker compose -f docker-compose.yaml -f
docker-compose.mail.yaml exec -T mail-ingest \
  php /opt/dnr/bin/reconcile_inbound_mail.php --list
```

The listing contains at most 100 pending candidates, each with sender, subject, sent time, UID and UIDVALIDITY. Review that metadata against retained mail/Chron history. To import one selected message, or deliberately leave it out, use exactly one of these commands with the listed values:

```
# Replace the example numbers with the UID and
UIDVALIDITY from the listing
docker compose -f docker-compose.yaml -f
docker-compose.mail.yaml exec -T mail-ingest \
  php /opt/dnr/bin/reconcile_inbound_mail.php
--import=13 --uid-validity=112563446
docker compose -f docker-compose.yaml -f
docker-compose.mail.yaml exec -T mail-ingest \
  php /opt/dnr/bin/reconcile_inbound_mail.php
--ignore=13 --uid-validity=112563446
```

Import rechecks the message fingerprint and sends it through normal routing/authentication rules. Ignore saves a content-free receipt so redelivery stays ignored. Re-run the listing after decisions to see any remaining candidates; there is intentionally no bulk-import command. Both reconciliation and the worker acquire the same mailbox lock. Neither changes IMAP read flags, moves mail, or sends email. Apply the migration and refreshed database grants before starting the upgraded worker.

An administrator with a recent elevated session can purge an individual retained mail entry from its **Inbound Mail** detail view. Purging removes the DNR mail card and its retained source content, but preserves every associated Contact,

Organization, and Engagement Chron Log entry; only the source-email link on those Chron entries is cleared. The original message in the IMAP mailbox is not deleted or moved.

The permanent receipt retains only the message fingerprint and import/purge/ignore timestamps; it cannot reconstruct deleted message content. Restoring a database backup also restores its mailbox checkpoints and receipts. A mailbox reset after restoration uses the same reconciliation process described above.

Proton Mail accounts require Proton Mail Bridge (<https://proton.me/support/imap-smtp-and-pop3-setup>) and a paid Proton plan. Configure DNR with the IMAP hostname, port, username, and generated password shown by Bridge - not the Proton account password. Bridge uses a local, self-signed IMAP endpoint and is designed for clients on the same computer. Set `DNR_IMAP_VERIFY_PEER=0` only for that local or tightly isolated Bridge connection; keep certificate verification enabled for any remote IMAP server. Because a Docker container may not be able to reach a Bridge listener bound only to the host's loopback interface, confirm network reachability from the mail-ingest service before using the production mail mode. If Bridge cannot be made reachable without exposing it, run the worker beside Bridge or use a dedicated standards-compliant IMAP mailbox rather than publishing Bridge to an untrusted network. Proton documents the local-only design in its Bridge overview (<https://proton.me/support/why-you-need-bridge>) and Bridge CLI guide (<https://proton.me/support/bridge-cli-guide>).

## Proton sender authentication: incident, fix, and verification

**Issue identified on September 6, 2026 (application 1.11.23).** An incoming message had a valid signed Engagement marker and uniquely matched an active user's verified email address, but Routing details reported: "The visible sender does not have a trusted aligned DMARC pass from the mailbox provider." The message had arrived successfully; the missing evidence prevented automatic Chron filing. That warning did not establish that the sender had failed DMARC or was spoofed.

Two independent conditions explained the behavior. Production's `DNR_INBOUND_TRUSTED_AUTH_SERVERS` was empty, so no ordinary Authentication-Results header could satisfy the original authentication gate. In addition, the inspected message was internal, end-to-end encrypted Proton mail. Its retained headers included `X-Pm-Origin: internal` and `X-Pm-Content-Encryption: end-to-end`, but no Authentication-Results header. Adding a trusted server name alone could not fix this internal-mail case. The 22-character signature in `[MOED#123.<signed-token>]` authenticates the

routing capability; it does not authenticate the person named in From.

**Implementation.** The Proton sidecar retains the checksum-pinned official 3.25.0 package and uses a narrowly adapted backend built from the separately checksum-pinned 3.25.0 source archive. The adapter lives in `docker/proton-bridge-auth/`; its installation script inserts one call at the end of upstream `getMessageHeader()`. The backend reports 3.25.0+dnr.1. Its decision uses the authenticated Proton API's `MessageMetadata.Flags` and `Sender`, rather than interpreting incoming `X-Pm-*` or sender-supplied Authentication-Results headers:

- A received message marked both **Internal** and **E2E** gets an internal assertion.
- Other received messages marked **DMARCPass** get a `dmarc` assertion.
- Imported mail, messages with **DMARCFail**, and messages flagged as spam or phishing get an `unverified` assertion, even if other flags claim success. Drafts and sent-only items also remain unverified. SPF failure alone does not override a DMARC pass, because DKIM can satisfy DMARC.

Release qualification also found fixable high-severity vulnerabilities in the upstream source's older Go dependency graph. The checked-in dependencies.patches pins `golang.org/x/crypto 0.55.0`, `golang.org/x/net 0.57.0`, `golang.org/x/text 0.41.0`, and `gRPC 1.83.1`, plus their required transitive updates and verified Go checksums. It is applied strictly to the pinned source; the image does not resolve floating latest versions. Message, IMAP-service, and synchronization-service tests run against that patched graph before the backend is built. Release scans remain mandatory.

With the Compose-provided key setting present, the adapter replaces every existing `X-Dnr-Sender-Authentication` field with its own result. Even when authentication or the key is unavailable, it installs a failure value so the upstream decrypted MIME-header merge cannot reintroduce a forged assertion. The result is bound to the normalized sender address and RFC Message-ID and authenticated with a full HMAC-SHA256. A versioned, domain-separated key is derived from the existing inbound routing key; event-tag signatures cannot be reused as authentication assertions. No private key or message content is exposed in the header.

`src/app/Security/InboundBridgeAuthentication.php` verifies that assertion, its signature, sender, and Message-ID. Duplicate, malformed, modified, or mismatched assertions fail closed. A failed Bridge assertion never falls back to ordinary DMARC headers. The existing `topmost-header, exact-trusted-server, aligned-DMARC` policy remains available for generic IMAP

providers and retained messages without a Bridge assertion. Raw X-Pm-Origin and encryption headers alone never authorize processing. Successful Routing details now identify **Verified by Proton (internal message)** or **DMARC verified by Proton**; missing evidence and configuration failures have distinct explanations.

This fixes both Proton cases without turning off `DNR_INBOUND_REQUIRE_AUTHENTICATED_FROM`: the Proton API assertion supplies authenticated evidence directly, so an empty generic trusted-server list does not block verified Bridge mail. A recognized active sender and a valid, unambiguous signed marker for an active Engagement are still required. Existing participant routing, Email Gateway attribution, duplicate-delivery protection, and manual approval remain in force.

**Rollout requirements.** This change includes the Bridge image, Compose secret mount, and PHP application. Deploy all of them through the normal release workflow; updating PHP alone cannot create authentication evidence that an older Bridge never supplied. There is no database migration. Before the first rollout, run `scripts/prepare_linux_secrets.sh` on the Linux host (with `DNR_INBOUND_ROUTING_KEY_FILE` set explicitly if a nondefault host path is used). It grants UID 10001 read access to only the inbound routing key, while retaining the existing `root/www-data` ACLs. `docker-compose.proton-bridge.yaml` mounts that key read-only into Bridge. The entrypoint refuses to start if the configured key cannot be read or is not a base64-encoded 32-byte key. Bridge does not receive database or outbound SMTP credentials. Keep the existing key; do not generate a replacement as part of this fix. Rotation invalidates previously issued event tags and retained Bridge assertions.

Keep Bridge's automatic updates disabled as described in its setup instructions, so an upstream binary cannot silently replace the adapter. Upgrading Bridge requires updating both pinned source and package, reviewing the metadata flags and header-merge behavior, and rerunning adapter tests. Generic IMAP installations continue to configure their real provider's exact `authserv-id` values; do not guess a server name or disable authentication to suppress a warning.

**Validation and operational check.** The Bridge image build runs the upstream message package tests plus `dnr_auth_test.go`. Adapter cases cover internal and external DMARC passes, unverified external mail, imports, drafts, missing encryption, spam, phishing, contradictory pass/fail flags, forged duplicate headers, and unavailable keys. PHP's `inbound_bridge_authentication_test.php` checks the same fixed cross-language HMAC fixture and rejects changed senders, Message-IDs, signatures, versions, duplicates, body-only assertions, and fallback attempts. The disposable `inbound_email_integration_test.php` suite exercises parsing,

storage, automatic processing, actual Engagement Chron writes, and deduplication with an empty trusted-server list. It also verifies that unknown senders, altered tags, and invalid assertions remain in review. These tests use synthetic mail and do not send messages or modify the production mailbox.

Local implementation validation passed composer check, the disposable inbound integration suite, production Compose configuration validation, and the Linux/amd64 Bridge image build (including the upstream and adapter tests). A network-disabled container reported **Proton Mail Bridge 3.25.0+dnr.1**; a separate startup check correctly refused an unreadable authentication key. The disposable database was removed after testing. These results do not constitute a production rollout.

After deployment, check new internal Proton mail and new external DMARC-passing mail from known senders carrying a valid event tag. Confirm the authentication method in Routing details, a final **Processed** status, and exactly one matching Engagement Chron entry. This live delivery check is separate from local automated tests and is not implied by a successful image build. Existing retained messages and Bridge-cached messages may lack the new assertion: the update does not invent evidence, reset mailbox state, refetch old mail, or automatically retry the review queue. Review those messages manually. Already processed messages remain terminal and are not filed again.

Primary implementation references: Proton's pinned message metadata flags ([https://github.com/ProtonMail/go-proton-api/blob/6bf7f5a61eb8/message\\_types.go](https://github.com/ProtonMail/go-proton-api/blob/6bf7f5a61eb8/message_types.go)), Bridge header construction (<https://github.com/ProtonMail/proton-bridge/blob/v3.25.0/pkg/message/build.go>), and sender verification explanation (<https://proton.me/support/digital-signature>).

## Follow-up: automatic Chron filing permissions

After deploying 1.11.24, a new Proton test message passed sender authentication and its signed Engagement route, but automatic filing failed with UPDATE command denied on `contact_chron_entries`. **Retry Routing** then succeeded because that action uses the web application's database account. The background worker uses `dnrmailingest`, which intentionally has only SELECT and INSERT access to Contact, Organization, Engagement, and Inquiry Chron.

The filing queries used ON DUPLICATE KEY UPDATE `id = id` to avoid duplicate Chron entries. MySQL requires UPDATE permission for that clause when preparing the statement, including a first delivery and even when the Contact target list is empty. The error therefore occurred before the intended Engagement entry could be inserted. The transaction rolled back, retaining the source message for retry. This was a filing-permission defect after successful authentication.

Filing now uses INSERT ... SELECT ... WHERE NOT EXISTS for all four Chron tables. The existing FOR UPDATE lock on the inbound source row serializes filing attempts for that message throughout the transaction. Existing entries are skipped without changing their text, attribution, or timestamps; the unique source/target indexes remain in place, and other database errors still abort the transaction. This requires no additional worker grants or schema migration. Processed messages remain terminal.

`tests/inbound_worker_filing_integration_test.php` reproduces the old permission denial and verifies the fix through a real `dnrmailingest` connection in a disposable database. It confirms that Chron updates remain forbidden, tests an Engagement-only message with no Contact match, covers all four Chron destinations, preserves pre-existing entries, and checks duplicate delivery and completed-message protection. Fixture setup and cleanup use the web account; filing always uses the restricted worker. Both ordinary integration CI and exact-release-image qualification run this regression. Previously, filing integration used the web account, while worker-privilege tests only checked account-column access, which allowed the mismatch to escape testing.

## Mattermost plugin

The installable server plugin under `mattermost-plugin/` exposes private daily summaries, engagement search/cards, editor/admin channel bindings, and role-checked follow-up buttons while keeping MOED authoritative. It uses single-use account-link codes and a deployment secret; it never connects to the database directly. Build it with `make -C mattermost-plugin dist` and follow the complete deployment, installation, verification, and rotation guide in `docs/mattermost-plugin.md`. End-user behavior is documented in the in-app **User Manual > Mattermost** chapter.

## Configuration reference

### PHP runtime requirements

For installations outside Docker, Composer validates the PHP runtime used by the application. Install the `cURL`, `Fileinfo`, `GD`, `mbstring`, `mysqli`, `OpenSSL`, and `Sodium` extensions before running composer install.

### Deployment configuration profiles

Non-secret deployment identity and business defaults live in a validated YAML profile. Compose mounts `DNR_CONFIG_FILE_HOST` read-only and exposes it inside PHP as `DNR_CONFIG_FILE`. The tracked MOED profile is `deployments/moed/application.yaml`; copy `deployments/example/application.yaml` when preparing an independent deployment. Do not put passwords, encryption keys, SMTP tokens, or other secrets in these files.

The profile controls:

- display, native, mail, calendar, and authenticator names plus light/dark logo assets;
- default speaker, country, telephone country code, and business timezone;
- emitted and accepted inbound-email marker prefixes, allowing old replies to remain routable after a deployment rename;
- tile provider URL/attribution and bounded dashboard, task, map, calendar, and PDF windows;
- an explicit initial standard-task seed list.

Logo paths are relative to the public application directory and must name files included under `src/assets/` before the image is built.

Configuration precedence is built-in safe defaults, then deployment YAML, then a small set of documented environment overrides. Unknown YAML keys and invalid types, URLs, asset paths, marker prefixes, ranges, and timezones fail application startup. Validate a profile without connecting to the database:

```
DNR_CONFIG_FILE=deployments/example/application.yaml
php scripts/check_config.php
```

Standard tasks are database-managed after import. Migrations never re-read YAML, and normal container startup never reconciles administrator edits. After migrations, explicitly insert missing profile tasks and apply only required-task policy with:

```
docker compose exec web php
/opt/dnr/bin/seed_standard_tasks.php
```

Existing titles, notes, priorities, schedules, and sort order are not overwritten. Tasks absent from the profile are not deleted or archived. Historical product-default tasks came from immutable migrations, so a new deployment should archive any unwanted baseline definitions in **Standard event tasks** after running its profile seed.

## Environment variables

Configure these values as needed:

### Deployment identity and workflow defaults

- **DNR\_CONFIG\_FILE\_HOST**: host path to the selected non-secret deployment YAML; defaults to the tracked MOED profile for backward compatibility.
- **DNR\_BRAND\_DISPLAY\_NAME**, **DNR\_TOTP\_ISSUER**, **DNR\_CALENDAR\_NAME**, **DNR\_INBOUND\_MARKER\_PREFIX**, and **DNR\_INBOUND\_ACCEPTED\_MARKER\_PREFIXES**: optional highest-precedence identity overrides. The accepted marker value is a comma-separated list and must include the emitted prefix.
- **DNR\_DEFAULT\_SPEAKER**: optional name used to preselect a matching saved speaker record for new presentations; otherwise the first-created speaker is selected. The legacy **DEFAULT\_SPEAKER** name remains accepted during migration.
- **DNR\_DEFAULT\_COUNTRY**, **DNR\_DEFAULT\_PHONE\_COUNTRY\_CODE**, and **DNR\_TIMEZONE**: optional overrides for the

corresponding profile defaults. Invalid values fail startup.

- **DNR\_DASHBOARD\_UPCOMING\_DAYS**, **DNR\_TASK\_UPCOMING\_DAYS**, **DNR\_CALENDAR\_PAST\_DAYS**, **DNR\_CALENDAR\_FUTURE\_DAYS**, **DNR\_PDF\_MAX\_CHRON\_ENTRIES**, and **DNR\_PDF\_MAX\_TASKS**: optional overrides for validated workflow windows and PDF export limits normally read from YAML.

### Networking, HTTPS, and sessions

- **PORT**: published HTTP port; defaults to 8080.
- **DNR\_BIND\_ADDRESS**: address on which Docker publishes the HTTP port; defaults to 127.0.0.1.
- **DNR\_DEV\_BIND\_ADDRESS** and **DNR\_DEV\_ALLOW\_REMOTE\_HTTP**: separate development-mode publish controls. Development ignores **DNR\_BIND\_ADDRESS**, binds to 127.0.0.1 by default, and refuses a non-loopback address unless the plaintext remote-access opt-in is exactly 1.
- **DNR\_PUBLIC\_BASE\_URL**: externally visible HTTPS origin used to construct calendar, invitation, verification, recovery, and task-digest links.
- **DNR\_REQUIRE\_HTTPS**: rejects non-HTTPS requests in production; defaults to 1. The development Compose override sets it to 0 for loopback-only HTTP.
- **DNR\_SESSION\_IDLE\_SECONDS**, **DNR\_SESSION\_ABSOLUTE\_SECONDS**, and **DNR\_SESSION\_ROTATION\_SECONDS**: authenticated-session idle lifetime, absolute lifetime, and identifier-rotation interval. Defaults are 12 hours, 24 hours, and 15 minutes.
- **DNR\_TRUSTED\_PROXY\_IPS**: comma-separated reverse-proxy IP addresses or CIDR networks whose X-Forwarded-For hops DNR may trust; defaults to Docker Desktop's published-port proxy at 192.168.65.1. DNR walks the forwarding chain from the nearest hop outward, skips only configured proxies, and uses the first untrusted address so a client-controlled leftmost value cannot override audit or throttling attribution. Other deployments can set an explicit proxy address or use `docker-gateway` to resolve the container's default route dynamically. If the published port is reachable beyond the reverse proxy, restrict it with a firewall and ensure the proxy replaces client-supplied forwarding headers, including X-Forwarded-Proto.
- **DNR\_BACKEND\_SUBNET** and **DNR\_INGRESS\_PROXY\_IP**: private backend network and fixed address of the

localhost ingress proxy. The defaults are 172.30.255.0/24 and 172.30.255.254. Override both together if that subnet conflicts with another Docker network. Only the fixed proxy address is added to the application's trusted proxy list; the web container remains on the internal backend without an outbound route.

- **DNR\_TRUSTED\_CLOUDFLARE\_PROXY\_IPS:** comma-separated IP addresses or CIDR networks used by the trusted Cloudflare tunnel hop in X-Forwarded-For; defaults to this deployment's 172.18.0.0/24 private proxy network so container address changes do not break client-IP detection. On that route DNR records Cloudflare's CF-Connecting-IP value instead of the tunnel container address.

## Database and protected secrets

- **DNR\_MYSQL\_ROOT\_PASSWORD\_FILE,** **DNR\_MYSQL\_APP\_PASSWORD\_FILE,** **DNR\_MYSQL\_BACKUP\_PASSWORD\_FILE,** **DNR\_MYSQL\_MAINTENANCE\_PASSWORD\_FILE,** **DNR\_MYSQL\_GEOCODER\_PASSWORD\_FILE,** **DNR\_MYSQL\_MAIL\_INGEST\_PASSWORD\_FILE,** and **DNR\_MYSQL\_MAIL\_DISPATCH\_PASSWORD\_FILE:** host paths to independent secret files. The isolated backup service uses the read-only full-schema backup identity after independently checking the administrator's current role, password, and fresh 2FA or recovery code; the everyday web service has no backup credential; ordinary web requests, geocoding, inbound parsing, outbound delivery, migration, and destructive maintenance retain separate identities with only their required privileges.
- **DNR\_BACKUP\_PASSWORD\_FILE:** host path to the temporary file containing the exact password of the backup being restored. It is mounted only in the maintenance profile and should be emptied or removed immediately after the restore is verified.
- **DNR\_2FA\_KEY\_FILE:** host path to the Docker secret containing the base64-encoded 2FA encryption key; defaults to `./secrets/dnr_2fa_encryption_key`.
- **DNR\_DATABASE\_BACKUP\_MAX\_BYTES:** maximum unencrypted backup size; defaults to 1073741824 bytes (1 GiB), with coordinated temporary-storage and worker memory budgets. The maintenance page estimates capacity; larger databases use the native encrypted deployment backup. Backup and restore plaintext exists only in the relevant container's memory-backed `/tmp`.
- **DB\_HOST,** **MYSQL\_DATABASE,** **MYSQL\_USER,** and **MYSQL\_PASSWORD\_FILE:** runtime database connection settings for non-Compose deployments.

**MYSQL\_BACKUP\_USER** and **MYSQL\_BACKUP\_PASSWORD\_FILE** configure the isolated exporter's read-only connection. Keep them out of the everyday web process. Non-Compose web deployments must set **DNR\_BACKUP\_SERVICE\_URL** to their private exporter endpoint; do not publish that service on the Internet. Compose uses the fixed `dnr` database with restricted `dnruser` and `dnrbackup` accounts.

## Outbound mail

- **DNR\_MAIL\_TRANSPORT:** `smtp` enables account and task-digest email delivery; the secure default is disabled. `log` acknowledges messages without logging their bearer links and is intended only for automated tests.
- **DNR\_MAIL\_FROM:** validated sender address for outbound email. The sender display name comes from `brand.mail_name`; **DNR\_MAIL\_FROM\_NAME** remains an optional highest-precedence override.
- **DNR\_SMTP\_HOST,** **DNR\_SMTP\_PORT,** and **DNR\_SMTP\_ENCRYPTION:** SMTP relay connection. Encryption accepts `starttls` (the default), `implicit tls`, or `none` for a trusted internal relay.
- **DNR\_SMTP\_USERNAME** and **DNR\_SMTP\_PASSWORD\_SECRET\_FILE:** optional SMTP authentication and the host path mounted by the SMTP overlay. The dedicated mail-dispatch service receives it as **DNR\_SMTP\_PASSWORD\_FILE**; the web service remains backend-only and cannot reach the relay.
- **DNR\_SMTP\_CA\_SECRET\_FILE** and **DNR\_SMTP\_PEER\_NAME:** optional pinned SMTP trust anchor and expected certificate name. The certificate is mounted as **DNR\_SMTP\_CA\_FILE** only by an `*-smtp-ca` mode; peer and chain verification remain enabled.
- **DNR\_EMAIL\_OUTBOX\_BATCH\_SIZE** and **DNR\_EMAIL\_OUTBOX\_IDLE\_SECONDS:** bounded outbound messages per worker cycle and idle polling interval. Defaults are 20 messages and 15 seconds.
- **DNR\_NOTIFICATION\_OUTBOX\_BATCH\_SIZE:** bounded task-digest messages claimed per worker cycle; defaults to 20.
- **DNR\_ENGAGEMENT\_EMAIL\_OUTBOX\_BATCH\_SIZE:** bounded Engagement-recipient deliveries claimed per worker cycle; defaults to 20.
- **DNR\_NOTIFICATION\_SCHEDULE\_INTERVAL\_SECONDS:** interval between checks for newly due task digests; defaults to 300 seconds.

## Inbound mail

- `DNR_INBOUND_ADDRESS`: required dedicated mailbox address copied on messages when a mail-ingest Compose mode is enabled.
- `DNR_INBOUND_ROUTING_KEY_FILE`: host path to the independent base64-encoded 32-byte key used to sign Engagement reply-routing markers and derive a separate HMAC key for the bundled Bridge's sender-authentication assertions. Generate it with `scripts/ensure_inbound_routing_key.sh`, back it up securely, and do not rotate it while issued reply markers or retained assertions are still in use.
- `DNR_INBOUND_MAX_BYTES`, `DNR_INBOUND_BATCH_SIZE`, and `DNR_INBOUND_IDLE_SECONDS`: maximum raw message size, bounded messages per polling cycle, and idle polling interval. Defaults are 10 MiB, 20 messages, and 30 seconds.

- **DNR\_INBOUND\_REQUIRE\_AUTHENTICATED\_FROM** and **DNR\_INBOUND\_TRUSTED\_AUTH\_SERVERS**: fail-closed automatic-routing gate. It defaults on. The bundled Bridge supplies signed assertions from Proton's internal-mail or DMARC metadata. Other IMAP providers require a topmost Authentication-Results header from a listed trusted authserv-id with an aligned DMARC pass. An empty trusted-server list blocks that generic path but does not block valid Bridge assertions. Set the gate to 0 only as an explicit compatibility exception for a trusted mailbox that cannot expose provider authentication results. See Proton sender authentication ([#proton-sender-authentication-incident-fix-and-verification](#)) for incident and rollout notes.
- **DNR\_IMAP\_HOST**, **DNR\_IMAP\_PORT**, and **DNR\_IMAP\_SECURITY**: inbound mailbox endpoint. Security accepts starttls (the default), implicit tls, or none only for a trusted isolated connection.
- **DNR\_IMAP\_USERNAME**, **DNR\_IMAP\_PASSWORD\_FILE**, and **DNR\_IMAP\_MAILBOX**: mailbox credentials and selected folder. The mail Compose overlay mounts the password as a Docker secret; **DNR\_IMAP\_PASSWORD** is accepted only for simple non-Compose or development execution.
- **DNR\_IMAP\_VERIFY\_PEER**: verifies the IMAP server certificate by default. Disable it only for a local Proton Bridge endpoint using Bridge's self-signed certificate.

## Maps and geocoding

- **DNR\_GEOCODER\_BASE\_URL** and **DNR\_GEOCODER\_ALLOWED\_HOSTS**: public HTTPS endpoint and explicit hostname allowlist used only by the background geocoder worker.
- **DNR\_GEOCODER\_USER\_AGENT**: identifying user agent sent to the configured geocoder. Set this to the deployment name and a contact URL or email. When omitted, DNR identifies itself with its version and repository URL.
- **DNR\_GEOCODER\_BATCH\_SIZE**, **DNR\_GEOCODER\_IDLE\_SECONDS**, **DNR\_GEOCODER\_LEASE\_SECONDS**, and **DNR\_GEOCODER\_MAX\_ATTEMPTS**: bounded worker throughput, polling, stale-job lease, and retry policy.
- **DNR\_MAP\_PAST\_DAYS**, **DNR\_MAP\_FUTURE\_DAYS**, and **DNR\_MAP\_MAX\_EVENTS**: optional overrides for the bounded map window and result cap normally read from YAML.
- **DNR\_MAP\_TILE\_URL**, **DNR\_MAP\_ATTRIBUTION\_TEXT**, **DNR\_MAP\_ATTRIBUTION\_URL**, and **DNR\_MAP\_MAXIMUM\_ZOOM**: optional overrides for the validated map provider. The tile origin is also used to construct the page's Content Security Policy.

## Mattermost and build metadata

- **DNR\_MATTERMOST\_TOKEN\_SECRET\_FILE** and **DNR\_MATTERMOST\_INSTANCE\_ID**: host path to the shared Mattermost plugin token and stable identifier for the authorized Mattermost server. They are mounted only when a \*-mattermost Compose mode is selected. See [docs/mattermost-plugin.md](#).
- **DNR\_GITHUB\_REPOSITORY**, **DNR\_BUILD\_COMMIT**, and **DNR\_BUILD\_TIMESTAMP**: repository link and immutable build provenance displayed in the footer. The Compose wrapper derives the full hash and UTC commit timestamp automatically. CI builds from source archives without .git may export both values explicitly. Page rendering never calls GitHub or another third-party API.

## Worldwide address lookup with Geoapify

Use the optional `docker-compose.geoapify.yaml` overlay for Geoapify geocoding. Create a project at <https://myprojects.geoapify.com>, then save its API key in `secrets/geoapify_api_key` (excluded from Git). The overlay mounts the key only into the egress-enabled geocoder worker; PHP pages, browser scripts, and map payloads never receive it. The existing map renderer and tile provider remain independently configurable. Geoapify attribution is shown with its results.

After applying current migrations, activate it in the local preview with:

```
docker compose -f docker-compose.yaml -f
docker-compose.dev.yaml \
  -f docker-compose.geoapify.yaml up -d --no-deps web
geocoder
```

The deployment wrapper automatically includes this overlay when a nonempty key file is provisioned on the host, so subsequent s1 releases retain Geoapify. Provision the secret separately before deployment. On Linux, keep the file owner-only and grant the container worker (UID 33) read access with a file ACL, as for the other worker secrets. Set **DNR\_GEOCODER\_PROVIDER=nominatim** when invoking the wrapper to explicitly opt out, or `geoapify` to require the key. **DNR\_GEOAPIFY\_API\_KEY\_FILE** can override the host secret path. Never commit the key, place it in a tile URL, or paste it

into a command argument. Configure key restrictions for the worker's outgoing IP if desired; browser referrer-only restrictions do not work for background requests.

Lookups retain provider, confidence, match type, and matched-address metadata. Automatic Geoapify pins require a building or amenity result with at least 0.95 provider confidence, matching the requested house number and explicit country code when present. Confidence is a provider score, not a guarantee of accuracy. Broad or uncertain results remain unresolved instead of placing a city-center pin. Searches preserve street directions and the stored address; bounded fallbacks remove a venue prefix or normalize US highway wording. Provider errors are retried by the worker and never cached as address misses.

**Show missing addresses** filters for records needing address details; **Retry lookup** explicitly requeues a missed or failed lookup without resetting active jobs or their backoff. Empty results show guidance and a return action. Editors can also use **Set map pin** to click, drag, or enter coordinates and explicitly confirm the venue. Confirmed pins are stored per engagement, take priority over worker results, and apply only while the address hash still matches. **Use automatic lookup** removes the override. Both actions require CSRF and editing access, reject stale addresses, and record an audit event.

## Security and operations

### Two-factor authentication

Recovery-email changes are separate from ordinary profile edits. They require the current password and a fresh authenticator code when enabled. The old verified address remains active until the new address is verified, an old-address notice is queued, and successful promotion revokes existing sessions.

- TOTP authenticator codes use a 30-second time step and tolerate one neighboring time step for clock drift.
- A successful code cannot be reused.
- Five failed password or second-factor attempts temporarily lock that factor for 15 minutes.
- Recovery codes are single-use. DNR stores only a keyed HMAC lookup value, never the code itself.
- Every account type (Administrator, Editor, and Reviewer) must use 2FA. Accounts without it are guided through authenticator setup after their next successful password login or invitation acceptance, before accessing application data. Existing password-only sessions must sign in again. Users cannot disable 2FA; an

administrator can reset another user's factor, requiring enrollment at the next login.

- Administrators can use **Preview access** in the sidebar to navigate with Editor or Reviewer permissions. A persistent banner identifies the active preview and returns the session to Administrator access; actions taken during a preview still affect live data under the administrator's identity.
- An administrator can reset another user's 2FA from **Manage Users**. Resetting or replacing a factor invalidates that user's other sessions.
- An administrator can set a temporary password for another user from **Manage Users**. The control appears only during a five-minute sensitive-action window opened with the administrator's password plus a fresh authenticator or recovery code. The route rechecks that elevation, invalidates the target user's sessions, and forces the target to choose a private password after login.
- Users can change their own password from **Account Security**; doing so invalidates their other sessions.

### Password recovery

- The login page links to a self-service password recovery flow.
- Recovery links are sent only to the unique verified email address of an active account. Responses do not reveal whether an address belongs to an account.
- Recovery links are random, single-use bearer tokens. Only their SHA-256 digests are stored, and they expire after one hour.
- A successful recovery requires a new password of at least 12 characters, invalidates every existing session, records a security audit event, and returns the user to sign-in so normal 2FA requirements still apply.
- Account passwords must contain at least 12 characters and no more than 72 UTF-8 bytes; the upper bound prevents bcrypt from silently ignoring part of a password.
- Accounts without a verified email address require another administrator to set a temporary password from **Manage Users**, or a server administrator to run `docker compose exec web dnr-set-password USERNAME`.

## User lifecycle and invitations

- Administrators can edit any user's first and last name, phone number, profile picture, account access, and daily digest settings from **Manage Users > Edit**. Saves require a recent administrator unlock and record the acting administrator in the audit log. Recovery email changes use the user's verification flow in **My Profile**.
- Freshly invited accounts cannot authenticate. The seven-day invitation link lets the recipient choose a private password, verifies the invited email address, and activates the account.
- A self-service email change retains the current verified address while a new 24-hour verification link is pending. Successful verification promotes the new address and revokes existing sessions. Only verified addresses can receive password-recovery links.
- Deactivation retains the user and every audit reference while incrementing the authentication version, revoking all calendar subscriptions, invalidating outstanding email links, removing task assignments, and making any session-held administrator elevation unusable.
- Reactivation restores sign-in access only. Revoked calendar links and prior task assignments are intentionally not restored.

## Database encryption at rest

The Compose database image loads MySQL's component `_keyring_file` before InnoDB starts. Application tables (including full-text indexes), the `mysql` system tablespace, new redo/undo log pages, and new binary/relay logs use native encryption. The migrator encrypts existing application tables, sets the schema encryption default, and blocks startup if verification fails. New tables inherit encryption; the everyday application account cannot disable it. Temporary query tables/files use memory-backed `/tmp`.

The persistent `db_keyring` volume is separate from `db_data`, readable only by MySQL, and never mounted in application containers. Preserve it across container recreation and back up its contents separately with encryption and restricted access. Never delete, replace, or regenerate a keyring for an existing encrypted database. Physical recovery needs the original keys; verified logical backups can be restored into a fresh encrypted database with a new keyring. The existing deployment backup performs a logical restore check using the database image, including its keyring initialization.

Before the first conversion, create and restore-verify a fresh encrypted backup, pause all application writers (including backup), and allow time and disk space for table rebuilds. Start

the new database image, run the migrator, then verify encryption and restart the application. Existing redo/undo log pages are not retroactively encrypted; they remain in their earlier format until MySQL recycles them. Retained binary logs created **before** encryption remain plaintext until retired; inspect `SHOW BINARY LOGS` and securely archive them before purging, preserving any replication or recovery dependencies. Never downgrade MySQL or delete its volume as an upgrade rollback.

This protects database files taken without their keys. It does not prevent a running application, an authorized database connection, or an attacker with host/root access and the local keyring from reading data. It also does not encrypt the entire host filesystem or database network traffic. Protect physical snapshots together with separately controlled keys; stronger protection from host compromise requires an external key-management system or encrypted storage with independent key custody.

## Health and operations

- `/health.php` is a dependency-free liveness response.
- `/ready.php` verifies database connectivity and every migration filename/checksum before reporting ready.
- Application errors are logged as structured JSON with a request ID. Public error responses omit database and exception details and include the request ID for correlation.

Every DNR Compose service opts out of host-wide Watchtower polling. Production images are built and qualified by CI on the final merged commit, then promoted by digest through the guarded deployment workflow (`docs/release-workflow.md`). The opt-out prevents Watchtower from treating Compose's local `project-service:latest` image names as Docker Hub repositories or trying to update dependencies outside the reviewed deployment path.

## Persistent uploaded files

Uploaded speaker-note PDFs and user, contact, and speaker portraits (including thumbnails) live in the Docker `uploaded_files` volume at `/var/lib/dnr/files`, outside the web document root. `stored_files` contains each immutable storage key, filename, content type, byte size, and SHA-256 checksum; the owning database row holds the key. Downloads retain the existing authentication, public-note link rules, cache headers, and PDF byte-range support. Small generated QR assets remain in the database and are included in the database portion of the backup.

The web and maintenance services have read/write access; the isolated backup service mounts the volume read-only.

Non-Compose installations must set `DNR_FILE_STORAGE_PATH` to an absolute, private persistent directory owned by the PHP user and share it with the exporter and restore process. Use encrypted host/volume storage for encryption at rest: these files are outside MySQL's encrypted tablespaces. Never put this directory under a public document root or in the container's temporary filesystem, and do not remove the volume with `docker compose down -v`.

On an upgrade, take a verified backup and stop application writers before running migrations. The SQL migration adds file metadata and nullable storage keys without deleting existing bytes. The file-migrator service then copies each legacy BLOB, verifies its checksum, and commits the storage key and removal of the BLOB together, one row at a time. It runs before web/backup startup and can be safely rerun after a failure:

```
docker compose run --rm migrator
docker compose run --rm --no-deps file-migrator
```

A failed conversion blocks startup; correct the storage/space problem and rerun it. Legacy BLOB columns remain nullable for this resumable transition; ordinary uploads now write only file keys and metadata to the database. File contents are immutable, and replacements/removals detach the previous key. Old registered files are retained and included in backups; automatic file pruning is deliberately disabled so a concurrent snapshot or rollback cannot lose its files. Unregistered files left by interrupted transactions are not included in admin backups. Do not manually prune the volume while backups, restores, or writers are running.

## Encrypted database backups

Administrators can open **Database** in the primary navigation to download a DNR database backup. Export requires the administrator's password, a fresh authenticator or recovery code, and a new backup password. That password is required to restore the file and is never stored by DNR. The complete `.dnrbackup` archive is encrypted with a key derived by Argon2id using libsodium's moderate resource profile and authenticated with XChaCha20-Poly1305 secretstream. New backup passwords must contain at least 16 characters. The versioned reader retains support for older DNRBACKUP-ENC-1 archives while new exports use the stronger DNRBACKUP-ENC-2 profile. Backups contain every application table, including user authentication and audit data, plus all registered persistent uploaded files. Version 3 archives stream file chunks and verify each file against its stored size and SHA-256 checksum. Missing or damaged files cause export to fail rather than producing an incomplete backup. The configured size limit includes both the database and files. Treat encrypted files as secrets, use a strong unique backup password, and keep the password separately in a password manager. A forgotten backup password cannot be recovered.

A restore is accepted only when the backup schema exactly matches the deployed database schema. Install the matching DNR version and run its migrations before restoring. The data replacement is transactional and automatically rolls back on failure. Restore first validates the complete archive, then installs and verifies its immutable files before changing database rows. Existing files are never overwritten or deleted, so a failed restore preserves the old database and its files; it may leave harmless unreferenced files. A successful restore invalidates all existing sessions and requires everyone to sign in again. Restore is not exposed by HTTP: it runs in a one-shot, non-egress maintenance container using a database credential that the web and geocoder containers never receive. Database backups do not contain the separate `DNR_2FA_ENCRYPTION_KEY`, so keep a secure copy of that key with the backup set. For full disaster recovery, initialize and migrate an empty DNR deployment, restore the `.dnrbackup` from the maintenance profile, and restore the same two-factor encryption key.

## Audit-log retention

The application keeps the audit log append-only during normal use. An administrator can open **Users > Audit Log**, enter the number of days to keep in the **Retention** panel, and preview the exact UTC cutoff and affected row count. Pruning then requires a recent administrator password and fresh 2FA confirmation, the literal PRUNE phrase, and a final themed in-app confirmation. The web database identity still has no direct delete permission; it can invoke only the migration-installed, definer-secured retention procedure, which validates the retention range and performs the deletion in 1,000-row transactions. Every committed batch writes its own audit entry atomically, so an interrupted multi-batch run retains a complete record of the deletions that finished. One invocation removes at most 50,000 rows so maintenance cannot create an unbounded transaction; if more expired entries remain, the UI asks for another reviewed run.

Deployment operators can use the equivalent preview-first terminal workflow. This example keeps the most recent 365 days:

```
./scripts/prune_audit_log.sh 365
```

After reviewing the preview, repeat the command with the literal confirmation word:

```
./scripts/prune_audit_log.sh 365 PRUNE
```

Both workflows accept retention periods from 1 through 36500 days, delete only entries strictly older than the displayed cutoff, and add an `audit_log_pruned` event with the cutoff and deleted count. If no entries qualify, they make no change. Take and retain any required backup before pruning; deleted audit entries cannot be recovered from the application.

## Operational mail retention

Terminal account-email and digest outbox rows, plus processed, rejected, or failed inbound source messages, can be previewed and pruned with a separate bounded maintenance command. Pending, processing, retrying, human-review, and inbound records with an undelivered Mattermost reply alert are never eligible. Removing an inbound source message preserves its Chron Log text while its source link is cleared by the existing foreign key.

```
./scripts/prune_mail_history.sh 365
./scripts/prune_mail_history.sh 365 PRUNE
```

The command accepts 30 through 36500 retention days and removes at most 10,000 rows per category per invocation. Review the preview and retain any required backup before

confirming; source mail and terminal queue history cannot be recovered from the application.

## Exact database restore runbook

The following procedure restores both database rows and persistent files for the Docker Compose deployment. For an older archive, restore it using its matching older release first, then upgrade and run the file migration to move its embedded BLOBs into persistent storage. Run every step from the repository root. The example deliberately renames the selected archive to `backups/restore.dnrbackup`, so the commands can be copied without shell globs or unresolved path variables.

### 01 Check out the exact DNR release that created the backup.

Restore the matching `secrets/dnr_2fa_encryption_key`; create or restore the independent root, application, backup-reader, maintenance, geocoder, inbound-mail, and outbound-mail database secret files; create an empty mode-600 `secrets/backup_password`; and confirm `.env` points to those nine secret files. Then build every image used by the procedure:

```
install -d -m 700 secrets backups
install -m 600 /dev/null secrets/backup_password
./scripts/compose_with_provenance.sh production build
maintenance web geocoder ingress
```

Do not generate a new 2FA key: without the original key, authenticator secrets in the restored database cannot be decrypted. If the database service and its volume already exist, start the database and one-shot migrator:

```
docker compose up -d db migrator --wait
```

For disaster recovery with no database volume, the same command builds the empty `dnr` database entirely from the baseline and forward migrations and installs the restricted service accounts. The restore refuses a schema mismatch before deleting or inserting data.

### 02 Copy the selected encrypted backup into the ignored backups/ directory under the fixed name and protect it. Replace `/absolute/path/to/selected.dnrbackup` with the actual source path:

```
install -m 600 /absolute/path/to/selected.dnrbackup
backups/restore.dnrbackup
```

### 03 Put the exact backup encryption password in `secrets/backup_password` with no added newline. `read -s` keeps it off the screen and `printf` preserves the value exactly:

```
umask 077
IFS= read -r -s DNR_RESTORE_PASSWORD
printf '%s' "$DNR_RESTORE_PASSWORD" >
secrets/backup_password
```

```
unset DNR_RESTORE_PASSWORD
chmod 600 secrets/backup_password
```

**04** Before stopping the application, make an independent plaintext SQL safety dump of the current database. This file is the rollback point and contains secrets, so retain mode 600 and store it only on the deployment host. Keep the existing uploaded\_files volume intact: the SQL dump contains storage keys, not file bytes, and is not a standalone disaster-recovery backup. Before any destructive volume operation, download a complete admin .dnrbackup as well:

```
docker compose exec -T db sh -c 'MYSQL_PWD="$(cat
"$MYSQL_ROOT_PASSWORD_FILE")" mysqldump
--single-transaction --routines --triggers
--no-tablespaces -uroot dnr' >
backups/pre-restore-safety.sql
chmod 600 backups/pre-restore-safety.sql
```

**05** Stop every service that can mutate application data. Leave db running. If inbound or outbound mail overlays are enabled, stop mail-ingest and mail-dispatch through the same overlay set as well:

```
docker compose stop ingress web backup geocoder
docker compose ps
```

Verify that ingress, web, backup, and geocoder show Exited and db shows Up (healthy) before continuing.

**06** Run the one-shot restore with the literal confirmation word RESTORE:

```
docker compose --profile maintenance run --rm
--no-deps maintenance /backups/restore.dnrbackup
RESTORE
```

Success prints the restored row, table, and file counts. Uploaded files are restored automatically into the shared uploaded\_files volume; no separate extraction command is required. A fresh deployment starts with an empty volume. Retain an existing volume when restoring over a deployment. The command authenticates and decrypts the complete archive, checks its size, format, schema fingerprint, declared row counts, content hash, and trailing data, verifies every file size/checksum, installs the files, replaces all tables in one transaction, verifies every restored table count, records database\_restored, and invalidates sessions. A wrong password, damaged archive, schema mismatch, missing/corrupted file, storage write failure, insertion error, or count mismatch leaves the original database unchanged (or rolls its transaction back).

**07** If step 6 failed, do not run the remaining success steps. Because the restore transaction was rolled back, restart the stopped services. If you will not immediately correct the problem and retry, empty the password secret and

remove the working copy before investigating the printed error:

```
docker compose up -d web backup geocoder ingress
install -m 600 /dev/null secrets/backup_password
rm -f backups/restore.dnrbackup
```

**08** After a successful restore, apply any still-pending migrations, reassert table-specific runtime grants and the isolated maintenance grant, then restart the application services:

```
docker compose run --rm migrator
docker compose run --rm --no-deps file-migrator
docker compose up -d web backup geocoder ingress
```

**09** Wait for the health check, inspect service status, and run the schema health check directly:

```
docker compose ps
docker compose exec web php
/opt/dnr/bin/check_schema.php
```

Do not declare the restore complete until ingress, web, backup, geocoder, and db are running; ingress, web, and db are healthy; and the schema command exits successfully.

**10** Sign in with an administrator account that exists in the restored backup. Verify at least one known engagement, organization, contact, and user; open **Users > Audit Log** and verify the database\_restored event. Open an uploaded PDF and full-size/thumbnail portraits to verify persistent file recovery. Also verify 2FA decryption by completing a fresh authenticator check. All pre-restore browser sessions should require sign-in again.

**11** Empty the temporary restore password and remove the extra working copy only after verification. Keep the original encrypted backup and password in their approved long-term locations. Retain the SQL safety dump until the restored deployment has passed operational verification, then securely dispose of it according to the deployment's retention policy:

```
install -m 600 /dev/null secrets/backup_password
rm -f backups/restore.dnrbackup
```

If step 6 succeeded but later verification reveals incorrect data, stop ingress, web, and geocoder (plus enabled mail workers), import the safety dump, rerun migrations and privilege configuration, and restart the services:

```
docker compose stop ingress web geocoder
docker compose exec -T db sh -c 'MYSQL_PWD="$(cat
"$MYSQL_ROOT_PASSWORD_FILE")" mysql -uroot dnr' <
backups/pre-restore-safety.sql
docker compose exec -T db sh -c 'MYSQL_PWD="$(cat
"$MYSQL_ROOT_PASSWORD_FILE")" mysql -uroot dnr -e
"UPDATE users SET auth_version = auth_version + 1"'
docker compose run --rm migrator
docker compose up -d web backup geocoder ingress
```

```
docker compose exec web php
/opt/dnr/bin/check_schema.php
```

The explicit `auth_version` update after the `safety-dump` import prevents browser sessions that existed before either restore from becoming valid again. Repeat steps 9 through 11 after the rollback, using the `safety-dump` data for the `representative-record` checks. Once the approved retention period ends, remove the plaintext rollback dump with `rm -f backups/pre-restore-safety.sql`; filesystem-level secure erasure must follow the host's encrypted-storage and media-disposal policy.

## Development and contributing

### Front-end assets

The application serves committed minified CSS and JavaScript while retaining readable source files in `src/assets`. After changing a source asset, rebuild the production files with:

```
npm ci
npm run build:assets
```

Page heads and asset cache keys are generated by `renderPageHead()` and `assetUrl()`. The asset build also emits a deterministic PHP fingerprint manifest, allowing OPcache-backed requests to avoid hashing large bundles; development falls back to direct hashing for files not yet present in the manifest. Page-specific source styles live in `src/assets/css/pages`; executable page behavior lives in `src/assets/js/page-actions.js`. Inline executable scripts and style attributes are intentionally avoided so the application can enforce a strict content security policy. The map alone permits runtime inline positioning because MapLibre GL requires it.

### Architecture and quality checks

HTTP entry points load `src/bootstrap.php`, which initializes Composer/local autoloading, structured request logging, database configuration, and shared application helpers. Reusable validation and reference data live under `src/app/Domain`; create and edit routes use the same normalizers. PHPStan checks migrated request/controller routes at level 3, the remaining HTTP surface at level 0, the legacy helper layer at level 5, and the typed domain/runtime layer at level 6 so newly extracted code can move progressively into the stricter configurations.

Telephone numbers are validated with `libphonenumber` metadata and stored in canonical E.164 form. National and international formatting is applied only when values are rendered or returned to an edit form.

Run the complete local quality gate before opening a pull request:

```
composer install
npm ci
composer validate --strict --no-check-publish
composer audit --no-interaction
npm audit --audit-level=high
composer check
npm test
```

`composer check` runs PHP syntax checks, PHPStan level 6 on the typed domain/runtime layer, PHPStan level 5 on the legacy helper layer, level 3 on migrated request/controller routes, level 0 on the remaining HTTP surface, and all unit/feature tests. `npm test` rebuilds every committed production asset and runs JavaScript syntax and behavior tests. GitHub Actions runs the PHP checks on PHP 8.4 and 8.5 while frontend checks, locked-dependency audits, plugin checks, and integration checks run once in parallel. Dependency audits have bounded retries so an advisory-service outage fails promptly without weakening the security threshold, and superseded runs for the same branch or pull request are cancelled. CI also validates every Compose overlay combination and starts a disposable Docker/MySQL environment through the documented automatic-migration path before exercising HTTP and database behavior. Dependabot proposes weekly Composer, npm, Docker, and pinned GitHub Actions updates.

Database integration suites are discovered automatically from `tests/*_integration_test.php` and `tests/integration/*_test.php`. Run them only against the disposable Compose environment with `sh scripts/run_integration_tests.sh disposable`; the runner sends destructive backup/restore coverage to the isolated maintenance container.

VERSION is the single source of release-version metadata. DNR uses the project ontology `[super].[major].[minor] = x.y.z`: a minor release is `[x].[y].[z+1]` (for example, 1.10.3 becomes 1.10.4), a major release is `[x].[y+1].0`, and a super release is `[x+1].0.0`. Update it once when preparing a release; runtime responses, fallback asset cache keys, the footer, backups, and container images read that value automatically.

## Contributing

Database integration tests must run only against a disposable database created for that test run. They refuse to start unless `DNR_INTEGRATION_TARGET=disposable` is set. The database-backup integration additionally requires `DNR_DESTRUCTIVE_BACKUP_TEST=isolated-restore` because it deletes and restores every application table. Never set either acknowledgement against a development or production database; dispose of the isolated container and volume afterward.

Keep work from different development computers on separate remote branches. Codex-assisted MacBook work uses `codex/macbook/<topic>` and home-computer work uses `codex/home/<topic>`. Use the same Git author identity on both computers, and add these trailers to every workstation-specific commit so its origin remains searchable after it is pushed:

```
Development-Host: MacBook
Codex-Client: Desktop
```

Push each branch with an upstream (`git push -u origin <branch>`) and merge it through a pull request. When continuing on a different computer, fetch the remote branch and create a new branch with that computer's prefix instead of committing directly to the first computer's branch. Application versions describe released behavior, not the computer that produced a commit; do not bump the version for each workstation commit. Version positions follow `[super].[major].[minor]`: minor is `[x].[y].[z+1]`, major is `[x].[y+1].0`, and super is `[x+1].0.0`.

Contributions to the DNR project are welcome. To contribute:

- fork the repository
- create a new branch for your feature or bug fix
- commit your changes with descriptive messages
- push your branch to your forked repository
- submit a pull request to the main repository

Please ensure that your contributions adhere to the project's coding standards and include appropriate tests.

## Maintaining the user documentation

Update `src/help.php` when an application workflow changes, then refresh the Comprehensive Guide using the manual build instructions (`docs/user-manual/README.md`). The PDF includes the current README as an appendix and an exact embedded attachment; refresh its Markdown snapshot after changing this file. Review rendered PDF pages for screenshot boundaries, readable examples, and isolated lines before installing the download.

## License

This project is licensed under the MIT License. See LICENSE for details.

## Storage and delivery hardening

See Storage and delivery operations (`docs/storage-and-delivery-operations.md`) for isolated integration tests, retained-file cleanup, storage integrity monitoring, encrypted native backups, production disk-encryption checks, the separate download pool, and handling uncertain email delivery.

## Large presentation uploads

The engagement editor uploads PPT/PPTX and PDF files in 10 MiB requests before saving the form, supporting PowerPoint files up to 500 MiB and PDFs up to 100 MiB without sending the whole file through Cloudflare in one request. The progress panel shows transfer percentage and then "Saving changes". Transient chunk failures retry twice; selecting Save Changes again on the same page reuses acknowledged chunks. Keep the page open until the save completes. JavaScript is required for chunked uploads.

Staging files live outside the document root on the existing uploaded-files volume. Upload references are scoped to the authenticated session, user, engagement, and presentation form row. The final save validates the assembled file and records it through the normal storage and audit flow. Successful saves delete staging files; the file-monitor worker removes abandoned uploads after 24 hours. Each session may reserve at most 1 GiB across ten pending files. Deploy the updated web assets and file-monitor worker together; no database migration or Cloudflare plan change is needed.

Run the isolated HTTP upload/save and ranged-download regression with `python3 scripts/integration_environment.py` uploads. It creates and removes its own labelled Docker project and verifies a 331 MiB upload without using a live database.