

## Abstract

In Republic of Lithuania, public elects their representatives to a parliament in which new legislation is considered. Due nature of politics, a problem arises once citizens wants to observe and evaluate parliament members work. Main output of parliament is their votes for various legislatures. Voting data is publicly available through Parliament of the Republic of Lithuania (LRS) website. This project aims to visualize voting patterns and their changes. Another goal is to provide public access to results.

In the project Multidimensional scaling (MDS) and *k-means* clustering are used to analyze voting patterns. Software to download, process and visualize data is written with Scala.

# Contents

<b>Abstract</b>	<b>i</b>
<b>1 Introduction</b>	<b>1</b>
<b>2 Analysis</b>	<b>2</b>
2.1 Literature analysis . . . . .	2
2.2 Materials and methods . . . . .	3
2.2.1 Lithuania's parliament open data semantics analysis . . .	3
2.3 Method analysis . . . . .	9
2.3.1 MDS . . . . .	9
2.3.2 Unsupervised learning: <i>k</i> -means clusterization . . . . .	9
2.4 Problem analysis . . . . .	10
2.5 Visualizations . . . . .	11
<b>3 Software design</b>	<b>12</b>
3.1 Components of system . . . . .	12
3.1.1 Functional requirements . . . . .	12
3.1.2 Non-functional requirements . . . . .	12
3.1.3 Data flow diagram . . . . .	13
3.2 Tools . . . . .	13
3.2.1 Database: <i>MySQL</i> . . . . .	13
3.3 Downloader . . . . .	13
3.4 Coordinator . . . . .	13
3.5 API server . . . . .	13
3.6 User interface (Frontend) . . . . .	13
<b>4 Description of experimental research</b>	<b>14</b>
4.1 Data statistics . . . . .	14
4.2 Experiments . . . . .	14
4.2.1 MDS . . . . .	14
4.2.2 Unsupervised learning: <i>k</i> -means clusterization . . . . .	14
4.3 Results . . . . .	14
<b>A Appendix</b>	<b>i</b>





# 1 Introduction

In Republic of Lithuania, public elects their representatives to a parliament in which new legislation is considered. By this election each citizen delegates specifics of legislation process to their representatives so they don't have to actively participate in the process.

However, a problem arises once citizen wants to validate what his representative has been doing. Single term of office NEEDS-CITATION involves thousands of complicated laws and votes. To analyze everything becomes almost an impossible task for a single citizen who is out of the loop.

To make it easier there are journalists, politologists and other personas who review new legislation, current issues. Delegates themselves also do press conferences, debates where they state their intentions, comment on their actions. However, this requires citizens to trust that journalists and delegates only state truth, don't omit important information and don't have other hidden agendas. Study done about intrinsic honesty showed that the more society is corrupt - the more people lie in a simple dice game. This applies to politicians too and citizens trust in parliament is relatively low. Therefore, anything that can be done to better observe representatives is useful.

This thesis goal is to X and Y

## 2 Analysis

### 2.1 Literature analysis

There is a decent amount of previous work analyzing voting on roll call data. A huge part of this research is on specific elections that happened in the past.

In *Spatial Models of Parliamentary Voting* [1] author discusses how voter's positions on specific issues can be captured by his position on one or two dimensions such as liberalism or conservatism. This constraint means there are two spaces - one with few dimensions - basic or ideological. The other - high dimensional space which represents remaining issues. This breakthrough might suggest Multi-dimensional scaling as a good performance method for visualization and analysis as majority of data is encoded in few dimensions.

There is research done specifically on LRS data. One such is *On Structural Analysis of Parliamentary Voting Data* [2]. In this paper authors discuss about data reduction to dissimilarity matrix, vote encoding, MDS and its performance on specific dimensions. Authors focus on specific elections and term of office which is different from our goal. However, methods discussed and research results are relevant for this project.

Master thesis was written few years ago on LRS voting which included similar analysis. One of research areas was to see if there are hidden groups in the parliament [3]. Author was not able to detect hidden groups. In this project, goal, data and parameters are different so conclusion might differ too. Method used was *k-means* clustering and data was showed on MDS reduced coordinates. In this project similar approach can be taken with different parameters like date ranges for votes.

In *The new Voteview.com: preserving and continuing Keith Poole's infrastructure for scholars, students and observers of Congress* [4] paper, authors discuss famous *Voteview.com* website. While website's primary goal is to provide open data access is different from ours - it contains useful information about how specific methods are used, how visualizations work. It also contains visualization which shows how data changed over time - how ideology and party composition changes.

## 2.2 Materials and methods

### 2.2.1 Lithuania's parliament open data semantics analysis

In this section open data from XML is reviewed. Only data and properties important to the project are included and commented on. All data is imported into MySQL database, therefore to demonstrate structure tables are used. Field types are inferred empirically by looking at data, therefore might not be correct in some cases. Moreover, data itself is not consistent through all years of Parliament of the Republic of Lithuania activity.

Table 1 contains term of office table structure.

In XML	In database	Type	Comments
kadencijos_id	term_of_office_id	int(11)	Unique term of office id
pavadinimas	name	varchar(255) not null	Name
data_nuo	date_from	date not null	Date when term of office begins
data_iki	date_to	default null	Date when term of office ends

Table 1: Term of office table structure

Table 2 contains parliament sessions table structure.

In XML	In database	Type	Comments
sesijos_id	session_id	int(11) not null	Unique parliament session id
kadencijos_id	term_of_office_id	int(11)	Unique term of office id
numeris	number	varchar(255) not null	Number
pavadinimas	name	varchar(255) not null	Session name
data_nuo	date_from	date not null	Date when session begins
data_iki	date_to	date default null	Date when session ends. Current session doesn't have this value set.

Table 2: Parliament session table structure

Table 3 contains parliament plenaries table structure.

In XML	In database	Type	Comments
posėdžio_id	plenary_id	int(11) not null	Unique plenary id
sesijos_id	session_id	int(11) not null	Unique parliament session id
numeris	number	varchar(255) not null	Number
tipas	plenary_type	varchar(255) not null	Plenary type
pradžia	time_start	datetime default null	Plenary starting time
pabaiga	time_finish	datetime default null	Plenary ending time. Some plenaries are not yet finished and some entries don't include times at all

Table 3: Plenary table structure



Table 4 contains parliament member table structure.

In XML	In database	Type	Comments
asmens_id	person_id	int(11) not null	Person id
-	unique_id	varchar(100) not null	Unique id for person, generated by script
vardas	person_name	varchar(255) not null	Member name
pavardė	person_surname	varchar(255) not null	Member surname
lytis	gender	varchar(1) not null	Gender
data_nuo	date_from	date not null	Date from inauguration
data_iki	date_to	date default null	Date when term ends. Current session doesn't have this value set.
iškėlusi_partija	faction_name	text	Faction name
išrinkimo_būdas	elected_how	varchar(255) not null	How member was elected
biografi-jos_nuoroda	biography_link	varchar(255) default null	Hyperlink to biography
-	term_of_office_id	int(11)	Unique term of office id
-	term_of_office_specific_id	int(11)	Specific term id used for computations
-	faction_id	int(11) not null	Faction id

Table 4: Parliament member table structure

Table 5 contains agenda question table structure.

In XML	In database	Type	Comments
darbot-varkės_klausimo_id	agenda_question_id	int(11) not null	Agenda question id
-	agenda_question_group_id	varchar(255) not null	Group id
pavadinimas	title	text	Title
laikas_nuo	time_from	time default null	Question start time
laikas_iki	time_to	time default null	Question end time
-	datetime_from	datetime default null	Custom generated date time
-	datetime_to	datetime default null	Custom generated date time
data	date	date not null	Date
pavadinimas	raw_status	varchar(255) not null	Status as taken from XML
-	status	int(5) default null	Status encoded
dokumentu_nuoroda	document_link	varchar(255) default null	Hyperlink to document
-	speakers	text	Speakers list converted from XML to single text field with separators
numeris	number	varchar(255) not null	Number
-	plenary_id	int(11) not null	Plenary id

Table 5: Agenda question table structure

Table 6 contains plenary question table structure.

In XML	In database	Type	Comments
darbot-varkės_klausimo_id	agenda_question_id	int(11) not null	Agenda question id
-	ple-nary_question_group_id	varchar(255) not null	Group id
pavadinimas	title	text	Title
laikas_nuo	time_from	time default null	Question start time
-	datetime_from	datetime default null	Custom generated date time
pavadinimas	raw_status	varchar(255) not null	Status as taken from XML
-	status	int(5) default null	Status encoded
numeris	number	varchar(255) not null	Number
-	plenary_id	int(11) not null	Plenary id

Table 6: Plenary question table structure

Table 7 contains discussion event table structure.

In XML	In database	Type	Comments
-	agenda_question_id	int(11) not null	Agenda question id
-	unique_id	varchar(255) not null	Custom generated unique id
laikas_nuo	discusstion_time_from	time default null	Event start time
asmens_id	person_id	nt(11) not null	Person id
balsavimo_id	vote_id	int(11) not null	Vote id
balsavimo_tipas	vote_type	int(5) default null	Vote type
-	plenary_id	int(11) not null	Plenary id

Table 7: Discussion event table structure

Table 8 contains vote table structure.

In XML	In database	Type	Comments
-	vote_person_id	int(11) not null	Custom generated unique id for vote
balsavimo_laikas	time	time DEFAULT not null	Voting time
balsavo	vote_total	int(11) not null	How many voted
viso	vote_total_max	int(11) not null	How many can vote
už	vote_for	int(11) not null	Voted for
prieš	vote_against	int(11) not null	Voted against
susilaikė	vote_abstain	int(11) not null	Voted abstain
komentaras	comment	text	Vote comment
asmens_id	person_id	int(11) not null	Person id
asmeyns_vardas	person_name	varchar(255) not null	Person name
asmens_pavarde	person_surname	varchar(255) not null	Person surname
kaip_balsavo	vote	int(11) not null	Vote itself
-	vote_person_id	int(11) not null	Custom generated unique id for vote
frakcija	faction_acronym	varchar(255) default null	Acronym for faction
balsavimo_id	vote_id	int(11) not null	Vote id
balsavimo_tipas	vote_type	int(5) default null	Vote type
-	vote_id	int(11) not null	Vote id
-	plenary_id	int(11) not null	Plenary id

Table 8: Votes table structure

## **2.3 Method analysis**

### **2.3.1 MDS**

### **2.3.2 Unsupervised learning: *k*-means clusterization**

Due missing labels of this dataset we are forced to look into unsupervised machine learning methods. *k-means* clusterization [?] is one such method and it fits well with our features. This is due TFIDF which transforms text into vectors be used with *k-means*. For distance between comments we can use cosine similarity [?] due its nature of performing better when comparing texts. To compare we can try with Euclidian and Manhattan distances too.

## 2.4 Problem analysis

Problem can be divided into two pieces:

- Research part, including MDS and *k-means* classification
- Software development

If considered what is output of parliaments during their term of office in parliament - it would be their voting outcomes. Let's say there is a set of all votes made by parliament members  $V = \{v_1, v_2, \dots, v_n\}$  where each vote  $v_i$  has a tuple of parameters  $P = \{\text{timestamp}, \text{term of office}, \text{parliament member id}, \text{voting outcome}, \dots\}$ . Votes can be divided into groups depended on term of office  $T$  during which they were cast. Each term of office  $T_i$  can be divided into smaller empirically chosen time periods  $\{p_1, p_2, \dots, p_n\}$ . Each time periods can have votes assigned which were cast during that time. Goal is visualize set  $V$  in a way that similar voting patterns of different members are visible.

In order to visualize voting patterns by members, its dimensions need to be reduced. With help of Multidimensional scaling (MDS), vote set  $V$  with parameters set  $P$  can be visualized on a two or one dimensional coordinate system. As discussed in literature analysis and [1] voting patterns can be captured by only few dimensions. To observe how voting patterns change during time, different time periods could be chosen. Term of office should be the maximum time period  $p_n$  to analyze, as majority and minority usually changes together with parliament members.

Another goal is to see if votes can be classified to certain political groups' without knowing who voted. This also enables us to see if there are hidden factions between the explicitly stated ones. As discussed in literature analysis, in order to predict if voting pattern reveals political faction, majority or minority side, different amount of clusters need to be chosen. Finding clusters  $\{c_1, c_2, \dots, c_n\}$  representing political faction voting patterns and then assigning votes to the specifics clusters will show how similarly explicitly stated sides vote.

## **2.5 Visualizations**

## 3 Software design

### 3.1 Components of system

#### 3.1.1 Functional requirements

Main goal of software is to provide public access for masses to view analysis and research done in this project. Software will run on virtual server and be available online on [atviras-seimas.lt](http://atviras-seimas.lt). There are two main roles: guest user and scientist. Users will be able to access system with any modern browser. Scientist, or the person maintaining project will be able to update data to most recent one on LRS open data website.

Data is visualized using interactive diagrams. In table 9 functional requirements are presented.

Requirement	User	Scientist
Access online with browser	✓	✓
View MDS results	✓	✓
Filter MDS results	✓	✓
Select different time periods for MDS results	✓	✓
View clustering results	✓	✓
Filter clustering results	✓	✓
Automatically update data with http query		✓

Table 9: Functional requirements for [atviras-seimas.lt](http://atviras-seimas.lt)

#### 3.1.2 Non-functional requirements

Non functional requirements:

- Page should load faster than 2 seconds
- Data should update in less than a day after query running
- User experience for users should be good
- System source code should be open source



### 3.1.3 Data flow diagram

Data flow diagram

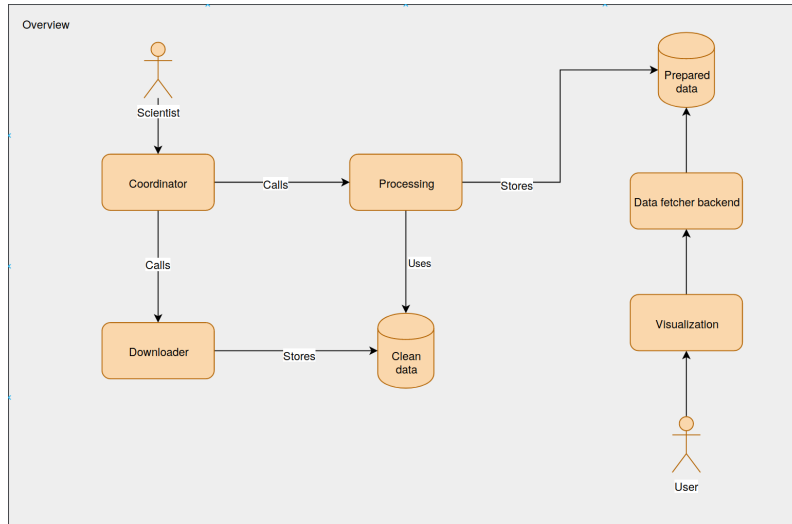


Figure 1: Data flow from database to  $k$ -means

## 3.2 Tools

### 3.2.1 Database: MySQL

### 3.3 Downloader

### 3.4 Coordinator

### 3.5 API server

### 3.6 User interface (Frontend)

## 4 Description of experimental research

### 4.1 Data statistics

Data statistics are calculated from data LRS open data API which was downloaded and saved to local database. Quite a big chunk data from 1997-2007 and 1990-1997 is missing due different information systems used at that time and other reasons. It was not migrated to current open data API.

Name	Count
Term of offices	8
Sessions	101
Parliament members	1207
Plenaries	3977
Vote rows	3933006
Votes	28121
Agenda questions	64243
Plenary questions (2012-)	15108
Discussion events (2007-)	361996

Table 10: Statistics of downloaded data

### 4.2 Experiments

#### 4.2.1 MDS

#### 4.2.2 Unsupervised learning: *k*-means clusterization

### 4.3 Results

## References

- [1] K. T. Poole, *Spatial Models of Parliamentary Voting*. Analytical Methods for Social Research, Cambridge University Press, 2005.
- [2] T. Krilavicius and A. Zilinskas, “On structural analysis of parliamentary voting data,” *Informatica, Lith. Acad. Sci.*, vol. 19, no. 3, pp. 377–390, 2008.
- [3] V. Mickevičius.
- [4] A. Boche, J. B. Lewis, A. Rudkin, and L. Sonnet, “The new voteview.com: preserving and continuing keith poole’s infrastructure for scholars, students and observers of congress,” *Public Choice*, vol. 176, 05 2018.

## **A Appendix**