



ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Table of Contents

API at a Glance.....	2
Terms of Service	4
Use Cases.....	4
API Endpoint Quick Reference	5
Consider Using Product Feeds	12
Gathering a Product Data Set	13
Understanding Nike Product Data	14
Merchandised Products Concepts	16
International Considerations.....	22
Using Merchandised Products	23
Using Merchandised Product SKUs.....	41
Using Merchandised Product Prices	50
Using Merchandised VAS	59
Using Product Content	68
Upgrading to the Latest Version.....	89
Troubleshooting	89
Glossary.....	91
Document Change Log	93
Related Links.....	93

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Last Updated: 10/01/2018

If you've read [Using NDe APIs \(https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html \)](https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html), this guide provides the details necessary to integrate with the Nike Merchandised Products APIs.

API at a Glance

The **Merchandised Products API** is a set of REST services that provides Nike product data in JSON format. You can list product information such as product attributes, SKU data, prices, product content, product images, and value-added services (VAS).

The following table describes the key details of the API:

Topic	Details
Use this API to	List product and SKU details, pricing, value-added services
Who calls this API	Examples include Product Feed API, SNKRs App, CMS, and the Inventory domain
Current Version	Merchandised Products Service v2 Merchandised SKUs Service v2 Merchandised Prices Service v2 Merchandised Value-Added Services v1 Product Content Service v1
Scope/Limitations	NIKEiD is not supported. Although NIKEiD Master products are available in

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Topic	Details
	the Merchandised Products API, NIKEiD Prebuild products and paths are not supported. These are required to properly render the NIKEiD experience. Retail data product is available, but not supported. Contact the Product Owner for details. Bulk download of all product data is not supported. Nike Outfits are not supported. No product data metrics are currently sent to Analytics (Business Intelligence). The v2 Merchandised Products SKUs service does not determine if a SKU is in stock. Use the Inventory API to determine if a SKU has inventory.
SLAs	Response time (RT) and request per second (RPS): RT: 250ms RPS: 500ms
Domain	Commerce
Prerequisites	API Registration (https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#registration)
Contact Info	Slack #pdm-merch-product (https://nikedigital.slack.com/messages/pdm-merch-product) Confluence space: Merchandised Products API Team (https://confluence.nike.com/collector/pages.action?key=MPA)

Topic	Details
	Mailing List: Lst-nde.pdm.merch.dev@nike.com Product Owner: Arun KannanGeetha

Terms of Service

To use the Merchandised Products API, you must send a caller ID header in every API request to help troubleshoot unexpected responses. See the Registration section of the [Using NDe APIs \(https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#registration \)](https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#registration) guide on how to create your caller ID.

Authentication Requirements

If you are retrieving products that are publicly available, no authentication or authorization is required. If you need product data that is not available to the public and you are an internal Nike team, you can contact the Product Owner for details on setting up authentication.

Use Cases

I want to...	API(s) to use
List merchandised product information such as product state, gender, merchandising tags, product type, and launch dates for a list of style-colors	Merchandised Products API
List the prices of a style-color in a certain country Includes retail price, employee price, sale price, current price, and MSRP	Merchandised Products API Price API
List all products that can be gift	Merchandised Value-Added Services API

I want to...	API(s) to use
wrapped<p>Returns all value-added services of products that can be gift wrapped	
List the sizes and SKU detail such as Nike size, localized size description, value-added tax (VAT) and Commodity Code for a style-color	Merchandised Products API Merchandised SKUs API
List the available images and localized product information such as title, subtitle, and description for a product Lists all images in the Scene7 or Cloudinary image set	Product Content API
List product information for a product at a specific point in time using a Snapshot ID	Merchandised Products API

API Endpoint Quick Reference

For more information about each service and to try them out through the UI, visit the Nike Developer Portal through the links below.

MERCHANDISED PRODUCT INFORMATION SERVICE (
<https://developer.niketech.com/docs/projects/Merchandised%20Products%20Service%20API?tab=api>
)

Endpoint Name	Path	HTTP Method
MERCHANDISED PRODUCTS LIST (	/merch/products/v2	GET

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Endpoint Name	Path	HTTP Method
https://developer.niketech.com/docs/projects/Merchandised%20Products%20Service%20API?tab=api)		
MERCHANDISED PRODUCTS BY ID (https://developer.niketech.com/docs/projects/Merchandised%20Products%20Service%20API?tab=api)	/merch/products/v2/{id}	GET
MERCHANDISED PRODUCTS CREATE (https://developer.niketech.com/docs/projects/Merchandised%20Products%20Service%20API?tab=api)	/merch/product/v2	POST
MERCHANDISED PRODUCTS DELETE (https://developer.niketech.com/docs/projects/Merchandised%20Products%20Service%20API?tab=api)	/merch/products/v2/{id}	DELETE

MERCHANDISED SKU INFORMATION SERVICE (<https://developer.niketech.com/docs/projects/Merchandised%20SKUs%20Service%20API?tab=api>)

Endpoint Name	Path	HTTP Method
MERCHANDISED PRODUCT SKU LIST (https://developer.niketech.com/docs/projects/Merchandised%20SKUs%20Service%20API?tab=api)	/merch/skus/v2	GET
MERCHANDISED PRODUCT SKU BY ID (https://developer.niketech.com/docs/projects/Merchandised%20SKUs%20Service%20API?tab=api)	/merch/skus/v2/{id}	GET
MERCHANDISED PRODUCT SKU CREATE (https://developer.niketech.com/docs/projects/Merchandised%20SKUs%20Service%20API?tab=api)	/merch/skus/v2	POST
MERCHANDISED PRODUCT SKUS DELETE (https://developer.niketech.com/docs/projects/Merchandised%20SKUs	/merch/skus/v2	DELETE

Endpoint Name	Path	HTTP Method
%20Service%20API?tab=api)		
MERCHANDISED PRODUCT SKUS DELETE (https://developer.niketech.com/docs/projects/Merchandised%20SKUs%20Service%20API?tab=api)	/merch/skus/v2/{id}	DELETE

MERCHANDISED PRODUCT PRICE SERVICE (<https://developer.niketech.com/docs/projects/Merchandised%20Prices%20Service%20API?tab=api>)

Endpoint Name	Path	HTTP Method
MERCHANDISED PRICES LIST (https://developer.niketech.com/docs/projects/Merchandised%20Prices%20Service%20API?tab=api)	/merch/prices/v2	GET
MERCHANDISED PRICES BY ID (https://developer.niketech.com/docs/projects/Merchandised%20Prices%20Service%20API?tab=api)	/merch/prices/v2/{id}	GET

Endpoint Name	Path	HTTP Method
MERCHANDISED PRICES CREATE (https://developer.niketech.com/docs/projects/Merchandised%20Prices%20Service%20API?tab=api)	/merch/prices/v2	POST
MERCHANDISED PRICES DELETE (https://developer.niketech.com/docs/projects/Merchandised%20Prices%20Service%20API?tab=api)	/merch/prices/v2/{id}	DELETE

MERCHANDISED VALUE-ADDED SERVICES (<https://developer.niketech.com/docs/projects/Merchandised%20Value%20Added%20Services%20Service%20API?tab=api>)

Endpoint Name	Path	HTTP Method
MERCHANDISED VALUE ADDED SERVICES LIST (https://developer.niketech.com/docs/projects/Merchandised%20Value%20Added%20Services%20Service%20API?tab=api)	/merch/ value_added_services/v1	GET

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Endpoint Name	Path	HTTP Method
MERCHANDISED VALUE ADDED SERVICES BY ID (https://developer.niketech.com/docs/projects/Merchandised%20Value%20Added%20Services%20Service%20API?tab=api)	/merch/ value_added_services/ v1/{id}	GET
MERCHANDISED VALUE ADDED SERVICES CREATE (https://developer.niketech.com/docs/projects/Merchandised%20Value%20Added%20Services%20Service%20API?tab=api)	/merch/ value_added_services/v1	POST
MERCHANDISED VALUE ADDED SERVICES DELETE (https://developer.niketech.com/docs/projects/Merchandised%20Value%20Added%20Services%20Service%20API?tab=api)	/merch/ value_added_services/ v1/{id}	DELETE

PRODUCT CONTENT (<https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api>)

Endpoint Name	Path	HTTP Method
PRODUCT CONTENT BY STYLE COLOR (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/{style-color}/content{?country,locale}	GET
PRODUCT CONTENT ITEM BY STYLE COLOR (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/{style-color}/content/{itemName}{?country,locale}	GET
PRODUCT CONTENT BY STYLE COLOR LIST (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/content{?country,locale,stylecolors}	GET
PRODUCT CONTENT FIELD BY STYLE COLOR LIST (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/content/{fieldname}{?country,locale,stylecolors}	GET
PRODUCT IMAGE SET BY STYLE COLOR (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/{style-color}/images{?country}	GET

Endpoint Name	Path	HTTP Method
https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)		
PRODUCT IMAGE SET BY STYLE COLOR LIST (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/images{?country,stylecolors}	GET
PRODUCT BASE IMAGE URL BY STYLE COLOR (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/{styleColor}/images/base{?country}	GET
PRODUCT BASE IMAGE URL BY STYLE COLOR LIST (https://developer.niketech.com/docs/projects/Product%20Content%20Service%20API?tab=api)	/merch/contents/v1/images/base	GET

Consider Using Product Feeds

Before you start using the Merchandised Products APIs, you should evaluate whether you could accomplish the same objectives by using the Product Feeds API.

The Product Feeds API aggregates product information, inventory data, and brand content from various sources including the Merchandised Products API. The Product Feeds API organizes the data into Cards (product data or events), Threads (groups of related cards) and

Feeds (groups of related Threads). Using Product Feeds rather than the Merchandised Products API has the following advantages:

- Product Feeds remains in sync with multiple data providers (including Merchandised Products), which reduces the number of service contracts for which you need to keep track.
- Since Product Feeds is an aggregation service, you only need to make a single call to get most of the information you would need. By contrast, calling Merchandised Products APIs directly requires a minimum of 4-5 calls to get the complete portrait of a single product.
- Product Feeds enforces business-critical rules around product visibility in experiences. For example, Nike restricts the sale and presentation of some products in countries. Product Feeds eliminates the logic required to comply with these rules.

There are a few caveats:

- Product Feeds responses are larger, so response times may be slightly slower - but still within SLAs.
- Product Feeds does not provide all of the data that is provided in every service with which it integrates. The data points in some cases are selective.

For the full list of use cases to evaluate if that API is better suited to your product needs, see [Product Threads List \(https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html#product-threads-list \)](https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html#product-threads-list).

Gathering a Product Data Set

The following example describes the set of Merchandised Products service calls you can make to assemble the product details of a style-color. These are all public services, so feel free to experiment with the endpoints. Note that the style-color in this example is not a current, active style-color. Product availability changes all the time, so you should get a current product from Nike.com to try this out.

Follow these steps to assemble a complete set of product data:

1. Using style-color 526628-009 (example), get the Product ID and a few product details from the Merch Product endpoint (filtered by style-color and Merch Group):
<https://api.nike.com/merch/products/>

v2?filter=merchGroup(US)&filter=styleColor(526628-009)&filter=merchgroup(US)

2. Using the product ID from the Merch Product response, get prices from the Merch Price endpoint (filtered by product ID and country US): [https://api.nike.com/merch/prices/v2?filter=productid\(22d2ea87-d7ce-50e7-a5ca-884788e1d958\)&filter=country\(US\)](https://api.nike.com/merch/prices/v2?filter=productid(22d2ea87-d7ce-50e7-a5ca-884788e1d958)&filter=country(US))
3. Using the same product ID, get the SKU data from the Merch SKUs endpoint (filtered by country US): [https://api.nike.com/merch/skus/v2?filter=productid\(22d2ea87-d7ce-50e7-a5ca-884788e1d958\)&filter=country\(US\)](https://api.nike.com/merch/skus/v2?filter=productid(22d2ea87-d7ce-50e7-a5ca-884788e1d958)&filter=country(US))
4. Using style-color 526628-009 (not product ID), get the product images from the images endpoint of the Product Content service: <https://api.nike.com/merch/contents/v1/526628-009/images?country=US>

Note: Images are returned from the Product Content service without a URL; but all of the necessary information is returned to build it. The experience is responsible for assembling the image URL.

1. Using style-color 526628-009 (not product ID), get the localized content for the product from the Product Content endpoint of the Product Content service: https://api.nike.com/merch/contents/v1/526628-009/content?country=US&locale=en_US

Understanding Nike Product Data


Nike product data is a complex set of information that flows from multiple origin systems and processes.

Where Does Product Data Come From?

Product data originates from two primary upstream systems: **Prodigy** (via **eMerch**), and the cloud-based **Catalog** service. Prodigy and the Catalog service are the systems of record for product data, and are not managed within the Merchandised Products domain.

The following diagram illustrates the most common patterns for data flow.

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

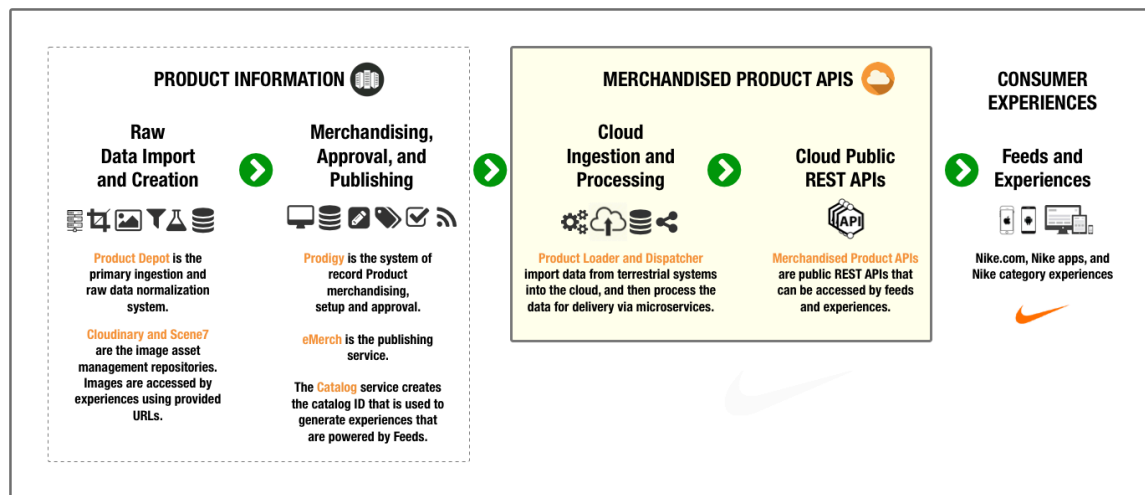

After a notification from the system of record is received, the Merchandised Products services then decorate the product data with domain-specific elements such as Product UUIDs for each service. Generally Merchandised Products does not modify the data provided by the systems of record. For more information on the IDs that are returned within the Merchandised Products domain, see [Understanding the Various IDs Returned Within Each Response](#).

TIPS:

When a Merchandised Products object is created, the object remains in the application cache for 30 seconds.

Because Prodigy is the source of data, product data that is served through any Merchandised Products API is subject to change at any time.

How Does Product Data Get Published?

When a change to a product is saved in Prodigy, a notification that a new product has been published is received by Merchandised Products cloud services. This initiates the creation of a fresh snapshot of all product data.

Prodigy uses a first-in-first-out queue, however an individual product update is pushed to the top of the queue so that it takes precedence over larger bulk updates. For example, the queue may contain 100k updates when a global product attribute has been applied. Since a producer who manually updates and publishes a single product likely wants that change to take place as quickly as possible, Prodigy gives preference to that manual update.

NOTE: When a Merchandised Products object is updated, the object remains in the application cache for 30 seconds.

Where Do I Get Inventory Information?

Inventory is available via the Inventory domain. For example, product availability can be found [here](https://developer.niketech.com/docs/projects/Availability?tab=api) (<https://developer.niketech.com/docs/projects/Availability?tab=api>).

How To Find a Current Product

The easiest way to find a current product is to go to Nike.com and find a style-color that is offered on the site. With the exception of NIKEiD products, if the style-color is available on Nike.com, the data is available in our services.

Merchandised Products Concepts

The Merchandised Products API uses underlying concepts as the foundation for how the API is designed and consumed.

How Product Data is Organized in the Merchandised Products API


Depending upon the information you are looking for, you may need to chain together several service calls, using the output of one service call as input to another service call.

In the Nike data ecosystem, every product has the following fundamental characteristics:

- One or more SKUs
- One set of prices
- One or more associated value-added services
- A body of content

- A set of product images

These items are divided into a set of microservices. The relationship between the Merchandised Products objects is illustrated below.

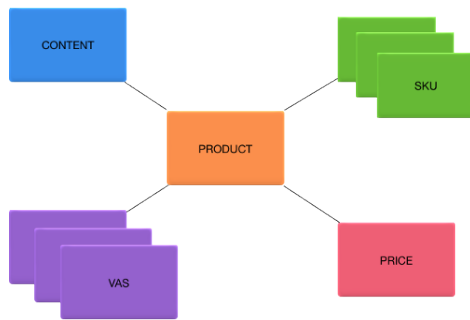

Finding the Data Points You Need

Microservice architecture specifies that data should be divided into logical groupings within semantically-named resources. You can use the following general guidelines to find the data points among the Merchandised Products resources:

- If the data can be localized, it is typically in the Content API.
- If you are looking for size information, it is in the Merchandised SKUs API.
- If you are looking for launch-related information or dates associated with a product, look in the Merchandised Products API.

Understanding the Various IDs Returned Within Each Response

The resources provided by the **Merchandised Products API** include a wide range of IDs that are used for various current and historical purposes. The following table describes the concepts and common uses for each of these IDs.

ID	Services	Description
id	Merchandised Products, Price, SKU, and VAS	UUID for the object (and any nested object) that is returned. Each value in the

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

ID	Services	Description
		object's id field is generated within the Merchandised Products domain, and is not used by legacy systems. Each ID is unique to the Merch Group that was specified in the request, but is not globally unique. For a globally unique ID, use the value in the catalogId field.
productId	Merchandised Price, SKU, and VAS	UUID of the parent product to which the data is tied. Each product returned in the Merchandised Products service can be thought of as a parent for the data returned by the other APIs in the domain. For example, if you want to retrieve the SKUs for a specific product, you need to first know the product UUID for the parent of those SKUs.
parentId	Merchandised Price, SKU, and VAS	UUID of the parent product to which the data is tied. NOTE: In practical terms, the parent ID is identical to the product UUID.
snapshotId	Merchandised Products, Price, SKU, and VAS	UUID for a record of what was returned with the

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

ID	Services	Description
		response. Snapshot IDs are used for historical lookup purposes. For example, Checkout stores a record for every transaction that occurs on Nike.com. Within that record, the Snapshot ID is stored to later retrieve the exact details of the transaction at the moment that product data was requested. NOTE: There is no lookup provided to retrieve a previous Snapshot ID for a given time. You can only use a Snapshot ID that you stored when the request occurred.
styleCode , colorCode , and styleColor	All	Consumer-facing product style and color for the requested product. The style-color is visible on the Product Detail Page on Nike.com, for example, in the product description. NOTE: Style-colors are not globally unique. For example, occasionally a style-color ID is identical in two different Merch

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

ID	Services	Description
		Groups, but that identical ID represents two distinct physical products. These collisions are rare, but can occur.
catalogId	Merchandised Products	Globally unique product UUID that is generated by the Catalog domain.
pid	Merchandised Products	Deprecated Product ID (PID) that is used by various internal systems at Nike, as well as in legacy URLs on Nike.com. PIDs are generally included for historical mapping purposes for legacy systems that are not completely cloud-enabled.
productGroupId	Merchandised Products	Deprecated Product Group ID (PGID) that is used by various internal systems at Nike, as well as in legacy URLs on Nike.com. PGIDs were used to group products together in a merchandised experience. PGIDs are included generally for historical mapping purposes for legacy systems that are not completely cloud-enabled.

ID	Services	Description
legacyCatalogIds	Merchandised Products	Deprecated IDs that are returned for use by legacy systems.
stockKeepingUnitId	Merchandised Price	Deprecated SKU ID that is used for historical purposes by legacy systems.
gtin	Merchandised SKU	Globally unique 14-digit number that used to identify retail SKUs. These are commonly called UPC codes, though the technical specification for the two is slightly different.
catalogSkuld	Merchandised SKU	Deprecated IDs that are returned for use by legacy systems.

Caching Data

The Merchandised Products API caching strategy includes three layers: application, Akamai and experience.

The first cache layer is at the application level where each instance of the Merchandised Products application has its own cache. There is no distributed caching, so the service instances do not share cache information with one another. Application cache times vary between services.

The second cache layer is Akamai caching, utilized when the client calls the services through the public router. There is no caching performed when an application calls the application directly.

The third type of caching should occur within the client experience, depending on the client's architectural patterns. Caching client-side is recommended to reduce network calls and

unnecessary load on the system.

Create, Update, and Delete Capabilities of the API

In addition to listing product data, the API creates, modifies and deletes merchandised product data that flows into the system from Prodigy, which is the primary system of record. Every update call made to the Merchandised Products services from Prodigy (including deletion) is versioned, creating an audit trail. In this way, no merchandised product data is physically deleted from the data store. A timestamped deletion record is inserted instead. Each version has a unique **snapshotId** representing a snapshot of the object in time. The create, update and delete endpoints are restricted and only certain applications can call them.

International Considerations

Generally the rules and behaviors for products are the same regardless of geography. However, there are a few key concepts and exceptions.

Working with Merch Groups, Countries, and Languages

A Merch Group is a collection of countries defined in Prodigy. Merch Groups are used to manage product information and inventory at a group level. The Merchandised Products API uses the Merch Group as a foundational element in how the data is organized and presented.

Within each Merch Group, each country may include translations and size conversions for more than one language-dialect.

For most API calls, Merch Group and Country are required. For the current list of supported Merch Groups, countries, and languages see [Merchandised Products API Reference Guide \(https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products\)](https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products).

Excluding Countries where a Specific Product Should

Not Be Offered

In some cases, Nike does not offer a specific product in a certain country, even if it is offered in other countries within the same Merch Group. This may be for a variety of reasons, including legal implications of selling a product that is not within the trade guidelines for a given country. If you are building a public or consumer-facing experience, it is essential that you do not show that product in an excluded country.

The Merchandised Products API includes two fields that are used for this purpose:

- **commerceCountryInclusions**
- **commerceCountryExclusions**

The two data points reflect two views of essentially the same data. You should use **commerceCountryExclusions** to exclude a product from being displayed in the specified country. The **commerceCountryInclusions** field is an inverse view that is primarily used for legacy systems, and may be deprecated soon.

Using Merchandised Products

- [Merchandised Products Overview](#)
- [Merchandised Product List](#)
- [Merchandised Product by ID](#)

Merchandised Products Overview

Use the Merchandised Products service to list, create, update, and delete merchandised product information.

- Search for a specific version of the object by product ID or snapshot ID. Searching by a filter other than **snapshotId** returns the most recent version.
- Filter field names are case-insensitive.
- One product is returned if searching by product ID.
- If country is not specified, all countries are returned.
- This is a synchronous service.

Merchandised Product List

The Merchandised Products service returns all products matching the filter query parameter up to the value supplied in the count parameter. If no count parameter is supplied, up to 25 products are returned. When the count parameter is supplied, the maximum number of products is 25. Product results are sorted by product ID, style-color or style, depending upon the filter query parameters passed in. If the count parameter restricts the results, a **pages** object is returned in the response that the caller can use for pagination.

This is not a **JWT-restricted** (<https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#jwt-json-web-token>) service but results differ based on whether or not this header is sent in the request. If no JWT header is supplied, the response contains products matching the criteria and have an ACTIVE status. If a valid JWT header is supplied, the response contains products matching the criteria regardless of status.

List product information for a specific version by ID and by Snapshot ID. If no **snapshotId** parameter is supplied, the most recent version of the product is returned.

Filter field names are case insensitive.

The caller does not have to send an access token in the Authorization header (indicating the customer is logged in) to use this service.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/products/ v2{?filter,snapshotId,count,anchor}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	query	Fields and values used to filter the results. Maximum of one merchgroup (https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) is required. id + style or style-color is required. Maximum of one style is supported.	String	Required
snapshotId	query	ID representing the product version Allowed in listing by	String	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Parameter	Type	Description	Data Type	Required?
		product ID only		
count	query	Number of results to return, default = 25, max = 25	Integer	Optional
anchor	query	If the value is 10, results returned start with result 11	Integer	Optional

Let's take a look at some Merchandised Product List scenarios.

I Want to List	Sample Query
EU products with style 849560	https://api.nike.com/merch/products/v2?filter=merchgroup(EU)&filter=style(849560)
EU products with style-color 849560-001 and 849560-002	https://api.nike.com/merch/products/v2?filter=merchgroup(EU)&filter=stylecolor(849560-100,849560-002)
US product with ID 58aaa694-5889-5965-a781-6abcc3e4ff68	https://api.nike.com/merch/products/v2?filter=merchgroup(US)&filter=id(58aaa694-5889-5965-a781-6abcc3e4ff68)
US products with style 919704, limiting the results to 10	https://api.nike.com/merch/products/v2/?filter=merchgroup(US)&filter=style(919704)&count=10
US product with product ID 8653b383-22a0-55a1-ba7e-56174e5ab1e7 and Snapshot ID c59808d1-0945-4bcc-9c47-dcb34cc40824	https://api.nike.com/merch/products/v2?filter=merchgroup(US)&filter=snapshotId(c59808d1-0945-4bcc-9c47-dcb34cc40824)&filter=id(8653b383-22a0-55a1-ba7e-56174e5ab1e7)

I Want to List	Sample Query
More than one product in a single response: US product with product ID b9c9789-1a35-503c-8a22-95a745c35df8 and US product with product ID 30e88273-bc07-5a51-bb8a-9c58a789c504	https://api.nike.com/merch/products/v2?filter=id(ab9c9789-1a35-503c-8a22-95a745c35df8,30e88273-bc07-5a51-bb8a-9c58a789c504)

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

No body is required for a GET request.

Sample Merchandised Product List URI:

```
https://api.nike.com/merch/products/v2?filter=merchgroup(EU)&filter=style(AJ8646)
```

Response Body

Element Name	Type	Description	Required?
pages	object	Object with a next and prev link used to paginate results	Optional
pages. prev	string	Relative URL to the previous page of results	Optional
pages. next	string	Relative URL to the next page of results	Optional
id	string	ID of the product in UUID format, generated when product flows into Merch Product from Prodigy, will eventually replace pid	Required
snapshotId	string	ID of the most recent snapshot of the SKU in UUID format, generated when the product is updated	Required
modificationDate	string	Timestamp the product was last modified	Required
status	string	Product status, see Merchandised Product Field	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		Reference Guide (https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	
merchGroup	string	Group this product is merchandised to, see Merchandised Product Field Reference Guide (https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	Required
styleCode	string	Code indicating Nike style	Required
colorCode	string	Code indicating Nike color	Required
styleColor	string	Concatenation of styleCode-colorC	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		ode	
pid	string	Product ID from legacy system used to map to the product UUID	Required
catalogId	string	Catalog ID in UUID format from the Catalog Product (https://developer.nike.com/docs/projects/Product%20Catalog%20V3?tab=api) service, will eventually replace legacyCatalogIds	Optional
productGroupId	string	ID used to group products together such as products with the same styleCode, from legacy system	Optional
nikeIdStyleCode	string	Nike ID style code, only populated for products of styleType NIKEID	Optional
brand	string	Nike brand associated to this product such as “Jordan”	Optional
channels	array	Array of channels	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		this product is sold in	
legacyCatalogIds	array	Array of legacy system catalog ids the product is in, used to map to the catalogId UUID	Optional
genders	array	Array of genders this product is associated with, see Merchandised Product Field Reference Guide (https://developer.nike.com/developer/docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	Optional
valueAddedServices	array	Array of value-added service objects associated with this product	Optional
valueAddedServices.id	string	Value-added-service UUID associated with this product that can be used in the	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		Merchandised Value Added Services by ID endpoint call	
valueAddedService s. publishDate	string	Timestamp value-added service was published	Optional
valueAddedService s. startDate	string	Timestamp value-added service begins	Optional
valueAddedService s. endDate	string	Timestamp value-added service ends	Optional
customization	array	Array of NIKEiD-related customizations available for this product	Optional
customization. nikeIdStyleCode	string	Style code of matching NIKEiD product	Optional
customization. nikeIdSlug	string	NIKEiD slug code associated with this product	Optional
sportTags	array	Array of sport tags associated with this product	Optional
widthGroupIds	array	Group of product IDs with same style but different width, not currently used	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
classificationConcepts	array	Array of Taxonomy concept objects associated with this product. See the Taxonomy Service (https://bitbucket.nike.com/projects/TAX/repos/taxonomy/browse/API-v2.md) for more information.	Optional
classificationConcepts.broaderConceptId	string	UUID of the broad Taxonomy concept associated with this product, e.g. Platinum Tint	Required
classificationConcepts.narrowerConceptIds	array	Array of narrower Taxonomy concept UUIDs associated with this product	Required
commerceCountryInclusions	array	Array of ISO2 country codes where this product can be sold, e.g. CN,JP	Optional
commerceCountryExclusions	array	Array of ISO2 country codes where this product can not be sold, e.g. AT,BE	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
productRollup	object	Object containing Prodigy rollup attributes	Optional
productRollup. type	string	Type of Prodigy rollup attribute associated to the product	Optional
productRollup. key	string	Key of Prodigy rollup attribute associated to the product	Optional
quantityLimit	integer	Integer restricting how many of this product a customer can purchase at one time	Optional
nikeidStyleNumber	string	Nike ID style code, only populated for products of styleType NIKEID	Optional
styleType	string	Type of style, see Merchandised Product Field Reference Guide (https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#usi)	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		ng-merchandised-products) for a complete list	
productType	string	Type of product, see Merchandised Product Field Reference Guide (https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	Optional
publishType	string	Type of publishing, see Merchandised Product Field Reference Guide (https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	Optional
mainColor	boolean	True or false, indicating this is the	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		main color of the style	
exclusiveAccess	boolean	True or false, indicating whether or not the user must have an access code to unlock the product in order to purchase it	Required
preOrder	boolean	True or false, true indicates the PDP should display in preOrder status	Optional
hardLaunch	boolean	True or false, true indicates the PDP should not display before the commerceStartDate or after the commerceEndDate regardless of inventory	Optional
hidePayment	boolean	True or false, true indicates certain payment types are not allowed to purchase the product, such as COD in China	Optional
commercePublish Date	string	Timestamp indicating when this	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		product was published. e.g. if date is within 30 days of current date, product is considered a New Release	
commerceStartDate	string	Timestamp indicating when the product product can be sold	Optional
commerceEndDate	string	Timestamp indicating when the product can no longer be sold	Optional
preorderAvailabilityDate	string	Timestamp indicating when the product can be pre-ordered	Optional
preorderByDate	string	Timestamp, not currently used	Optional
softLaunchDate	string	Timestamp e.g. used for products with a publishType of LAUNCH. if hardLaunch is true, current date is between the commerceStartDate and softLaunchDate ,	Optional

Element Name	Type	Description	Required?
		display product in Coming Soon status	
resourceType	string	Type of resource, always merchProduct	Required
links.self.ref	string	Referrer link to result	Required
errors	array	Array of errors associated with this request	Optional
errors.requested	string	Error message indicating which field or parameter caused the error	Required
errors.httpStatus	integer	HTTP error response code	Required
errors.message	string	Detailed error message	Required

Merchandised Product By ID

This service returns product information for the **id** path parameter and **snapshotId** query parameter, if supplied. This endpoint returns the same fields as the [Merchandised Product List](#) endpoint except for the pages object, because the endpoint only returns one result.

The caller does not have to send an access token in the **Authorization** header (indicating the customer is logged in) to use this service.

TIP: If you know the product ID, this endpoint yields faster results than the [Merchandised Product List](#) endpoint does because it locates the product record directly by ID rather than filtering the results.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/products/ v2/{id}{?snapshotId}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	path	ID of product	String	Required
snapshotId	query	ID representing the product version	String	Optional

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional

Header Name	Description	Required?
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

No body is required for GET requests.

Sample request URI to list product information for ID

58aaa694-5889-5965-a781-6abcc3e4ff68 and Snapshot ID
34cec674-4200-4001-8632-1f4f3cec5078:

```
https://api.nike.com/merch/products/v2/  
58aaa694-5889-5965-a781-6abcc3e4ff68?snapshotId=34cec674-4200-4001  
-8632-1f4f3cec5078
```

Sample request URI to list product information for ID

30e88273-bc07-5a51-bb8a-9c58a789c504:

```
https://api.nike.com/merch/products/v2/  
30e88273-bc07-5a51-bb8a-9c58a789c504
```

Response Body

See the [Merchandised Product List](#) endpoint to view the list of response body field definitions.

Using Merchandised Product SKUs

- [MERCHANDISED PRODUCT SKU LIST](#)
- [MERCHANDISED PRODUCT SKU BY ID](#)

Merchandised Product SKU Overview

Use this service to list, add, update and delete merchandised SKU information.

- Search for a specific version of the object by ID and Snapshot ID. Searching by a filter other than **snapshotId** returns the most recent version.
- Filter field names are case-insensitive.
- One product's SKU data is returned if searching by SKU ID.
- If country is not specified, all countries are returned.
- This is a synchronous service.

The following sections describe each endpoint of the Merchandised Product SKU API in detail.

Merchandised Product SKU List

Use this service to search for multiple SKUs by filter. Search results are sorted in ascending order by the **displayOrder** field and then **stockKeepingUnitId**. Note that the **displayOrder** field is not returned in the results.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/skus/ v2{?filter,snapshotId,count,anchor}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	query	id (SKU UUID), productid (product UUID from Merch Product endpoint), gtin (from Merch Product endpoint) or stockkeeping unitid (from Merch Product endpoint) is required https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) is optional	String	Required
snapshotId	query	Unique ID in UUID format indicating a	String	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Parameter	Type	Description	Data Type	Required?
		version of the SKU		
count	query	Number of results to return. Max = 25	String	Optional
anchor	query	If the value is 10, results returned start with result 11	Integer	Optional

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in the response. The only accepted value is application/json	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

No request body is required for GET requests.

Let's take a look at some sample Merchandised Product SKU scenarios.

I Want to List SKUs for filter	Sample Query
Product ID 2c4282cc-9fd1-5250-94a5-0c74735443d	https://api.nike.com/merch/skus/v2?filter=productid(2c4282cc-9fd1-5250-

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

I Want to List SKUs for filter	Sample Query
c	94a5-0c74735443dc)
GTIN 00887225865153	https://api.nike.com/merch/skus/v2/?filter=gtin(00887225865153)
Legacy SKU (stockkeepingunitid) 18925450	https://api.nike.com/merch/skus/v2/?filter=stockkeepingunitid(18925450)

Sample Merchandised Product SKU List request URI:

```
https://api.nike.com/merch/skus/
v2/?filter=productid(ab9c9789-1a35-503c-8a22-95a745c35df8)&filter=
country(US)
```

Response Body

Element Name	Type	Description	Required?
id	string	ID of the SKU	Required
snapshotId	string	ID of the most recent snapshot of the SKU	Required
productId	string	ID of the product (as passed in the query parameter)	Required
parentId	string	Same as the productId if the SKUs product has no parent	Optional
parentType	string	Type of parent product. In the	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		current version, this is always merchProduct.	
catalogSkuld	string	UUID of catalog product. See Product Catalog Service (https://developer.nike.com/docs/projects/Product%20Catalog%20V3?tab=api) for more information.	Optional
modificationDate	string	Date the SKU was last modified	Required
merchGroup	string	Merchandising group to which this SKU belongs. For more information on Merch Groups, see Merchandised Product Field Reference Guide (https://developer.nike.com/ndc-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		complete list	
stockKeepingUnitId	string	Deprecated SKU ID that is used for historical purposes by legacy systems. legacy SKUID	Optional
gtin	string	Global Trade Item Number	Required
nikeSize	string	Internal size	Optional
countrySpecifications	array	Array of specifications based on country parameter	Required
countrySpecifications. country	string	Country, matches the country filter	Optional
countrySpecifications. localizedSize	string	Localized SKU size based on country filter	Optional
countrySpecifications.taxInfo. commodityCode	string	Category code of SKU	Optional
countrySpecifications.taxInfo. vat	string	Value-added tax based on the country filter, 0 if none	Optional
resourceType	string	Type of resource, always merchSku	Required
links.self. ref	string	Referrer link to	Required

Element Name	Type	Description	Required?
		result	
errors.requested	string	Error message indicating which field caused the error	Optional
errors.httpStatus	integer	HTTP error response code	Optional
errors.message	string	Detailed error message	Optional

Merchandised Product SKU by ID

Use this service to search for SKU information by SKU ID. This service returns the same data as the [Merchandised Product SKU List](#) endpoint returns except for the pages object because the endpoint only returns one result. In order to get a SKU ID, you can query the Merchandised Product SKU List endpoint filtering by productid.

TIP: If you know the SKU ID, this endpoint yields faster results than the [Merchandised Product SKU List](#) endpoint does because it locates the SKU record directly by ID rather than filtering the results.

Merchandised Product SKU by ID Details

HTTP Method	URI Path	Restricted?
GET	/merch/skus/v2/{id}	No

Path and Query Parameters

Parameter	Type	Description	Data Type	Required?
id	path	SKU ID	string	Required
snapshotId	query	Unique ID in UUID format indicating a version of the SKU	string	Optional
fields	query	List of fields to return. if not sent, all fields are returned	string	Optional
country	query	Country (https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products)	string	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Parameter	Type	Description	Data Type	Required?
		used to localize results		

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	No
Content-Type	Content type of the request, application/json is only value allowed	No

Request Body

Required parts of the request body:

No body is required for a GET request.

I Want to List SKU UUID	Sample Query
036006d4-fdb7-55f6-9430-9eaf239ce22f	<code>https://api.nike.com/merch/skus/v2/036006d4-fdb7-55f6-9430-9eaf239ce22f</code>
036006d4-fdb7-55f6-9430-9eaf239ce22f in Finland	<code>https://api.nike.com/merch/skus/v2/036006d4-fdb7-55f6-9430-9eaf239ce22f?country=FI</code>

Sample Product SKU by ID request URI:

`https://api.nike.com/merch/skus/v2/`

afb793c5-1bfe-5ec3-a7f7-63e7ea59db13

Using Merchandised Product Prices

- [MERCHANDISED PRICES LIST](#)
- [MERCHANDISED PRICES BY ID](#)

Merchandised Product Prices Overview

Use this API to list, create and delete product prices.

- Search for a specific version of the object by ID and Snapshot ID. Searching by a filter other than **snapshotId** returns the most recent version.
- Filter field names are case-insensitive.
- One product's price data is returned if searching by price ID.
- All endpoints are synchronous.

The following sections describe each endpoint of the Merchandised Product Price API in detail.

Merchandised Prices List

Use this endpoint to list price data by price ID or by product ID and [country](#) (<https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products>). Because price values and currency are localized, both country and productid are required parameters when searching by productid. Country is not required when searching by price ID because the price record for a price ID is for a specific country. To get the price ID in the results, first search by productid and country. If you do not know the product id, use the [Merchandised Product List](#) endpoint to search by style-color or style. Product ID is returned in the results.

No special headers are required to use this endpoint so it can be executed in any browser, and the customer does not have to be logged in.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/prices/ v2{?filter,fields,anchor,count}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	query	productId + country (https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) or price ID	String	Required
snapshotId	query	ID representing the price version	String	Optional
count	query	Number of results to return, default	Integer	Optional

Parameter	Type	Description	Data Type	Required?
		= 25, max = 25		
anchor	query	If the value is 10, results returned start with result 11	Integer	Optional

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Let's take a look at Merchandised Price List scenarios.

I Want to List Prices for	Sample Query
Product UUID and a specific location (e.g. Ireland)	https://api.nike.com/merch/prices/v2/?filter=productid(58aaa694-5889-5965-a781-6abcc3e4ff68)&filter=country(IE)
Price UUID 486d098c-a403-5fb7-8305-243d71625d4c and snapshotId	https://api.nike.com/merch/prices/v2/?filter=id(486d098c-a403-5fb7-8305-243d71625d4c)&filter=s

I Want to List Prices for	Sample Query
678408f9-0eea-4560-b537-e85c131e9495	snapshotId(85ebb452-f61c-46a2-b0ce-14a89a542816)

Note that for the **productid** + **country** (<https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products>) price queries, there is a different price record for each country. Querying by ID is for a specific country.

Response Body

Element Name	Type	Description	Required?
pages	object	Object with a next and prev link used to paginate results	Optional
pages. prev	string	Relative URL to the previous page of results	Optional
pages. next	string	Relative URL to the next page of results	Optional
id	string	ID of the price in UUID format, generated when product flows into Merchandised Price from Prodigy	Required
snapshotId	string	ID of the most recent snapshot of the price in UUID format	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
productId	string	ID of product this price belongs to	Required
parentId	string	ID of parent product this price belongs to, alias for productId	Optional
parentType	string	Type of parent product, always merchProduct	Optional
modificationDate	string	Timestamp the price was last modified	Required
country	string	Country of this price, see Merchandised Product Field Reference Guide (https://developer.nike.com/ndc-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	Required
msrp	number	Manufacturer's recommended retail price. often not provided or	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
		may be 0	
fullPrice	number	Nike's original, retail price used for display purposes when a product is discounted and the full retail price is displayed with a strike-through (e.g. a clearance product) and used by the Cart & Checkout APIs (https://developer.nike.com/ndc/docs/doc/commerce/checkout/use-checkout.html) to calculate the difference between current retail price and full retail price to send to fulfillment system	Required
currentPrice	number	Purchase price of product. if discounted, price is calculated in Prodigy/PI	Required
employeePrice	number	Employee price of product	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
currency	string	Localized currency according to country	Required
discounted	boolean	True or false indicating this product is on sale set by the Price Class field in Prodigy/PI	Required
promoInclusions	array	Array of promotions associated with this price	Required
promoExclusions	array	Array of true or false values indicating if promo exclusions apply to this price	Required
resourceType	string	Type of resource, always merchSku	Required
links.self.ref	string	Referrer link to result	Required
errors.requested	string	Error message indicating which field caused the error	Required
errors.httpStatus	integer	HTTP error response code	Required
errors.message	string	Detailed error message	Required

Merchandised Prices by ID

Use this endpoint to list price data by price ID. To get the price ID, search by productid and country (<https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products>) using the [Merchandised Prices List](#) endpoint and Price ID is returned in the results. If you do not know the product id, use the [Merchandised Product List](#) endpoint to search by style-color or style. Product ID is returned in the results.

Results from this endpoint are almost identical to those returned from the [Merchandised Product List](#) endpoint. The difference is no pagination data is returned and you can only search by one price ID at a time.

No special headers are required to use this endpoint so it can be executed in any browser, and the customer does not have to be logged in.

TIP: If you know the price ID, this endpoint yields faster results than the [Merchandised Prices List](#) endpoint does because it locates the price record directly by ID rather than filtering the results.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/prices/ v2/{id}?{snapshotId}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	Path	Field list and values to search for. ID or productid + country is required. maximum of one country is supported	String	Required
snapshotId	Query	ID representing the product version, allowed in listing by price ID only	String	Optional

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Let's take a look at some Merchandised Price by ID scenarios.

I Want to List Merchandised Price for	Sample Query
price ID 486d098c-a403-5fb7-8305-243d71625d4c	<code>https://api.nike.com/merch/prices/v2/486d098c-a403-5fb7-8305-243d71625d4c</code>
price ID 486d098c-a403-5fb7-8305-243d71625d4c and snapshotId 85ebb452-f61c-46a2-b0ce-14a89a542816	<code>https://api.nike.com/merch/prices/v2/486d098c-a403-5fb7-8305-243d71625d4c?filter=snapshotId(85ebb452-f61c-46a2-b0ce-14a89a542816)</code>

Sample Merchandised Price by ID request URI:

```
https://api.nike.com/merch/prices/v2/486d098c-a403-5fb7-8305-243d71625d4c
```

Response Body

See the [Merchandised Prices List](#) endpoint for a description of response body field descriptions.

Using Merchandised VAS

- [MERCHANDISED VALUE ADDED SERVICES LIST](#)
- [MERCHANDISED VALUE ADDED SERVICES BY ID](#)

Merchandise Value Added Services Overview

Products can be merchandised with one or more Value Added Services (VAS) such as gift wrap or personalization. Digital and physical gift cards are another example of VAS as customers can personalize the gift message and configure the amount. A VAS can be merchandised to an unlimited number of products. Use this service to list, add, and delete VAS.

- Search for a specific version of the object by ID and Snapshot ID. Searching by a filter other than **snapshotId** returns the most recent version.
- Filter field names are case-insensitive.
- One VAS is returned if searching by VAS ID.
- All endpoints are synchronous.

Note that the VAS services return a field named `pid`. Even though this field implies a one-to-one relationship between product and VAS, this field is a legacy ID used for reporting purposes in Prodigy. Products can have several Value-Added Service objects associated with them.

The following sections describe each endpoint of the Merchandise Value Added Services API in detail.

Merchandise Value Added Services List

Use this endpoint to list VAS by type or by VAS ID. Listing by multiple IDs is supported.

If you want to search by VAS ID but do not know it, call the [Merchandise Product List](#) endpoint first. The `value_added_service` ID will be returned in the search results for each product that has one or more value-added service attributes.

The customer does not have to be logged in to call this endpoint.

This endpoint requires no special headers so you can execute test calls in any browser.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/ value_added_services / v1{?filter,fields,count,anchor}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	Query	Values to search for, ID or type is supported	String	Optional
fields	query	List of fields to return. if not sent, all fields are returned	string	Optional
count	Query	Number of results to return, default = 25, max = 25	Integer	Optional
anchor	Query	If the value is 10, results returned start with result 11	Integer	Optional

Let's take a look at some Merchandised Value Added Services List scenarios.

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

I Want to List VAS Details for	Sample Query
VAS type DIGITAL_GIFT_CARD	https://api.nike.com/merch/value_added_services/v1?filter=type(DIGITAL_GIFT_CARD)
VAS ID 47bc9091-2965-5231-b5f1-a7216e249894	https://api.nike.com/merch/value_added_services/v1?filter=id(47bc9091-2965-5231-b5f1-a7216e249894)
VAS ID 124ae4cb-0506-5b52-98c0-06eaf7b7ea67 and VAS ID 47bc9091-2965-5231-b5f1-a7216e249894	https://api.nike.com/merch/value_added_services/v1?filter=id(124ae4cb-0506-5b52-98c0-06eaf7b7ea67,47bc9091-2965-5231-b5f1-a7216e249894)
VAS ID 47bc9091-2965-5231-b5f1-a7216e249894 and Snapshot ID 52ca6f5b-fde9-4daf-af65-3993ef7eb428	https://api.nike.com/merch/value_added_services/v1?filter=id(afd90c5b-230f-5fd3-b3a4-af36c5dbd55d)&filter=snapshotId(e0861083-f3a3-4120-bc30-29888113e940)
all available VAS	https://api.nike.com/merch/value_added_services/v1

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is	Optional

Header Name	Description	Required?
	only value allowed	

Request Body

There is no body in a GET request.

Response Body

Element Name	Type	Description	Required?
pages	object	Object with a next and prev link used to paginate results	Optional
pages.prev	string	Relative URL to the previous page of results	Optional
pages.next	string	Relative URL to the next page of results	Optional
id	string	ID of the VAS in UUID format, generated when VAS flows into Merchandised VAS from Prodigy	Required
snapshotId	string	ID of the most recent snapshot of the VAS in UUID format	Required
modificationDate	string	Timestamp the VAS was last modified	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
status	string	VAS status, see Merchandised Product Field Reference Guide (https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	Required
merchGroup	string	Merchandising group this VAS is merchandised to, see Merchandised Product Field Reference Guide (https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) for a complete list	Required
pid	string	Legacy product id used to map to the product UUID	Required

Element Name	Type	Description	Required?
type	string	VAS type	Required
displayName	string	VAS display name	Optional
commercePublish Date	string	Timestamp indicating when this VAS was published	Optional
commerceStartDate	string	Timestamp indicating when the VAS is available	Optional
resourceType	string	Type of resource, always “merchValueAdded Service”	Required
links.self.ref	string	Referrer link to result	Required

Merchandised Value Added Services by ID

Use this endpoint when you want to list the fields for one VAS ID. This endpoint returns almost identical results as the [Merchandised Value Added Services List](#) endpoint returns except that it does not return pagination information because it returns only one VAS object. This endpoint returns a quicker response than the Merchandised Value Added Services List endpoint because it does not filter or paginate the results.

If you do not know the VAS ID, call the [Merchandised Product List](#) endpoint first. The value_added_service ID will be returned in the search results for each product that has one or more VAS attributes.

The customer does not have to be logged in to call this endpoint.

This endpoint requires no special headers so you can execute test calls in any browser.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/ value_added_services / v1/{id}/{?snapshotId ,fields}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	VAS ID	String	Required
snapshotId	Query	ID representing the product version, allowed in listing by price ID only	String	Optional
fields	Query	List of fields to return. If not supplied, all fields are returned	String	Optional

Let's take a look at some Merchandised Value Added Services by ID scenarios.

I Want to List VAS Details for	Sample Query
ID 56e48cf5-050f-51a7-b6ce-1ca5ab9d415	https://api.nike.com/merch/ value_added_services/

I Want to List VAS Details for	Sample Query
b	v1?filter=id(47bc9091-2965-5231-b5f1-a7216e249894)
ID 56e48cf5-050f-51a7-b6ce-1ca5ab9d415 b and Snapshot ID 52ca6f5b-fde9-4daf-af65-3993ef7eb428	https://api.nike.com/merch/ value_added_services/v1/ 56e48cf5-050f-51a7-b6ce-1ca5ab9d415 b?snapshotId=566ba45b-898b-4f19-a743-c12e8a753945
ID 56e48cf5-050f-51a7-b6ce-1ca5ab9d415 b and only return pid and type fields	https://api.nike.com/merch/ value_added_services/v1/ 56e48cf5-050f-51a7-b6ce-1ca5ab9d415 b?fields=(status,pid,type)

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no body in a GET request.

Response Body

See the [Merchandised Value Added Services List Response Body](#) endpoint for a list of

VAS field descriptions returned in the response.

Using Product Content

- [PRODUCT CONTENT BY STYLE COLOR](#)
- [PRODUCT CONTENT BY STYLE COLOR LIST](#)
- [PRODUCT CONTENT ITEM BY STYLE COLOR](#)
- [PRODUCT CONTENT FIELD BY STYLE COLOR LIST](#)
- [PRODUCT IMAGE SET BY STYLE COLOR](#)
- [PRODUCT BASE IMAGE URL BY STYLE COLOR](#)
- [PRODUCT IMAGE SET BY STYLE COLOR LIST](#)
- [PRODUCT BASE IMAGE URL BY STYLE COLOR LIST](#)

Product Content Overview

Use these services to list product content such as title, subtitle, description, and images by [country](https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) (<https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products>) and locale.

There are two sets of Product Content services, internal and external. External services go through the public router (api.nike.com and snkrs.prod.commerce.nikecloud.com) and return product information for products in the ACTIVE and CLOSEOUT status. Internal services go through the frame router (frame.prod.commerce.nikecloud.com). These services return identical fields to the external services but they return all products regardless of status.

When making service to service calls, use the internal Product Content endpoints.

All endpoints are synchronous.

The following sections describe each endpoint of the Product Content Services API in detail.

Product Content by Style Color

Use this endpoint to list localized product content for a style-color, [country](https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) (<https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products>) and locale.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/ v1/{style- color}/content{?coun try,locale}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
style-color	Path	Style-color code of content	String	Required
country	Query	Country used to localize the content for the correct country, see Merchandise Product Field Reference Guide (https://developer.nike.com/nde-docs/doc/commerce/product/merch-product-field-reference.html)	String	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Parameter	Type	Description	Data Type	Required?
		#using-merchandised-products) for a complete list		
locale	Query	Locale used to localize the content for the correct language	String	Required

Let's take a look at some Product Content by Style Color scenarios.

I Want to List Product Content for	Sample Query
Style-color code 919704-006 in Spain for locale es_ES	https://api.nike.com/merch/contents/v1/919704-006/content?country=ES&locale=es_ES

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Sample Product Content by Style Color URI:

```
https://api.nike.com/merch/contents/v1/919704-006/
content?country=ES&locale=es_ES
```

Response Body

Element Name	Type	Description	Required?
globalPid	string	Global product ID from legacy system	Optional
parentId	string	ID of parent product in UUID format	Optional
parentType	string	Type of parent product, always merchProduct	Optional
langLocale	string	Locale of product content	Optional
colorDescription	string	Localized color description	Optional
slug	string	Slug ID of the product	Optional
fullTitle	string	Localized full title of product	Required
title	string	Localized short title of product	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
subtitle	string	Localized subtitle of product	Optional
descriptionHeading	string	Localized heading description	Optional
description	string	Localized long description of product	Optional
headLine	string	Localized headline of product	Optional
preOrder	string	Localized preorder text	Optional
softLaunch	string	Localized soft launch text	Optional
outOfStock	string	Localized out of stock text	Optional
notifyMe	string	Localized notify me text	Optional
accessCode	string	Localized access code text	Optional
pdpGeneral	string	Key for custom messaging e.g. preOrder or notifyMe	Optional
productName	string	Localized product name	Optional
techSpec	string	Localized technical specification text	Optional
benefitSummaryLi	string	Localized list of	Optional

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Element Name	Type	Description	Required?
st		benefits text	
benefitSummaryVideo	string	Localized benefits video URI	Optional
manufacturingCountryOfOrigin	string	Localized name of country where product was manufactured	Optional
shippingDelay	integer	Integer value representing when the customer must be notified of a shipping delay	Optional
sizeChart	string	Key of size chart for this product	Optional
imageBadgeResource	string	Relative URI to image such as "Editor's Choice" image	Optional
colors	array	Array of color items associated with this product	Optional
colors.type	string	Type of color e.g. simple, primary or secondary	Optional
colors.name	string	Localized color	Optional
colors.hex	string	Color hex value	Optional
bestFor	array	Array of bestFor items	Optional

Element Name	Type	Description	Required?
bestFor.value	string	'Best for' value such as surface best used on	Optional
bestFor.localizedValue	string	Localized value such as surface best used on	Optional
bestFor.type	string	'Best for' type	Optional
athletes	array	Array of athlete items	Optional
athletes.value	string	Athlete value, such as athlete's name	Optional
athletes.localizedValue	string	Athlete value, localized athlete name	Optional
widths	array	Array of widths	Optional
widths.type	string	Width type	Optional
widths.value	string	Internal width value	Optional
widths.localizedValue	string	Localized width value	Optional

Product Content by Style Color List

Use this endpoint to list localized product content for a list of style-colors, [country \(https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products\)](https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) and locale. Only one country and locale is supported.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/v1/ content{?country,locale,stylecolors}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
style-color	Query	Comma-separated list of style-color codes	String	Required
country	Query	Country used to localize the content for the correct country	String	Required
locale	Query	Locale used to localize the content for the correct language	String	Required

Let's take a look at some Product Content by Style Color List scenarios.

I Want to List Product Content for	Sample Query
Style-color codes 852395-601 and 919704-006, country Spain and locale es_ES	https://api.nike.com/merch/contents/v1/content?stylecolors=852395-601,919704-006&country=ES&locale=es_ES

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Sample Product Content by Style Color List URI:

```
https://api.nike.com/merch/contents/v1/
content?stylecolors=852395-601,919704-006&country=ES&locale=es_ES
```

Response Body

See the complete response body field list in the [Product Content by Style Color Response Body](#).

Product Content Item by Style Color

Use this endpoint to list one item (field) of product content for a style-color, [country](#) (<https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products>) and locale. Only one style-color, itemName, country and locale is supported. You can use any valid itemName in the path

parameter.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/ v1/{styleColor}/cont ent/{itemName}{?coun try,locale}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
style-color	Path	Style-color code	String	Required
itemName	Path	Any product content item name e.g. colorDescription or title	String	Required
country	Query	Country used to localize the content, see Merchandised Product Field Reference Guide (https://developer.nike.com/nde-docs/doc/commerce/	String	Required

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Parameter	Type	Description	Data Type	Required?
		product/merch-product-field-reference.html#using-merchandised-products) for a complete list		
locale	Query	Locale used to localize the content for the correct language	String	Required

Let's take a look at some Product Content Item by Style Color scenarios.

I Want to List Product Content for	Sample Query
Title information for style-color code 919704-006, country Spain and locale es_ES	https://api.nike.com/merch/contents/v1/919704-006/content/title?country=ES&locale=es_ES

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is	Optional

Header Name	Description	Required?
	only value allowed	

Request Body

There is no request body for a GET request.

Sample Product Content by Style Color List URI:

```
https://api.nike.com/merch/contents/v1/919704-006/content/
title?country=ES&locale=es_ES
```

Product Content Field by Style Color List

Use this endpoint to list one item (field) of product content for a list of style-colors, [country \(https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products\)](https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products) and locale. Only one itemName, country and locale is supported. You can use any valid itemName in the path parameter.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/v1/ content/{fieldname}{ ?country,locale,styl ecolors}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
fieldname	Path	Any product content item name e.g. colorDescription or title	String	Required
style-color	Query	Comma-separated list of style-color codes	String	Required
country	Query	Country used to localize the content for the correct country	String	Required
locale	Query	Locale used to localize the content for the correct language	String	Required

Let's take a look at some Product Content Field by Style Color List scenarios.

I Want to List Product Content for	Sample Query
Title information for style-color codes 852395-601 and 919704-006, country Spain and locale es_ES	https://api.nike.com/merch/contents/v1/content/descriptionHeading?country=ES&locale=es_ES&stylecolors=852395-601,919704-006

Request Headers

Required request headers:

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Sample Product Content Item by Style Color List URI:

```
https://api.nike.com/merch/contents/v1/content/
descriptionHeading?country=ES&locale=es_ES&stylecolors=852395-601,
919704-006
```

Product Image Set by Style Color

Use this endpoint to list the images associated with a style-color and country.

Product images are stored in Scene 7. A Nike product often has multiple images associated with it, each displaying the product from a different angle. This group of images is called an image set in Scene 7.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/v1/{styleColor}/images{?country}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
style-color	Path	Style-color code	String	Required
country	Query	Image country	String	Required

Let's take a look at some Product Image Set by Style Color scenarios.

I Want to List Product Image Set for	Sample Query
Style-color code 919704-006 and country Spain	hhttps://api.nike.com//merch/contents/v1/919704-006/images?country=ES

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the	Optional

Header Name	Description	Required?
	request, application/json is only value allowed	

Request Body

There is no request body for a GET request.

Sample Product Image Set by Style Color URI:

```
https://api.nike.com//merch/contents/v1/919704-006/
images?country=ES
```

Response Body

Element Name	Type	Description	Required?
name	string	Image set name, usually the style-color code	Required
type	string	Image set type, always img_set	Required
title	string	Image set title e.g. Air-Jordan-1-Retro-High-Flyknit	Required
defaultDomains	array	Array of domains the image set is served from	Required
images	array	Array of image objects that make up the image set	Required

Element Name	Type	Description	Required?
images. company	string	Image company code	Required
images. view	string	Key of image view of product, usually in the format stylecode_colorcode_imageletter_type	Required

Product Base Image URL by Style Color

Use this endpoint to list the first image in the image set for a style-color. This is also known as the base image.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/v1/{styleColor}/images/base{?country}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
style-color	Path	Style-color code	String	Required
country	Query	Image country	String	Required

Let's take a look at some Product Base Image URL by Style Color scenarios.

I Want to List the Base Product Image for	Sample Query
Style-color code 919704-006 and country Spain	https://api.nike.com/merch/contents/v1/919704-006/images/base?country=ES

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Sample Product Base Image URL by Style Color URI:

```
https://api.nike.com//merch/contents/v1/919704-006/
images?country=ES
```

Product Image Set by Style Color List

Use this endpoint to list the image set for a list of style-color codes and country. Only one country is supported.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/v1/ images{?country,styl ecolors}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
country	Query	Image country	String	Required
style-colors	Query	List of style- color codes separated by commas	String	Required

Let's take a look at some Product Image Set by Style Color List scenarios.

I Want to List the Image Set for	Sample Query
Style-color codes 919704-006 and 852395-601 and country Spain	https://api.nike.com/merch/contents/v1/ images%3Fcountry=ES&stylecolors=919 704-006,852395-601

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response,	Optional

Header Name	Description	Required?
	application/json is only value allowed	
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Sample Product Image Set by Style Color List URI:

```
https://api.nike.com/merch/contents/v1/
images?country=ES&stylecolors=919704-006,852395-601
```

Response Body

See the [Product Image Set by Style Color List Response Body](#) for a list of response body field descriptions.

Product Base Image URL by Style Color List

Use this endpoint to list the base image for a list of style-color codes and country. Only one country is supported.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/merch/contents/v1/ images/ base{?country,stylec olors}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
country	Query	Image country	String	Required
style-colors	Query	List of style- color codes separated by commas	String	Required

Let's take a look at some Product Base Image URL by Style Color List scenarios.

I Want to List the Base Product Image URL for	Sample Query
Style-color codes 919704-006 and 852395-601 and country Spain	https://api.nike.com/merch/contents/v1/ images/ base?country=ES&stylecolors=919704-0 06,852395-601

Request Headers

Header Name	Description	Required?
Accept	Content type you will accept in response, application/json is only value allowed	Optional
Content-Type	Content type of the request, application/json is only value allowed	Optional

Request Body

There is no request body for a GET request.

Sample Product Base Image URL by Style Color List URI:

```
https://api.nike.com/merch/contents/v1/images/
base?country=ES&stylecolors=919704-006,852395-601
```

Upgrading to the Latest Version

All clients are currently calling the most recent version of Merchandised Products services.

There are no upgrade notes at this time.

Troubleshooting

Listed below are ways to troubleshoot unexpected responses using this API.

Use Troubleshooting Tools

Use the [Recently Published Merch Products \(https://nike.splunkcloud.com/en-US/app/nike_search/search/merchproducts_ \)](https://nike.splunkcloud.com/en-US/app/nike_search/search/merchproducts_) Splunk dashboard to view product and VAS data recently loaded into the Merch v2 APIs. You can query products by time, environment, Merch Group and status. This is especially useful to get fresh data for testing.

Use the [Merch Products Publish Log \(https://nike.splunkcloud.com/en-US/app/nike_search/search//merch_publish_debug \)](https://nike.splunkcloud.com/en-US/app/nike_search/search//merch_publish_debug) Splunk dashboard to view the complete publish history of a style-color and Merch Group. Click a result to view all Splunk log entries associated with that publish event for a style-color and Merch Group. The results list the Traceld, useful if you need to contact the Merch Product Team for troubleshooting.

Common Questions

I published a change in Prodigy but it is not returned when using the Merch Product API

It takes approximately 30 seconds for an add/update/delete record to flow to the Merchandised Products Database once it is published in Prodigy. If a change does not appear after 30 seconds by Merchandised Products API, it may be in the Prodigy queue behind other jobs with higher priority. Republish the change in Prodigy to push it again. Note that Prodigy gives a higher queue priority to an individual project change than to a change made to several products at once in a bulk update.

The fields I need are not returned by the Merch Product API

There could be several reasons why the product data you expect is not listed.

1. You may not be calling the correct service. Depending upon the product data you are looking for, you may need to chain together services to get the input to the service that returns the data you need. See the [Portrait of a Product](#) section for the chain of calls you need to make to get all details for a product.
2. The data you are looking for is not set up in the upstream system. Check the product in Prodigy to verify that it is merchandised as you expect.
3. The product data may be queued or in transit from Prodigy to the Merchandised

Products database. Wait 30 seconds and call the API again.

If none of these scenarios apply, contact the Merchandised Product team on the [#pdm-merch-product](https://nikedigital.slack.com/messages/pdm-merch-product) (<https://nikedigital.slack.com/messages/pdm-merch-product>) Slack channel for help. Supply as much of the information below to the Team as possible to help them troubleshoot the issue:

- Date/time of request
- URI, headers and body (if POST request)
- Context in which your request was executed (service-to-service, app, web)
- Environment in which your request was executed (test, prod, performance)
- Splunk [Traceld](https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#query-logs-with-a-trace-id) (<https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#query-logs-with-a-trace-id>)

Glossary

Term	Definition
Image Base	Full path to a product image in an image set in Scene 7. Does not include resizing parameters.
Image Set	Set of product images stored in Scene 7 representing different views of the product. Build the URI to the product image using domain + company + view from the list image results call.
GTIN	Global Trade Item Number. Nike leases a block of GTINs and recycles them seasonally. GTIN is commonly called UPC code, although the technical specification is slightly different for the two.
Master Product	A Nike iD product that has SKUs and is purchasable.

ADDING MERCHANDISED PRODUCTS TO YOUR EXPERIENCE

Term	Definition
Merch Group	Merchandising Group representing a Nike geographical region. See a list of supported Merchandising Groups in the Enumerations section of the Merchandised Product service.
Prebuild Product	A non-purchasable Nike iD product that has no SKUs. Each Prebuild product is associated to one Master product that is purchasable.
Prodigy	System of record for all product data. All products are merchandised in this system and flow into the Merchandised Product database when they are published in Prodigy.
SLA	Service Level Agreement. Commitment to caller from the service regarding service response times and service availability
SKU	Stock Keeping Unit. Has unique ID associated with a SKU in the ATG legacy system. A product has one or more SKUs. A SKU represents one size and has inventory.
VAS	Value-Added Service associated with a product such as gift wrap and product customization

Document Change Log

Summary	Date	Description
V1.0 Published	1 December, 2017	The initial, reviewed version of the document was published.
Edits, Internationalization, Product sections	7 December, 2017	Updated documentation with new content on how products flow, international considerations, and editing/formatting changes.
Clarification on count	12 February, 2018	Clarified that when count query parameter is supplied that the maximum number of products returned is 25.

Related Links

[NDe Docs Home](#)

[Get Started \(https://developer.niketech.com/nde-docs/doc/getting-started/get-started.html \)](https://developer.niketech.com/nde-docs/doc/getting-started/get-started.html)

[Merchandised Product Field Reference Guide \(https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products \)](https://developer.niketech.com/nde-docs/doc/commerce/product/merch-product-field-reference.html#using-merchandised-products)