



ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

Last Updated: 11/20/2018

If you've read [Using NDe APIs](#) and [Product Feeds Overview](#), this guide provides the additional details necessary to integrate with Product Feeds.

API at a Glance

Product Feeds enables users of your app to browse a feed of relevant Nike product-related content, including details about the products with images, videos, and more.

Topic	Details
Use this API to	Access Nike product data and content in the form of Cards, Threads, and Feeds
Who calls this API?	SNKRS (iOS/Android), Bootroom (Web), Nike.com (Web), Retail Wall (Apple TV)
Versions	v2
Supported Locales	See Language/Locale Mapping
SLA	Response time: 250 ms for all endpoints
Domain	Commerce
Prerequisites	None (public API)
Contact Info	Slack: #nde-product-feeds Confluence: Product and Feeds API Product Owner: Andy Sun

NOTE: This guide covers the v2 Product Feeds APIs in detail, as well as the process to upgrade from v1.x to v2. The v1.x endpoints are not otherwise covered in this guide.

Terms of Service

It is highly recommended that you send a caller ID header in every request to this API to help troubleshoot unexpected responses. See the Registration section of the [Using NDe APIs](#) guide on how to create and register your caller ID.

Authentication

There are no authentication requirements for Product Feeds except when using the **preview** query parameter to preview a Feed or Thread, which is not common. See the [Using Product Feeds v2](#) section for more details.


Use Cases

I want to...	API(s) to use
List all Product Threads for a channel, language, marketplace, feed ID, SEO slug, style-color, gender, keywords, and more	<i>Threads List</i>
Get a specific Product Thread by its ID	<i>Product Thread by ID</i>

TIP: See the [Threads List](#) section for the full list of use cases. After that, if you still didn't find your product use case, check out the [Merchandised Products API Developer's Guide](#) for more.

Example Implementation Diagram

Here is an example of a sequence of API calls to get content from Product Feeds v2:

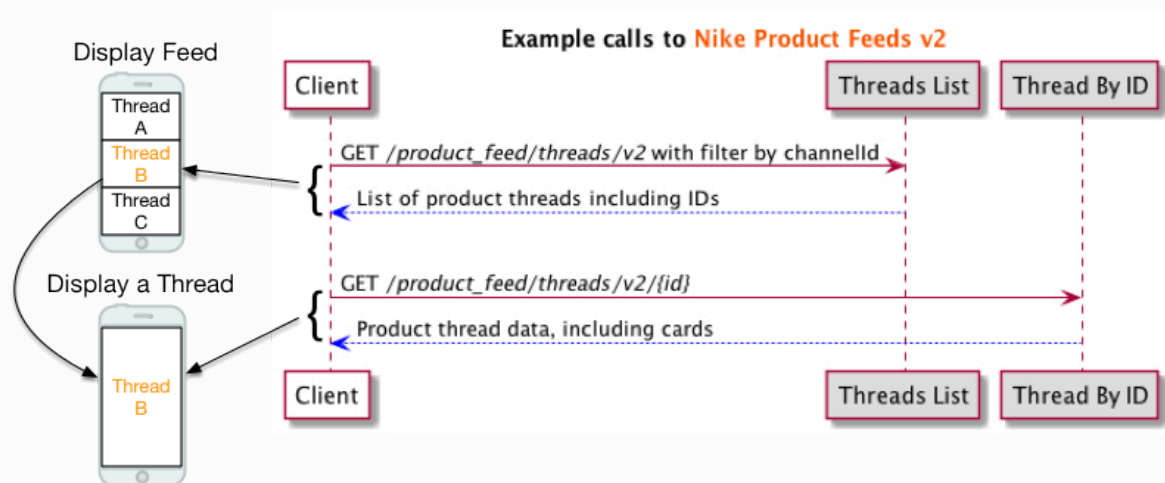

API Endpoint Quick Reference

Product Feeds v2 Endpoints

HTTP Verb	Endpoint Name	Endpoint Description	URI Format
GET	Product Threads List	Get all threads for a channel,	/product_feed/threads/

HTTP Verb	Endpoint Name	Endpoint Description	URI Format
		marketplace, language combination	v2{?filter,fields,anchor,count,sort,searchTerms}
GET	Product Thread by ID	Get a specific thread by its identifier	/product_feed/threads/v2/{id}{?channel,marketplace,language,fields,preview}

Cards, Threads, and Feeds

What are Cards, Threads, and Feeds?

Use Product Feeds to get product data and content in the form of Cards, Threads, and Feeds.

+ **Cards** contain Nike product information or content such as notifications about upcoming Nike events.




+ Related Cards are organized into **Threads** that tell a Nike story.

+ Multiple Threads make up **Feeds**, customized for your users based on their chosen preferences in a Nike experience.

To summarize, a Feed is comprised of multiple Threads, and within each Thread resides a set of Cards. For an in-depth explanation of Cards, Threads, and Feeds, see the [Product Feeds Confluence Space](#).







Feed View

Feed w/multiple Threads
(Thread cover cards visible)

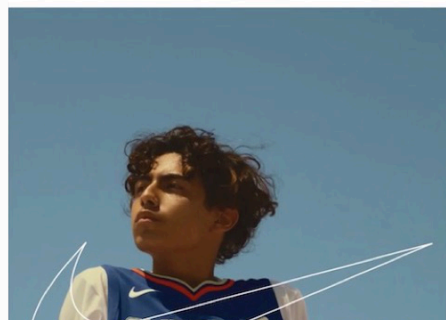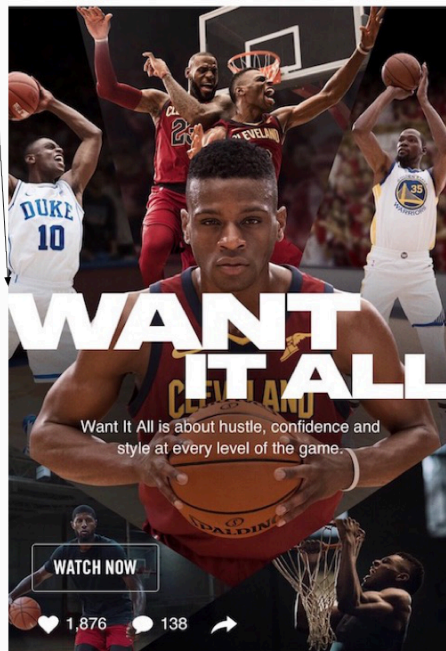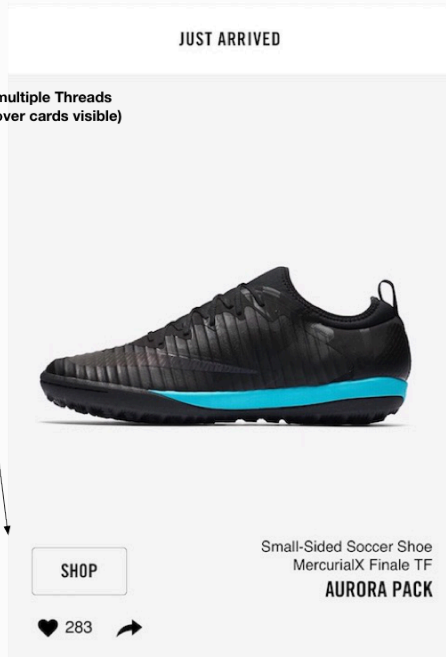

Thread View

Single Thread
w/multiple Cards

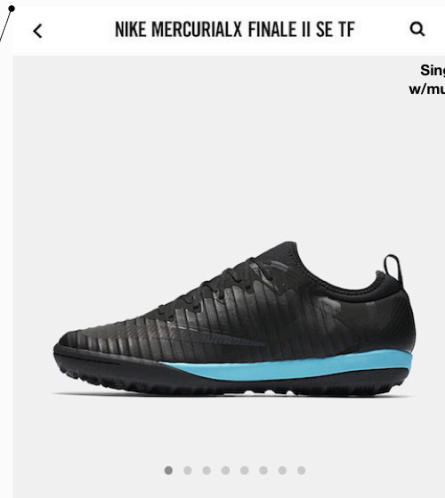

Where Do Cards, Threads, and Feeds Come From?

The Product Feeds API combines product information with product content into Cards, Threads, and Feeds by pulling data from the following Nike Cloud APIs:

Cloud API	Data Type	Examples	Data Source
Merchandised Product Information	Product attributes per style-color, country	styleCode, colorCode, status, genders, sportTags	Prodigy & Product Information Services
Merchandised Product Price	Pricing per style-color, country	msrp, currentPrice, discounted, currency	Prodigy & Product Information Services
Merchandised Product SKU	SKU-related attributes per style-color-size, country	gtin, nikeSize, localizedSize, commodityCode	Prodigy & Product Information Services
Merchandised Product Content	Display-oriented content by style, country	colorDescription, fullTitle, colors, bestFor, athletes, widths	Prodigy & Product Information Services
Product Inventory Availability	Inventory availability by style-color	true/false	Sterling
SKU Inventory Availability	Inventory availability by style-color-size	true/false	Sterling
Published Content	Authored cards and threads	title, seo slug, image URL, video URL, text	Nike CMS (Content Management System)
Launch Views	Launch attributes by style-color	method, startEntryDate,	Launch Admin Tool

Cloud API	Data Type	Examples	Data Source
	(SNKRS, Bootroom only)	stopEntryDate	
Customized PreBuilds	Customized prebuild (e.g. suggested NikeID shoe design)	designId, status, merchGroup	Consumer experiences, Prodigy

TIP: The full response from all of the above APIs is passed along to you in the Product Feeds response, i.e. nothing is filtered out by default.

What are Channels and Why Do I Need One?

A channel is a distinct user experience where Nike products are showcased and made available for purchase, for example in SNKRS or the Nike app. Each channel has a unique **channelId** (channel identifier) that is required by certain Product Feeds API endpoints. This allows the results in responses to be filtered appropriately for your experience.

Each **channelId** value originates in Nike CMS under a different name, **collectionGroupId**. Each Feed can be associated with one or more channels, opening up the personalized Feed to many Nike experiences.

Terminology Differences Between CMS and Product Feeds

As mentioned earlier, the Product Feeds API pulls product content from Nike CMS and includes it in responses. One thing to be aware of is that Nike CMS sometimes uses different names for the same field than Product Feeds. For example, the CMS **collectionGroupId** that you will see in responses is synonymous with the **channelId** query parameter you might send to Product Feeds.

Here is a terminology guide between Nike CMS and Product Feeds:

CMS Term	Product Feeds Term
Collection Group	Channel
Collection	Feed
Content/Thread	Thread
Node	Card

Making Your First API Request

For your first API request, call Product Feeds v2 to get a list of all Threads for a particular channel:

1. Gather the data

The Product Feeds v2 *Threads List* endpoint only supports the HTTP GET method, so you do not need to send a request body. Only the required request headers and URL query parameters should be sent.

The [API Reference](#) states that there are *no* required request headers and the only required query parameter is **filter** in the format of **?filter=channelId(your_channel_id_here)**.

TIP: The channelId value is in UUID format

Don't have a channelId yet? Request that the [Product Owner](#) assign one for your app.

2. Create the URL

The [API Reference](#) states that the required URL format is `[ /product_feed/threads/v2{?filter,fields,anchor,count} ]`.

To build the full URL, prepend `https://api.nike.com` to the above path, then append after 'v2' with the required **filter** query parameter. The resulting full URL would be:
`https://api.nike.com/product_feed/threads/v2?filter="channelId(your_channel_id_here)"`.

3. Execute the request

Test the URL using the Postman app, your favorite browser or cURL. Below is an example of how to call the endpoint via cURL.

```
curl -X GET \
      'https://api.nike.com/product_feed/threads/
v2?filter=channelId(your_channel_Id_here)' \
      -H 'cache-control: no-cache'
```

You will receive a response body from the Threads List endpoint similar to the JSON below.

```
{
  "pages": {
    "prev": "",
    "next": ""
  },
  "objects": [
    {
      "id": "80bbdb01-114d-474f-a4e3-99e4e70f4931",
      "marketplace": "US",
      "language": "en",
      "lastFetchTime": "2017-02-23T16:42:00.711Z",
      "publishedContent": {
        "collectionGroupId":
"008be467-6c78-4079-94f0-70e2d6cc4003",
        "marketplace": "US",
        "language": "en",
        "resourceType": "publishedContent",
        "id": "80bbdb01-114d-474f-a4e3-99e4e70f4931",
        "relationalId": "80bbdb01-114d-474f-a4e3-99e4e70f4931",
```

```
"version": "1487089517266",
"type": "thread",
"subType": "thread",
"publishStartDate": "2017-02-10T17:15:00.000Z",
"publishEndDate": "2999-01-01T08:00:00.000Z",
"viewStartDate": "2017-02-10T17:15:00.000Z",
"supportedLanguages": [],
"properties": {
  "title": "BEHIND THE DESIGN",
  "coverCard": {
    "id": "f97b6bfa-4231-4e69-a3fe-7f83cae4829a",
    "version": "1486746663030",
    "type": "card",
    "subType": "image",
    "properties": {
      "altText": "",
      "colorTheme": "light",
      "landscapeURL": "https://static.nike.com/images/
h54tkibftysvmsjkymg9/image.jpg",
      "portraitURL": "",
      "squarishURL": "",
      "subtitle": "Insights from Inside",
      "title": "BEHIND THE DESIGN",
      "custom": {
        "feedImageOverride": "landscape"
      }
    }
  },
  "subtitle": "",
  "seo": {
```

```
    "slug": "behind-the-design"
  },
  "publish": {
    "countries": [
      "US"
    ],
    "collectionGroups": [
      "008be467-6c78-4079-94f0-70e2d6cc4003"
    ],
    "collections": [
      "514dcaea-b752-11e6-80f5-76304dec7eb7"
    ]
  },
  "threadType": "editorial",
  "products": [
    {
      "styleColor": "AH8605-800",
      "productId": "54c0191f-4c53-56e7-ab8e-5a3dae503090"
    }
  ],
  "consumerLabels": [],
  "custom": {
    "snkrsDiscover": {
      "order": "6",
      "query": [
        "Behind the Design"
      ]
    }
  }
},
```

```
"nodes": [  
  {  
    "id": "556b8a85-b58d-46ce-bb50-81a17200b44c",  
    "version": "1486746676247",  
    "type": "card",  
    "subType": "image",  
    "properties": {  
      "landscapeURL": "https://static.nike.com/images/  
yqbuzhb5zypbdz2jfirn/image.jpg",  
      "title": "",  
      "colorTheme": "dark",  
      "subtitle": "",  
      "squarishURL": "",  
      "portraitURL": "",  
      "altText": "",  
      "custom": {  
        "threadImageOverride": "landscape"  
      }  
    }  
  },  
  {  
    "id": "3b0e3594-2875-48a5-9367-c05110d0d04c",  
    "version": "1487089477265",  
    "type": "card",  
    "subType": "text",  
    "properties": {  
      "body": "Explore the design process with an inside  
look at the exclusive designer interviews, original sketches and  
prototypes.\n",  
      "title": "BEHIND THE DESIGN",
```

```
        "subtitle": "INSIGHTS FROM THE INSIDE"
      }
    }
  ],
  "links": {
    "self": "/content/threads/v1/80bbdb01-114d-474f-a4e3-99e4e70f4931?collectionGroupId=008be467-6c78-4079-94f0-70e2d6cc4003&marketplace=US&language=en"
  },
  "classifications": [],
},
"productInfo": [
  {
    "merchProduct": {},
    "merchPrice": {},
    "availability": {},
    "productContent": {},
    "imageUrls": {},
    "skus": [],
    "availableSkus": [],
    "customizedPreBuild": {},
    "socialInterest": {}
  }
],
"resourceType": "thread",
"links": {
  "self": {
    "ref": "/product_feed/threads/v2/80bbdb01-114d-474f-a4e3-99e4e70f4931?channel=008be467-6c78-4079-94f0-70e2d6cc4003&marketplace=US&langauge=en"
```

```

    }
  }
}
]
}

```

More Complex Examples

1. Query by SEO Slug

Display Thread content for a NBA Finals campaign called “FINALS FRESH” for the US by specifying the SEO slug ‘finals-fresh’ in the request.

Include filter parameters **marketplace**, **language**, and **publishedContentproperties.seo.slug** as follows:

```

/product_feed/threads/
v2?filter=channelId()&filter=marketplace(US)&filter=language(en)&filter=publishedContent.pro
perties.seo.slug(finals-fresh)

```

1. Query by Style-color Code

Display all Threads for a specific soccer boot with a style-color code of ‘AA0612-706’.

Include parameter **filter=publishedContent.properties.products.styleColor** as follows:

```

/product_feed/threads/
v2?filter=channelId()&filter=marketplace(US)&filter=language(en)&count=50&filter=publishedC
ontent.properties.products.styleColor(AA0612-706)

```

Using Product Feeds

- [Product Threads List](#)
- [Product Thread by ID](#)
- [Product Feeds Error Handling](#)

The following sections explain each Product Feeds endpoint in detail.

Product Threads List

List all threads by one or more filter criteria, e.g. channel and style-color.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/product_feed/ threads/ v2{?filter,fields,an chor,count,sort,sear chTerms}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	Query	Restrict the response by one or more criteria. channelId , marketplace , and language are required	String	Required
fields	Query	Select the fields to be included in the response	String	Optional
anchor	Query	Return elements after this anchor	String	Optional

Parameter	Type	Description	Data Type	Required?
count	Query	Maximum number of objects to return. Default: 50	String	Optional
sort	Query	Field(s) by which the results are sorted. Default: publishedContent.viewStartDateDesc , then id.keywordAsc . See below for allowed sort parameters	String	Optional
searchTerms	Query	Search for threads by one or more keywords separated with spaces. Request exact match by enclosing in double quotes. Default: partial match	String	Optional

TIP: For a list of supported locales, see the [Language/](#)

[Locale Mapping JSON](#) and the [Language/Locale Mapping README](#).

Allowed Sort Parameters

The following are the allowed fields that can be sent in the **sort** query parameter:

Sort Field	Description
publishedContent.publishStartDateAsc	By Content Publish Start Date, Ascending
publishedContent.publishStartDateDesc	By Content Publish Start Date, Descending
publishedContent.viewStartDateAsc	By Content View Start Date, Ascending
publishedContent.viewStartDateDesc	By Content View Start Date, Descending
productInfo.merchProduct.commerceStartDateAsc	By Commerce Start Date, Ascending
productInfo.merchPrice.currentPriceAsc	By Current Price, Ascending
productInfo.merchPrice.currentPriceDesc	By Current Price, Descending
productInfo.merchProduct.commercePublishDateDesc	By Commerce Publish Date, Descending
effectiveStartSellDateAsc	By Effective Start Sell Date, Ascending
effectiveStartSellDateDesc	By Effective Start Sell Date, Descending
lastFetchTimeAsc	By Last Fetch Time, Ascending
lastFetchTimeDesc	By Last Fetch Time, Descending
idAsc	By Thread Id, Ascending

Sort Field	Description
idDesc	By Thread Id, Descending

Allowed Filter Parameters

The following is a list of scenarios that illustrate which **filter** parameters are supported:

I Want to List	Sample Query
Threads for a channelId, marketplace of US, and language of English	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)
Threads for a feed	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=publishedContent.properties.publish.collections(364c1c0e-f67f-45f0-a107-d0a60876d835)
Threads for a SEO slug (short text for search engines)	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=publishedContent.properties.seo.slug(sock-dart-university-gold-safari-2017)
Threads for a style-color code	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976

I Want to List	Sample Query
	-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=publishedContent.properties.products.styleColor(942198-700)
Threads for a style code	https://api.nike.com/product_feed/threads/v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=productInfo.merchProduct.styleCode(942198)
Threads for a color code	https://api.nike.com/product_feed/threads/v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=productInfo.merchProduct.colorCode(001)
Threads for a product ID	https://api.nike.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=productInfo.merchProduct.id(62404604-1e78-5e53-b8f1-6632543cb986)
Threads for a SKU ID	https://api.nike.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-

I Want to List	Sample Query
	f159cf99c647)&filter=skulds(2852f714-361b-5ce4-a8bf-a33cb0a7240a,fc42d40e-dad8-522f-bd5b-b59890ca2f53)
Threads for a Taxonomy ID	https://api.nike.com/product_feed/threads/ v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=taxonomyIds(c2ec05f1-f18f-4bf7-8d39-7788feb46ff2)
Threads for a gender name	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=productInfo.merchProduct.genders(WOMEN)
Threads for a Merch Product channel name	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=productInfo.merchProduct.channels(SNKRS)
Threads Merch Product main color	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=productInfo.merchProduct.mainColor(true)
Threads for product attribute “best for”	https://api.nike.com/product_feed/

I Want to List	Sample Query
	threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=productInfo.productContent.bestFor.value(Firm%20Ground)
Threads with buyable product	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=inStock(true)
Threads with a specific available size	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=availableSizes(9)
Threads with a specific available localized size	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=availableLocalizedSizes(27)
Threads for an athlete	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=productInfo.produ

I Want to List	Sample Query
	ctContent.athletes.value(Kobe%20Bryant)
Threads for a channel with only selected fields returned	https://api.nike.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&fields=publishedContent.properties.products.styleColor,publishedContent.nodes.nodes.properties.squarishURL,productInfo.merchPrice.currentPrice
Threads for keywords 'Chuck Taylor'	https://api.nike.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&searchTerms=Chuck%20Taylor
Threads for a product rollup key	https://api.nike.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=productInfo.merchProduct.productRollup.key(YPTArgON)
Threads for upcoming products	https://api.nike.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=upcoming(true)&sort=productInfo.merchProduct.commerceSt

I Want to List	Sample Query
	artDateAsc
Thread for a thread ID	https://api.nike.com/product_feed/threads/ v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=id(2efdc3a4-7214-3a88-b1b0-4083dc9657d5))
Threads for Exclusive Access products	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=language(en)&filter=marketplace(US)&filter=exclusiveAccess(true,false)
Threads for a Global Trade Identification Number (GTIN)	https://api.nike.com/product_feed/threads/ v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=language(en)&filter=marketplace(US)&filter=productInfo.skus.gtin(00884500634190)

TIPS:

- ✓ Use dot notation to indicate nesting while using the fields parameter, e.g. field1.field2. Always start your nesting below the **objects** element of the response structure, so rather than **objects.id** use **id**, for example.
- ✓ Most filters allow comma-separated values to retrieve

multiple values at a time:

```
?filter=productInfo.merchProduct.styleCode(
942198,AA1697)
```

Using Search-Based Queries

Send one or more search keywords in the **searchTerms** query parameter to list only the threads that contain those keywords. In order for a thread to be returned in the response, all included keywords must be found in a searchable field within that thread.

The searchable fields are:

- productInfo.productContent.**fullTitle**
- productInfo.productContent.**title**
- productInfo.productContent.**subtitle**
- publishedContent.properties.consumerLabels.classification.**text**
- productInfo.merchProduct.**styleColor**
- productInfo.merchProduct.**styleCode**

For example, using `searchTerms=Chuck Taylor` returns all threads with the words 'Chuck' and 'Taylor' in a searchable field.

The default search behavior is *partial match*. Limiting the search to only *full string matches* can be done by enclosing the keywords in double quotes, like `searchTerms="Chuck Taylor"`. In this case, the thread must contain the exact full string 'Chuck Taylor' in a searchable field in order to be returned in the response.

Pagination and Limits

The Threads List endpoint returns a paginated response when the number of threads found exceeds the count query parameter. If the count query parameter is omitted, the maximum number of threads returned is 50.

The `next` and `prev` URLs are returned in the `pages` section of the response for paginated results. These URLs include all the parameters originally passed to the endpoint along with an anchor parameter. The anchor parameter in the `prev` URL marks the number in the result

set listed first on the previous page. Similarly, the anchor parameter marks the number in the result set listed first on the next page. For instance if you are viewing threads 26 - 50 of 100 paginated results, the anchor parameter in the `prev` URL would be 1 and 51 in the `next` URL.

If the query results contain thousands of items, the max limit that can be paged through is 10,000. When the anchor exceeds 10,000 items you should expect to get an error. This is an intentional limitation imposed on the backend data store for performance reasons. If you make a request whose response would contain the 10,000th item, the next link returned will be empty.

What is the Customized PreBuild Section of the Response?

If you are getting data in the **objects.productInfo.customizedPreBuild** section of the response, then one of the threads that you've requested contains a customizable prebuild product.

A prebuild is a design for a customizable (e.g., NIKEiD) product invented by merchandisers/designers to demonstrate how customers can personalize the product. These “inspiration” designs are merchandised within specific experiences and can be found on product walls, product display pages and in marketing materials.

You will be able to identify the presence of prebuilds when

objects.publishedContent.properties.threadType field contains the value **nikeid_soldier**.

For a sample *Threads List* response body (HTTP 200) see [here](#).

Product Thread by ID

Get a Thread by its unique identifier.

Endpoint Details

HTTP Method	URI Path	Restricted?
GET	/product_feed/ threads/ v2/{id}{?channel,mar	No

HTTP Method	URI Path	Restricted?
	ketplace,language,fields,preview,includeExclusiveAccess}	

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier of the thread in UUID format	String	Required
channel	Query	Sales channel, defaults to 'snkrs'	String	Optional
marketplace	Query	ISO 3166 two-letter country code, defaults to 'US'	String	Optional
language	Query	BCP-47 language code, defaults to 'en'	String	Optional
fields	Query	Select the fields to be included in the response	String	Optional
preview	Query	Preview a thread that is not yet enabled.	String	Optional

Parameter	Type	Description	Data Type	Required?
		Requires Authorization header to be sent		
includeExclusiveAccess	Query	Include exclusive and non-exclusive access threads in the results	Boolean	Optional

TIP: For a list of supported locales, see the [Language/Locale Mapping JSON](#) and the [Language/Locale Mapping README](#).

Example Scenarios

I Want to List	Sample Query
Single thread by ID	https://api.nike.com/product_feed/threads/v2/ bcbeae50-28a5-404d-9941-fbbdff0c7860
Single thread by ID (only selected fields returned)	https://api.nike.com/product_feed/threads/v2/ bcbeae50-28a5-404d-9941-fbbdff0c7860 ?fields=publishedContent.properties.coverCard.properties.title,publishedContent.properties.coverCard.properties.landscapeURL

Product Feeds Error Handling

Following is a summary of the errors that can come back in responses from the Product Feeds v2 APIs:

HTTP Response Code	Relevant HTTP Method(s)	Error Message	Action to Take
400	GET	MISSING_REQUIRED	Check the URL for missing path parameter or incorrectly-formatted query parameter. Correct and retry
401	GET	Unauthorized	Applies only to thread preview by ID. Check your Authorization header. Correct and retry
404	GET	Feed or thread not found	Check the feed ID, thread ID or query parameter value for validity. Correct and retry
404	GET	Resource does not exist	Check for malformed URL. Correct and retry
500	GET	Internal Server Error	Downstream service does not recognize query parameter, e.g. ?language=foo

Upgrading to the Latest Version

Ready to upgrade to the latest version of the Product Feeds API?

First, some considerations:

- By design, not all v1.x endpoints have a direct v2 equivalent. For example, there are no v2 endpoints which return product channels.
- All endpoints of Product Feeds exclusively feature the GET method, which has no request body, so the focus of each section will be on the differences in the response body only.
- For the 4 endpoints that have both a v1 and a v1.5 (see [Product Feeds v1 API Reference](#) for details), the response schemas are the same between v1 and v1.5 so the upgrade process to v2 is the same for both.

TIP: Upgrading from CAPI (Commerce API)? See the [CAPI Migration Guide](#) for detailed instructions.

V1.x to V2 Endpoint Mapping

The following table lists the v1 endpoints along with the equivalent v2 endpoint for each:

V1 Endpoint Name	Equivalent V2 Endpoint Name
All Product Channels	None
Product Channel by Name	None
Product Feed by Feed ID	None
All Product Threads	Product Threads List
Product Thread by ID	Product Thread by ID

V1 Endpoint Name	Equivalent V2 Endpoint Name
Product Thread by Thread ID	None
Product Thread by Style-Color	Product Threads List
Product Thread by SEO Slug	Product Threads List
All Admin Threads	None
Product Card by ID	None

All Product Threads & Product Thread by ID v1 to v2 Field Mapping

The response structure of the v1 *All Product Threads* and *Product Thread by ID* endpoints is the same, with a few minor exceptions, so for the purposes of upgrading to v2 they can be discussed together.

The following table describes how the response body fields map from the v1 to the v2 endpoints.

V1 Field Name	Description	V2 Field Name	Description	Notes
country	Country in which the thread exists	marketplace	ISO 3166 two-letter country code for the user's current location	
locale	Locale of the thread content	language	BCP-47 language code	
channel	Channel in which the thread exists	channelId	UUID for the channel (collectionGroupId)	

V1 Field Name	Description	V2 Field Name	Description	Notes
totalRecords	Total number of threads that match the criteria	N/A	No equivalent	Deprecated
threads	Array containing one or more threads that match the criteria	objects	Array containing one or more threads	
id	Unique identifier for a particular thread	id	Unique identifier for the thread	v1 and v2 IDs are not the same, also v2 is in UUID format
threadId	Unique ID coming from the relative path of the object in AEM/ Authoring tool	N/A	No equivalent	Deprecated
interestId	Unique ID coming from the Social interests	N/A	No equivalent	Deprecated
name	Name of the thread describing the campaign	publishedContent.properties.title	Thread title	
createdDate	Time when the object was	N/A	No equivalent	Deprecated

V1 Field Name	Description	V2 Field Name	Description	Notes
	created in AEM/Authoring tool			
lastUpdatedDate	Last time this object was updated	lastFetchTime	date-time the data was aggregated, in this ISO-8601 compliant format: yyyy-MM-ddTHH:mm:ss.SSSZZ	
publishedDate	The first time any card in this thread should be visible	publishedContent. publishStartDate	Date time string of when the publishing schedule is set to start	
product	Object containing product info	productInfo	Array of product info	
product. id	Unique ID coming from Merchandised Products API	productInfo.merchProduct. id	Unique identifier for the product object	
product. interestId	Unique ID coming from the Social interests	N/A	No equivalent	Deprecated
product. style	Style identifier for the style of the product	productInfo.merchProduct. styleCode	Style code of the product	

V1 Field Name	Description	V2 Field Name	Description	Notes
product. colorCode	Three-digit color code identifier	productInfo.merchProduct. colorCode	Color code of the product	
product. globalPid	Global identifier of the product	productInfo.merchProduct. pid	Product identifier for the product	
product. fullTitle	Full title of the product	productInfo.productContent. fullTitle	Full title of the product	
product. title	Title of the product	productInfo.productContent. title	Title of the product	
product. subtitle	Subtitle of the product	productInfo.productContent. subtitle	Subtitle of the product	
product. description	Description of the product	productInfo.productContent. description	Description of the product	
product. imageUrl	URL for product images	productInfo.imageURLs. productImageUrl	URL for product images	
product. genders	Array of relevant genders for the product	productInfo.merchProduct. genders	Genders that the product is for	
product. price	Object containing product price info	productInfo.merchProduct. price	Object containing product price info	

V1 Field Name	Description	V2 Field Name	Description	Notes
product.price.onSale	Indicates if the product is on clearance or not	productInfo.merchPrice.discounted	Indication if the product is on sale	
product.price.msrp	Maximum stated retail price of the product	productInfo.merchPrice.msrp	Maximum stated retail price of the product	
product.price.fullRetailPrice	Full retail price of the product	productInfo.merchPrice.fullPrice	Full price of the product	
product.price.currentRetailPrice	Current retail price of the product. For discounted products it will be different from fullRetailPrice	productInfo.merchPrice.currentPrice	Current price of the product	
product.price.formattedFullRetailPrice	Formatted full retail price	N/A	No equivalent	Deprecated
product.price.formattedCurrentRetailPrice	Formatted current retail price	N/A	No equivalent	Deprecated
product.estimatedLaunchDate	Deprecated, do not use	N/A		
product.publishedDate	Date when a product was			

V1 Field Name	Description	V2 Field Name	Description	Notes
	published in launch admin tool			
product. quantityLimit	Quantity limit of the product	productInfo.merchProduct. quantityLimit	Quantity limit of the product	
product. status	Status of the product	productInfo.merchProduct. status	Status of the product	
product. selectionEngine	Selection engine of the product	N/A	No equivalent	Deprecated
product. colorDescription	Description of the color of the product	N/A	No equivalent	Deprecated
product. productType	Type of product	productInfo.merchProduct. productType	Type of product	
product. salesChannel	Sales channel of product	productInfo.merchProduct. channels	Sales channel of product	
product. accessCode	Boolean indicator for whether access code is required or not	productInfo.merchProduct. exclusiveAccess	Boolean indicator for whether access code is required or not	
product. startSellDate	Date when a product is estimated to launch	productInfo.launchView. startEntryDate OR product.Info.m	Date when launch entries will start being accepted	

V1 Field Name	Description	V2 Field Name	Description	Notes
		erchProduct.c ommerceStart Date		
product. timeT oStartSelectio nSeconds	Number of seconds until the product drawing is started	N/A	No equivalent	Deprecated
product. timeT oStartSellSec onds	Number of seconds until the product drawing ends and the product is available to sell	N/A	No equivalent	Deprecated
product. endDr awDate	Date that the drawing ends	productInfo.lau nchView. endE ntryDate	Date when launch entries will stop being accepted	
product. waitlin eEnabled	Boolean for whether wait line for the product was enabled or not	N/A	No equivalent	Deprecated
product. availa ble	Boolean for whether any size of the product is available or not	productInfo.av ailability. availa ble	Boolean for whether any size of the product is available or not	
product. sportT ags	Array of sport tags	productInfo.me rchProduct. sp	Array of sport tags	

V1 Field Name	Description	V2 Field Name	Description	Notes
		ortTags		
product. skus	Array of SKU info	productInfo. skus	Array of SKU info	
product.skus. id	UUID for the SKU	productInfo.skus. id	UUID for the SKU	
product.skus. localizedSize	Localized size for this SKU	productInfo.skus.countrySpecifications. localizedSize	Localized size for the SKU	
product.skus. nikeSize	Nike size for this SKU	productInfo.skus. nikeSize	Nike size for the SKU	
product.skus. available	Boolean for whether SKU is available for purchase or not	productInfo.availableSkus. available	Boolean for whether SKU is available for purchase or not	
restricted	Boolean for whether an access code is tied the thread or not	N/A	No equivalent	
feed	Feeds this thread belongs to	publishedContent.properties.publish. collections		Not a true equivalent, but has similar info
title	Title of the thread	publishedContent. title	Title of the thread	
subtitle	Subtitle of the thread	publishedContent. subtitle	Subtitle of the thread	

V1 Field Name	Description	V2 Field Name	Description	Notes
imageUrl	URL where the image exists	publishedContent.properties.coverCard.properties. landscapeURL	URL where cover card image exists	
altText	Alt text for the image	publishedContent.properties.coverCard.properties. altText	Alt text for the cover card	
tabletImageUrl	URL where the image for the tablet exists	N/A	No equivalent	Deprecated
tabletAltText	Alt text for the tablet image	N/A	No equivalent	Deprecated
desktopImageUrl	URL where the image for desktop exists	N/A	No equivalent	Deprecated
desktopAltText	Alt text for desktop image	N/A	No equivalent	Deprecated
tags	Array of tags that can be applied to content to relate them	N/A	No equivalent	Deprecated
cards	Array of card info	publishedContent. nodes	Array of card info	
cards. country	Country of the card	N/A	No equivalent	Deprecated
cards. locale	Locale of the	N/A	No equivalent	Deprecated

V1 Field Name	Description	V2 Field Name	Description	Notes
	card			
cards. channel	Channel of the card	N/A	No equivalent	Deprecated
cards. id	Unique identifier for a particular card	publishedContent.nodes. id	Unique identifier for the card	
cards. cardId	Unique ID coming from the relative path of the object in AEM/ Authoring tool	N/A	No equivalent	Deprecated
cards. sortOrder	Order in which the card should appear in the thread	N/A	No equivalent	Deprecated
cards. interestId	Unique ID coming from the social interests	N/A	No equivalent	Deprecated
cards. type	Type of card (photo, photo-carousel, video or text)	publishedContent.nodes. subType	Type of card	
cards. title	Title of the card	publishedContent.nodes.properties. title	Title of the card	
cards. subtitle	Subtitle of the card	publishedContent.nodes.properties. subtitle	Subtitle of the card	

V1 Field Name	Description	V2 Field Name	Description	Notes
cards.description	Description of the card	publishedContent.nodes.properties. body	Description of the card	
cards.images	Array of image info related to the card	publishedContent.nodes. properties		No distinct section for images, instead evaluate subType field
cards.images.type	Type of image (card, thread or alternate)	N/A	No equivalent	Deprecated
cards.images.imageUrl	URL where the image exists	publishedContent.nodes.properties. portraitURL		Also available are landscapeURL, squarishURL fields
cards.images.alt	Alt text for the image	publishedContent.nodes.properties. altText	Alt text for the card	
cards.images.sortOrder	Sort order in which images should be displayed	N/A	No equivalent	Deprecated
cards.images.desktopImageUrl	URL where the image for desktop exists	N/A	No equivalent	Deprecated
cards.images.desktopAltText	Alt text for desktop image	N/A	No equivalent	Deprecated
cards.images.thumbnailUrl	URL where the	N/A	No equivalent	Deprecated

V1 Field Name	Description	V2 Field Name	Description	Notes
abletImageUrl	image for the tablet exists			
cards.images. tabletAltText	Alt text for the tablet image	N/A	No equivalent	Deprecated
cards. videos	Array of video info for the card	publishedContent.nodes. properties		No distinct section for videos, instead evaluate subType field
cards.videos. type	Type of video object (nikeserver, brightcove or youtube)	publishedContent.nodes.properties. providerId	Name of video provider	
cards.videos. stillImageUrl	URL of still image to be shown as placeholder for the video	publishedContent.nodes.properties. startImageUrl	Still image to be shown as placeholder for the video	
cards.videos. videoUrl	Video URL that can be retrieved to display on the card	publishedContent.nodes.properties. videoId	Identifier for the video	
cards.videos. alt	Text string that verbally describes the video for accessibility	publishedContent.nodes.properties. altText	Alt text for the card	
cards.videos. s	Order in which	N/A	No equivalent	Deprecated

V1 Field Name	Description	V2 Field Name	Description	Notes
sortOrder	the multiple videos on the card need to be presented			
cards.videos.desktopImageUrl	URL of still image to be shown as placeholder for the video on a desktop	N/A	No equivalent	Deprecated
cards.videos.desktopAltText	Text string that verbally describes the video on a desktop	N/A	No equivalent	Deprecated
cards.videos.tabletImageUrl	URL of still image to be shown as placeholder for the video on a tablet	N/A	No equivalent	Deprecated
cards.videos.tabletAltText	Text string that verbally describes the video on a tablet	N/A	No equivalent	Deprecated
cards.createdDate	Time when the object was created in AEM/Authoring tool	N/A	No equivalent	Deprecated

V1 Field Name	Description	V2 Field Name	Description	Notes
cards. lastUpdatedDate	Last time this object was updated	N/A	No equivalent	Deprecated
cards. colorHint	Object containing color hint info	N/A	No equivalent	Deprecated
cards.colorHint. text	RGB hex color code ranging from 000000 for black to FFFFFFFF for white	N/A	No equivalent	Deprecated
cards.colorHint. active	RGB hex color code ranging from 000000 for black to FFFFFFFF for white	N/A	No equivalent	Deprecated
cards.colorHint. inactive	RGB hex color code ranging from 000000 for black to FFFFFFFF for white	N/A	No equivalent	Deprecated
cards.colorHint. pressed	RGB hex color code ranging from 000000 for black to FFFFFFFF for white	N/A	No equivalent	Deprecated
cards. cta	Object	publishedCont	Type of call-to-	

V1 Field Name	Description	V2 Field Name	Description	Notes
	containing call-to-action info	ent.nodes.properties.title.actions. actionType	action info	
cards.cta.text	Custom call to action text that can be presented on a content card, when there is no product object associated with it	N/A	No equivalent	Deprecated
cards.cta.buyingTools	Boolean indicating the need to present buying tools on the card	N/A	No equivalent	Deprecated
cards.iOSOnly	Flag to indicate if the card is only for IOS	N/A	No equivalent	Deprecated
relations	Array of related threads data	N/A	No equivalent	Deprecated
relations.name	Name (RELATED)	N/A	No equivalent	Deprecated
relations.threads	Identifier (threadId) of related threads	N/A	No equivalent	Deprecated
locations		N/A	No equivalent	Deprecated

V1 Field Name	Description	V2 Field Name	Description	Notes
active	Boolean for whether the thread is active or not	active	Boolean for whether the thread is active or not	
seoSlug	The SEO slug of the thread	publishedContent.seo. slug	The SEO slug of the thread	
seoTitle	Title tag for SEO	publishedContent.seo. title	Title tag for SEO	
seoDescription	Meta description for SEO	publishedContent.seo. description	Meta description for SEO	
relationId		publishedContent. relationId	The ID of the parent thread. Ties various language threads to the source version	
socialPattern		N/A	No equivalent	Deprecated

TIP: For the v2 URI format and available parameters, see the [Product Thread by ID](#) and [Product Threads List](#) sections of this document.

URL Patterns By Version

The URL pattern used by the Product Feeds API's varies depending on the version, as described here:

v1

`https://api.nike.com/commerce/productfeed/products` (Note: no version number indicated in path)

v1.5

`https://api.nike.com/commerce/productfeed/products/v1.5`

v2

None

TIP: Always check the specific API you are integrating with to confirm the correct URL format. Also, see the URL Patterns section of the [Using NDe APIs](#) guide for info on Nike standards.

Best Practices

Listed below are some best practices for working with Product Feeds.

Test Environment

Product Feeds v2 has a test environment available at host

`https://experience.test.commerce.nikecloud.com`.

Apart from the host, you can use the same URL, for example:

`https://experience.test.commerce.nikecloud.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)`.

Some considerations about using the test environment:

- The functionality of the API is the same in test vs. production, with the exception of new features that are not yet deployed to production.
- Test has a different set of product data than production, but the test data set is similar. For example, many of the constants are the same in test, i.e. the marketplace, language,

and channelId, as they are in production.

- Inventory availability data is scarce in the test environment. At the product level, i.e. the values in **productInfo.availability.available**, might show as 'false' in test most of the time. Availability data at the SKU/size level, i.e. in **productInfo.availableSkus**, is *not* present in test.
- All performance testing activities should be done in test and not in production.

Troubleshooting

Listed below are ways to troubleshoot unexpected responses using this API.

Use Troubleshooting Tools

- Use the general troubleshooting tips in the [Using NDe APIs](#) guide.
- Use a Splunk query (requires access) such as [this](#) to check for issues with your request.
- Use the [Product Feeds v2 Overview](#) dashboard in Insights (requires access) to see if the service is up and healthy.
- Contact the Product Feeds Team on the [#nde-product-feeds](#) Slack channel for assistance.

Common Questions

Who do I contact with questions about what I'm seeing in the **productInfo or **publishedContent** sections of the response?**

- The data in **productInfo** and **publishedContent** is not owned by the Product Feeds team. Refer to [Thread Response Ownership Breakdown](#) to find the Slack channel of the team responsible for that data.

How do I know what product attributes are available for me to use to request Threads?

- Unless you are doing a keyword search using the **searchTerms** query parameter, you need to know in advance which product attributes to include in your requests. The source of product attributes (e.g. slugs, 'best for', and other attributes) is Nike's Prodigy

system.

Why isn't my feed showing up?

- *The feed may have failed validation and was marked inactive.* Only active threads with a valid publish date will be returned by this API. Contact the Product Feeds Team on the [#nde-product-feeds](#) Slack channel to check if the feed failed validation and why.
- *The feed might not yet be published.* It can take up to 15 minutes to publish a change from AEM and have it be reflected in the Feeds API.

Why am I getting an empty 200 response from *Threads List*?

- There might not be any threads that meet the criteria that you specified, particularly when using optional filters. For example, if you send a request with `filter=productInfo.merchProduct.styleCode(999999)` and there are no threads for style code 999999, you will get an empty 200 response.
- The **publishStartDate** for the requested threads might be in the future, or conversely the **publishEndDate** might be in the past. In other words, if today's date is not within the publish start/end range for the thread, the thread will not be returned in the response.
- The **softLaunchDate** on the product is in the future. The `softLaunchDate`, when present, overrides the `publishStartDate`, and thus can affect whether the thread is returned or not.

Why am I getting a 404 error from Thread by ID when I know that the thread ID is valid?

- Today's date might be outside the publish start/end range for the thread.
- The **catalogId** on the product might be blank. To troubleshoot, send a request to the Merchandised Products API with the affected product ID (e.g. <https://api.nike.com/merch/products/v2/c98f12d7-7dee-5775-b4a6-c83d0d2dcb9a>) to see if a catalog ID is present or not. If not, that is the reason that the thread is not being returned.

TIP: Be careful not to confuse **legacyCatalogId**, which like **catalogId** is also present in the threads response under **productInfo.merchProduct**, but does not affect

thread visibility.

Glossary

See the [Glossary](#).

Document Change Log

Summary	Date	Description
Initial draft	01/23/2018	Initial Draft
Added upstream contact info	7/5/2018	Linked to 'Thread Response Ownership Breakdown' in Troubleshooting
Used valid channelId in examples	7/16/2018	Changed from using invalid to valid channelId (and collectionGroupId) in examples
Removed long JSON samples	11/20/2018	Removed long JSON to improve PDF output

Related Links

[NDe Docs Home](#)

[Get Started](#)