



Table of Contents

- [Introduction.....](#) [2](#)
- [Key Terms](#) [2](#)
- [Cart Reviews](#) [3](#)
- [Shipping Options.....](#) [4](#)
- [Fulfillment Offerings](#) [5](#)
- [Shipping Address Validation.....](#) [5](#)
- [Checkout Preview](#) [5](#)
- [Checkout Submit](#) [7](#)
- [API Quick Reference](#) [8](#)
- [Best Practices.....](#) [9](#)
- [Troubleshooting](#) [11](#)
- [Terms of Service](#) [12](#)
- [Contacting the Team.....](#) [12](#)
- [Document Change Log](#) [12](#)
- [Next Steps](#) [13](#)

Adding Checkout to Your Experience

Last Updated: 06/01/2022

Manage the Checkout process for the consumer.

TIPS:

- Before using this guide, read [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html) and [Cart & Checkout Overview \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html).
- Use this Developer’s Guide to supplement the API Reference with detailed use cases. See [API Quick Reference](#) for links to all the API Reference docs discussed in this guide.
- The steps involving **Payment** are covered in [Adding Payment to Your Experience \(https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html)

Introduction

What is a Checkout?

A checkout represents a consumer’s intent to complete a purchase and includes information necessary for the fulfillment of an order.

At Nike, a checkout includes **all the information from a cart, plus the following**:

- Shipping methods (**Checkout V2 only**)
- Shipping addresses
- Fulfillment details including type, cost, and “get by” dates (**Checkout V3 only**)
- Payment methods
- Billing addresses
- Taxes

Which Version of Checkout Should I Use?

The Nike shopping experience involves several APIs. To support the latest features, sometimes certain API versions must be used together. See [Which API Version Should I Use \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use) in the **Cart & Checkout Overview** for more information on the Checkout version you need.

Key Terms

Listed below are some terms important to understanding checkout.

Table 1: Key Terms for Checkout

Term	Definition
Cart	The virtual shopping cart used by Nike consumers to collect and compare items for purchase
Checkout	A collection of data, including cart data, describing what may become a consumer order
Fapiao	Tax-related invoice offered to China consumers only
Legacy fulfillment flow	Checkout flow supporting ship to consumer address and digital delivery only
Omnichannel fulfillment flow	Checkout flow supporting ship to consumer address, digital delivery, Buy-Online-Pickup-in-Store (BOPIS), pickup at third party location, and Instant Checkout
SMS	Short Message Service used to send text messages to mobile phones
Source-aware	Using consumer location and other factors to offer the best options of when, where, and how to receive Nike product

Cart Reviews

Use the Cart Reviews API to show the consumer a summary of their cart as an initial step in the checkout, or alternatively, as an intermediate step between cart and checkout.

The cart summary includes updated subtotals of all cart items, taxes, estimated delivery/pick up dates and costs.

Details on the available Cart Reviews versions are listed below.

Table 1: Cart Reviews API Versions

Version	Description
V2	Used in omnichannel (https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use) shopping flow Supports fulfillment offerings (https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html) , including Buy-Online-Pickup-In-Store (BOPIS) For registered consumers, guest consumers, and employees Asynchronous endpoint
V1	Used in legacy (https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use) shopping flow Limited to basic shipping options (https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-checkout.html#shipping-options) , for example Standard For registered consumers and employees only Synchronous endpoint

Cart Reviews V2

Execute a PUT request to the [Create a Job \(https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put \)](https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put) endpoint with a complete cart, passing the **country**, **currency**, and **fulfillmentDetails** for each item returned from [fulfillment offerings \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html) associated with the consumer. The id path parameter is a client-generated UUID.

NOTE: Cart Reviews V2 operates asynchronously. This means that after you execute the initial request, you call another endpoint to get the result. See [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#asynchronous-operation \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#asynchronous-operation) for more details.

Sample [Create a Job \(https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put \)](https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put) PUT request URI:

```
https://api.nike.com/buy/cart_reviews/v2/52bc115b-16e5-43b5-bcaf-dd6168c543g9
```

After calling [Create a Job \(https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put \)](https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put) and receiving an HTTP 202 response, execute a GET request to [Retrieve a Job Result \(https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-get \)](https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-get) using the same Cart Reviews ID to check the status of your job.

To know if the job is done, check the value of the status field in the response body as follows:

- "status": "PENDING": job processing has not started
- "status": "IN_PROGRESS": job processing is in progress
- "status": "COMPLETED": job has completed

Once you receive a job status of COMPLETED, get the results of your job by parsing the data in the response object.

Sample [Retrieve a Job Result \(https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-get \)](https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-get) GET request:

```
https://api.nike.com/buy/cart_reviews/v2/52bc115b-16e5-43b5-bcaf-dd6168c543g9
```

A successful 200 response in the COMPLETED state contains currency, locale and fulfillmentGroups information.

Cart Reviews V1 (Legacy)

To get a cart summary, execute a request to the [Augment a Cart \(https://developer.niketech.com/docs/projects/Cart%20Reviews?tab=api#cart-reviews-augment-a-cart-post \)](https://developer.niketech.com/docs/projects/Cart%20Reviews?tab=api#cart-reviews-augment-a-cart-post) endpoint with a complete cart.

NOTE: It is not required to create a cart with the Carts V2 API prior to sending a request to the Cart Reviews V1 API. Instead of using Cart ID in the request, send the **country**, **currency**, and **brand** associated with the consumer.

Cart Reviews V1 does not support guest consumers. The consumer must be logged in.

You can get additional info in the response by including the following in the request:

- To get sales tax and shipping tax, include postal code.
- To get estimated delivery date(s), include the shipping method(s).
- To get shipping group information, include the shipping method and the shipping address associated with each product.

Sample [Augment a Cart \(https://developer.niketech.com/docs/projects/Cart%20Reviews?tab=api#cart-reviews-augment-a-cart-post \)](https://developer.niketech.com/docs/projects/Cart%20Reviews?tab=api#cart-reviews-augment-a-cart-post) POST request URI:

```
https://api.nike.com/buy/cart_reviews/v1/
```

A successful 200 COMPLETED response contains country, currency, locale, brand, channel, and shippingGroups information.

TIPS:

- The shipping group refers to the grouping of products into multiple shipments with potentially different delivery dates. This is done automatically for you based on Nike business rules.
- For China consumers, you can capture and include [Fapiao invoice \(https://www.sirva.com/docs/default-source/resources-docs/reports/2012/what-are-fapiaos-and-why-do-they-matter-.pdf \)](https://www.sirva.com/docs/default-source/resources-docs/reports/2012/what-are-fapiaos-and-why-do-they-matter-.pdf) info in the request, and it will be returned in the response.

Shipping Options

✓ Get available shipping methods and estimated delivery dates

TIP: Shipping Options is for the [legacy fulfillment](#) flow only. New implementations should use [Fulfillment Offerings](#) instead.

Once the consumer finalizes their [cart \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-carts.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-carts.html), it's time to begin the checkout process. If your app or experience is using the [legacy fulfillment](#) flow, the first step for consumers is to select a shipping method.

Consumers are accustomed to selecting a shipping method (Standard, Two-Day, Next-Day for example) during the checkout process. But how do you know which methods to present to them, based on their shopping context?

Use the [Shipping Options API \(https://developer.niketech.com/docs/projects/Shipping%20Options?tab=api#shipping-options-post \)](https://developer.niketech.com/docs/projects/Shipping%20Options?tab=api#shipping-options-post) to retrieve the available shipping methods for a consumer's checkout.

Step 1: Display a List of Shipping Options

To show a UI of shipping options available for each item in a consumer's cart, execute a request to the *Shipping Options* endpoint. Pass the consumer's shopping country, currency, locale and item information, including promotional codes.

Sample [Shipping Options API \(https://developer.niketech.com/docs/projects/Shipping%20Options?tab=api#shipping-options-post \)](https://developer.niketech.com/docs/projects/Shipping%20Options?tab=api#shipping-options-post) POST request URI:

```
https://api.nike.com/buy/shipping_options/v2
```

A successful 200 response includes the available shipping methods for a consumer's checkout, associated costs, estimated delivery dates, and discounts such as free shipping for members.

TIPS:

- Although optional, pass a shippingAddress when available. In certain countries including the US, passing shippingAddress returns an estimated delivery date instead of an estimated delivery range.
- In China, shipping methods vary based on the province, city, and district combination.

Fulfillment Offerings

✓ **Get available shipping and pickup locations, costs, and delivery/pickup dates**

TIP: Fulfillment Offerings is for the [omnichannel](#) fulfillment flow only

The **Fulfillment Offerings API** (<https://developer.niketech.com/docs/projects/Fulfillment%20Offerings?tab=api>) is a replacement of the **Shipping Options API** (<https://developer.niketech.com/docs/projects/Shipping%20Options?tab=api>) just discussed. Fulfillment Offerings provides consumers more flexibility in choosing how, when, and where to get Nike products based on consumer location, availability and several other factors. They may be able to choose to have their items digitally delivered, shipped to an address of their choice, pick up at a Nike store, or pick up at a third party location. A user experience driven by the Fulfillment Offerings API helps the consumer make those decisions by providing the cost of each offering and “get by” dates that predict when the consumer can get the product.

See [Adding Fulfillment Offerings To Your Experience \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html) for more information.

Shipping Address Validation

After the consumer selects or provides a personal shipping address through either the Shipping Options or Fulfillment Offerings, validate the address with the Address Validation API. See the [Address Validation \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-address.html#address-validation \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-address.html#address-validation) section of the **Address Tools** guide for more information.

Checkout Preview

✓ **Validate a checkout for fulfillment**

Next, let’s make sure that the checkout details are accurate and that the process can proceed to the payment steps.

Can I Skip This?

It is not required to [Request a Checkout Preview \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put \)](https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put) in order for the consumer to complete their purchase. However, calling the endpoint to validate the order and payment details one last time increases the consumer’s chance of a successful checkout.

You can use the details in a successful response to display the final payment amount to the consumer. Once the consumer confirms the payment method details and places the order, there will be a better chance of success.

NOTE: Checkout Preview (and Checkout Submit in the next steps) operates asynchronously. This means that after you execute the initial request, you call another endpoint to get the result. See [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#asynchronous-operation \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#asynchronous-operation) for more details.

Which Version of Checkout Preview Should I Use?

See [Which API Version Should I Use \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use) in the **Cart & Checkout Overview** for the list of API versions that must be used together in a checkout flow.

Details on the available Checkout Preview versions are listed below.

Table 2: Checkout Preview API Versions

Version	Description
V3	Used in omnichannel shopping flow Supports fulfillment offerings, including Buy-Online-Pickup-In-Store (BOPIS) and SMS (China only)
V2	Used in legacy shopping flow Limited to basic shipping options and estimated delivery date (EDD), for example Standard

Step 1: Request Checkout Preview

Checkout Preview V3

Execute a PUT request to the [Request Checkout Preview \(https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-request-checkout-preview-put \)](https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-request-checkout-preview-put) endpoint, passing the complete cart and fulfillmentDetails returned from [fulfillment offerings \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html) for each item.

The API ensures that the products and fulfillment details for each item are valid based on Nike pricing, availability, and other factors. You can also get product pricing, sales tax, fulfillment fees and tax, “get by” dates, and checkout subtotals in the response.

SMS Checkout Preview (China Only)

SMS Checkout Preview allows both Nike members and guests to purchase Nike products using a mobile phone number instead of an email address. If the consumer is purchasing with an email address, you can skip this section.

Note: SMS checkout is currently available in China only

Nike member SMS checkout preview requests

In addition to the usual Checkout preview request values, these are SMS-specific:

- Send the value **‘SMS_ACCOUNT’** in `phoneNumber.type`
- Send the SMS phone number from the consumer’s profile in `phoneNumber.subscriberNumber`, 1–13 digits
- Send the country code in `phoneNumber.countryCode`, 1–3 digits
- Send the Nike member’s profile ID in `phoneNumber.accountId`
- Do not send email

Guest SMS checkout preview requests

Checkout preview for guest SMS consumers requires a few extra steps to check that the SMS phone number is valid.

1) Send the consumer a verification code to the SMS phone number they provide

After capturing the guest consumer’s phone number in your app or experience, call the [Identity Initiation \(https://developer.niketech.com/docs/projects/IdnVerify?tab=api \)](https://developer.niketech.com/docs/projects/IdnVerify?tab=api) endpoint at `/identity/verify/contact_channel/initiation/v1`. Send the guest consumer’s SMS phone number in `contactChannel`. A successful 204 response sends the identity-generated verification code to the consumer at the SMS phone number provided.

2) The consumer submits the verification code

Your app or experience provides a UI into which the consumer enters and submits the verification code from Step 1.

3) Get the validation token

Once your UI captures the verification code, call the [Identity Completion \(https://developer.niketech.com/docs/projects/IdnVerify?tab=api \)](https://developer.niketech.com/docs/projects/IdnVerify?tab=api) endpoint at `/identity/verify/contact_channel/completion/v1`, sending:

- SMS phone number in `contactChannel`
- Verification code from Step 2 in `verificationCode`

A successful 200 response returns a `validationToken` and `validationTimestamp`.

4) Call the Checkout Preview endpoint

In addition to the usual Checkout preview request values, these are SMS-specific:

- Send the value **‘SMS_VERIFY’** in `phoneNumber.type`
- Send the SMS phone number in `phoneNumber.subscriberNumber`, 1–13 digits
- Send the country code in `phoneNumber.countryCode`, 1–3 digits
- Send the `validationToken` from Step 3 in `phoneNumber.verifyId`
- Do not send email

Note: Checkout preview requests with both a `phoneNumber.subscriberNumber` and email will be rejected.

Sample V3 [Request Checkout Preview \(https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-request-checkout-preview-put \)](https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-request-checkout-preview-put) PUT request URI:

`https://api.nike.com//buy/checkout_previews/v3/89rc115b-16e5-43b5-bcaf-dd6168c543u4`

Checkout Preview V2

Execute a request to the [Request Checkout Preview \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put \)](https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put) endpoint.

The API ensures that the products, shipping method(s), and shipping address(es) are valid based on Nike pricing and address rules. You can also get product pricing, sales tax, shipping fee and tax, estimated delivery date(s), and checkout subtotals in the response.

TIP: For more context, see a step-by-step example of all the requests in a checkout in the diagram in the [Best Practices](https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html) section of this document. For more info about Payment, see [Adding Payment to Your Experience \(https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html).

Sample V2 [Request a Checkout Preview \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put \)](https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put) request URI:

```
https://api.nike.com/buy/checkout_previews/v2/61bc115b-16e5-43b5-bcaf-dd6168c543f8
```

Step 2: Retrieve Checkout Preview Job

After calling either V2 or V3 **Request a Checkout Preview** and receiving an HTTP 202 response, execute a request to either V2 or V3 **Retrieve Checkout Preview Job** using the same checkout ID to check the status of your job.

To know if the job is done, check the value of the **status** field in the response body as follows:

- "status": "PENDING": job processing has not started
- "status": "IN_PROGRESS": job processing is in progress
- "status": "COMPLETED": job has completed

Once you receive a job status of COMPLETED, get the results of your job by parsing the data in the **response** object.

Sample V3 [Retrieve Checkout Preview Job \(https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-retrieve-checkout-preview-job-get \)](https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-retrieve-checkout-preview-job-get) request URI:

```
https://api.nike.com/buy/checkout_previews_jobs/v3/89rc115b-16e5-43b5-bcaf-dd6168c543u4
```

Sample V2 [Retrieve Checkout Preview Job \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-retrieve-checkout-preview-job-get-1 \)](https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-retrieve-checkout-preview-job-get-1) request URI:

```
https://api.nike.com/buy/checkout_previews/v2/jobs/61bc115b-16e5-43b5-bcaf-dd6168c543f8
```

Checkout Submit

✔ **Submit a checkout for fulfillment**

Which Version of Checkout Submit Should I Use?

See [Which API Version Should I Use \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/overview-checkout.html#which-api-version-should-i-use) in the **Cart & Checkout Overview** for the list of API versions that must be used together in a checkout flow.

Details on the available Checkout Submit versions are listed below.

Table 3: Checkout Submit API Versions

Version	Description
V3	Used in omnichannel shopping flow Supports fulfillment offerings, including Buy-Online-Pickup-In-Store (BOPIS)
V2	Used in legacy shopping flow Limited to basic shipping options and estimated delivery date (EDD), for example Standard

Step 1: Request Checkout Submit

Checkout Submit performs the final validations of the consumer’s information, requests payment authorization, and if everything succeeds, submits the checkout for fulfillment.

TIPS:

- You must have previously called the Payment Preview API to collect the required payment information, most notably the mandatory Payment Preview **id**. See the [Adding Payment to Your Experience \(https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html) for more info.
- Optionally, for Japan only, send GIFT_RECEIPT in the **invoiceInfo** block, which prevents prices from being printed on the packing slip that is included with the product shipment.
- Optionally, for China only, send ELECTRONIC_FAPIAO in **invoiceInfo** for Fapiao, which is a special tax invoice. If the consumer indicates a preference for Fapiao, they can enter a personal message to be used as a title for the invoice. For example:

```
"invoiceInfo": {  
  "type": "ELECTRONIC_FAPIAO",  
  "detail": "The consumer's personal title for the invoice"  
}
```

Checkout Submit V3

Execute a PUT request to the **Request a Checkout Submit** endpoint, passing the complete cart and fulfillmentDetails returned from [fulfillment offerings \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html) for each item.

SMS Checkout Submit (China Only)

SMS Checkout Submit allows both Nike members and guests to purchase Nike products using a mobile phone number instead of an email address. If the consumer is purchasing with an email address, you can skip this section.

Note: SMS checkout is currently available in China only

Follow the steps in [SMS Checkout Preview \(China Only\)](#) to implement SMS Checkout Submit in your app or experience.

Sample [Request Checkout Submit \(https://developer.niketech.com/docs/projects/Checkouts%20V3?tab=api#checkout-request-a-checkout-submit-put \)](https://developer.niketech.com/docs/projects/Checkouts%20V3?tab=api#checkout-request-a-checkout-submit-put) PUT request URI:

https://api.nike.com/buy/checkouts/v3/61bc115b-16e5-43b5-bcaf-dd6168c543f8

Checkout Submit V2

Execute a request to the **Request a Checkout Submit** endpoint when your consumer is ready to complete their purchase.

Sample [Request Checkout Submit \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-request-a-checkout-submit-put \)](https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-request-a-checkout-submit-put) request URI:

https://api.nike.com/buy/checkouts/v2/61bc115b-16e5-43b5-bcaf-dd6168c543f8

Step 2: Retrieve Checkout Submit Job

After calling either V2 or V3 **Request Checkout Submit** endpoint and receiving an HTTP 202 response, execute a request to either the V2 or V3 **Retrieve Checkout Submit Job** using the same checkout ID to check the status of your job.

The same job statuses apply to this endpoint as for [Retrieve Checkout Preview Job](#). Once you observe a job status of COMPLETED, get the results of your job by parsing the data in the **response** object.

Sample V3 [Retrieve Checkout Submit Job \(https://developer.niketech.com/docs/projects/Checkouts%20V3?tab=api#checkout-retrieve-checkout-submit-job-get \)](https://developer.niketech.com/docs/projects/Checkouts%20V3?tab=api#checkout-retrieve-checkout-submit-job-get) GET request URI:

https://api.nike.com/buy/checkouts/v3/jobs/61bc115b-16e5-43b5-bcaf-dd6168c543f8

Sample V2 [Retrieve Checkout Submit Job \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-retrieve-checkout-submit-job-get \)](https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-retrieve-checkout-submit-job-get) GET request URI:

https://api.nike.com/buy/checkouts/v2/jobs/61bc115b-16e5-43b5-bcaf-dd6168c543f8

API Quick Reference

Cart Reviews

V1:

- [Augment a Cart \(https://developer.niketech.com/docs/projects/Cart%20Reviews?tab=api#cart-reviews-augment-a-cart-post \)](https://developer.niketech.com/docs/projects/Cart%20Reviews?tab=api#cart-reviews-augment-a-cart-post)

V2:

- [Create a Job \(https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put \)](https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-put)
- [Retrieve a Job Result \(https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-get \)](https://developer.niketech.com/docs/projects/Cart%20Reviews%20V2?tab=api#cart-reviews-v2-endpoints-cart-reviews-v2-jobs-endpoint-get)

Shipping Options

- [Shipping Options \(https://developer.niketech.com/docs/projects/Shipping%20Options?tab=api \)](https://developer.niketech.com/docs/projects/Shipping%20Options?tab=api)

Checkouts


- Request Checkout Preview [V2 \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put \)](https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-preview-request-checkout-preview-put) and [V3 \(https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-request-checkout-preview-put \)](https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-request-checkout-preview-put)
- Retrieve Checkout Preview Job [V2 \(https://developer.niketech.com/docs/projects/](https://developer.niketech.com/docs/projects/)

- [Checkouts%20V2?tab=api#checkout-preview-retrieve-checkout-preview-job-get](#)) and [V3 \(https://developer.niketech.com/docs/projects/Checkout%20Previews%20V3?tab=api#checkout-preview-retrieve-checkout-preview-job-get \)](#)
- Request Checkout Submit [V2 \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-request-a-checkout-submit-put \)](#) and [V3 \(https://developer.niketech.com/docs/projects/Checkouts%20V3?tab=api#checkout-request-a-checkout-submit-put \)](#)
 - Retrieve Checkout Submit Job [V2 \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#checkout-retrieve-checkout-submit-job-get \)](#) and [V3 \(https://developer.niketech.com/docs/projects/Checkouts%20V3?tab=api#checkout-retrieve-checkout-submit-job-get \)](#)
 - Request Checkout Submit (Launch) [V2 \(https://developer.niketech.com/docs/projects/Checkouts%20V2?tab=api#launch-checkout-request-a-checkout-submit-put \)](#)

Best Practices

Here are some best practices. We'll start with an example sequence of API calls to execute an entire checkout:

Example Implementation Diagram

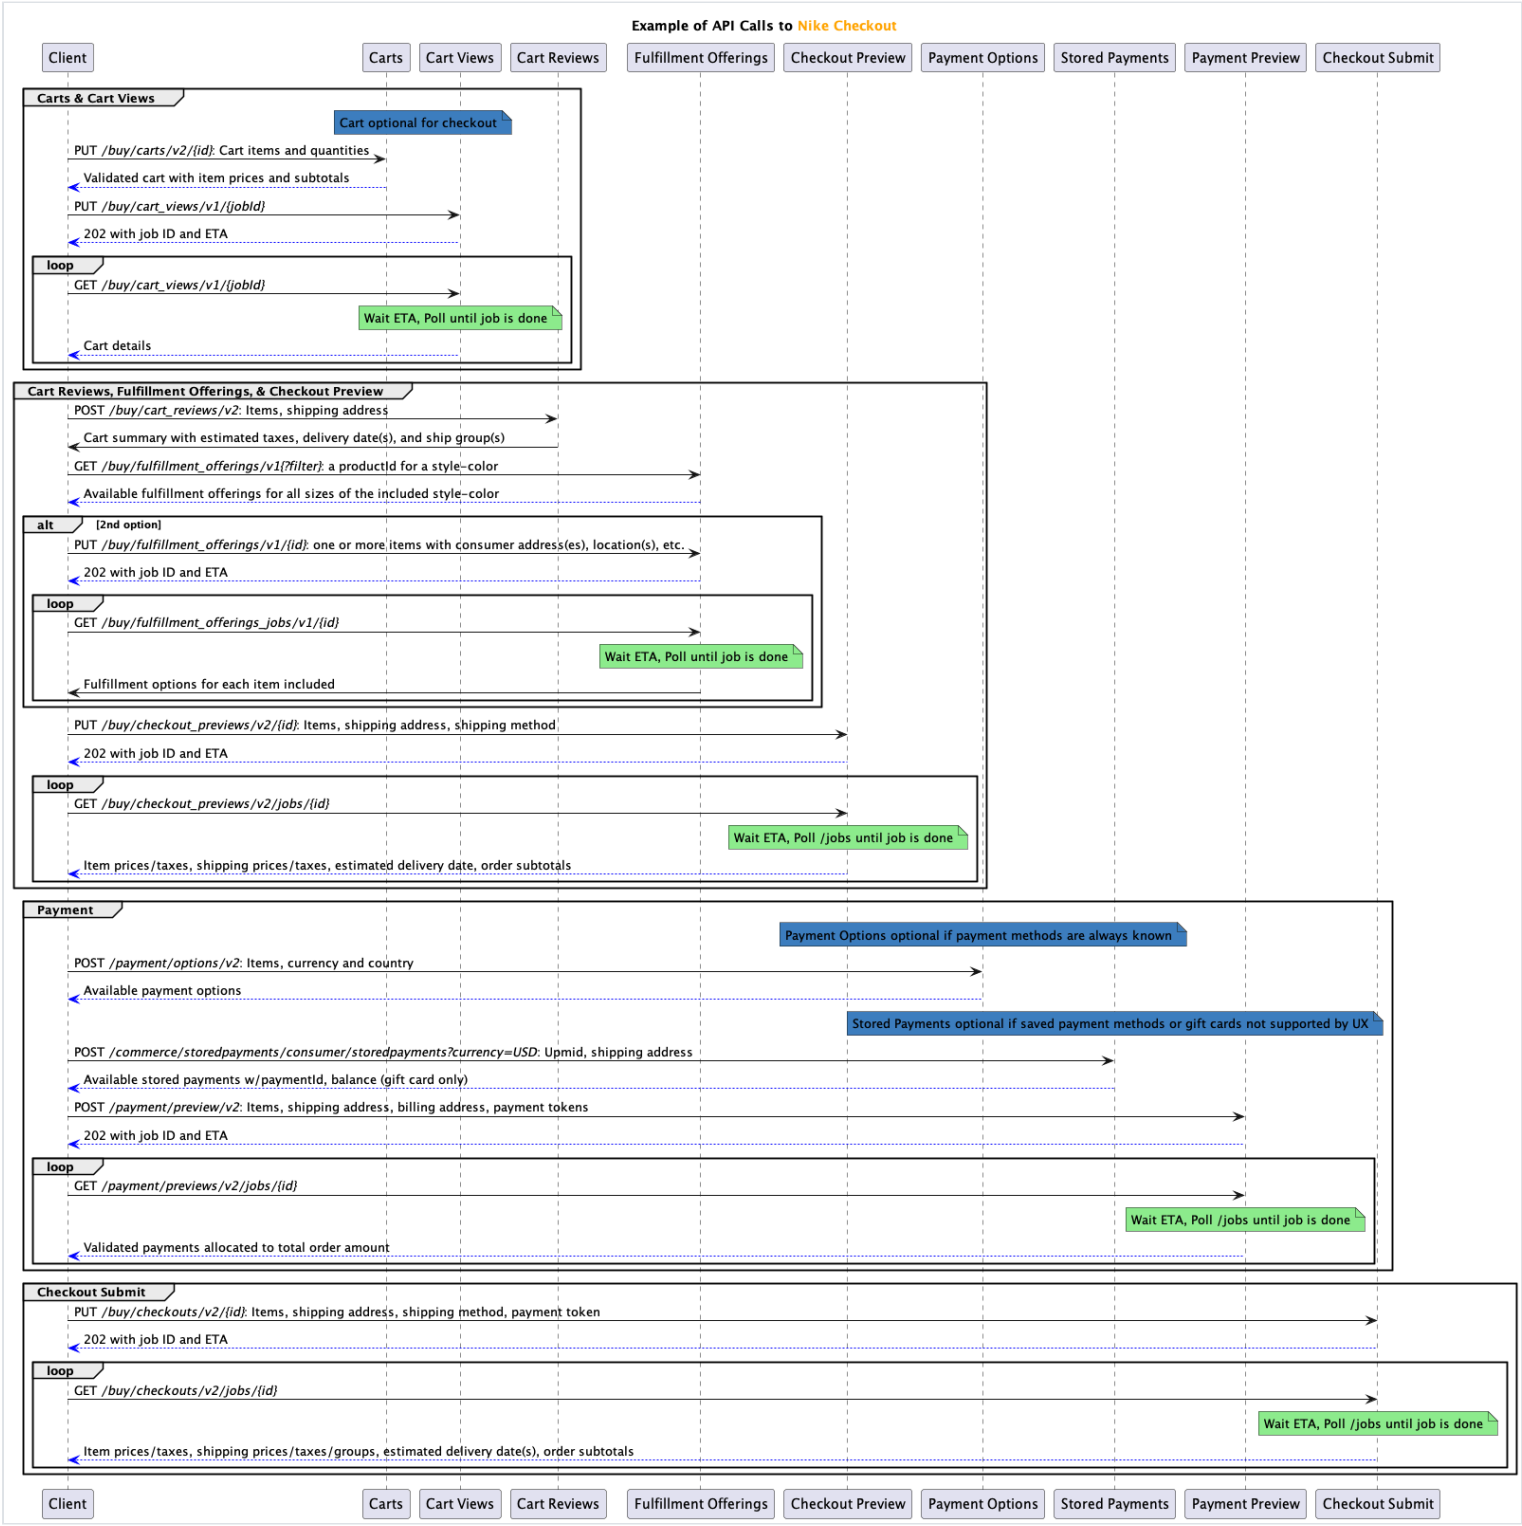

User Types

The Checkout API supports 3 distinct user types:

- Member: user has logged in with their Nike account credentials
- Guest: user has not logged in (anonymous user)
- Employee: user is an employee of Nike or a subsidiary and has logged in with swoosh.com credentials (also known as Swoosh user type)

Depending on user type, certain aspects of the calls that you make to the Checkout API might need to be modified. Also, consider that not all user types might apply to your app. For example, your app might only support Members.

See the User Types section of the [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#user-types \)](#) guide for more information.

Request Headers

The following request headers are common to all the Cart & Checkout APIs:

Table 4: Common Request Headers for Checkout APIs

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the consumer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) consumer, validated by the Edge router and passed through to the service		X	

TIP: For the Authorization header, use the token for the consumer’s login session that you obtained from Nike Unite/Identity, prefixed by ****Bearer **** (note the single space after Bearer). This is necessary for Nike to verify that you are authorized to perform the requested operation on behalf of the consumer.

Supported Countries & Currencies

For the list of country code and currency code combinations supported by Cart & Checkout, see [Supported Countries \(https://nde-devportal-docs.niketech.com/doc/commerce/reference/global.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/reference/global.html).

Idempotence

Idempotence (http://restcookbook.com/HTTP%20Methods/idempotency/) means that the result of a successful request is independent of the number of times it is executed. What does that mean for the Checkout API? Each PUT request to **Request a Checkout Preview** and **Request Checkout Submit** includes 1) a client-generated UUID (checkout ID) in the URL and 2) an Entity in the request body. There are 4 possible scenarios:

Table 5: Scenarios Illustrating Idempotence Behavior for Checkout Requests

Scenario	Result
UUID and Entity are new to the system (base use case)	Client receives HTTP 202 response, request processed as new job
UUID and Entity match a prior request	Client receives the exact same HTTP 202 response from the prior request (no new job processed)
UUID used previously, Entity is new	Client receives HTTP 409 error response (no new job processed)
UUID is new, Entity previously submitted under another UUID	Client receives HTTP 202 response, request processed as new job

TIP: For more, see the Idempotence Guarantee section of the [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#idempotence-guarantee \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#idempotence-guarantee) guide.

Conditions for Retries

For retry information by Checkout endpoint, visit [Retry Patterns for Checkout Clients \(https://confluence.nike.com/display/DAHP/DRAFT+-+Retry+Pattern+for+Checkout+Service+Clients \)](https://confluence.nike.com/display/DAHP/DRAFT+-+Retry+Pattern+for+Checkout+Service+Clients) in Confluence.

For all Checkout APIs, the general rule is that HTTP 4XX error codes (except for 429) should not be retried but HTTP 5XX errors can be retried. For general information on Nike error retry practices, see [API Error Patterns \(https://confluence.nike.com/pages/viewpage.action?spaceKey=DAHP&title=API+-+Error+Patterns#API-ErrorPatterns-RetrylogicbasedonHTTPstatuscode \)](https://confluence.nike.com/pages/viewpage.action?spaceKey=DAHP&title=API+-+Error+Patterns#API-ErrorPatterns-RetrylogicbasedonHTTPstatuscode) on Confluence.

Honor the ETAs for Best Performance

For async endpoints that return an ETA, i.e. the estimated time for the job to be completed, it is important for your app to honor the ETA for the best performance. For example, if the ETA is 2000ms, your app should wait 2000ms to start polling the /jobs endpoint to avoid consuming network and other resources unnecessarily.

Test Scenarios

Here is an example list of test scenarios for a consumer experience that is integrating with the Checkout API.

- Single Product (non-customizable only) - Single Payment (Credit Card)
- Single Product (non-customizable only) - Single Payment (Gift Card)
- Single Product (non-customizable only) - Single Payment (PayPal)
- Multiple Products (non-customizable only) - Single Payment (Credit Card)
- Single Product (customizable only) - Single Payment (Credit Card)
- Single Product (customizable only) - Single Payment (PayPal)
- Single Product (non-customizable only) - Multiple Payment (Credit Card & Gift Card)
- Single Product (customizable only) - Multiple Payment (Credit Card & Gift Card)
- Multiple Products (customizable only) - Single Payment (Credit Card)
- Mixed Products (customizable & non-customizable) - Single Payment (Credit Card)\
- Mixed Products (customizable & non-customizable) - Single Payment (PayPal)
- Mixed Products (customizable & non-customizable) - Multiple Payment (Credit Card & Gift Card)

TIPS:

- While inspecting browser activity on www.nike.com/launch, you can change your shopping country with the flag icon at the upper right of the homepage.
- You can place an order to observe all the checkout calls. Orders can be cancelled via self-service within 30 minutes of submission, otherwise contact Nike Consumer Services.

Test Environment

Test low-volume requests using production Checkout endpoints rather test environment endpoints. Test environment endpoint responses can be unpredictable due to the many downstream services these endpoints rely on in order to simulate typical ‘production-like’ responses.

Keep in mind the following:

- Performance tests at high volumes should never be done in production
- Calling **Request a Checkout Submit** in production can result in actual Nike orders being sent for fulfillment, and actual payment methods being authorized and/or charged. Proceed with caution

Caching Data

None of the endpoints described in this document support caching.

Error Handling: Which JSON Field Had The Error?

In error responses from APIs, Nike uses the [JSON Pointer \(https://tools.ietf.org/html/rfc6901 \)](https://tools.ietf.org/html/rfc6901) standard to indicate which field of the request JSON had the error.

Sample Carts error message using the JSON Pointer standard:

```
{
  "message": "Validation Failed",
  "errors": [{
    "field": "/request/items/0/contactInfo/email",
    "code": "INVALID_EMAIL",
    "message": "Invalid email"
  }]
}
```

Troubleshooting

Listed below are ways to troubleshoot unexpected responses using this API.

Tools

- Use the general troubleshooting tips in the [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#troubleshooting \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#troubleshooting) guide.

- Use a Splunk query (requires access) to check for issues with your request.
- Contact the Buy team on the [#cic-order-integration \(https://nikedigital.slack.com/messages/C38BE20SV \)](https://nikedigital.slack.com/messages/C38BE20SV) Slack channel for assistance.

Common Questions

Is it okay to call Checkout APIs if my app is hosted in an Amazon Web Services VPC?

Yes. The APIs are exposed publicly, so it should not matter where you are calling from. If you are calling repeatedly from a small set of IP addresses, it might be possible that Nike’s bot-mitigation tools could interfere with your ability to make calls. If you are having issues, reach out to us for help.

Why does my Checkout Submit job sometimes take a long time to complete?

Checkout Submits initiate a lot of behind-the-scenes API calls, the duration of which is somewhat unpredictable. Depending on the total volume of requests happening at the time your request was submitted, combined with the payment method and shipping country selected by the consumer, it may take several seconds to get a completed job. The best case is about 5 seconds, while the worst case can be well over a minute. If the job times out, you will get a ‘completed with error’ job status.

Terms of Service

It is recommended that you send a caller ID header in every request to this API to help troubleshoot unexpected responses. See the Registration section of the [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#registration \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#registration) guide on how to create and register your caller ID.

Authentication

Access Tokens

Most calls through the Nike API gateway (api.nike.com) require an access token be sent in the request header. This allows Nike to verify that your app is authorized to perform the action on behalf of the consumer. Access tokens are obtained by calling Nike Unite services prior to calling the API which you ultimately want to reach.

See the [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#authorization \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#authorization) guide for more on how to call Unite services.

JSON Web Token

Only one Buy API endpoint requires the additional authorization of a JSON Web Token (JWT), **Checkout Submit (Launch)**. For more information, see the JWT section of [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#authorization \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html#authorization).

Contacting the Team

Need to contact the Buy team?

Slack	#cic-order-integration (https://nikedigital.slack.com/messages/C38BE20SV)
Confluence Space	CiC Order Capture (https://confluence.nike.com/pages/viewpage.action?pageId=163654070)
Team Contacts	Dan Robertson , Saket Shrivastava

Document Change Log

Summary	Date
Initial publish	10/02/2018
Added Key Terms	08/01/2019
Added Address Validation	09/30/2019
Moved Cart and Wishlist to separate docs, added Checkout Preview V3 and Checkout Submit V3 content	04/30/2020
Added Address Geocoding	04/12/2021
Moved Address Geocoding and Address Validation into Address Tools (https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-address.html) guide	04/19/2021

Summary	Date
Added SMS	08/04/2021
Added Cart Reviews v1/v2 content from Carts guide	05/09/2022

Next Steps

You’ve learned how to add Checkout to your experience. Here are some related topics.

- [Wishlist \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-wishlists.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-wishlists.html)
- [Carts \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-carts.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-carts.html)
- [Address Tools \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-address.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-address.html)
- [Fulfillment Offerings \(https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/checkout/use-fulfillment-offerings.html)
- [Payment \(https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/payment/use-payment.html)
- [Using Nike APIs \(https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html \)](https://nde-devportal-docs.niketech.com/doc/getting-started/using-nike-apis.html)
- [Glossary \(https://nde-devportal-docs.niketech.com/doc/commerce/reference/glossary.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/reference/glossary.html)
- [Supported Countries \(https://nde-devportal-docs.niketech.com/doc/commerce/reference/global.html \)](https://nde-devportal-docs.niketech.com/doc/commerce/reference/global.html)