



ADDING CUSTOMIZATION TO YOUR EXPERIENCE (DRAFT)


Table of Contents

- Introduction 3
- Quick-Start: Load the Builder 3
- Show Customizable Products 7
- Show a Design Experience 15
- Best Practices 17
- Troubleshooting 17
- Terms of Service 17
- Contacting the Team..... 17
- Glossary..... 18
- Document Change Log 18
- Next Steps 18

ADDING CUSTOMIZATION TO YOUR EXPERIENCE (DRAFT)

Last Updated: 05/17/2019

The **Customization Experience Platform (CXP)** unlocks your ability to add premium product customization features to your experience, similar to [Nike By You](https://store.nike.com/us/en_us/pw/nikeid-air-max-shoes/oolZb8dZoi3) (https://store.nike.com/us/en_us/pw/nikeid-air-max-shoes/oolZb8dZoi3):

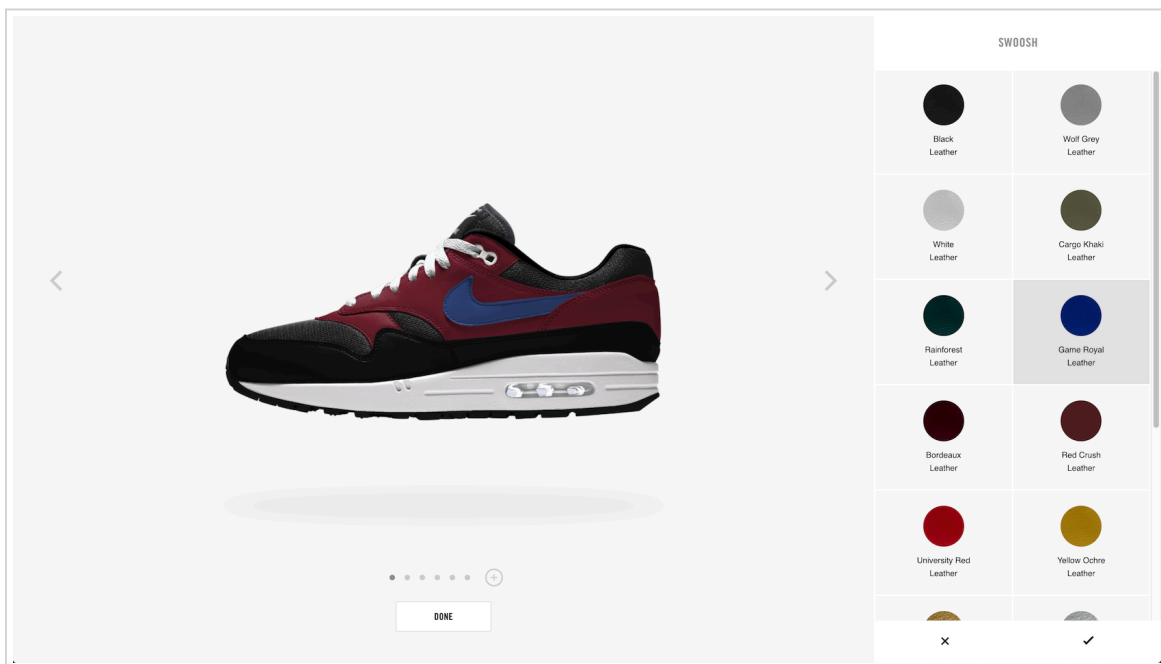

TIP: Before using this guide, you should have already completed [Customization Overview](https://developer.niketech.com/nde-docs/doc/commerce/customization/overview-customization.html) (<https://developer.niketech.com/nde-docs/doc/commerce/customization/overview-customization.html>).

Introduction

In this guide, we will discuss how to integrate CXP customization features into your app. First, what does CXP have to offer?

The Builder

The Builder is a JavaScript bundle that is your main interface with CXP. It does the following:

- **UX:** Returns a fully-styled UX for customizing products
- **Data API:** Allows you to interact with product build data and CXP REST APIs

REST APIs

Use CXP's [REST APIs \(https://developer.niketech.com/?domains=Customization \)](https://developer.niketech.com/?domains=Customization) along with the Builder to enhance your experience. For example, you can display a message to the consumer about the estimated delivery date of their customized product.

Quick-Start: Load the Builder

Want to load the Builder bundle and start interacting with a basic Customization experience? Read this section, otherwise skip to [Show Customizable Products](#).

In your app's source, create an HTML template and follow these steps:

1. Include the Builder bundle

Add a `<script>` tag in the `<body>` to include the Builder JavaScript bundle like:

```
<script src="https://assets.commerce.nikecloud.com/nikeid/builder/dist/b16Builder.bundle.min.js" type="text/javascript"></script>
```

2. Add a `<div>` for the Builder to load into

Add a `<div>` in the `<body>` with an `id="nikeid-app"` attribute like:

```
<div id="nikeid-app-container" style="width: 1000px; height:
```

```
800px;">
    <div id="nikeid-app">
    </div>
</div>
```

3. Load the Builder

Add a `<script>` tag in the `<body>` that invokes the `nikeIdBuilder(rootElement, config)` function like:

```
<script>
    const builderApi =
nikeIdBuilder(document.getElementById('nikeid-app'), {
    'nike-api-caller-id': 'com.nike:commerce.b16.localhost',
    pathName: 'KobeAD2exoFA18'
    })
</script>
```


TIPS:

- The argument for the `rootElement` parameter can be populated with a method like `document.getElementById('element-id-where-builder-renders')`.
- The argument for the `config` parameter must contain at minimum the `nike-api-caller-id` and `pathName` properties.
- See [Customization Builder Reference \(https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html\)](https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html) for details about the Builder.

4. Navigate to Your Local Host to View the Builder Experience

ADDING CUSTOMIZATION TO YOUR EXPERIENCE (DRAFT)

- The Builder loads into your chosen HTML element (in this case, a `<div>` with attribute `id="nikeid-app"`), and it invokes the necessary services to render the experience:
- Browse to the HTML page on your localhost to view the Builder experience. The URL will vary depending on how your app is being served up locally.

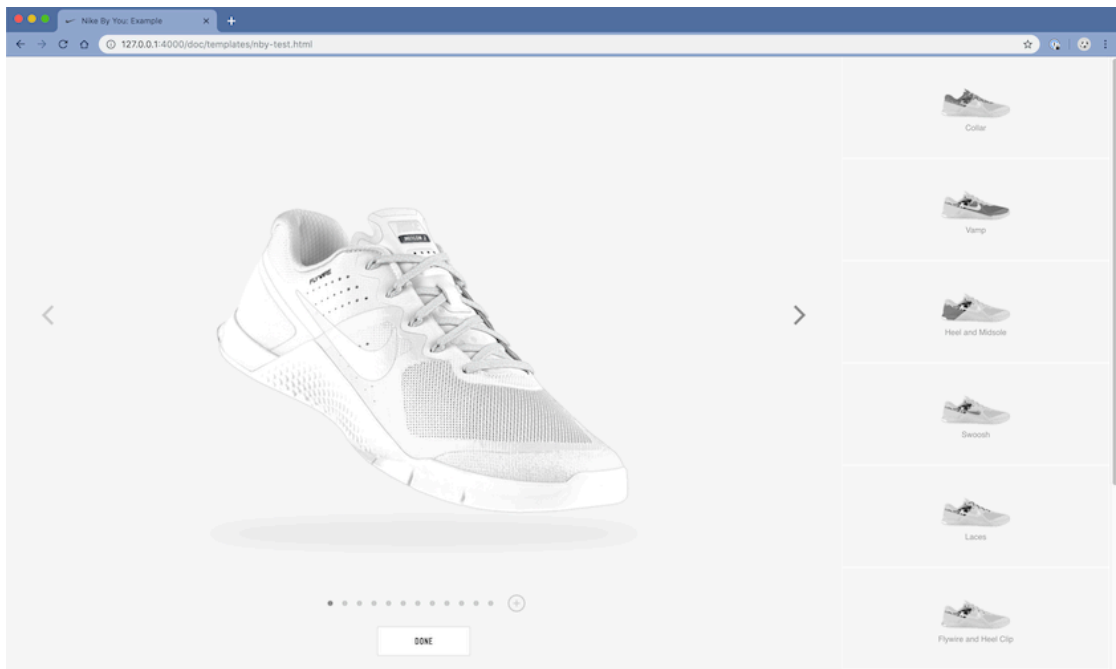

Example HTML template (initializes builder only):

```
<!DOCTYPE html>
<html>
<head>
  <title>Nike By You: Example</title>
  <meta charset="utf-8">
  <meta http-equiv="cache-control" content="max-age=0,no-
cache,no-store"/>
  <meta http-equiv="expires" content="Tue, 01 Jan 1980
1:00:00 GMT"/>
```

```

<meta http-equiv="pragma" content="no-cache,no-store"/>
<meta name="viewport"
      content="width=device-width, initial-scale=1.0,
minimum-scale=1.0, maximum-scale=1.0, user-scalable=no,
viewport-fit=cover"/>
<link rel="icon" href="//www.nike.com/favicon.ico"/>
<script type="text/javascript">
var nsgConfig = {
  HOST: ' //www.nike.com',
  PLATFORM: 'mobile'
};
</script>
<script type="text/javascript" src="//www.nike.com/
styleguide/init/nsg.js"></script>
</head>
<body>
<div id="nikeid-app-container" style="width: 1000px; height:
800px;">
  <div id="nikeid-app">
    </div>
  </div>
  <script type="application/javascript"
    src="https://assets.commerce.nikecloud.com/nikeid/
builder/dist/b16Builder.bundle.min.js"></script>
  <script>
    const builderApi =
nikeIdBuilder(document.getElementById('nikeid-app'), {
      'nike-api-caller-id': 'com.nike:commerce.b16.localhost',
      pathName: 'KobeAD2exoFA18',
    })
  </script>

```

```
</script>
</body>
</html>
```

TIP: See more at [Customization Builder Reference \(https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html\)](https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html), which is the single source of truth for Builder functionality.

Show Customizable Products

✓ **Show customizable products:** Which products are customizable? What is the estimated delivery date? How do I start designing?

Step 1: Load the Builder

Load the Builder and interact with the API to help drive the product browsing experience. Later, you can [Show a Design Experience](#) without having to first load the Builder.

Load the Builder by invoking the `nikeIdBuilder(rootElement, config)` function.

- In the `pathName` property of the `config` argument, use the value in `objects.productInfo.customizedPreBuild.legacy.pathName` from the Product Feeds response, like `pathName: 'aflLowChampsSU19'`.
- Use `bridge` (<https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html#bridge-properties>), a property of the `config` parameter, to listen for events coming back from the Builder.

Example (loads the Builder and logs a few things):

```
<script>
```

```

const builderApi =
nikeIdBuilder(document.getElementById('nikeid-app'), {
  'nike-api-caller-id': 'com.nike:commerce.b16.localhost',
  pathName: 'FUTUREELITEFA18',
  fetchCapacity: true,
  sizeTypeRegion: 'US',
  bridge: {
    onProductLoad: function(buildData) {
      // Builder is ready
      console.log('Set Size
Answer',builderApi.setSizeAnswer('FUTUREELITEFA18:LTITEM8538:LT
ITEM8112:LTITEM8010:LTITEM403108','LTITEM8132','us-mens'));
    },
    onError: function(error) {
      console.error(error);
    },
    onDone: function(buildData) {
      // Consumer selected Done button
      console.log('Done:',buildData);
    },
    onPriceUpdate: function(priceData) {
      // Customization selections have changed the product
price
      console.log('Price Update:',priceData);
    }
  }
})
</script>


```

TIP: See [Quick-Start: Load the Builder](#) and

Customization Builder Reference (<https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html>) for more details about the Builder.

Step 2: Show Customizable Products & Color Options

Whether it's a [Nike By You](https://www.nike.com/us/en_us/c/nikeid) (https://www.nike.com/us/en_us/c/nikeid) web experience with it's product grid walls and Product Detail Pages (PDPs), or some other type of experience, you need to show the consumer which products, and in what colors, can be customized.

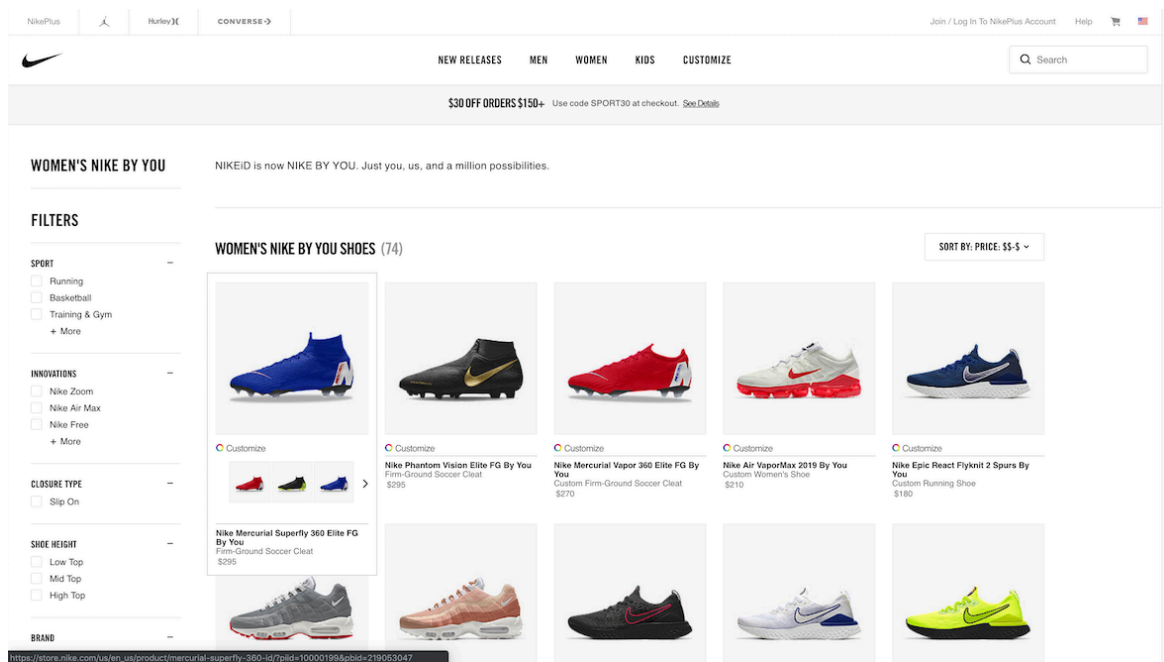

Get a list of customizable products, along with relevant content.

- Call either the [Product Feeds API](https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html) (<https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html>) or the [Rollup Threads API](https://developer.niketech.com/nde-docs/doc/commerce/product/use-rollup-threads.html) (<https://developer.niketech.com/nde-docs/doc/commerce/product/use-rollup-threads.html>)

- To select only 'Nike By You' products, use the `filter=attributeIds()` query parameter like: [https://api.nike.com/product_feed/threads/v2?filter=channelId\(d9a5bc42-4b9c-4976-858a-f159cf99c647\)&filter=marketplace\(US\)&filter=language\(en\)&filter=attributeIds\(92be6a0f-24dd-4e2e-87d0-5ce4ade3a923\)](https://api.nike.com/product_feed/threads/v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=attributeIds(92be6a0f-24dd-4e2e-87d0-5ce4ade3a923)) ([https://api.nike.com/product_feed/threads/v2?filter=channelId\(d9a5bc42-4b9c-4976-858a-f159cf99c647\)&filter=marketplace\(US\)&filter=language\(en\)&filter=attributeIds\(92be6a0f-24dd-4e2e-87d0-5ce4ade3a923\)](https://api.nike.com/product_feed/threads/v2?filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)&filter=marketplace(US)&filter=language(en)&filter=attributeIds(92be6a0f-24dd-4e2e-87d0-5ce4ade3a923))).


Use the response data to drive the experience of browsing customizable products (grid wall, feed, etc.).

TIPS:

- **Rollup Threads** (<https://developer.niketech.com/nde-docs/doc/commerce/product/use-rollup-threads.html>) is best for displaying a grid wall, where alternate colors are shown with each product in the grid.
- See **Adding Rollup Threads to Your Experience** (<https://developer.niketech.com/nde-docs/doc/commerce/product/use-rollup-threads.html>) and **Adding Product Feeds to Your Experience** (<https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html>) for more integration info.
- See **TTAC** (<https://developer.niketech.com/nde-docs/doc/taxonomy/overview-taxonomy-tagging.html>) for more about the benefits of using taxonomy tagging.

Step 3: Show a PDP for a Customizable Product

Show the consumer a particular product in more detail with a PDP like:

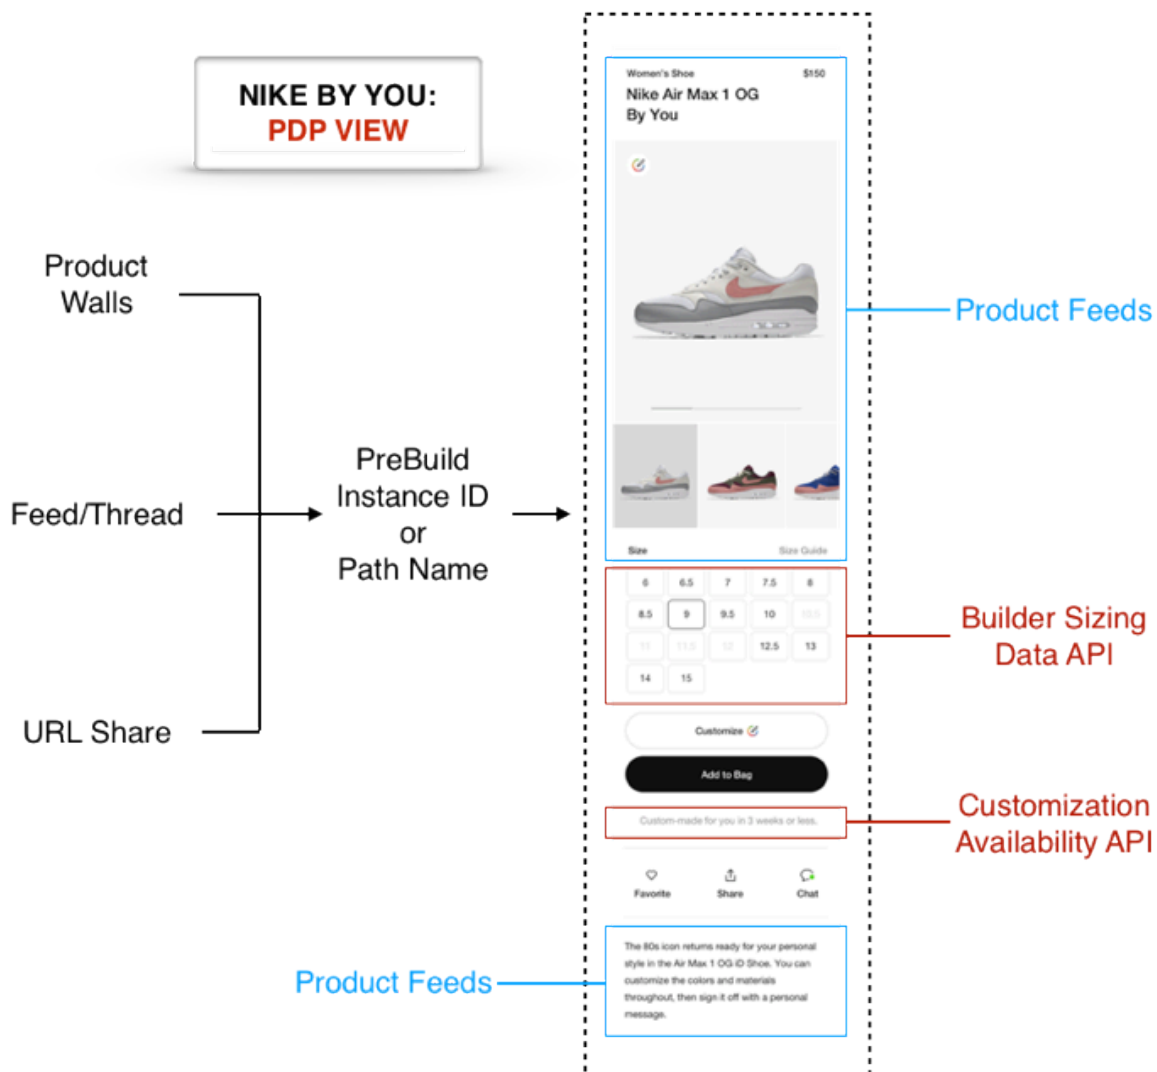

Next, we'll discuss some components that you can include in a PDP.

Step 3a: Show Product Content and Info

Show the product images, pricing, and other info from [Product Feeds](https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html) (<https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html>) on the PDP.

- Call the [Product Feeds API](https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html) (<https://developer.niketech.com/nde-docs/doc/commerce/product/use-product-feeds.html>) with the thread id to retrieve content and info for the product.

Step 3b: Show Product Availability Messaging

Show the consumer on the PDP whether the product can be purchased. If it can, show an estimated lead time (in weeks) for the product to be delivered. Here a few example messages:

Condition	Message on PDP
Product is available	"Custom-made and delivered to you in 4 weeks or less."
Product is not available	"The product is currently unavailable."

To retrieve the availability and lead-time data, there are two options:

Call the Customization Availability API (<https://developer.nike.com/docs/projects/Customization%20Availability?tab=api>)

- The API returns availability by size, lead-time in days, and message text, all for a particular style-color.
- In the `pathName` query parameter, use the value in `objects.productInfo.customizedPreBuild.legacy.pathName` from the Product Feeds API response, like `https://api.nike.com/customization/availability/v1/us/en_US?filter=pathName(aflLowChampsSU19)`.

OR

Read the Builder Data

- Availability: From the returned **Build Data (<https://developer.nike.com/nde-docs/doc/commerce/customization/builder-reference.html#build-data>)**, if `sizingData.displayName` is "Size", then loop through `sizingData.answers` and evaluate whether `isAvailable` is true or false for all sizes.
- Lead Time: Call the **getLeadTimeMessage (<https://developer.nike.com/nde-docs/doc/commerce/customization/builder-reference.html#getleadtimemessage>)** method of the Builder API to get the message text and lead time in days for the product.

TIP: Remember, by initializing and interacting with the Builder API prior to showing the Builder UX, you can access the Builder Dat. See [Step 1: Load the Builder](#) for more.

Step 3c: Show ‘Edit Design’ CTA

Show the consumer a way to edit the design.

Display an ‘Edit Design’ CTA (call-to-action) button that launches the Builder UX

- Example button code using [NCSS \(https://tourguide.prod.commerce.nikecloud.com/ncss \)](https://tourguide.prod.commerce.nikecloud.com/ncss):

```
<button class="ncss-btn-primary-dark">Edit Design</button>
```



Edit Design

TIP: It’s recommended for the ‘Edit Design’ CTA to be always active on the PDP.

Step 3d: Show Gender and Size Options, Confirm Consumer’s Selections

Show the consumer all of the possible gender and size options for the product. From the possible sizes, show which sizes are available for purchase. Allow the consumer to make their gender and size selections.

Show gender options (if applicable), and confirm consumer’s selection

- Use the info from the `sizingData` object (in the Builder Data) to display the available genders, making note of the respective `questionId` and `answerId` values.
- Using the `questionId` and `answerId` values for the gender selected by the consumer, call the `setSizeAnswer` method of the Builder API, like:

```
builderApi.setSizeAnswer( 'ER2teamSP19_barca:LTITEM8538:LTITEM8112', 'LTITEM8011', '' )`
```

This sets `isSelected: true` in `sizingData.answers`, indicating that a particular gender was selected.

- Note that selecting a gender will change the size options in `sizingData`.

Show size options, and confirm consumer's selection

- Use the info from `sizingData` to display the available sizes, making note of the respective `questionId` and `answerId` values.
- Using the `questionId` and `answerId` values for the size selected by the consumer, call the `setSizeAnswer` method, like:

```
builderApi.setSizeAnswer( 'FUTUREELITEFA18:LTITEM8538:LTITEM8112:LTITEM8010:LTITEM403108', 'LTITEM8132', 'us-mens' ) )
```

This sets `isSelected: true` in `sizingData.answers`, indicating that a particular size was selected.

TIP: Answering the gender and size-related questions are the only required Builder interactions for a design to be purchasable.

Step 3e: Show 'Add to Cart' CTA

Show the consumer a way to add the product to their shopping cart with an ****Add to Cart CTA.****

- Display an 'Add to Cart' CTA that adds the design to the cart.
- Example button code using **NCSS** (<https://tourguide.prod.commerce.nikecloud.com/ncss>):

```
<button class="ncss-btn-primary-dark">Add to Bag</button>
```

Add to Bag

- This CTA should only be active once the gender and size-related selections have been passed to the Builder, as shown in [Step 3d](#).
- Once active, the specific behavior of this CTA can vary depending on your requirements, but here is an example:
 - Call the [Carts API \(https://developer.nike.com/nde-docs/doc/commerce/checkout/use-checkout.html#cart \)](https://developer.nike.com/nde-docs/doc/commerce/checkout/use-checkout.html#cart) to add the product to a cart.
 - Show an updated cart item count on the PDP and/or navigate the consumer to a cart page/view.


TIP: For more see [Adding Cart and Checkout to your Experience \(https://developer.nike.com/nde-docs/doc/commerce/checkout/use-checkout.html \)](https://developer.nike.com/nde-docs/doc/commerce/checkout/use-checkout.html).

Show a Design Experience

✓ **Send consumers on design journeys:** What customization options are available? What does my design look like? How much will it cost?

The consumer has selected to edit the design via the 'Edit Design' CTA, so it's time to show them the Builder UX.

ADDING CUSTOMIZATION TO YOUR EXPERIENCE (DRAFT)

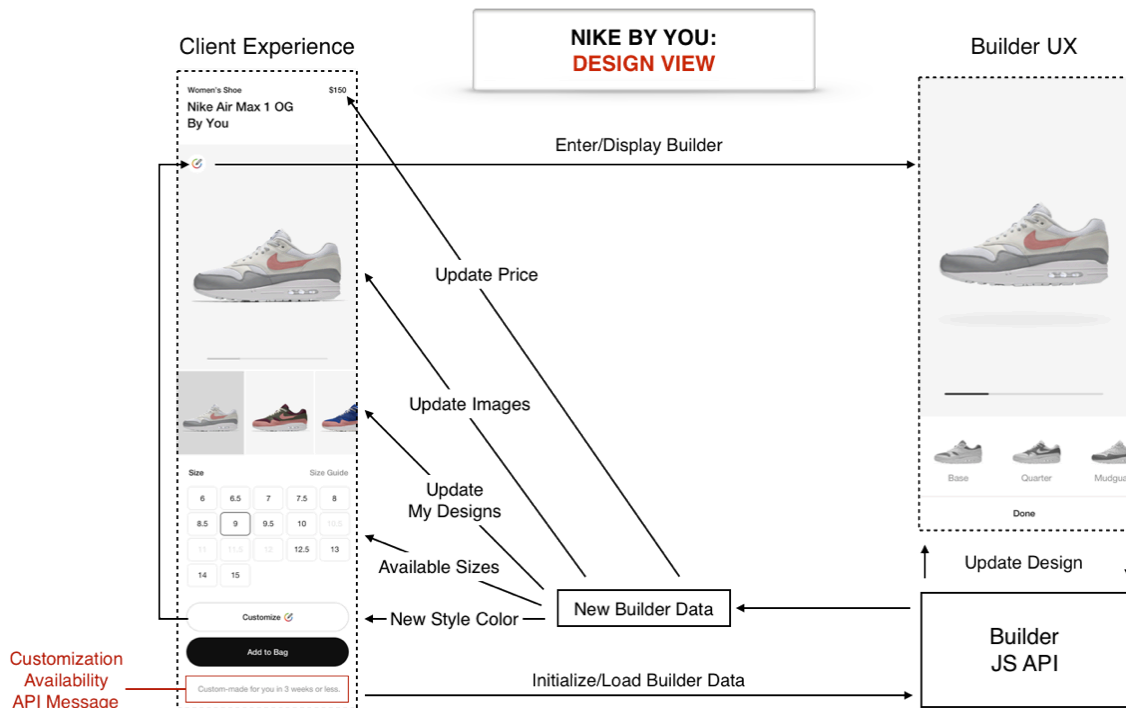

Show the HTML Element containing the Builder UX

- Use same Element ID you used when loading the Builder, e.g.
`document.getElementById('nikeid-app')`

Interact with the Builder

- To display price changes (when customization options are changed), listen to the `onPriceUpdate(priceData)` bridge callback.
- To trigger an action when the consumer selects the 'Done' button, listen to the `onDone(buildData)` bridge callback.
- To "reset" the builder, invoke the `setBuild` method to load a new build, for example by prebuild ID or metric ID.
- To trigger an action based on an consumer-invoked analytics event, listen to the `onAnalyticsEvent(type, payload)` bridge callback.
- To trigger an action based on an error occurring, listen to the `onError(error)` bridge callback.

TIP: See [Bridge Properties](https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html#bridge-properties) (<https://developer.niketech.com/nde-docs/doc/commerce/customization/builder-reference.html#bridge-properties>) for more.

Best Practices

Listed below are some best practices for working with Customization.

Troubleshooting

- Use the general troubleshooting tips in the [Using NDe APIs](https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#troubleshooting) (<https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#troubleshooting>) guide.
- Contact the CXP team on the [#cxp](https://nikedigital.slack.com/messages/GFH2GM02C) (<https://nikedigital.slack.com/messages/GFH2GM02C>) Slack channel for assistance.

Terms of Service

Contacting the Team

Slack	#cxp (https://nikedigital.slack.com/messages/GFH2GM02C)
Confluence Space	NikeiD Systems Home (https://confluence.nike.com/display/NIDS/NikeiD+Systems+Home)
Team Contacts	Jason Mueller, Product Manager

Glossary

See the [Glossary \(https://developer.niketech.com/nde-docs/doc/commerce/reference/glossary.html \)](https://developer.niketech.com/nde-docs/doc/commerce/reference/glossary.html) for related terms.

Document Change Log

Summary	Date
Initial draft	05/17/2019

Next Steps

You've learned how to add Customization to your experience. Here are some next steps.

- [Adding Cart & Checkout To Your Experience \(https://developer.niketech.com/nde-docs/doc/commerce/checkout/use-checkout.html \)](https://developer.niketech.com/nde-docs/doc/commerce/checkout/use-checkout.html)
- [Using NDe APIs \(https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html \)](https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html)