



DEVELOPER PORTAL MIGRATION GUIDE (DRAFT)

Last Updated: 03/20/2018

Submit Feedback: Dev Portal Slack channel[#devportal](#)

The Developer Portal available at <http://developer.nikedev.com> will migrate to <https://developer.niketech.com> as of 04/16/2018.

Use this guide to understand how to execute common tasks on the new Developer Portal.

Use Cases


This section covers how common use cases from the legacy portal can be achieved on the new portal, including screen shots from both.

Search for an API

Legacy Portal


From the APIs A-to-Z view, which is the default view, enter search text in the prompt at the upper right of the screen:



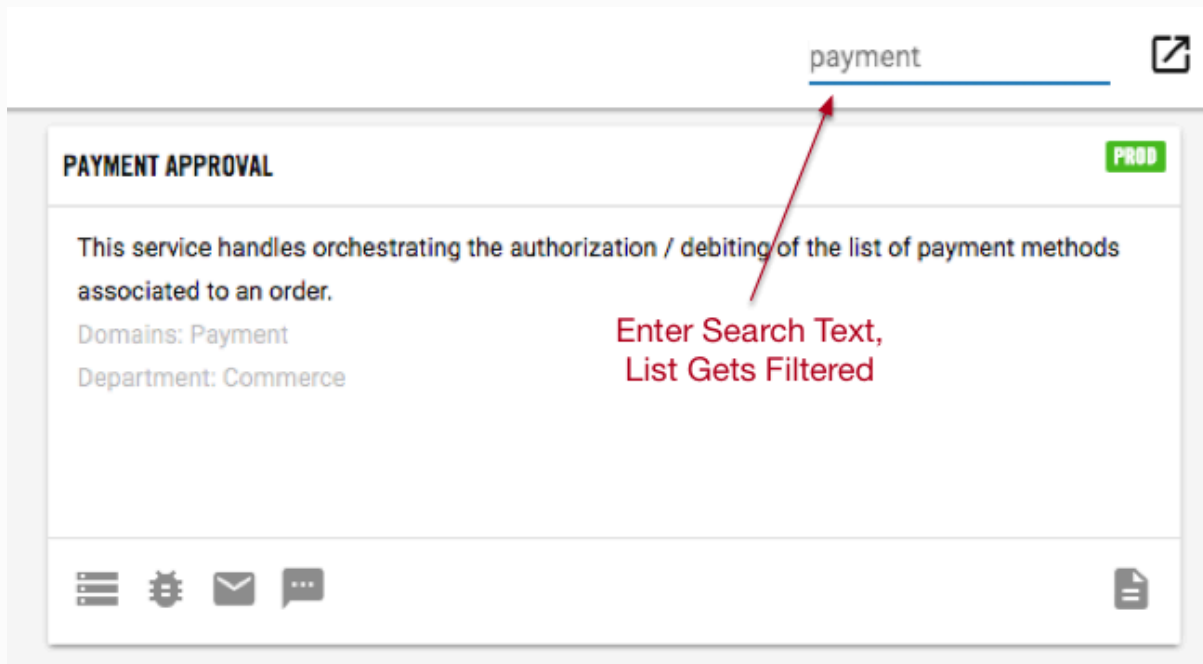

New Portal

From the Search view, which is the default view, enter search text in the prompt at the top of the screen:

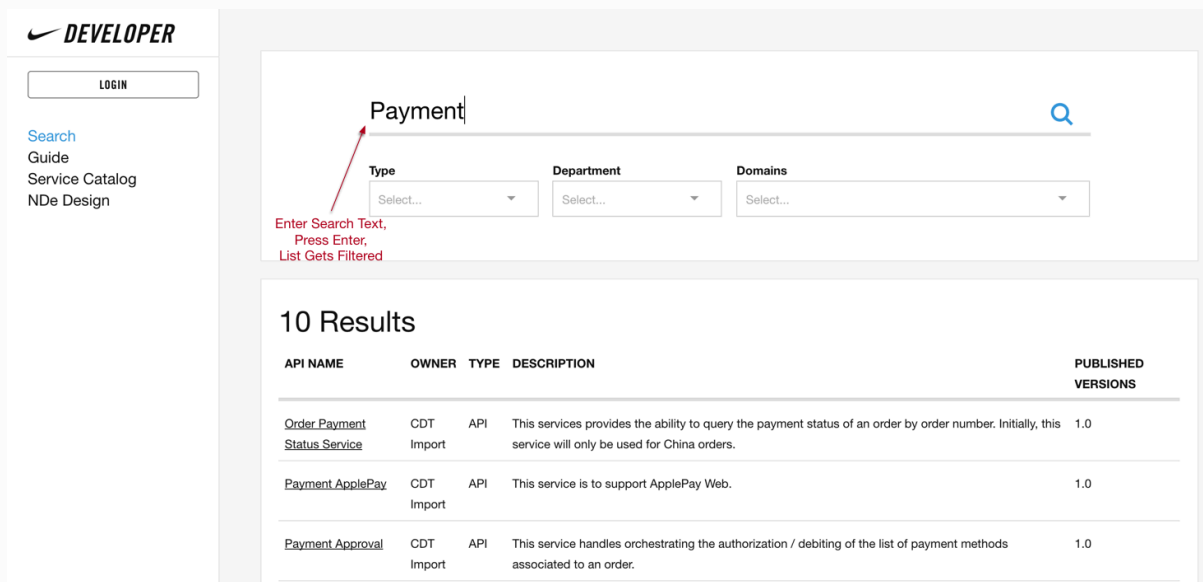

Navigate to an API

Legacy portal

Click the Domain icon at the top of the left navigation pane, click to expand a domain, then click to select an API:



AZ

ACCOUNT

ACTIVITY

ADDRESS

ARCHITECTURE ENABLEMENT

BRAND

BUY

BUY LISTS

CARRIER SERVICE CODES V2

CART REVIEWS

CARTS

CHECKOUTS V2

DELIVERY ESTIMATES V2

SHIPPING METHODS V2

SHIPPING OPTIONS

VALUE ADDED SERVICES VALIDATIONS

CIC

CATALOG

CHALLENGES

CHEERS

COLORMANAGEMENT

COMMENTS

COMMERCE

<APISLIBRARIESGETTING STARTEDGUIDESDEV RELATIONS

ACCEPTANCE SERVICE

DEV

The Acceptance service is used to store waiver acceptance documents.

Domains: UNKNOWN

Department: UNKNOWN

ACCOUNT RECONCILIATION NOTIFICATIONS SERVICE

DESIGN

Subscribes to reconciliation report sources for notification when reports become available for download.

Domains: Account, DTC Technology, Commerce

Department: Commerce

ACHIEVEMENTS API

PROD

Achievements API for retrieval of user achievements.

Domains: Motivation


Department: Nike Plus Platform

Navigate by Domain


Expand Domain, Select API

New Portal

Option 1: from the Domains drop-down menu, select a domain, then click on an API from the displayed list:

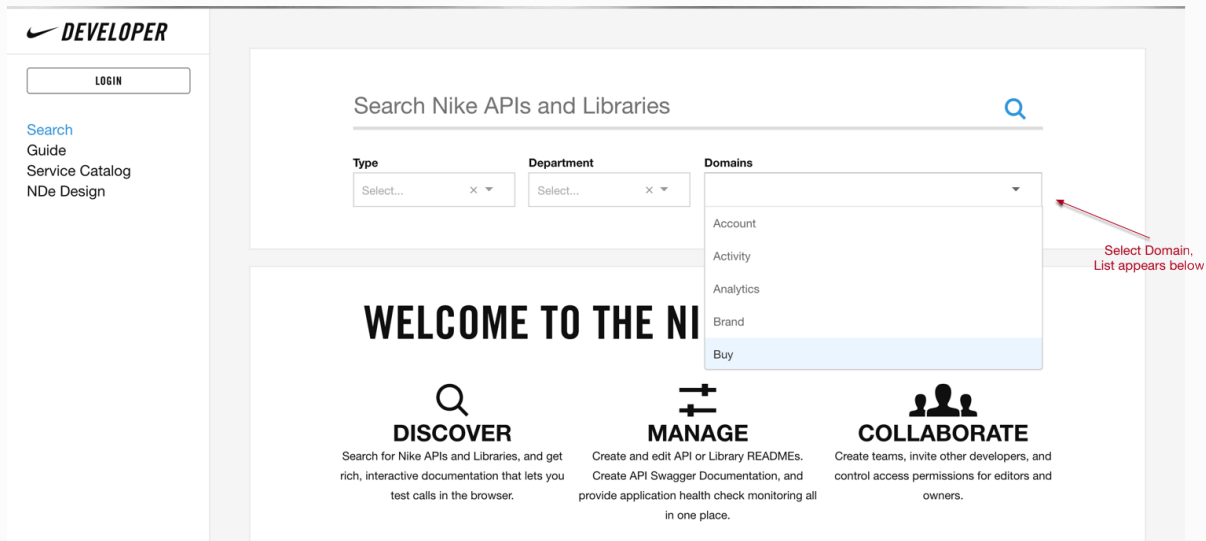

Option 2: from the left navigation menu, click Service Catalog, then either enter search text or select from the Domains drop-down (or both):

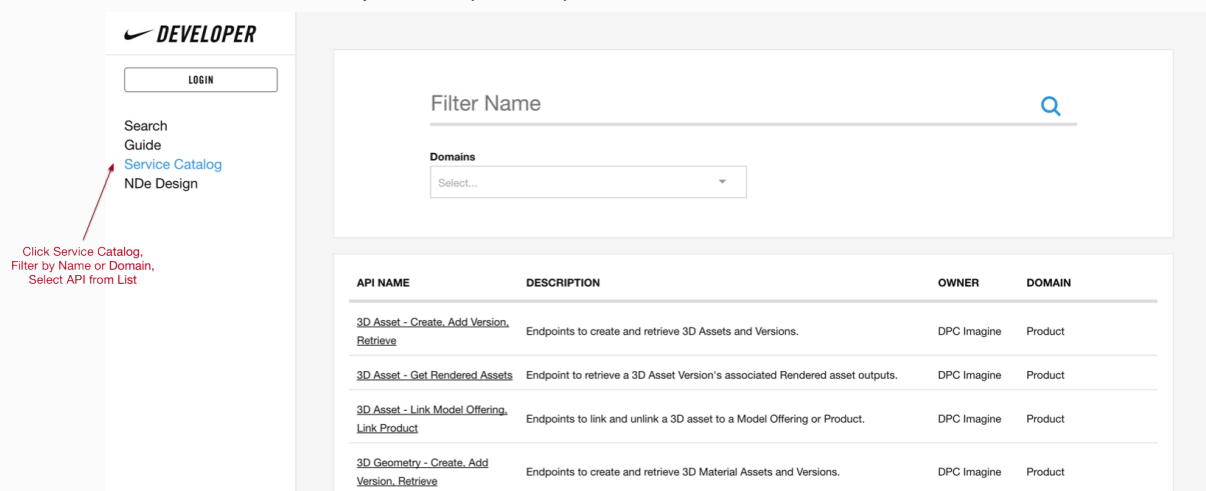

Use 'Try it Out' for an API

Legacy portal

Select Swagger view:

Overview

- REQUEST MEDIA TYPE
- RESPONSE MEDIA TYPE
- DATE AND TIME FORMATS
- GZIP COMPRESSION HEADER
- AKAMAI HEADER EDGE-CONTROL
- PARTIAL RESPONSES
- ENUMERATIONS
- MERCHANDISED PRODUCT

MERCHANDISED PRODUCT

- MERCHANDISED PRODUCT CREATE
- MERCHANDISED PRODUCT LIST
- MERCHANDISED PRODUCT DELETE
- MERCHANDISED PRODUCT BY ID

SWAGGER APIB SNIPPETS README SLA

MERCHANDISED PRODUCT INFORMATION SERVICE

Service for retrieving, loading and deleting product information for merchandised products

REQUEST MEDIA TYPE

Content-Type = application/json, The API produces JSON content types only.

RESPONSE MEDIA TYPE

Content-Type = application/json, The API produces JSON content types only.

DATE AND TIME FORMATS

The API accepts and returns date-time values in this ISO-8601 compliant format: yyyy-MM-dd'T'HH:mm:ss.SSSZ

GZIP COMPRESSION HEADER

Gzip is supported by the API using the Jetty built-in gzip filters. Request Header: Accept: application/json, gzip

AKAMAI HEADER EDGE-CONTROL

Edge-Control Header: !no-store,max-age=600,downstream-ttl=0s

Click Login icon in upper right of screen:

Enter your query...

SWAGGER APIB SNIPPETS README SLA

MERCHANDISED PRODUCT INFORMATION SERVICE

Service for retrieving, loading and deleting product information for merchandised products.

REQUEST MEDIA TYPE

Content-Type = application/json, The API produces JSON content types only.

RESPONSE MEDIA TYPE

Content-Type = application/json, The API produces JSON content types only.

In API Swagger View, Click Login Icon to Login

Log in with your Nike+ account:

AUTHENTICATE USING YOUR NIKE+ ACCOUNT ✕

Nike+ Login

bill.bowerman@nike.com

Nike+ Password

Returned Access Token

Returned UPM ID

CLOSE

API AUTH

Expand endpoint, then execute a request:

OVERVIEW

REQUEST MEDIA TYPE

RESPONSE MEDIA TYPE

DATE AND TIME FORMATS

GZIP COMPRESSION HEADER

AKAMAI HEADER EDGE-CONTROL

PARTIAL RESPONSES

ENUMERATIONS

MERCHANDISED PRODUCT

MERCHANDISED PRODUCT

MERCHANDISED PRODUCT CREATE

MERCHANDISED PRODUCT LIST

MERCHANDISED PRODUCT DELETE

MERCHANDISED PRODUCT BY ID

MERCHANDISED PRODUCT

POST /merch/products/v2

GET /merch/products/v2/

DELETE /merch/products/v2/{id}

GET /merch/products/v2/{id}

CONSOLE CODE SNIPPET

RESPONSE CLASS (STATUS 200)

OK

Model Model Schema

```
{
  "application/json; charset=UTF-8": {
    "id": "3cf6972-fb7c-11e5-80aa-5e5517587c96",
    "snapshotId": "a1f2822-b07c-11e5-80aa-5e5517587c96",
    "modificationDate": "2016-01-12T22:52:12.132Z",
    "status": "ACTIVE",
    "merchGroup": "US",
    "styleCode": "831756",
    "colorCode": "882",
    "styleColor": "831756-882",
    "pid": "18959778",
    "catalogId": "f8c0c476-8d47-3550-b33c-1ac7c182854",
    "productGroupId": "11828113",
    "brand": "Nike Sportswear",
    "channels": {
      "shops": {

```

Response Content Type application/json; charset=UTF-8

PARAMETERS

PARAMETER	VALUE	DESCRIPTION	PARAMETER TYPE	DATA TYPE
id	8e94a64b-a232-5739-b4a6-c7d844a8bda0	IDENTIFIER FOR A PRODUCT.	path	string
snapshotId		the snapshot id of a particular version of merch products.	query	string
valueAddedServiceId		passing in a value for this query parameter will filter the array of value added services by this id. This validates if a valueAddedServiceId is associated to a given product id. If the response array of value added service ids has exactly 1 value then the id is valid, otherwise it is invalid.	query	string
fields		Indicates which fields we want to return in the response.	query	string

RESPONSE MESSAGES

HTTP STATUS CODE	REASON	RESPONSE MODEL	HEADERS
400	Bad Request	Model Model Schema <pre>{ "httpStatus": 0, "code": "string", "timestamp": "string", "service": "string", "message": "string" }</pre>	
404	Not Found	Model Model Schema <pre>{ "httpStatus": 0, "code": "string", "timestamp": "string", "service": "string", "message": "string" }</pre>	

Try it out!

Hide Response

Expand Endpoint.
Enter Required Values,
Click Try it out!

New Portal

Click Login button in left navigation pane (uses Nike single sign-on):





LOGIN

Click Login
(Upper Left of Page)

Select API tab, then click Convert to Swagger button:

CHECKOUTS V2

(Released) v1.0 ▾

README API ENVIRONMENTS INFO

Select API Tab First

Checkouts

Checkouts is an API allowing consumers to create, retrieve, validate and submit a checkout to the downstream order management systems for eventual fulfillment.

A checkout consists of all data necessary for defining the following:

- Consumer's product choices (items and value added services)
- Consumer's payment methods and billing address
- Consumer's shipping methods and shipping address
- Pricing

CONVERT TO SWAGGER

Then Click
Convert to Swagger

Click Try it Out to begin:

CHECKOUTS V2

(Released) v1.0 ▾

README API ENVIRONMENTS INFO

BACK TO API BLUEPRINT



Dev Portal does not guarantee accuracy of swagger conversion, for informational purposes only.

Checkout Preview ▾

PUT

/buy/checkout_previews/v2/{id} Request Checkout Preview

Request that validation and pricing rules be run on the Checkout.

Parameters

Try it out

Name	Description
id • required	Checkout identifier, <i>user generated UUID</i>
string	
(path)	
upmid	

Click Try it out
to start

Enter the info for the request, then click Execute:

True-Client-IP
string
(header)

127.0.0.1

User-Agent
string
(header)

Mozilla/5.0 (Windows NT 10.0; WOW64; rv:43.0) Ge

body
(body)

Example ValueModel

```
{
  "additionalProp1": {}
},
"offer": "string",
"quantity": 0,
"recipient": {
  "firstName": "string",
  "lastName": "string",
  "altFirstName": "string",
  "altLastName": "string",
  "middleName": "string",
  "middleInitial": "string",
  "givenName": "string",
  "additionalProp1": {}
},
"shippingAddress": {
  "address1": "string",
  "address2": "string",
  "address3": "string",
  "city": "string"
}
```

Enter Params/Body,
Click Execute

Cancel

Parameter content type
application/json; charset=UTF-8

Execute

Add/Update/Remove an API

Legacy portal

Process is documented [here](#).

New Portal

See the [New Developer Portal FAQ](#) doc on Confluence for instructions.