



BUY DOMAIN

DEVELOPER'S GUIDE

Last Updated: 10/01/2018

Submit Feedback: Dev Portal Slack channel [#devportal](#)

If you've read [Using NDe APIs](#) and [Get Started With Checkout](#), this guide provides the additional details necessary to integrate with the Buy Domain APIs.

API at a Glance

Topic	Details
Use these APIs to	- Add Nike products or gift cards to a shopping cart or Wish List and get pricing - Get available shipping options with pricing> - Preview & validate a checkout - Submit a checkout for fulfillment - More...
Who calls this API	SNKRS app (Web/iOS/Android), Nike+ app (iOS/Android), Nike.com
Version	v1, v2
SLA	- Carts - Response Time: 1000ms, Requests Per Second: 300 - Cart Reviews - Response Time: 150 ms, Requests Per Second: 200 - Wish Lists - Response Time: 160 ms, Requests Per Second: 80 - Shipping Options - Response Time: 100 ms, Requests Per

Topic	Details
	Second: 1000 Checkouts - Response Time: 300 ms, Requests Per Second: 600
Domain	Commerce
Prerequisites	API Registration JWT for <i>Launch Checkout Submit</i> only
Contact Info	Slack: #cic-order-integration Confluence: CiC Order Capture Product Owners: Dan Robertson, Saket Shrivastava, Sree Krishna (Carts v1/v2)

TIP: SLAs vary per endpoint for many of the Buy APIs. In the figures listed above, the highest response time and lowest requests per second *for the API overall* were shown. Ask the Product Owner to get specific SLA info for each endpoint.

Terms of Service

It is recommended that you send a caller ID header in every request to this API to help troubleshoot unexpected responses. See the Registration section of the [Using NDe APIs](#) guide on how to create and register your caller ID.

Authentication

Access Tokens

Most calls through the Nike API gateway (api.nike.com) require an access token be sent in the request header. This allows Nike to verify that your app is authorized to perform the action on behalf of the user.

Access tokens are obtained by calling Nike Unite services prior to calling the API which you ultimately want to reach.

To find out more on how to call Unite services to obtain access tokens, see the Authorization section of the [Using NDe APIs](#) guide.

JSON Web Token

Only one endpoint in the Buy APIs, *Launch Checkout Submit*, requires the additional authorization of a JSON Web Token (JWT). For more, see the JWT section of [Using NDe APIs](#).


Use Cases

I want to...	API(s) to use
Manage a user's shopping cart, get product pricing	Carts API
Check the 'buyability' of a product	Carts API
Augment a cart with estimated taxes and delivery dates	Cart Reviews API
Manage a user's Wish Lists (member/employee only), get product pricing	Wish Lists API
Get available shipping methods,	Shipping Options API

I want to...	API(s) to use
estimated delivery dates	
Validate product and shipping info. Get product, tax, and shipping prices	Checkouts API
Submit a checkout for fulfillment	Checkouts API

Example Implementation Diagram

Here is an example of a sequence of API calls to execute an entire checkout:

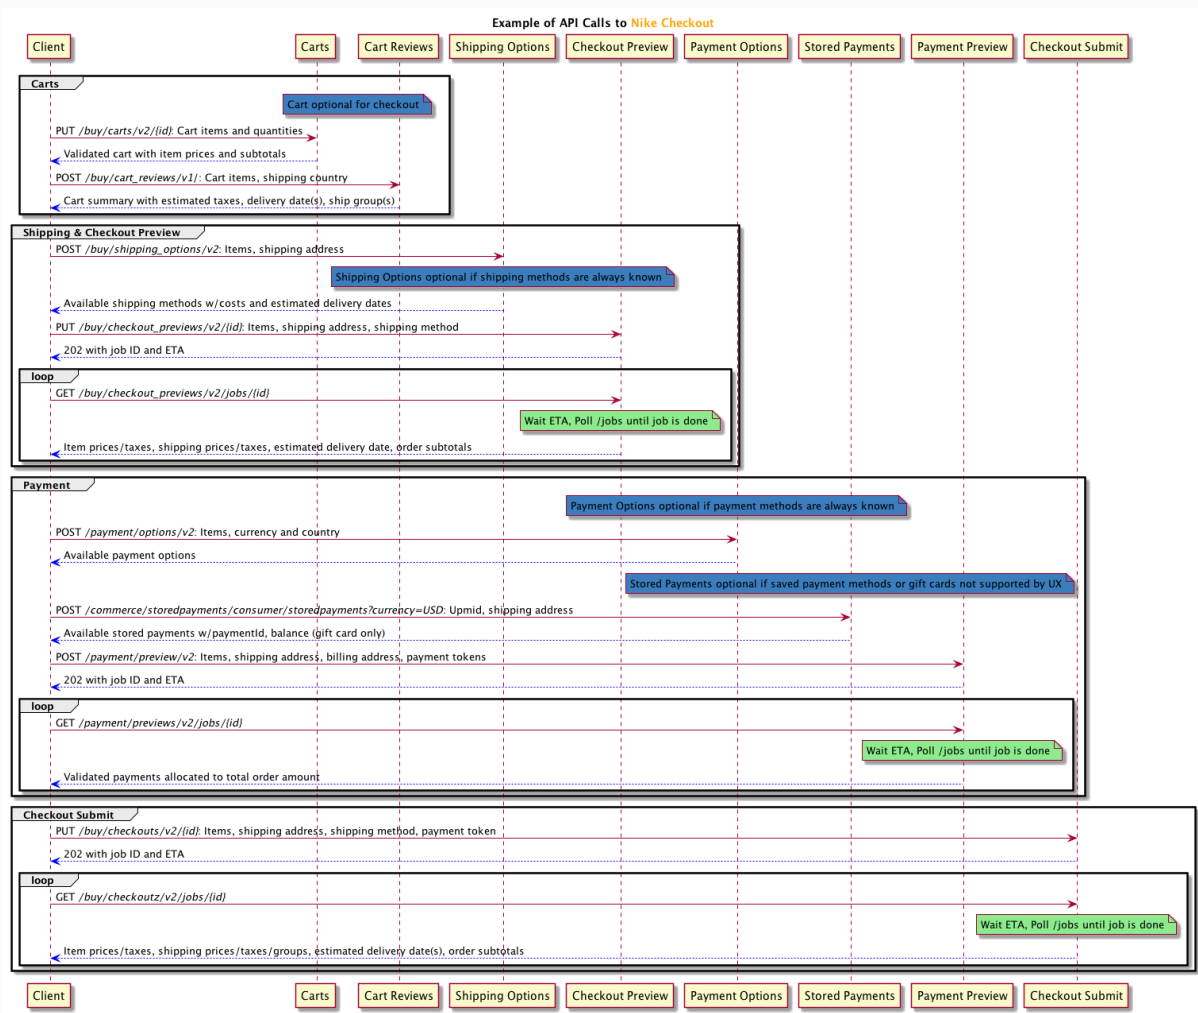

Sample Requests

The sample requests included throughout this guide often contain unique IDs and access tokens that are spent/expired in the Production environment, so you will not be able to copy and use them as-is for testing purposes. However, since other values in the request may still be valid and thus reusable, it may be convenient for you to copy the samples and change only the spent/expired values.

User Types

The Nike Checkout APIs support 3 distinct user types:

- Member: user has logged in with their Nike+ account credentials
- Guest: user has not logged in (anonymous user)
- Employee: user is an employee of Nike or a subsidiary and has logged in with swoosh.com credentials (also known as Swoosh user type)

Depending on user type, certain aspects of the calls that you make to the Checkout APIs might need to be modified. This will be called out whenever applicable in the detailed endpoint sections which follow in this guide. Also, consider that not all user types might apply to your app (e.g. you might only support Members).

See the User Types section of the [Using NDe APIs](#) guide for more information.

Idempotence

[Idempotence](#) means that the result of a successful request is independent of the number of times it is executed. What does that mean for the Checkouts API? Let's break it down.

Each PUT request to *Request Checkout Preview* and *Request a Checkout Submit* includes 1) a client-generated UUID (checkout ID) in the URL and 2) an Entity in the request body.

There are 4 possible scenarios:

Scenario	Result
UUID and Entity are new to the system (base use case)	Client receives HTTP 202 response, request processed as new job
UUID and Entity match a prior request	Client receives the exact same HTTP 202 response from the prior request (no new job processed)
UUID used previously, Entity is new	Client receives HTTP 409 error response (no new job processed)
UUID is new, Entity previously submitted under another UUID	Client receives HTTP 202 response, request processed as new job

TIP: For more, see the Idempotence Guarantee section of the [Using NDe APIs](#) guide.

API Endpoint Quick Reference

API Name	Endpoint Name	HTTP Method	URI Path
Carts v1	Create or Update a Cart	PUT	/buy/carts/v1/{id}{?fields}
Carts v1	Retrieve Carts by ID	GET	/buy/carts/v1/{id}/{?fields}
Carts v1	Retrieve Carts by Filter	GET	/buy/carts/v1/{?filter,fields}
Carts v1	Delete All Items from a Cart	DELETE	/buy/carts/v1/{id}

API Name	Endpoint Name	HTTP Method	URI Path
Carts v2	Create or Update a Cart by Cart ID	PUT	/buy/carts/v2/{id}
Carts v2	Modify a Cart by Cart ID	PATCH	/buy/carts/v2/{id}
Carts v2	Delete All Items from a Cart by Cart ID	DELETE	/buy/carts/v2/{id}
Carts v2	Get a Cart by Cart ID	GET	/buy/carts/v2/{id}
Carts v2	Get a Cart by Filter Criteria (Query Param)	GET	/buy/carts/v2/?filter
Carts v2	Create or Update a Cart by Filter Criteria	PUT	/buy/carts/v2/{country}/{brand}/{channel}
Carts v2	Modify a Cart by Filter Criteria	PATCH	/buy/carts/v2/{country}/{brand}/{channel}
Carts v2	Get a Cart by Filter Criteria (Path Param)	PATCH	/buy/carts/v2/{country}/{brand}/{channel}
Carts v2	Delete all Items from a Cart by Filter Criteria	DELETE	/buy/carts/v2/{country}/{brand}/{channel}
Cart Reviews	Augment a Cart	POST	/buy/cart_reviews/v1
Wish Lists	Create or Update a List	PUT	/buy/lists/v1/{id}{?fields}

API Name	Endpoint Name	HTTP Method	URI Path
Wish Lists	Delete a List	DELETE	/buy/lists/v1/{id}
Wish Lists	Retrieve a List by ID	GET	/buy/lists/v1/{id}{?fields}
Wish Lists	Retrieve Lists for Authenticated User	GET	/buy/lists/v1{?filter,fields}
Wish Lists	Add Item to List	PUT	/buy/list_items/v1/{id}{?fields}
Wish Lists	Remove Item from List	DELETE	/buy/list_items/v1/{id}
Wish Lists	Retrieve Items by List	GET	/buy/list_items/v1{?filter, anchor, count, fields, sort}
Wish Lists	Retrieve Item by ID	GET	/buy/list_items/v1/{id}{?fields}
Shipping Options	Shipping Options	POST	/buy/shipping_options/v2
Checkouts	Request Checkout Preview	PUT	/buy/checkout_previews/v2/{id}
Checkouts	Retrieve Checkout Preview Job	GET	/buy/checkout_previews/v2/jobs/{id}
Checkouts	Retrieve Checkout Preview Results	GET	/buy/checkout_preview_results/v2/{id}

API Name	Endpoint Name	HTTP Method	URI Path
Checkouts	Request Checkout Submit	PUT	/buy/checkouts/v2/{id}
Checkouts	Retrieve Checkout Submit Job	GET	/buy/checkouts/v2/jobs/{id}
Checkouts	Retrieve Checkout Results	GET	/buy/checkout_results/v2/{id}
Checkouts	Request Checkout Submit (Launch)	PUT	/buy/launch_checkouts/v2/{id}

Making Your First API Request

For your first API request, send a request to the *Create or Update a Cart by Cart ID* endpoint of the Carts v2 API and create your first cart.

1. Gather Data Needed For The Request

Our example endpoint, *Create or Update a Cart by Cart ID*, only supports the HTTP PUT method. To create a cart, send a PUT request with (at minimum) the required request headers and the required parts of the request body.

First, read the [Using Carts](#) section of this document to learn more about the required parts of this request.

Assume that user for whom you are creating the cart is a Nike+ member who has logged in with their Nike+ credentials. This indicates which request headers are required.

For the request headers, the following considerations apply (at minimum):

1. Always send `application/json` in both the **Accept** and **Content-Type** headers.
2. Send the user's access token as obtained from Unite services in the **Authorization** header.

```
Accept: application/json
Content-Type: application/json
Authorization: Bearer {your access token}
```

For the request body, the following considerations apply (at minimum):

1. Send a UUID **that you have created** in the **id** field, in this case 61bc115b-16e5-43b5-bcaf-dd6168c543f8. This is the cart ID.
2. Send the country code of the country where the user is shopping in the **country** field, in this case, US. Send NIKE in the **brand** field.
3. Send a UUID **that you have created, different from above** in the items.**id** field. This is the identifier for the line item in the cart. If you include multiple line items, each must have a unique identifier.
4. Send a valid SKU identifier obtained from the Merchandised Products SKU service in the items.**skuId** field.

```
{
  "id": "61bc115b-16e5-43b5-bcaf-dd6168c543f8",
  "country": "US",
  "brand": "NIKE",
  "items": [
    {
      "id": "9992b8cb-e4ac-42af-
a8bb-3454d8509d32",
      "skuId":
"1f6b36bd-61c0-5eb5-b9f0-8643e1ebae37",
      "quantity": 1
    }
  ]
}
```

```
}
```

2. Create the URL

The [API.md](#) states that the required URL format is `/buy/carts/v2/{id}`.

To build the full URL, prepend `https://api.nike.com` to the above path, then append **id** after “v2”. The **id** is the cart identifier you passed in the request body.

The complete URL is then `https://api.nike.com/buy/carts/v2/61bc115b-16e5-43b5-bcaf-dd6168c543f8`.

3. Execute the request

Execute the request with a cURL command. Using the values gathered in steps 1 and 2, the final cURL command is:

```
curl -X PUT \
  https://api.nike.com/buy/carts/v2/
61bc115b-16e5-43b5-bcaf-dd6168c543f8 \
  -H 'Accept: application/json' \
  -H 'Authorization: Bearer {your access
token}' \
  -H 'Cache-Control: no-cache' \
  -H 'Content-Type: application/json' \
  -d '{
    "id": "61bc115b-16e5-43b5-bcaf-
dd6168c543f8",
    "country": "US",
    "brand": "NIKE",
    "items": [
      {
        "id": "9992b8cb-e4ac-42af-
```

```

a8bb-3454d8509d32",
    "skuId":
"1f6b36bd-61c0-5eb5-b9f0-8643e1ebae37",
    "quantity": 1
}

```

4. Parse the Response

Assuming no errors, you will receive a response body similar to the following:

```

{
  "id": "61bc115b-16e5-43b5-bcaf-
dd6168c543f8",
  "country": "US",
  "currency": "USD",
  "brand": "NIKE",
  "totals": {
    "subtotal": 130,
    "discountTotal": 0,
    "valueAddedServicesTotal": 0,
    "total": 130,
    "quantity": 1
  },
  "items": [
    {
      "id": "9992b8cb-e4ac-42af-
a8bb-3454d8509d32",
      "skuId":
"1f6b36bd-61c0-5eb5-b9f0-8643e1ebae37",
      "quantity": 1,
      "priceInfo": {
        "price": 130,

```

Some values in the response are exactly what you sent in the request, but the values in the **totals** section provide a cart pricing summary and the values in items.**priceInfo** section provide the current item pricing details.

Another Example

For your next request, send a GET request to the *Get a Cart for a Cart ID* endpoint of the Carts v2 API, using the cart ID that you created in the previous step.

Refer to the [Using Carts v2](#) section of this document to find the required parts of this request.

For the request headers, use the same headers you used in the previous step.

NOTE: There is no request body needed for a GET request.

The complete URL is `https://api.nike.com/buy/carts/v2/61bc115b-16e5-43b5-bcaf-dd6168c543f8`. Note that the same cart ID that you created for the previous PUT request is at the end of the URL.

The final cURL is:

```
"resourceType": "cart"
}
curl -X GET \
  https://api.nike.com/buy/carts/v2/
61bc115b-16e5-43b5-bcaf-dd6168c543f8 \
  -H 'accept: application/json' \
  -H 'authorization: Bearer {your access
token}' \
  -H 'cache-control: no-cache' \
  -H 'content-type: application/json'
```

The response body from the *Get a Cart for a Cart ID* endpoint is the same as *Create or Update a Cart by Cart ID*, so the process of parsing it is also the same.

Using Carts v1

NOTE: Carts v1 has been replaced with Carts v2 and will be deprecated. Use Carts v2 for any new integrations. For more info, see the [Using Carts v2](#) section of this document.

- [Carts v1 Overview](#)
- [Create or Update a Cart](#)
- [Retrieve Carts by ID](#)
- [Retrieve Carts by Filter](#)
- [Delete All Items from a Cart](#)
- [Carts v1 Error Handling](#)

Carts v1 Overview

In e-commerce, the cart (also called basket or bag) allows customers to collect and compare items that they are considering for purchase before starting the checkout process. At Nike, a cart contains items, quantities, and associated value-added services (if any).

The Carts API helps you manage carts. It provides storage, validation, and pricing augmentation for up to 100 Nike products or value-added services in each cart.

More Facts About Carts

- Cart item count and/or cart item quantity totals can be calculated by executing a GET request and then summing the values.
- Cart pricing summary can be obtained by executing a PUT or GET request and will include totals only for “buyable” cart items.
- Carts can be stored long-term but not indefinitely; if unmodified for over 180 days, a cart will be automatically removed from storage.
- To check the buyability of cart items, execute either a PUT cart or GET cart request and interrogate the response body’s errors object. Item errors will be linked by cart item ID.
- Item pricing can be obtained by a PUT cart or GET cart request wherever available (for example, a non-buyable product will still have a price, while an invalid item skuld will not).

- PUT cart requests fail when cart items are invalid, non-buyable, or if more quantity was requested than available and/or allowed.
- All filter values are case-sensitive.
- Adding an item to a cart does not reserve the inventory for purchase.
- When using the optional channel filter in GET cart requests, carts for which no channel value was included in the preceding PUT request will not be returned.

TIP: It is a best practice to send all of the optional request headers and request body fields, if the data is available, to avoid unexpected responses.

The following sections describe each endpoint of the Carts API in detail:

Create or Update a Cart

Create a cart by executing an HTTP PUT request with a cart ID in **UUID** format **that you have generated**. Update a cart with PUT request using an existing cart ID.

Note: HTTP PATCH is not supported; for each 'update cart' operation, send the entire cart contents again.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/carts/v1/{id}{?fields}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier for the cart	string	Required
fields	Query	Fields to be included in the response (all fields included by default)	string	Optional

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only	X	X	X

Header Name	Description	Member	Guest	Employee
	value allowed			
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	

TIP: For the Authorization header, use the token for the user's login session that you obtained from Nike Unite/Identity, prefixed by ****Bearer **** (note the single space after Bearer). This is necessary for Nike to verify that you are authorized to perform the

requested operation on behalf of the user.

Request Body

Element Name	Required?	Description
id	Required	Unique client-generated cart identifier as UUID
country	Required	ISO 3166 country code, e.g. US. This is typically the same as the country of the user's shipping address.
currency	Required	ISO 4217 currency code, e.g. USD
brand	Required	Nike brand name associated with the cart, only NIKE is supported
items	Required	Array containing list of item objects, with the following required fields:
items. quantity	Required	Unit quantity (integer) of the SKU.
items. id	Required	Unique identifier of the line item in the request. You create

Element Name	Required?	Description
		this value. If the response contains errors, it will include a reference to the identifier of the line item having the error.
items. skuld	Required	Stock Keeping Unit (SKU) unique identifier of the product, as obtained from Nike Product services.
channel	Optional	Sales channel of the shopping cart, only NIKECOM is supported.
valueAddedServices	Optional	List of value-added service (VAS) line items. One or more VAS line items can be associated with a Nike product (i.e. skuld). Examples of VAS are a customization service for a shoe or a gift-wrapping service.
valueAddedServices. id	Optional	Unique identifier for the VAS.
valueAddedServices. Instruction.id	Optional	Instruction unique identifier for the value-added service, related to the various service domains, e.g. design id for Nike iD

Element Name	Required?	Description
		customization.
valueAddedServices.Instruction.type	Optional	Instruction Type, e.g. customization/nike_id (only one currently available), customization/my_print, customization/gift_card, buy/gift_wrap, buy/gift_message.

TIPS:

- ✓ For the list of supported country code and currency code combinations, see [here](#).
- ✓ Use the same brand value for all calls for a particular cart, else you will get a 409 Conflict error when the value varies from the initial PUT.
- ✓ Use the same channel value for all calls for a particular cart, else you will get a 409 Conflict error when the value varies from the initial PUT.
- ✓ To retrieve VAS data to include in your checkout request, call the Merchandised Value Added Services endpoints of the

Merchandised Products API. See the [Merchandised Products API Developer's Guide](#) for more information.

Sample *Create or Update Cart* Request Body:

```
{
  "id":
  "9af84d4b-6alf-4899-af57-b4379f966913",
  "country": "US",
  "currency": "USD",
  "brand": "NIKE",
  "channel": "NIKECOM",
  "items": [
    {
      "id": "9892b8cb-e4ac-42af-
a8bb-3454d8509d32",
      "skuId":
      "d3d15345-63e6-4cf9-9135-c2beacbbe352",
      "quantity": 2,
      "valueAddedServices": [
        {
          "id":
          "88d0475d-30e5-4c2f-9a87-7a31938f8ace",
          "instruction": {
            "id": "2027261230",
            "type": "customization/nike_id"
          }
        }
      ]
    }
  ]
}
```

Response Body

Sample *Create or Update Cart* response body without errors:
"ac9fd9d3-3815-44ce-8b1f-18cce7abd488",

```
    "instruction": {
    {
        "id": "1027551960",
        "id": "3dee558b-82e7-49aa-c55e-custimization/nike_id"
a9f3-46ee294ca7a0",
        "country": "US",
        "currency": "USD",
        "brand": "NIKE",
        "channel": "NIKECOM",
        "totals": {
            "id": "e945e0fd-
cdcfcf-400559fe41302b9d8235c",
            "discountTotal": 0,
            "valueAddedServicesTotal": 0,
            "total": 190,
            "quantity": 1
        }
    }
    "items": [
        {
            "id": "9892b8cb-e4ac-42af-
a8bb-3454d8509d32",
            "skuId":
"2f127fe4-78d4-5042-a944-b8a4938aff10",
            "quantity": 1,
            "valueAddedServices": [],
            "priceInfo": {
                "price": 190,
                "subtotal": 190,
                "discount": 0,
```

Some of the values in the response are exactly as sent in the request, but the values in the **totals** section provides a cart pricing summary and the **priceInfo** section provides the latest item pricing details. "priceSnapshotId":
 "a1f2f7ec-4faf-41d3-a144-d2da48c07bbe"

Retrieve Carts by ID

Get the details of a cart using the ID (in **UUID** format) that **you previously created**. The default HTTP 200 response includes a list of items in a cart with prices, quantities, discounts, value-added services, and totals. You can also choose which fields you want to receive in the response, using the fields query parameter in the URL.

3dee558b-82e7-49aa-a9f3-46ee294ca7a0"

TIP: Reads against this endpoint are **eventually consistent**. Since the PUT endpoint responds with the same body as this endpoint, consume the response body from the PUT for best performance to avoid polling.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/carts/v1/{id}/{?fields}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-	string	Required

Parameter	Type	Description	Data Type	Required?
		generated identifier for the cart		
fields	Query	Fields to be included in the response (all fields included by default)	string	Optional

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X

Header Name	Description	Member	Guest	Employee
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	

Request Body

There is no body on a GET request.

Response Body

See the response body from the *Create or Update Cart* endpoint as it is the same as this endpoint.

Retrieve Carts by Filter

Retrieve a user's cart(s) by country, brand, and (optionally) channel. The default format of each

cart in the HTTP 200 response is the same as doing a GET by ID.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/carts/ v1/{?filter,fields}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	Query	Values by which to limit the cart results: country: ISO 3166-1 two-letter code Required brand: NIKE brand name, only NIKE is supported Required channel: sales channel, only NIKECOM is supported, optional	string	Required
fields	Query	Fields to be	string	Optional

Parameter	Type	Description	Data Type	Required?
		included in the response (all fields included by default)		

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer	X		X

Header Name	Description	Member	Guest	Employee
	{ token } indicating the customer is logged in			
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	

Request Body

There is no body on a GET request.

Response Body

See the response body from the *Create or Update Cart* endpoint as it is the same as this endpoint.

Delete All Items From A Cart

Delete all items in a cart by its ID and receive a HTTP 204 response if successful. Subsequent calls to GET that same cart ID will return a HTTP 404 status ('Not Found').

NOTE: The delete operation is optional; carts will automatically purge from storage after 180 days of inactivity.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
DELETE	/buy/carts/v1/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier for the cart	string	Required

Request Headers

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/	X	X	X

Header Name	Description	Member	Guest	Employee
	json is only value allowed			
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	

Request Body

There is no body on a DELETE request.

Response Body

The HTTP 204 response (successful delete) returns an empty response body.

Carts v1 Error Handling

Following is a summary of the errors and warnings that can come back in responses from the Carts API:

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
400	GET, PUT	REQUEST_INVALID	Request was structurally invalid, such as malformed JSON.	Check the URL, syntax of the request body, or item quantity for validity.
400	PUT	MISSING_REQUIRED	Required field(s) missing in the request (e.g. cart ID, country, brand, etc.	Retry the request while supplying the missing field/value
400	PUT	FIELD_INVALID	Value of field(s) in the request not valid (e.g.	Check the indicated field/value. Correct and

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			>100 items, unsupported country code and/or brand, etc.).	retry
400	PUT	INVALID_SKU	Item SKU not found or not valid for the country.	Check the skuld. Correct and retry.
400	GET, PUT	PRODUCT_NOT_BUYABLE	Item sku not 'buyable', either due to being inactive, being outside sell dates, or launch product purchase being attempted outside of launch.	Notify user as necessary
400	PUT	ITEM_QUANTITY_LIMIT	Quantity limit (for single cart) exceeded for the item sku.	Notify the user as necessary
500	GET, PUT,	SYSTEM_E	Error	

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
	DELETE	RROR	occurred processing the request.	
401	GET, PUT, DELETE	35	The operation was requested by an unauthorized user.	Check that your access token was sent in Authorization request header in format Bearer {token} or that the token has not expired.
404	GET	n/a, no request body	The operation was not requested by the cart owner or ownership was not provided.	Check that the access token sent in the request header was for the correct user.
404	GET	n/a, no request body	Cart just created or cart has expired	If cart was just created, try GET again later or do a PUT. If cart was created >

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
				180 days ago, create a new cart.
409	PUT	n/a, no request body	Cart ID already exists and is associated with a different user ID, country or brand.	Choose a unique cartId and retry.
200	GET, PUT	PRICE_CHANGED	This is a <i>warning</i> only that the price of an item or value added service has changed since the item was added to the cart.	Notify the user as necessary

Example error response bodies:

1. Response for a request that was missing the required field 'id':

```
{
```

```
"errors": [  
  {  
    "code": "MISSING_REQUIRED",  
    "message": "Required field",  
    "field": "id"  
  }  
]  
}
```

2. Response for a request that included an invalid country code:

```
{  
  "errors": [  
    {  
      "code": "FIELD_INVALID",  
      "message": "Invalid field",  
      "field": "country"  
    }  
  ]  
}
```

3. Response for a request where the item quantity value exceeded the allowed limit:

```
{  
  "errors": [  
    {  
      "code": "ITEM_QUANTITY_LIMIT",  
      "message": "Product item quantity
```

```
limit exceeded.
skuId=2f127fe4-78d4-5042-a944-b8a4938aff10,
productId=636ae3f2-3d44-5751-9200-f6edfc5f026
4, itemQuantity=101,
accumulatedQuantity=101, quantityLimit=1",
      "field": "$.items[?(@.id ==
'9892b8cb-e4ac-42af-a8bb-3454d8509d32')]"
    }
  ]
}
```

4. Response for a request that included an invalid skuId:

```
{
  "errors": [
    {
      "code": "INVALID_SKU",
      "message": "Invalid skuId",
      "field": "sku.id"
    }
  ]
}
```

Using Carts v2

- [Carts v2 Overview](#)
- [Create or Update a Cart by Cart ID](#)

- [Modify a Cart by Cart ID](#)
- [Delete All Items from a Cart by Cart ID](#)
- [Get a Cart for a Cart ID](#)
- [Get a Cart by Filter Criteria \(Query Param\)](#)
- [Create or Update a Cart by Filter Criteria](#)
- [Modify a Cart by Filter Criteria](#)
- [Get a Cart by Filter Criteria \(Path Param\)](#)
- [Delete All Items from a Cart by Filter Criteria](#)
- [Carts v2 Error Handling](#)

Carts v2 Overview

Manage a user's shopping cart by either the cart ID or by a set of filter criteria.

Create or Update a Cart by Cart ID

Create a cart by executing an HTTP PUT request with a cart ID that you have generated.

Update a cart with a PUT request using an existing cart ID.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/carts/v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier for the cart	string	Required

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user,		X	

Header Name	Description	Member	Guest	Employee
	validated by the Edge router and passed through to the service			
x-nike-visitid	Count of visits by the guest user		X	
appld	Unique application identifier of the calling app		X	

TIP: For the Authorization header, use the token for the user's login session that you obtained from Nike Unite/Identity, prefixed by ****Bearer **** (note the single space after Bearer). This is necessary for Nike to verify that you are authorized to perform the requested operation on behalf of the user.

Request Body

Element Name	Type	Description	Required?
id	string	Shopping cart unique identifier (UUID), created by client	Required
country	string	ISO 3166-1 two letter country code, e.g. 'US'	Required
brand	string	Brand name associated with the cart	Required
items	array	List of items	Required
items.id	string	Shopping cart line item unique identifier, created by client. If the response contains errors, it will reference the identifier of the line item with the error	Required
items.skuld	string	Product SKU (Stock Keeping Unit) unique identifier	Required
items.quantity	integer	Unit quantity of the SKU	Required
items.giftCard	object	The gift card to	Optional

Element Name	Type	Description	Required?
		be added to cart	
items.giftCard. amount	number	Amount to be added to the purchased gift card	Required
items. offer	string	Item offer identifier	Optional
items. priceInfo	object	Object containing product pricing information	Optional
items.priceInfo. price	number	Retail cost	Required
items.priceInfo. total	number	The total price: retail price times quantity, less any discounts	Required
items.priceInfo. currency	string	Currency code following the ISO 4217 standard. Ex: US currency code is 'USD'	Optional
items. recipient	object	The person to which items are to be shipped. Applies to physical gift cards	Optional
items.recipient. firstName	string	First name of the person	Required

Element Name	Type	Description	Required?
		receiving the items. The name must be at least one character and non-whitespaces (e.g. " " is invalid)	
items.recipient. lastName	string	Last name of the person receiving the items. The name must be at least one character and non-whitespaces (e.g. " " is invalid).	Required
items.recipient. firstName	string	Alternate first name of the person receiving the items. This will typically be used in locales such as Japan where we support two versions of names.	Optional
items.recipient. lastName	string	Alternate last name of the person receiving the items. This will typically be	Optional

Element Name	Type	Description	Required?
		used in locales such as Japan where we support two versions of names.	
items.recipient. givenName	string	Given name of the person receiving the items.	Optional
items.recipient. middleInitial	string	Middle initial of the person receiving the items.	Optional
items.recipient. middleName	string	Middle name of the person receiving the items.	Optional
items. shippingAddress	object	The address to which items are to be shipped. Applies to physical gift cards	Optional
items.shippingAddress. country	string	Shipping address country. 2-alpha character ISO 3166 country code.	Required
items.shippingAddress. address	string	Shipping address line	Optional

Element Name	Type	Description	Required?
1		one.	
items.shippingAddress. address2	string	Shipping address line two.	Optional
items.shippingAddress. address3	string	Shipping address line three.	Optional
items.shippingAddress. city	string	Shipping address city.	Optional
items.shippingAddress. county	string	Shipping address county. This will typically be used for non-US addresses to hold specific regional data.	Optional
items.shippingAddress. email	string	Email address.	Optional
items.shippingAddress. postalCode	string	Shipping address postal code. In the US, this is the 5 digit or the 5 plus 4 digit zip code.	Optional
items.shippingAddress. state	string	Shipping address state. This should be the ISO 3166-2 subdivision code. For the	Optional

Element Name	Type	Description	Required?
		US, this is the 2-alpha state code as defined in ISO 3166-2:US.	
items. valueAddedServices	array	List of value-added services (VAS). Examples of VAS are a customization service for a shoe or a gift-wrapping service	Optional
items.valueAddedServices. id	string	VAS unique identifier.	Optional
channel	string	Sales channel of the shopping cart	Optional
links. self	object	Object containing self-link	Optional
links.self. ref	string	Link to this resource, itself	Required
resourceType	string	The type of resource the document is modeling	Optional

TIPS:

- ✓ For the list of supported

country code and currency code combinations, see [here](#).

✓ Use the same brand and channel values for all calls for a particular cart, else you will get a 409 Conflict error when the value varies from the initial PUT.

✓ To retrieve VAS data to include in your checkout request, call the Merchandised Value Added Services endpoints of the Merchandised Products API. See the [Merchandised Products API Developer's Guide](#) for more information.

Sample *Create or Update Cart by Cart ID* Request Body:

```
{
  "id": "61bc115b-16e5-43b5-bcaf-dd6168c543f8",
  "country": "US",
  "brand": "NIKE",
  "items": [
    {
      "id":
"05398886-5d3d-548d-937d-953d239d3221",
      "skuId": "87849a71-8d0a-5d62-9dbe-c2662c049088",
```

```
        "quantity": 1
      }
    ]
  }
```

Response Body

Some of the values in the response are exactly as sent in the request, but the values in the **totals** section provides a cart pricing summary and the **priceInfo** section provides the latest item pricing details.

Element Name	Type	Description	Required?	
	id	string	Shopping cart unique identifier	Required
	country	string	2-alpha character ISO 3166 country code	Required
	currency	string	Currency code following the ISO 4217 standard, e.g. US currency code is 'USD'	Required
	brand	string	NIKE brand	Required

Element Name	Type	Description	Required?	
	promotionCodes	array<string>		Optional
	channel	string	Sales channel of the shopping cart	Optional
	totals.subtotal	number	Subtotal of the item costs for all items	Required
	totals.valueAddedServicesTotal	number	Total of value added services on the items	Required
	totals.discountTotal	number	Total of all discounts applied to the cart	Required
	totals.total	number	Total price of the entire item or cart, item costs less any discounts	Required
	totals.quantity	integer	Cart quantity	Required
	items	array	List of items	Required
	items.id	string	Shopping cart item	Required

Element Name	Type	Description	Required?	
			unique identifier	
	items. skuld	string	Product Stock Keeping Unit (SKU) unique identifier	Required
	items. quantity	integer	Line item quantity	Required
	items. giftCard	object	The gift card to be added to cart	Optional
	items.giftCard. amount	number	Amount to be added to the purchased gift card	Required
	items. offer	string	The unique id (offer id) of the exclusive access offer	Optional
	items. pricingInfo	object		Optional
	items.pricingInfo. price	number	Price of the cart item	Required
	items.pricingInfo. subtotal	number	Item subtotal, the sku price	Required

Element Name	Type	Description	Required?	
			multiplied by quantity	
	items.priceIn fo. discount	number	Item discount	Required
	items.priceIn fo. valueAddedServices	number	The total cost of the value added services for the item	Required
	items.priceIn fo. total	number	Total price of the item and value added services, less any discounts	Required
	items.priceIn fo. priceSnapshotId	string	The price's snapshot in time unique identifier	Required
	items.priceIn fo. fullPrice	number	fullPrice from merch price service v2	Optional
	items.priceIn fo. msrp	number	msrp price from merch price service v2	Optional
	items. recipient	object	The person to which	Optional

Element Name	Type	Description	Required?	
			items are to be shipped. Applies to physical gift cards	
	items.recipient. firstName	string	First name of the person receiving the items. The name must be at least one character and non-whitespaces (e.g. " " is invalid)	Required
	items.recipient. lastName	string	Last name of the person receiving the items. The name must be at least one character and non-whitespaces (e.g. " " is invalid).	Required
	items.recipient. altFirstName	string	Alternate first name of	Optional

Element Name	Type	Description	Required?	
	me		the person receiving the items. This will typically be used in locales such as Japan where we support two versions of names.	
	items.recipient.altLastName	string	Alternate last name of the person receiving the items. This will typically be used in locales such as Japan where we support two versions of names.	Optional
	items.recipient.givenName	string	Given name of the person receiving the items.	Optional
	items.recipient.middleInitial	string	Middle initial of the person receiving the	Optional

Element Name	Type	Description	Required?	
			items.	
	items.recipient. middleName	string	Middle name of the person receiving the items.	Optional
	items. shippingAddress	object	The address to which items are to be shipped. Applies to physical gift cards	Optional
	items.shippingAddress. country	string	Shipping address country. 2-alpha character ISO 3166 country code.	Required
	items.shippingAddress. address1	string	Shipping address line one.	Optional
	items.shippingAddress. address2	string	Shipping address line two.	Optional
	items.shippingAddress. address3	string	Shipping address line three.	Optional

Element Name	Type	Description	Required?	
	items.shippingAddress.city	string	Shipping address city.	Optional
	items.shippingAddress.county	string	Shipping address county. This will typically be used for non-US addresses to hold specific regional data.	Optional
	items.shippingAddress.email	string	Email address.	Optional
	items.shippingAddress.postalCode	string	Shipping address postal code. In the US, this is the 5 digit or the 5 plus 4 digit zip code.	Optional
	items.shippingAddress.state	string	Shipping address state. This should be the ISO 3166-2 subdivision	Optional

Element Name	Type	Description	Required?	
			code. For the US, this is the 2-alpha state code as defined in ISO 3166-2:US.	
	items. valueAddedServices	array	List of value added services	Optional
	items.valueAddedServices. id	string	Value added service unique identifier	Required
	items.valueAddedServices. instructionId	string	Instruction unique identifier for the value added service, related to the various service domains. Example would be a design id for Nike iD customization	Required
	items.valueA	string	Instruction	Required

Element Name	Type	Description	Required?	
	addedServices.instruction. type		Type, e.g. customization/nike_id (only one currently available), customization/my_print, customization/gift_card, buy/gift_wrap, buy/gift_message	
	items.valueAddedServices. priceInfo	object	Object containing pricing information	Optional
	items.valueAddedServices. priceInfo.price	number	Price of the value added service	Required
	items.valueAddedServices. priceInfo.discount	number	Value added service discount	Required
	items.valueAddedServices. priceInfo.total	number	Total price of the value added service, less any	Required

Element Name	Type	Description	Required?	
			discounts	
	items.valueAddedService.priceInfo.priceSnapshotId	string	The price's snapshot in time unique identifier	Required
	errors	array	List of errors in the cart	Optional
	errors. code	string	Code for the error, text based, 'screaming snake-case', e.g. 'FIELD_INVALID'	Required
	errors. message	string	Plain text description of the error	Required
	errors. field	string	The field that has an error	Optional
	warnings	array	List of warnings in the cart	Optional
	warnings. code	string	Code for the warning, text based, 'screaming snake-case',	Required

Element Name	Type	Description	Required?	
			e.g. 'PRICE_CHANGED'	
	warnings. message	string	Plain text description of the warning	Required
	warnings. field	string	The field that has an error	Optional
	links. self	object	Object containing self-link	Optional
	links.self. ref	string	Link to this resource, itself	Required
	resourceType	string	The type of resource the document is modeling, e.g. 'cart'	Optional

Sample *Create or Update Cart by Cart ID* response body without errors:

```
{
  "id": "61bc115b-16e5-43b5-bcaf-dd6168c543f8",
  "country": "US",
  "currency": "USD",
```

```
"brand": "NIKE",
"totals": {
  "subtotal": 200,
  "discountTotal": 0,
  "valueAddedServicesTotal": 0,
  "total": 200,
  "quantity": 1
},
"items": [
  {
    "id":
"05398886-5d3d-548d-937d-953d239d3221",
    "skuId": "87849a71-8d0a-5d62-9dbe-
c2662c049088",
    "quantity": 1,
    "priceInfo": {
      "price": 200,
      "subtotal": 200,
      "discount": 0,
      "valueAddedServices": 0,
      "total": 200,
      "priceSnapshotId":
"04604d61-d5fc-4749-8380-8f720a93def0",
      "msrp": 200,
      "fullPrice": 200
    }
  }
],
"links": {
  "self": {
```

```

    "ref": "/buy/carts/v2/
61bc115b-16e5-43b5-bcaf-dd6168c543f8"
  }
  "resourceType": "cart"
}
```

TIP: Prices and subtotals are recalculated and returned in the response for each type.

Modify a Cart by Cart ID

Create or update a cart by executing a HTTP PATCH request with a Cart ID. Add or remove a line item or promotion code from a user’s cart, or to create or replace the entire cart contents.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PATCH	/buy/carts/v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier for the cart	string	Required

Request Headers

Required request headers:



Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed		X	

Header Name	Description	Member	Guest	Employee
	through to the service			
x-nike-visitid	Count of visits by the guest user		X	
appld	Unique application identifier of the calling app		X	

Request Body

The request must contain at least **ONE OF** the following schemas:

Element Name	Type	Description	Required?	
	op	string	Operation to perform, either 'add' or 'replace' is allowed	Required
	path	string	JSON Pointer path, only '/items' is allowed	Required
	value.id	string	Shopping cart item unique identifier	Required

Element Name	Type	Description	Required?	
	value. skuld	string	Product SKU unique identifier	Required
	value. quantity	integer	Number of units to be purchased	Required
	value. offer	string	Item offer identifier	Optional
	value. valueAddedServices	array	List of value added services	Optional
	value.valueAddedServices. id	string	Value added service unique identifier	Required
	value.valueAddedServices. instruction	object	Line item to add, update or remove.	Optional
	value.valueAddedServices.instruction. id	string	Instruction Id, (e.g. Metric Id, VAS UUID, Jersey Id, etc.)	Required
	value.valueAddedServices.instruction. type	string	Instruction type	Required

OR

Element Name	Type	Description	Required?	
	op	string	Operation to perform, only 'remove' is allowed	Required
	path	string	JSON Pointer path, only '/items' is allowed	Required
	value.id	string	Shopping cart item unique identifier	Required

OR

Element Name	Type	Description	Required?	
	op	string	Operation to perform, either 'add' or 'remove' is allowed	Required
	path	string	JSON Pointer path, only '/promotion Codes' is allowed	Required
	value	string	Promotion Code to add	Required

Element Name	Type	Description	Required?	
			or remove	

TIPS:

- ✓ You can include more than one patch operation in a request.
- ✓ Sending “op”: “remove” for a line item will delete the entire quantity previously added under that line item.

Sample *Modify a Cart by Cart ID* Request Body:

```
[
  {
    "op": "add",
    "path": "/items",
    "value": {
      "id": "e945e0fd-
cdcf-4005-9fe4-9302b9d6235c",
      "skuId":
"55b42896-dfc9-5e85-9d92-abd73c05cee5",
      "quantity": 1
    }
  }
]
```

Response Body

Some of the values in the response are exactly as sent in the request, but the values in the **totals** section provides a cart pricing summary and the **priceInfo** section provides the latest item pricing details.

Sample *Modify a Cart by Cart ID* response body without errors:

```
{
  "id": "61bc115b-16e5-43b5-bcaf-
dd6168c543f8",
  "country": "US",
  "currency": "USD",
  "brand": "NIKE",
  "totals": {
    "subtotal": 220,
    "discountTotal": 0,
    "valueAddedServicesTotal": 0,
    "total": 220,
    "quantity": 2
  },
  "items": [
    {
      "id": "e945e0fd-
cdcf-4005-9fe4-9302b9d6235c",
      "skuId":
"55b42896-dfc9-5e85-9d92-abd73c05cee5",
      "quantity": 1,
      "priceInfo": {
        "price": 110,
        "subtotal": 110,
```

```
        "discount": 0,
        "valueAddedServices": 0,
        "total": 110,
        "priceSnapshotId":
"0e4b0318-c3b0-4cf8-a84f-4cae821c9a09",
        "msrp": 110,
        "fullPrice": 110
    }
},
{
    "id": "9992b8cb-e4ac-42af-
a8bb-3454d8509d32",
    "skuId":
"55b42896-dfc9-5e85-9d92-abd73c05cee5",
    "quantity": 1,
    "priceInfo": {
        "price": 110,
        "subtotal": 110,
        "discount": 0,
        "valueAddedServices": 0,
        "total": 110,
        "priceSnapshotId":
"0e4b0318-c3b0-4cf8-a84f-4cae821c9a09",
        "msrp": 110,
        "fullPrice": 110
    }
}
],
"links": {
    "self": {
        "ref": "/buy/carts/v2/
61bc115b-16e5-43b5-bcaf-dd6168c543f8"
    }
}
```

```
},  
"resource": "  
}
```

Delete All Items from a Cart by Cart ID

Delete all items in a cart by its ID and receive a HTTP 204 response if successful. Subsequent calls to GET that same cart ID will return a HTTP 404 status ('Not Found').

NOTE: The delete operation is optional; carts will automatically purge from storage after 90 days of inactivity.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
DELETE	/buy/carts/ v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier for the cart	string	Required

Request Headers

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by		X	

Header Name	Description	Member	Guest	Employee
	the Edge router and passed through to the service			
x-nike-visitid	Count of visits by the guest user		X	
appId	Unique application identifier of the calling app		X	

Request Body

There is no body on a DELETE request.

Response Body

The HTTP 204 response (successful delete) returns an empty response body.

Get a Cart by Cart ID

Get the details of a cart using the Cart ID. The default HTTP 200 response includes a list of items in a cart with prices, quantities, discounts, value-added services, and totals.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/carts/v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier for the cart	string	Required

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the	X	X	X

Header Name	Description	Member	Guest	Employee
	request, application/json is only value allowed			
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	
x-nike-visitid	Count of visits by the guest user		X	
appld	Unique application identifier of the calling		X	

Header Name	Description	Member	Guest	Employee
	app			

Request Body

There is no body on a GET request.

Response Body

See the response body from the [Create or Update Cart by Cart ID endpoint](#) as it is the same for this endpoint.

Get a Cart by Filter Criteria (Query Param)

Retrieve a user's cart by **country**, **brand**, and (optionally) **channel** values sent as `?filter` query parameters. The default format of each cart in the HTTP 200 response is the same as doing a GET by ID.

TIP: For more info on how to use `?filter`, see the query parameters section of [Using NDe APIs](#).

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/carts/v2?filter	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	Query	Values by which to limit the cart results * country: ISO 3166-1 two-letter code Required * brand: Brand name, e.g. 'NIKE' Required * channel: Sales channel, optional	string	Required

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value	X	X	X

Header Name	Description	Member	Guest	Employee
	allowed			
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	
x-nike-visitid	Count of visits by the guest user		X	

Header Name	Description	Member	Guest	Employee
appld	Unique application identifier of the calling app		X	

Request Body

There is no body on a GET request.

Response Body

See the response body from the [Create or Update Cart by Cart ID](#) endpoint as it is the same for this endpoint.

Create or Update a Cart by Filter Criteria

Create or update a cart by executing an HTTP PUT request with country, brand, and (optionally) channel path parameters included. The format of each cart in the HTTP 200 response is the same as doing a PUT by Cart ID.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/carts/v2/{country}/{brand}/{channel}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
country	Path	2-alpha character ISO 3166 country code	string	Required
brand	Path	Brand name of the shopping cart	string	Required
channel	Path	Sales channel of the shopping cart	string	Required

Request Headers

See the required request headers of the [Create or Update a Cart by Cart ID](#) endpoint as it is the same for this endpoint.

Request Body

See the request body format and sample request of the [Create or Update a Cart by Cart ID](#) endpoint as it is the same for this endpoint.

Response Body

See the response body format and sample response of the [Create or Update a Cart by Cart ID](#) endpoint as it is the same for this endpoint.

Modify a Cart by Filter Criteria

Create or update a cart by executing an HTTP PUT request with country, brand, and (optionally) channel path parameters included. The format of each cart in the HTTP 200 response is the same as doing a PUT by Cart ID.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PATCH	/buy/carts/ v2/{country}/{brand}/{channel}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
country	Path	2-alpha character ISO 3166 country code	string	Required
brand	Path	Brand name of the shopping cart	string	Required
channel	Path	Sales channel of the shopping cart	string	Required

Request Headers

See the required request headers of the [Modify a Cart by Cart ID](#) endpoint as it is the same for this endpoint.

Request Body

See the request body format and sample request of the [Modify a Cart by Cart ID](#) endpoint as it is the same for this endpoint.

Response Body

See the response body format and sample response of the [Modify a Cart by Cart ID](#) endpoint as it is the same for this endpoint.

Get a Cart by Filter Criteria (Path Param)

Retrieve a user's cart by **country**, **brand**, and (optionally) **channel** values sent as path parameters. The default format of each cart in the HTTP 200 response is the same as doing a GET by ID.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/carts/ v2?filter	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
country	Path	ISO 3166-1 two-letter	string	Required

Parameter	Type	Description	Data Type	Required?
		code		
brand	Path	Brand name, e.g. 'NIKE'	string	Required
channel	Path	Sales channel	string	Optional

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer	X		X

Header Name	Description	Member	Guest	Employee
	{ token } indicating the customer is logged in			
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	
x-nike-visitid	Count of visits by the guest user		X	
appld	Unique application identifier of the calling app		X	

Request Body

There is no body on a GET request.

Response Body

See the response body from the [Create or Update Cart by Cart ID](#) endpoint as it is the same for

this endpoint.

Delete All Items from a Cart by Filter Criteria

Delete all items in a cart by **country**, **brand**, and (optionally) **channel** values sent as path parameters and receive a HTTP 204 response if successful. Subsequent calls to GET that same cart ID will return a HTTP 404 status ('Not Found').

NOTE: The delete operation is optional; carts will automatically purge from storage after 90 days of inactivity.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
DELETE	/buy/carts/v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier for the cart	string	Required

Request Headers

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by		X	

Header Name	Description	Member	Guest	Employee
	the Edge router and passed through to the service			
x-nike-visitid	Count of visits by the guest user		X	
appld	Unique application identifier of the calling app		X	

Request Body

There is no body on a DELETE request.

Response Body

The HTTP 204 response (successful delete) returns an empty response body.

Carts v2 Error Handling

Following is a summary of the errors and warnings that can come back in responses from the Carts v2 API:

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
400	GET, PUT,	REQUEST_I	Request	Check the

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
	PATCH	NVALID	was structurally invalid, such as malformed JSON.	URL, syntax of the request body, or item quantity for validity.
400	PUT, PATCH	MISSING_REQUIRED	Required field(s) missing in the request (e.g. cart ID, country, brand, etc.	Retry the request while supplying the missing field/value
400	PUT, PATCH	INVALID_VALUE	Value of field(s) in the request not valid (e.g. >100 items, unsupported country code and/or brand, etc.).	Check the indicated field/value. Correct and retry
400	GET, PUT, PATCH	PRODUCT_NOT_BUYABLE	Item sku not 'buyable', either due to being inactive, being outside sell dates, or launch	Notify user as necessary

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			product purchase being attempted outside of launch.	
400	PUT, PATCH	ITEM_QUANTITY_LIMIT	Quantity limit (for single cart) exceeded for the item sku.	Notify the user as necessary
400	PUT, PATCH	INVALID_QUANTITY	The item total requested quantity was too high.	
500	GET, PUT, PATCH, DELETE	SYSTEM_ERROR	Error occurred processing the request.	
503	GET, PUT, PATCH, DELETE	N/A	Service unavailable	
401	GET, PUT, PATCH, DELETE	35	The operation was requested by an unauthorized user.	Check that your access token was sent in Authorization request header in

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
				format Bearer {token} or that the token has not expired.
404	GET	N/A	The operation was not requested by the cart owner or ownership was not provided.	Check that the access token sent in the request header was for the correct user.
404	GET	N/A	Cart just created or cart has expired	If cart was just created, try GET again later or do a PUT. If cart was created > 180 days ago, create a new cart.
409	PUT, PATCH	N/A	Cart ID already exists and is associated with a different user ID,	Choose a unique cartId and retry.

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			country or brand.	
200	PUT, PATCH	VALUE_ADDED_SERVICE_INVALID	VAS associated with the item is invalid.	
200	PUT, PATCH	VALUE_ADDED_SKU_COMBINATION_INVALID	The items on the cart is not a VAS item.	
200	PUT, PATCH	EXCLUSIVE_OFFER_INVALID	OfferId used on the item is not valid.	
200	PUT, PATCH	EXCLUSIVE_OFFER_PRODUCT_COMBINATION_INVALID	OfferId applied on on-exclusive access product.	
200	PUT, PATCH	INTERNAL_ERROR	Error occurred while calling the exclusive access service for validating the offer.	
200	PUT, PATCH	OUT_OF_STOCK	Item does not have	Notify the user as

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			available inventory.	necessary
200	PUT, PATCH	INVALID_GIFT_CARD_AMOUNT	Gift Card does not have a valid price amount.	Notify the user as necessary
200	GET, PUT, PATCH	PRICE_CHANGED	This is a <i>warning</i> only that the price of an item or value-added service has changed since the item was added to the cart.	Notify the user as necessary

Example error response bodies:

1. Response for a request where the values in items.id (cart line item number) were not unique:

```
{
  "code": "REQUEST_INVALID",
  "message": "Bad Request",
  "errors": [
```

```
{
  "code": "REQUEST_INVALID",
  "field": "/item/id",
  "message": "Item ids are not unique"
}
```

2. Response for a request that included an invalid **country** value:

```
{
  "code": "CART_COUNTRY_INVALID",
  "message": "Bad Request"
}
```

3. Response for a request where the items.**quantity** value exceeded the allowed limit:

```
{
  "code": "ITEM_QUANTITY_LIMIT",
  "message": "Product item quantity limit
exceeded. skuId=ef3222c4-5571-591f-
b450-9f87a09df9e3,
productId=2bffa389a-59b9-5b86-9cbb-30b82f932b6
e, itemQuantity=1,000,
accumulatedQuantity=1,000, quantityLimit=10",
  "field": "/items/0/quantity"
}
```

4. Response for a request that included an invalid value (not a UUID) in items.**skuld**:

```
{
  "message": "Request validation failed",
  "errors": [
    {
      "field": "items..skuId",
      "code": "INVALID_VALUE",
      "message": "The field value is
invalid"
    }
  ]
}
```

Using Cart Reviews

- [Cart Reviews Overview](#)
- [Augment a Cart](#)
- [Cart Reviews Error Handling](#)

Cart Reviews Overview

After the customer has provided a shipping address and chosen a shipping method, use this service to retrieve an enhanced cart summary before the customer proceeds to the checkout process. Use the Cart Reviews API in conjunction with the Carts API to achieve this.

Cart Reviews returns sales and shipping taxes, estimated delivery date(s), and shipping group information (when applicable), as well as item and subtotal information for a customer's cart.

TIP: Shipping group refers to the

grouping of items into multiple shipments with potentially different delivery dates. This is done automatically for you based on Nike business rules.

More Facts About Cart Reviews:

- To get sales tax and shipping tax, the request must include postal code.
- To get estimated delivery date(s), the request must include the shipping method(s) the shopper had selected.
- To get shipping group information, the request must include the shipping method and the shipping address associated with each item.
- Items with the same shipping address and same shipping method will be in the same shipping group. If two items have either a different shipping address or different shipping method, the two items will be in different shipping groups in the response.
- This API is 'ephemeral' in that it does not create a resource for later retrieval.
- Subsequent calls for a given cart may result in different responses if underlying tax or delivery estimate details have changed.
- Requests not having a fields parameter will return the complete cart reviews response content.
- The Cache-Control response header indicates that responses must not be cached and thus not used across multiple requests.

TIP: It is a best practice to send all of the optional request headers and request body fields, if the data is available, to avoid unexpected responses.

The following section describes the endpoint of the Cart Reviews API in detail:

Augment a Cart

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
POST	/buy/ cart_reviews/v1	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
fields	Query	Fields to be included in the response (all fields included by default)	string	Optional

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response,	X	X	X

Header Name	Description	Member	Guest	Employee
	application/json is only value allowed			
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	

Request Body

Element Name	Type	Description	Required?
country	string	ISO 3166 country code, e.g. US	Required
currency	string	ISO 4217 currency code, e.g. USD	Required
brand	string	Nike brand name associated with the cart, only NIKE is supported	Required
items	array	Array containing list of item objects, with the following required fields:	Required
items.id	string	Unique identifier of the line item in the request. You create this value.	Required
items.skuld	string	Stock Keeping Unit (SKU) unique identifier of the product, as obtained from Nike Product services.	Required

Element Name	Type	Description	Required?
items. quantity	integer	Unit quantity of the SKU.	Required
items. shipping Address	object	Address to which items are to be shipped. Only the following field is required:	Required
items.shippingAddress. country	string	Shipping address country. 2-alpha character ISO 3166 country code.	Required
channel	string	Sales channel of the shopping cart, only 'NIKECOM' is supported. Located at top level of request.	Optional
shippingMethod	object	The method by which the item will be shipped. Located under items array. Only the following field is required:	Optional
shippingMethod. id	string	The identifier for the shipping method, e.g. 'STANDARD' for	Optional

Element Name	Type	Description	Required?
		standard ground shipping in the US.	
valueAddedServices	array	List of value-added service (VAS) line items. One or more VAS line items can be associated with a Nike product (i.e. skuld). Examples of VAS are a customization service for a shoe or a gift-wrapping service.	Optional
valueAddedServices. id	string	Unique identifier for the VAS. In nested Instruction object, the following are required:	Optional
valueAddedServices. Instruction.id	string	Instruction unique identifier for the value-added service, related to the various service domains, e.g. design id for	Optional

Element Name	Type	Description	Required?
		Nike iD customization.	
valueAddedServices.Instruction.type	string	Instruction Type, e.g. customization/nike_id (only one currently available), customization/my_print, customization/gift_card, buy/gift_wrap, buy/gift_message.	Optional

TIPS:

- ✓ For the list of supported country code and currency code combinations, see [here](#).
- ✓ Use the same brand and channel values for all calls for a particular cart, else you will get a 409 Conflict error when the value varies from the initial PUT.
- ✓ Although optional, send the postalCode in the shippingAddress in addition to the required country code. If so, the sales tax will be returned in items.priceInfo.tax and shipping

tax will be returned in
items.shippingCosts.pricelInfo.tax.

✓ Although optional, if you send a valid shippingMethod in the request, the net shipping cost for the item will be returned in shippingCosts.pricelInfo.total. If you also send a valid postalCode in the shippingAddress, the shipping tax for the item will be returned in shippingCosts.pricelInfo.tax and also in shippingCosts.taxes.total.

✓ To retrieve VAS data to include in your checkout request, call the Merchandised Value Added Services endpoints of the Merchandised Products API. See the [Merchandised Products API Developer's Guide](#) for more information.

Sample *Cart Reviews* request body:

```
{
  "country": "US",
  "currency": "USD",
  "brand": "NIKE",
  "channel": "NIKECOM",
```

```
"items": [  
  {  
    "id": "9892b8cb-e4ac-42af-a8bb-3454d8509d32",  
    "skuId":  
"d3d15345-63e6-4cf9-9135-c2beacbbe352",  
    "quantity": 1,  
    "valueAddedServices": [  
      {  
        "id":  
"88d0475d-30e5-4c2f-9a87-7a31938f8ace",  
        "instruction": {  
          "id": "2027261230",  
          "type": "customization/nike_id"  
        }  
      }  
    ],  
    "shippingMethod": {  
      "id": "STANDARD"  
    },  
    "shippingAddress": {  
      "city": "Beaverton",  
      "state": "OR",  
      "postalCode": "97006",  
      "country": "US",  
      "county": "Washington"  
    }  
  },  
  {  
    "id": "e945e0fd-
```

```
cdcfc4005-9fe4-9302b9d6235c",
```

```
  "skuId":
```

Response Body

```
    "resourceId": "2201b2201b-404e-82c9-aa9a23582e4f",
```

```
    "quantity": 1,
```

Sample Cart Reviews response body:

```
    "shippingMethod": {
```

```
      "id": "STANDARD"
```

```
    },
    "shippingAddress": {
      "resourceType": "buy/cart_reviews",
      "city": "Beaverton",
      "country": "US",
      "state": "OR",
      "currency": "USD",
      "postalCode": "97006",
      "brand": "NIKE",
      "country": "US",
      "channel": "NIKECOM",
      "county": "Washington"
    },
    "shippingGroups": [
      {
        "items": [
          {
            "id": "9892b8cb-e4ac-42af-a8bb-3454d8509d32",
            "skuId": "d3d15345-63e6-4cf9-9135-c2beacbbe352",
            "quantity": 1,
            "priceInfo": {
              "price": 200,
              "subtotal": 200,
              "discount": 0,
              "valueAddedServices": 0,
              "total": 200
            }
          }
        ]
      }
    ],
    "valueAddedServices": [
```

```
{
  "id":
    "88d0475d-30e5-4c2f-9a87-7a31938f8ace",
  "instruction": {
    "id": "2027261230",
    "type": "customization/nike_id"
  },
  "priceInfo": {
    "price": 0,
    "subtotal": 0,
    "discount": 0,
    "valueAddedServices": 0,
    "total": 0
  }
},
"taxes": [
  {
    "type": "SALESTAX",
    "rate": 10,
    "total": 20
  }
],
{
  "id": "e945e0fd-
cdcf-4005-9fe4-9302b9d6235c",
  "skuId":
    "f030bb22-4859-404e-82c9-aa9a23582e4f",
  "quantity": 1,
  "priceInfo": {
    "price": 75,
    "subtotal": 75,
```

```
    "discount": 0,
    "valueAddedServices": 0,
    "total": 75
  },
  "taxes": [
    {
      "type": "SALESTAX",
      "rate": 10,
      "total": 7.5
    }
  ]
}
],
"shippingMethod": {
  "id": "STANDARD",
  "estimatedDelivery":
"2016-02-09T00:00:00.000-08:00"
},
"shippingAddress": {
  "city": "Beaverton",
  "state": "OR",
  "postalCode": "97006",
  "country": "US",
  "county": "Washington"
},
"shippingCosts": {
  "priceInfo": {
    "price": 8,
    "discount": 8,
    "total": 0,
    "taxTotal": 0
  },
  "taxes": [
```

```
{
  "type": "SHIPPING",
  "rate": 10,
  "total": 0
}
```

Cart Reviews Error Handling

Following is a summary of the errors and warnings that can come back in responses from the Cart Reviews API:

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
400 <pre>{ "totals": { "subtotal": 275, "valueAddedServicesTotal": 0, "shippingTotal": 0, "discountTotal": 0, "total": 275 } }</pre>	POST	MISSING_REQUIRED	A required field or fields in the request was missing. Examples include not providing cart ID, country, brand etc.	Retry the request while supplying the missing field/value
400	POST	INVALID_FIELD	The value of a field or fields in the request was not valid. Examples include providing too many items, country code and/or brand not supported, etc.	Check the indicated field/value. Correct and retry
400	POST	INVALID_SKU	Item SKU	Check the

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
		U	not found or not valid for the country.	skuld. Correct and retry.
401	POST	35	The operation was requested by an unauthorized user.	Check that your access token was sent in Authorization request header in format Bearer {token} or that the token has not expired.
404	POST	310	The resource you requested does not exist.	Check the URL. Adjust as necessary and retry
500	POST	n/a	Request was structurally invalid, such as malformed JSON.	Check the syntax of the request body, or item quantity for validity.
500	POST	Server error	Error occurred	Bad shipping

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			processing the request.	method? skuld isn't in UUID format? Line item id not in UUID format?

Example error response bodies:

1. Response for a request that included an invalid skuld:

```
{
  "httpStatus": 400,
  "timestamp": 1500926608289,
  "message": "Bad Request",
  "errors": [
    {
      "code": "INVALID_SKU",
      "field": "sku.id",
      "message": "Invalid skuId"
    }
  ]
}
```

2. Response for a request that included a skuld which was not in UUID format:

```
{
  "httpStatus": 500,
  "timestamp": 1500926568225,
  "service": "cartreviews",
  "message": "Server error"
}
```

3. Response for a request that included an id (line item identifier) which was not in UUID format:

```
{
  "httpStatus": 500,
  "timestamp": 1500924543763,
  "service": "cartreviews",
  "message": "Server error"
}
```

4. Response for a request sent to an incorrect URL

```
{
  "error_id":
  "fa494ed5-7144-4771-9e11-dc7a86500ab5",
  "errors": [
    {
      "code": 310,
      "message": "The resource you
requested does not exist."
    }
  ]
}
```

```
]
}
```

5. Response for a request that included a line item ID which was not unique:

```
{
  "httpStatus": 400,
  "timestamp": 1500925852389,
  "message": "Bad Request",
  "errors": [
    {
      "code": "INVALID_REQUEST",
      "field": "/item/id",
      "message": "Item ids are not unique"
    }
  ]
}
```

6. Response for a request that was missing the required field 'country':

```
{
  "httpStatus": 400,
  "timestamp": 1500924336435,
  "message": "Bad Request",
  "errors": [
    {
      "code": "MISSING_REQUIRED",
      "field": "country",

```

```
        "message": "Required field"
    }
]
```

7. Response for a request that included an invalid country code:

```
{
  "httpStatus": 400,
  "timestamp": 1500924180370,
  "message": "Bad Request",
  "errors": [
    {
      "code": "INVALID_FIELD",
      "field": "country",
      "message": "Invalid field"
    }
  ]
}
```

8. Response for a request that had multiple errors:

```
{
  "httpStatus": 400,
  "timestamp": 1500928588847,
  "message": "Bad Request",
  "errors": [
    {
      "code": "INVALID_REQUEST",
      "field": "brand",

```

```
        "message": "Invalid value for the  
field"  
    },  
    {  
        "code": "INVALID_REQUEST",  
        "field": "/item/id",  
        "message": "Item ids are not unique"  
    }  
]  
}
```

Using Wish Lists

Manage a Nike member/employee's Wish Lists using the Wish Lists API.

- [Wish Lists Overview](#)
- [Create or Update a List](#)
- [Delete a List](#)
- [Retrieve a List by ID](#)
- [Retrieve Lists for Authenticated User](#)
- [Add Item to List](#)
- [Remove Item from List](#)
- [Retrieve Items by List](#)
- [Retrieve Item by ID](#)

Wish Lists Overview

The Wish Lists API allows Nike members and employees to save lists of products to consider for purchase.

Features:

- Store unlimited Wish Lists per user
- Get product pricing and availability for items added to the list
- Create, read, update and delete support
- Pagination support
- Member and employee support only. **Guest users may not save Wish Lists**

Life Cycle of Wish List



Create or Update a List

Create or update header-level information for a Wish List using this endpoint.

- Only **header-level** info, such as the list identifier and name, can be created with this

endpoint. Use the other endpoints to add or remove items from a list.

- List name must be unique within a user's lists for a given country.
- Updating lists is currently limited to changing the list name only.

TIP: You generate the unique list and list item identifiers and send them in the request in UUID format. See individual endpoint sections for details.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/lists/ v1/{id}{?fields}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	List identifier, client-generated UUID	String	Required
fields	Query	Filter the fields returned in the response. When not provided,	String	Optional

Parameter	Type	Description	Data Type	Required?
		the response will include all list contents.		

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

Element Name	Type	Description	Required?
id	string	List UUID assigned by the client	Required
country	string	2-alpha character ISO 3166 country code, e.g. 'US'	Required
name	string	Name of the list	Required
brand	string	Brand associated with	Required

Element Name	Type	Description	Required?
		the list, only 'NIKE' is allowed	
channel	string	Sales channel of the list, only 'NIKECOM' is allowed	Optional
isPublic	boolean	Specifies if the list is viewable by guests	Optional
isPublished	boolean	Specifies if the list is viewable	Optional

Sample *Create or Update a List* request URI:

```
https://www.api.nike.com/buy/lists/v1/  
93a333a2-907b-46f1-b9ac-469489909057
```

Sample *Create or Update a List* request body:

```
{  
  "id":  
  "93a333a2-907b-46f1-b9ac-469489909057",  
  "country": "US",  
  "name": "Winter Running",  
  "brand": "NIKE"  
}
```

Response Body

Element Name	Type	Description	Required?	
	id	string	List UUID assigned by the client	Required
	country	string	2-alpha character ISO 3166 country code, e.g. 'US'	Required
	name	string	Name of the list	Required
	brand	string	Brand associated with the list, only 'NIKE' is allowed	Required
	channel	string	Sales channel of the list, only 'NIKECOM' is allowed	Optional
	isPublic	boolean	Specifies if the list is viewable by guests	Optional
	isPublished	boolean	Specifies if the list is viewable	Optional

Element Name	Type	Description	Required?	
	modificationDate	string	ISO 8601 of the date when the resource was last updated, added or removed from	Optional
	links.self	object	Object containing self-link	Optional
	links.self.ref	string	Link to this resource, itself	Required

Sample *Create or Update a List* 200 response:

```
{
  "id":
  "93a333a2-907b-46f1-b9ac-469489909057",
  "country": "US",
  "name": "Winter Running",
  "brand": "NIKE",
  "modificationDate":
  "2016-11-29T22:52:12.132Z",
  "links": {
    "self": {
      "ref": "/buy/lists/v1/
```

```
93a333a2-907b-46f1-b9ac-469489909057"
  }
}
}
```

Sample *Create or Update a List* 400 response:

```
{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "/country",
      "code": "FIELD_INVALID",
      "message": "Invalid country"
    }
  ]
}
```

Delete a List

Delete a Wish List using this endpoint. Note that **all** of the items on the list will be removed.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
DELETE	/buy/lists/ v1/{id}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	List identifier, client-generated UUID	String	Required

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

There is no request body for a DELETE request.

Sample *Delete a List* request URI:

```
https://www.api.nike.com/buy/lists/v1/  
93a333a2-907b-46f1-b9ac-469489909057
```

Response Body

There is no response body for a successful HTTP response to a DELETE request.

Retrieve a List by ID

Call this endpoint to retrieve header info for a single list using the list identifier that you previously created. The list items are **not** included in the response. To get the list items, separately call the *Retrieve Items by List* endpoint with the appropriate list identifier.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/lists/ v1/{id}{?fields}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	List identifier, client-generated UUID	String	Required
fields	Query	Filter the fields returned in the response. When not provided, the response will include all list contents.	String	Optional

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

There is no request body on a GET request.

Sample *Retrieve a List by ID* request URI:

```
https://www.api.nike.com/buy/lists/v1/  
93a333a2-907b-46f1-b9ac-469489909057
```

Response Body

Element Name	Type	Description	Required?	
	id	string	List UUID assigned by the client	Required
	country	string	2-alpha character ISO 3166 country	Required

Element Name	Type	Description	Required?	
			code, e.g. 'US'	
	name	string	Name of the list	Required
	brand	string	Brand associated with the list, only 'NIKE' is allowed	Required
	channel	string	Sales channel of the list, only 'NIKECOM' is allowed	Optional
	isPublic	boolean	Specifies if the list is viewable by guests	Optional
	isPublished	boolean	Specifies if the list is viewable	Optional
	modificationDate	string	ISO 8601 of the date when the resource was last updated, added or removed from	Optional

Element Name	Type	Description	Required?	
	links. self	object	Object containing self-link	Optional
	links.self. ref	string	Link to this resource, itself	Required

Sample *Retrieve a List by ID* 200 response:

```
{
  "id":
  "93a333a2-907b-46f1-b9ac-469489909057",
  "country": "US",
  "name": "Winter Running",
  "brand": "NIKE",
  "modificationDate":
  "2016-11-29T22:52:12.132Z",
  "links": {
    "self": {
      "ref": "/buy/lists/v1/
93a333a2-907b-46f1-b9ac-469489909057"
    }
  }
}
```

Retrieve Lists for Authenticated User

Retrieve header info for all lists for a single authenticated user with this endpoint. The list items

are **not** included in the response. To get the list items, separately call the *Retrieve Items by List* endpoint with the appropriate list identifier.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/lists/ v1{?filter,fields }	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	Query	Limit the results to those matching the specified filters: country (string, required) - ISO 3166 country code(s) name (string, optional) - List name	String	Required
fields	Query	Filter the fields returned in the	String	Optional

Parameter	Type	Description	Data Type	Required?
		response. When not provided, the response will include all list contents.		

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

There is no request body on a GET request.

Sample *Retrieve Lists for Authenticated User* request URI:

```
https://www.api.nike.com/buy/lists/
v1?filter=country(US)
```

Response Body

Element Name	Type	Description	Required?	
	objects	object	List resources	Required
	objects.id	string	List UUID assigned by the client	Required
	objects.country	string	2-alpha character ISO 3166 country code, e.g. 'US'	Required
	objects.name	string	Name of the list	Required
	objects.brand	string	Brand associated with the list, only 'NIKE' is allowed	Required
	objects.channel	string	Sales channel of the list, only 'NIKECOM' is allowed	Optional
	objects.isPublic	boolean	Specifies if the list is viewable by guests	Optional
	objects.isPublic	boolean	Specifies if	Optional

Element Name	Type	Description	Required?	
	blished		the list is viewable	
	objects.modificationDate	string	ISO 8601 of the date when the resource was last updated, added or removed from	Optional
	objects.links.self	object	Object containing self-link	Optional
	objects.links.self.ref	string	Link to this resource, itself	Required

Sample *Retrieve Lists for Authenticated User* 200 response:

```
{
  "objects": [
    {
      "id":
"93a333a2-907b-46f1-b9ac-469489909057",
      "country": "US",
      "name": "Winter Running",
      "brand": "NIKE",
      "modificationDate":
```

```

"2016-11-29T22:52:12.132Z",
  "links": {
    "self": {
      "ref": "/buy/lists/v1/
93a333a2-907b-46f1-b9ac-469489909057"
    }
  },
  {
    "id":
"7b1d5327-58e6-054f-8492-60150b8caafb",
    "country": "US",

```

Sample *Retrieve Lists for Authenticated User* 400 response:

```

    "name": "Summer Basketball",
    "brand": "NIKE",
    "modificationDate":
"2016-11-29T22:52:12.132Z",
    "message": "validation Failed",
    "links": {
      "self": {
        "ref": "/buy/lists/v1/
7b1d5327-58e6-054f-8492-60150b8caafb"
      }
    }
  }
]
}

```

Add Item to List

Add an item to an existing list using the list identifier and get current product pricing in the response.

- If you add an item that is already on the list, the item will be replaced.

- Only the item being added are included in the response, not all items in the list.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/list_items/v1/{id}{?fields}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	List identifier, client-generated UUID	String	Required
fields	Query	Filter the fields returned in the response. When not provided, the response will include all list contents.	String	Optional

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

Element Name	Type	Description	Required?
id	string	List item UUID assigned by the client	Required
wishlistId	string	List UUID assigned by the client	Required
skuld	string	SKU UUID from the merchandising services	Optional
productId	string	Product UUID from the merchandising services	Optional
country	string	Country code to use when looking up price for the item.	Optional

Element Name	Type	Description	Required?
		Overrides the country of the parent list	
valueAddedServices	array	The value-added services to apply to the purchased SKU. Examples are gift wrap, personalization and customization	Optional
valueAddedServices. id	string	UUID of the value-added service	Optional
valueAddedServices. instruction	string	Further information about the value-added service. Systems can derive instructions, bill of materials, etc from the referenced resource	Optional
valueAddedServices.instruction. id	string	Instruction identifier	Optional
valueAddedServices.instruction. type	string	Instruction type, e.g. NIKEiD (only one currently	Optional

Element Name	Type	Description	Required?
		available), Gift Wrap	

Sample *Add Item to List* request URI:

```
https://www.api.nike.com/buy/list_items/v1/  
93a333a2-907b-46f1-b9ac-469489909057
```

Sample *Add Item to List* request body:

```
{  
  "id":  
  "bf69a7c9-55c5-f643-ffb1-c6f1eaadde21",  
  "wishlistId":  
  "93a333a2-907b-46f1-b9ac-469489909057",  
  "productId":  
  "82ec699b-7855-7a29-1a94-6a1eaf2807d1",  
  "valueAddedServices": [  
    {  
      "id": "1905b205-0908-4f8e-  
a716-7b1695c38995",  
      "instruction": {  
        "id": "0123456789",  
        "type": "NIKEID"  
      }  
    }  
  ]  
}
```

Response Body

Element Name	Type	Description	Required?	
	id	string	List item UUID assigned by the client	Required
	wishlistId	string	List UUID assigned by the client	Required
	skuld	string	SKU UUID from the merchandising services	Optional
	productId	string	Product UUID from the merchandising services	Optional
	country	string	Country code to use when looking up price for the item. Overrides the country of the parent list	Optional
	valueAdded Services	array	The value-added services to	Optional

Element Name	Type	Description	Required?	
			apply to the purchased SKU. Examples are gift wrap, personalization and customization	
	valueAddedServices.id	string	UUID of the value-added service	Optional
	valueAddedServices.instruction	string	Further information about the value-added service. Systems can derive instructions, bill of materials, etc from the referenced resource	Optional
	valueAddedServices.instruction.id	string	Instruction identifier	Optional
	valueAddedServices.instruction.type	string	Instruction type, e.g. NIKEiD (only	Optional

Element Name	Type	Description	Required?	
			one currently available), Gift Wrap	
	msrp	string	Suggested retail price of the product	Optional
	currentPrice	string	Current price of the product	Optional
	fullPrice	string	Full price of the product	Optional
	employeePrice	string	Employee price of the product	Optional
	currency	string	Currency of the product prices	Optional
	creationDate	string	ISO 8601 of the date when the resource was created	Optional
	links. self	object	Object containing self-link	Optional
	links.self. ref	string	Link to this resource, itself	Required

Element Name	Type	Description	Required?	
	error	object	Error information	Optional
	error.field	string	JSON Pointer to the erroneous field	Required
	error.code	string	Error code for the error, text-based, 'screaming snake-case', one of "INVALID_FIELD", "UNAVAILABLE", "NOT_FOUND"	Required

Sample *Add Item to List 200* response:

```
{
  "id":
  "bf69a7c9-55c5-f643-ffb1-c6f1eaadde21",
  "wishlistId":
  "93a333a2-907b-46f1-b9ac-469489909057",
  "productId":
  "a05846b0-fef4-e113-94dc-7bad08547709",
  "country": "US",
```

```

    "msrp": 34.22,
    "currentPrice": 34.22,
    "fullPrice": 34.22,
    "employeePrice": 34.22,
    "currency": "USD",
    "creationDate": "2016-11-29T22:52:12.132Z",
    "links": {
      "self": {
        "ref": "/buy/list_items/v1/
bf69a7c9-55c5-f643-ffb1-c6f1eaadde21"
      }
    },

```

Sample *Add Item to List* 400 response:

```

    "code": "UNAVAILABLE"
  }
}
{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "/country",
      "code": "FIELD_INVALID",
      "message": "Invalid country"
    }
  ]
}

```

Remove Item from List

Delete a single item from a list using the list **item** identifier that you previously created, and get a HTTP 200 response if successful.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
DELETE	/buy/list_items/v1/{id}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	List item identifier, client-generated UUID	String	Required

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

There is no request body on a DELETE request.

Sample *Remove Item from List* request URI:

```
https://www.api.nike.com/buy/list_items/v1/  
93a333a2-907b-46f1-b9ac-469489909057
```

Response Body

There is no response body for a successful HTTP response to a DELETE request.

Retrieve Items by List

Retrieve all items in a list by its list identifier, which you previously created. Add optional filter, sort, count, or anchor criteria query parameters to further manipulate the data in the response.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/list_items/ v1{?filter, anchor, count, fields, sort}	No

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
filter	Query	Limit the results to those matching the specified filters: wishlistId	String	Required

Parameter	Type	Description	Data Type	Required?
		(required), List identifier, e.g. 93a333a2- 907b-46f1 -b9ac-469 489909057		
anchor	Query	Return elements after this anchor	String	Optional
count	Query	Number of items to return per response	String	Optional
fields	Query	Filter the fields returned in the response. When not provided, the response will include all list item contents.	String	Optional
sort	Query	To sort the items in the list, indicate the field to be sorted on	String	Optional

Parameter	Type	Description	Data Type	Required?
		along with the sort order(field+order)		

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

There is no request body for a GET request.

Sample *Retrieve Items by List* request URI:

```
https://www.api.nike.com/buy/list_items/
v1?filter=wishlistId(3ebf8798-2c86-4e29-a67b-74
35ebad62af)
```

Response Body

Element Name	Type	Description	Required?	
	pages	object	Pagination links	Optional
	pages.prev	string	Link to previous set of results	Optional
	pages.next	string	Link to next set of results	Optional
	objects	array	List item resources	Required
	objects.id	string	List item UUID assigned by the client	Required
	objects.wishlistId	string	List UUID assigned by the client	Required
	objects.skuld	string	SKU UUID from the merchandising services	Optional
	objects.productId	string	Product UUID from the merchandising services	Optional
	objects.country	string	Country code to use	Optional

Element Name	Type	Description	Required?	
			when looking up price for the item. Overrides the country of the parent list	
	objects.valueAddedServices	array	The value-added services to apply to the purchased SKU. Examples are gift wrap, personalization and customization	Optional
	objects.valueAddedServices.id	string	UUID of the value-added service	Optional
	objects.valueAddedServices.instruction	string	Further information about the value-added service. Systems can derive instructions, bill of	Optional

Element Name	Type	Description	Required?	
			materials, etc from the referenced resource	
	objects.valueAddedServices.instruction.id	string	Instruction identifier	Optional
	objects.valueAddedServices.instruction.type	string	Instruction type, e.g. NIKEiD (only one currently available), Gift Wrap	Optional
	objects.msrp	string	Suggested retail price of the product	Optional
	objects.currentPrice	string	Current price of the product	Optional
	objects.fullPrice	string	Full price of the product	Optional
	objects.employeePrice	string	Employee price of the product	Optional
	objects.currency	string	Currency of the product prices	Optional

Element Name	Type	Description	Required?	
	objects. isAvailable	boolean	Indicates if the product is available	Optional
	objects. creationDate	string	ISO 8601 of the date when the resource was created	Optional
	objects. isCurrentPriceChanged	boolean	Indicates if currentPrice has changed since the item was saved	Optional
	objects.links. .self	object	Object containing self-link	Required
	objects.links. .self.ref	string	Link to this resource, itself	Required
	objects. error	object	Error information	Optional
	objects.error. .field	string	JSON Pointer to the erroneous field	Required
	objects.error. .code	string	Error code for the error, text-based,	Required

Element Name	Type	Description	Required?	
			'screaming snake-case', one of "INVALID_FIELD", "UNAVAILABLE", "NOT_FOUND"	

Sample *Retrieve Items by List* 200 response:

```
{
  "pages": {
    "prev": "/buy/list_items/v1?filter=wishlistId(93a333a2-907b-46f1-b9ac-469489909057)&anchor=0&count=25",
    "next": "/buy/list_items/v1?filter=wishlistId(93a333a2-907b-46f1-b9ac-469489909057)&anchor=2&count=25"
  },
  "objects": [
    {
      "id": "bf69a7c9-55c5-f643-ffb1-c6f1eaadde21",
      "wishlistId": "93a333a2-907b-46f1-b9ac-469489909057",
      "productId": "a05846b0-fef4-e113-94dc-7bad08547709",

```

```
    "country": "US",
    "msrp": 34.22,
    "currentPrice": 34.22,
    "fullPrice": 34.22,
    "employeePrice": 34.22,
    "currency": "USD",
    "creationDate":
"2016-11-29T22:52:12.132Z",
    "links": {
      "self": {
        "ref": "/buy/list_items/v1/
bf69a7c9-55c5-f643-ffb1-c6f1eaadde21"
      }
    },
    "error": {
      "field": "/productId",
      "code": "UNAVAILABLE"
    }
  },
  {
    "id":
"189d2970-3d3b-854e-03c2-843c55789f48",
    "wishlistId":
"93a333a2-907b-46f1-b9ac-469489909057",
    "productId":
"82ec699b-7855-7a29-1a94-6a1eaf2807d1",
    "country": "US",
    "valueAddedServices": [
      {
        "id": "1905b205-0908-4f8e-
```

```
a716-7b1695c38995",
```

Sample *Retrieve Items from List* 400 response:

```
"instruction": {
  "id": "0123456789",
```

```
    "type": "NIKEID"
  }
  "message": "Validation Failed",
  "errors": [
    { "msrp": 99.49,
      "currentPrice": 99.49,
      "code": "QUERY_PARAMETER_INVALID",
      "message": "Price value is not a number"
    }
  ]
  "currency": "USD",
  "creationDate":
    "2016-11-29T22:52:12.132Z",
  "links": {
    "self": {
      "ref": "/buy/list_items/v1/
189d2970-3d3b-854e-03c2-843c55789f48"
```

Retrieve Item by ID

```
189d2970-3d3b-854e-03c2-843c55789f48"
```

Retrieve a list item by the list item identifier that you previously created.

Endpoint Details

```
"error": {
  "field": "/valueAddedServices/0/id",
```

HTTP Method	code	URI Path	JWT Restricted?
GET	"UNAVAILABLE"	/buy/list_items/v1/{id}{?fields}	No

```
}
```

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	List identifier, client-generated UUID	String	Required
fields	Query	Filter the fields returned in the response. When not provided, the response will include all list contents.	String	Optional

Request Headers

Header Name	Description
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in

Request Body

There is no request body for a GET request.

Sample *Retrieve Item by ID* request URI:

```
https://www.api.nike.com/buy/list_items/v1/  
93a333a2-907b-46f1-b9ac-469489909057
```

Response Body

Element Name	Type	Description	Required?	
	id	string	List item UUID assigned by the client	Required
	wishlistId	string	List UUID assigned by the client	Required
	skuld	string	SKU UUID from the merchandising services	Optional
	productId	string	Product UUID from the merchandising services	Optional
	country	string	Country code to use	Optional

Element Name	Type	Description	Required?	
			when looking up price for the item. Overrides the country of the parent list	
	valueAdded Services	array	The value-added services to apply to the purchased SKU. Examples are gift wrap, personalization and customization	Optional
	valueAdded Services. id	string	UUID of the value-added service	Optional
	valueAdded Services. instruction	string	Further information about the value-added service. Systems can derive instructions, bill of	Optional

Element Name	Type	Description	Required?	
			materials, etc from the referenced resource	
	valueAddedServices.instruction.id	string	Instruction identifier	Optional
	valueAddedServices.instruction.type	string	Instruction type, e.g. NIKEiD (only one currently available), Gift Wrap	Optional
	msrp	string	Suggested retail price of the product	Optional
	currentPrice	string	Current price of the product	Optional
	fullPrice	string	Full price of the product	Optional
	employeePrice	string	Employee price of the product	Optional
	currency	string	Currency of the product prices	Optional
	isAvailable	boolean	Indicates if	Optional

Element Name	Type	Description	Required?	
			the product is available	
	creationDate	string	ISO 8601 of the date when the resource was created	Optional
	isCurrentPriceChanged	boolean	Indicates if currentPrice has changed since the item was saved	Optional
	links.self	object	Object containing self-link	Optional
	links.self.ref	string	Link to this resource, itself	Required
	error	object	Error information	Optional
	error.field	string	JSON Pointer to the erroneous field	Required
	error.code	string	Error code for the error, text-based, 'screaming	Required

Element Name	Type	Description	Required?	
			snake-case', one of "INVALID_FIELD", "UNAVAILABLE", "NOT_FOUND"	

Sample *Retrieve Item by ID* 200 response:

```
{
  "id":
  "bf69a7c9-55c5-f643-ffb1-c6f1eaadde21",
  "wishlistId":
  "93a333a2-907b-46f1-b9ac-469489909057",
  "productId":
  "a05846b0-fef4-e113-94dc-7bad08547709",
  "country": "US",
  "msrp": 34.22,
  "currentPrice": 34.22,
  "fullPrice": 34.22,
  "employeePrice": 34.22,
  "currency": "USD",
  "creationDate": "2016-11-29T22:52:12.132Z",
  "links": {
    "self": {
      "ref": "/buy/list_items/v1/
bf69a7c9-55c5-f643-ffb1-c6f1eaadde21"
```

```
    }  
  },  
  "error": {  
    "field": "/productId",  
    "code": "UNAVAILABLE"  
  }  
}
```

Using Shipping Options

```
}
```

- [Shipping Options Overview](#)
- [Shipping Options](#)
- [Shipping Options Error Handling](#)

Shipping Options Overview

Shoppers are accustomed to selecting a shipping method (e.g. Standard, Two-Day, Next-Day) during the checkout process. But how do you know which methods to present to them, based on their shopping context?

Use the Shipping Options v2 API to retrieve the customer's available shipping methods for a checkout, including associated costs and estimated delivery dates/ranges.

TIP: It is a best practice to send all of the optional request headers and request body fields, if the data is available, to avoid unexpected responses.

Shipping Options

Send a request with a country code, currency code, item information and (optionally) shipping address information to this endpoint to get the list of available shipping methods, along with associated costs/taxes and estimated delivery date(s). This endpoint calculates shipping

discounts such as free shipping for members.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
POST	/buy/shipping_options/v2	no

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of	X		X

Header Name	Description	Member	Guest	Employee
	Bearer {token} indicating the customer is logged in			
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	

Request Body

Element Name	Type	Description	Required?
country	string	ISO 3166 country code, e.g. US	Required
currency	string	ISO 4217 currency code, e.g. USD	Required
items	array	Array containing list of item objects, with the	Required

Element Name	Type	Description	Required?
		following required fields:	
items. id	string	Unique identifier of the line item in the request. You create this value.	Required
items. skuld	string	Stock Keeping Unit (SKU) unique identifier of the product, as obtained from Nike Product services.	Required
valueAddedServices	array	List of value-added service (VAS) line items. One or more VAS line items can be associated with a Nike product (i.e. skuld). Examples of VAS are a customization service for a shoe or a gift-wrapping service.	Optional
valueAddedServices. id	string	Unique identifier for the VAS. In	Optional

Element Name	Type	Description	Required?
		nested Instruction object, the following are required:	
valueAddedServices.Instruction. id	string	Instruction unique identifier for the value- added service, related to the various service domains, e.g. design id for Nike iD customization.	Optional
valueAddedServices.Instruction. type	string	Instruction Type, e.g. customization/ nike_id (only one currently available), customization/ my_print, customization/ gift_card, buy/ gift_wrap, buy/ gift_message.	Optional
shippingAddress	object	The address to which items are to be shipped. Required fields are postalCode and country . Complete list of	Optional

Element Name	Type	Description	Required?
		fields here:	
shippingAddress s.address1	string	Shipping address line one.	Optional
shippingAddress s.address2	string	Shipping address line two.	Optional
shippingAddress s.address3	string	Shipping address line three.	Optional
shippingAddress s.city	string	Shipping address city.	Optional
shippingAddress s.state	string	Shipping address state. This should be the ISO 3166-2 subdivision code. For the US, this is the 2-alpha state code as defined in ISO 3166-2:US.	Optional
shippingAddress s.postalCode	string	Shipping address postal code. In the US, this is the 5-digit or the 5-plus-4-digit zip code.	Optional
shippingAddress	string	Shipping	Optional

Element Name	Type	Description	Required?
s.country		address country. 2-alpha character ISO 3166 country code.	
shippingAddress s.country	string	Shipping address country. This will typically be used for non-US addresses to hold specific regional data.	Optional
promotionCodes	array	Array containing promotion codes that the user has attempted to apply	Optional

TIPS:

- ✓ For the list of supported country code and currency code combinations, see [here](#).
- ✓ To retrieve VAS data to include in your checkout request, call the Merchandised Value Added Services endpoints of the Merchandised Products API. See the [Merchandised Products API Developer's Guide](#) for more

information.

✓ Although optional, including a shippingAddress is recommended whenever possible. In China, shipping methods can vary based on the province, city, and district combination. Also, for certain countries (e.g. US), including the shipping address can get you an estimated delivery date versus an estimated delivery range.

Sample *Shipping Options* request body:

```
{
  "country": "US",
  "currency": "USD",
  "items": [
    {
      "id":
"a05dcb8a-79e5-4f69-bc30-213dd93f429c",
      "skuId": "15611769-e81b-45dd-b28c-
ca0effb272de",
      "valueAddedServices": [
        {
          "id":
"88d0475d-30e5-4c2f-9a87-7a31938f8ace",
          "instruction": {
            "id": "2027261230",
```

```

        "type": "customization/nike_id"
      }
    }
  ],
  "shippingAddress": {
    "address1": "1234 NW Test",
    "city": "Beaverton",
    "state": "OR",

```

Response Body

The HTTP 200 success response from *Shipping Options* reflects back many elements from the request body and also includes the following new information to the client:

Element Name	Type	Description
shippingMethods	array	Array under items containing information about the shipping methods available to your shopper based on the data sent in the request
shippingMethods. id	string	Shipping method name
shippingMethods. daysToArrive	n/a	DEPRECATED - do not use
shippingMethods. estimatedDelivery	object	Estimated delivery date (in nested date field) or date range (in nested range. min and range. max for the shipping method. You will get either a date or a date range, not both.

Element Name	Type	Description
shippingMethods.estimateDelivery. id	string	Identifier for the delivery estimate
shippingMethods.estimateDelivery. date	string	Estimated delivery date
shippingMethods.estimateDelivery. range	object	Estimated delivery range (see min/max nested)
shippingMethods.estimateDelivery.range. minDate	string	Earliest date within range that the delivery can be completed
shippingMethods.estimateDelivery.range. maxDate	string	Latest date within range that the delivery can be completed
shippingMethods. priceInfo	string	Price information for shipping method. Contains the following:
shippingMethods.priceInfo. cost	number	Base price of shipping method
shippingMethods.priceInfo. discount	number	Discount amount applied (if any)
shippingMethods.priceInfo. total	number	Net price of shipping method (cost - discount)
shippingMethods. promotionDiscounts	array	Array of applied promotion codes and their discount amounts
shippingMethods.promotionDiscounts. code	string	Promotion code associated with the discount (entered by

Element Name	Type	Description
		user)
shippingMethods.promotionDiscounts. amount	number	Promotion discount amount
shippingMethods.promotionDiscounts. id	string	Promotion unique identifier

TIP: The date value(s) in estimatedDelivery object are in the [ISO-8601](#) format of yyyy-mm-ddThh:mm:ss.mssZ and in UTC with zero offset, e.g.
2017-07-18T18:25:45.237Z.
Convert to the local date (or date/time) of the shopper as necessary.

Sample *Shipping Options* response body:

```
{
  "resourceType": "shippingOptions",
  "country": "US",
  "currency": "USD",
  "items": [
    {
      "id":
"7e909b64-fbb1-5dc7-bf39-a67fcfefb7b8",
      "skuId":
"d76dfbd7-13fb-5675-9365-2a8859750c15",
```

```
    "shippingMethods": [  
      {  
        "id": "STANDARD",  
        "daysToArrive": 5,  
        "estimatedDelivery": {  
          "range": {  
            "minDate":  
"2017-06-28T23:19:50.33Z",  
            "maxDate":  
"2017-07-01T23:19:50.33Z"  
          }  
        },  
        "priceInfo": {  
          "cost": 8,  
          "discount": 8,  
          "total": 0  
        }  
      },  
      {  
        "id": "TWO_DAY",  
        "daysToArrive": 4,  
        "estimatedDelivery": {  
          "range": {  
            "minDate":  
"2017-06-28T23:19:50.443Z",  
            "maxDate":  
"2017-06-29T23:19:50.443Z"  
          }  
        },  
        "priceInfo": {
```

```

    "cost": 15,
    "discount": 0,
    "total": 15
  }
}
```

Shipping Options Error Handling

Following is a summary of the errors and warnings that can come back in responses from the Shipping Options API: {

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
400	POST	MISSING_REQUIRED	"id": "NEXT_DAY", "daysToArrive": 2, "estimatedDelivery": { "range": { "minDate": "2017-06-27T23:19:50.544Z", "maxDate": "2017-06-29T23:19:50.544Z" } }, "priceInfo": { "cost": 25, "discount": 0, "total": 25 }	Check the syntax of the request body, or item quantity for validity.
400	POST	MISSING_REQUIRED	"id": "NEXT_DAY", "daysToArrive": 2, "estimatedDelivery": { "range": { "minDate": "2017-06-27T23:19:50.544Z", "maxDate": "2017-06-29T23:19:50.544Z" } }, "priceInfo": { "cost": 25, "discount": 0, "total": 25 }	Retry the request while supplying the missing field/value
400	POST	FIELD_INVALID	The value of a field or fields in the request was not valid.	Check the indicated field/value. Correct and retry

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			Examples include providing too many items, country code and/or brand not supported, etc.	
401	POST	35	The operation was requested by an unauthorized user.	Check that your access token was sent in Authorization request header in format Bearer {token} or that the token has not expired.
404	POST	310	The resource you requested does not exist.	Check the URL. Adjust as necessary and retry
500	POST	Server error	Error occurred processing	skuld invalid or isn't in UUID

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			the request.	format? Line item id not in UUID format?

Example error response bodies:

1. Response for a request containing an invalid country code:

```
{
  "code": "INPUT_VALIDATION_FAILED",
  "message": "Validation Failed",
  "errors": [
    {
      "field": "/country",
      "code": "FIELD_INVALID",
      "message": "ECMA 262 regex \"^[A-Z]{2}$\" does not match input string \"\\\"\""
    }
  ]
}
```

2. Response for a request sent to an unrecognized URL:

```
{
  "error_id":
    "40b05032-bd51-46b3-bd05-19eb261055e9",
}
```



```
"errors": [  
  {  
    "code": 310,  
    "message": "The resource you  
requested does not exist."  
  }  
]  
}
```

3. Response for a request that was missing a required field:

```
{  
  "code": "INPUT_VALIDATION_FAILED",  
  "message": "Validation Failed",  
  "errors": [  
    {  
      "field": "country",  
      "code": "MISSING_REQUIRED",  
      "message": "object has missing  
required properties ([\"country\"])"  
    }  
  ]  
}
```

4. Response for a request with malformed JSON:

```
{  
  "code": "MISSING_REQUIRED",
```

```
"message": "Request body contained invalid
JSON",
"errors": [ ]
}
```

Using Checkouts

- [Checkouts Overview](#)
- [Request Checkout Preview](#)
- [Retrieve Checkout Preview Job](#)
- [Retrieve Checkout Preview Results](#)
- [Request Checkout Submit](#)
- [Retrieve Checkout Submit Job](#)
- [Retrieve Checkout Results](#)
- [Request Checkout Submit \(Launch\)](#)
- [Checkouts Error Handling](#)

Checkouts Overview

The Checkouts v2 API allows you to create, validate, and submit a checkout to Nike for fulfillment. What exactly is a checkout? (Hint: it's like an order).

A checkout consists of all data necessary for defining the following:

- Consumer's product choices (items, quantities, value-added services)
- Consumer's payment method(s) and billing address(es)
- Consumer's shipping method(s) and shipping address(es)
- Pricing
- Taxes

- Discounts

Through calls to Checkout and other Nike APIs, you can maintain the state of the shopper's checkout in your client application and then submit the checkout to Nike for approval and fulfillment.

TIP: It is a best practice to send all of the optional request headers and request body fields, if the data is available, to avoid unexpected responses.

Request Checkout Preview

The *Request a Checkout Preview* endpoint allows you to check that the items, shipping method(s), and shipping address(es) included in a checkout are valid based on Nike pricing and address rules. Additionally, you'll get item pricing and tax, shipping fee and tax, and checkout subtotals in the response.

Checkout Preview Is Optional, But Recommended

Is it not required to call *Request Checkout Preview* in order for your shopper to complete their purchase. However, it is recommended.

In a typical Nike digital experience, a successful checkout preview means that the checkout details are accurate, including shipping fees and taxes, and that the checkout process can proceed to the payment steps.

Use the response to display the final payment amount to the customer. Once the customer confirms the payment method details and clicks or taps 'Place Order', there will be a greater chance of success.

TIP: For more context, see a step-by-step example of all the calls in

a checkout in the diagram in the [Use Cases](#) section of this document. For more info about Payment, see the [Payment Domain Developer's Guide](#).

Checkout Preview Operates Asynchronously

This endpoint operates **asynchronously** which means that there are extra steps to retrieve the results of your request. Read the Asynchronous Operation section of the [Using NDe APIs](#) guide to learn more.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/ checkout_previews /v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier (UUID) for the checkout	string	Required

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user,		X	

Header Name	Description	Member	Guest	Employee
	validated by the Edge router and passed through to the service			
appld	Your application identifier		X	

Request Body

Element Name	Type	Description	Required?
request	object	Top-level object in request schema	Required
email	string	Email address for the shopper	Required
country	string	2-alpha character ISO 3166 country code, e.g US	Required
currency	string	ISO 4217 currency code for the shopper, e.g. USD	Required
locale	string	Posix-formatted locale code, e.g. en_US	Required

Element Name	Type	Description	Required?
channel	string	Selling channel name associated with the checkout, e.g. 'SNKRS'	Required
items	array	Array containing list of products and value-added services to be previewed. The minimum values that need to be sent in this section are:	Required
items. id	string	Unique identifier of the line item in the array. You create this value	Required
items. skuld	string	Stock Keeping Unit (SKU) unique identifier of the product, as obtained from Nike Product services	Required
items. quantity	integer	Unit quantity (integer) of the line item, as chosen by the shopper	Required
items. recipient	object	Person to which	Required

Element Name	Type	Description	Required?
		the items are to be shipped, as entered by the shopper:	
items.recipient. firstName	string	First name of the person receiving the items	Required
items.recipient. lastName	string	Last name of the person receiving the items	Required
items. shippingAddress	object	Address to which items are to be shipped, as entered by the shopper:	Required
items.shippingAddress. address1	string	Shipping address line one	Required
items.shippingAddress. city	string	Shipping address city	Required
items.shippingAddress. country	string	Shipping address country	Required
items. shippingMethod	string	Identifier for the shipping method, as obtained from the Nike Shipping Options API and	Required

Element Name	Type	Description	Required?
		selected by the shopper, e.g. 'STANDARD' for standard ground shipping in the US	
clientInfo	object	Information about the client system making the request to the API	Optional
clientInfo. deviceId	string	'Fingerprint' of the device making the request	Optional
clientInfo. client	string	Name of client making the request, e.g. 'com.nike.commerce.snkrs.web'	Optional
valueAddedServices	array	List of value-added service (VAS) line items. One or more VAS line items can be associated with a Nike product (i.e. skuld). Examples of VAS: a customization service for a	Optional

Element Name	Type	Description	Required?
		shoe or a gift-wrapping service	
valueAddedServices.id	string	Unique identifier for the VAS. In nested Instruction object, the following are required:	Optional
valueAddedServices.Instruction.id	string	Instruction unique identifier for the value-added service, related to the various service domains, e.g. design id for Nike iD customization	Optional
valueAddedServices.Instruction.type	string	Instruction Type, e.g. customization/nike_id (only one currently available), customization/my_print, customization/gift_card, buy/gift_wrap, buy/gift_message	Optional
promotionCod	array	Array containing	Optional

Element Name	Type	Description	Required?
es		list of promotion codes being applied to the checkout	

TIPS:

- ✓ For the list of supported country code and currency code combinations, see [here](#).
- ✓ To retrieve VAS data to include in your checkout request, call the Merchandised Value Added Services endpoints of the Merchandised Products API. See the [Merchandised Products API Developer's Guide](#) for more information.

Sample *Request a Checkout Preview* request body:

```
{
  "request": {
    "email": "null@null.com",
    "country": "US",
    "currency": "USD",
    "locale": "en_US",
    "channel": "SNKRS",
    "clientInfo": {
```

```
        "deviceId": "iPhone"
    },
    "items": [
        {
            "id":
"a05dcb8a-79e5-4f69-bc30-213dd93f429c",
            "skuId": "15611769-e81b-45dd-b28c-
ca0effb272de",
            "quantity": 1,
            "valueAddedServices": [
                {
                    "id":
"88d0475d-30e5-4c2f-9a87-7a31938f8ace",
                    "instruction": {
                        "id": "2027261230",
                        "type": "customization/
nike_id"
                    }
                },
                {
                    "id":
"ac9fd9d3-3815-44ce-8b1f-18cce7abd488",
                    "instruction": {
                        "id": "1027551960",
                        "type": "customization/
nike_id"
                    }
                },
                "priceInfo": {
                    "price": 12,
                    "discount": 0,
```

```
        "total": 12,
        "priceSnapshotId":
"12319076-f81c-4fdb-8beb-2510ba74e9ff"
    }
}
],
"recipient": {
    "firstName": "John",
    "altFirstName": "J",
    "lastName": "Doe",
    "altLastName": "Deer",
    "middleName": "Henry",
    "middleInitial": "H",
    "givenName": "John H. Deer"
},
"shippingAddress": {
    "address1": "1234 NW Test",
    "address2": "Suite 22",
    "address3": "Door 1",
    "city": "Beaverton",
    "state": "OR",
    "postalCode": "97006",
    "country": "US",
    "county": "Washington"
},
"contactInfo": {
    "phoneNumber": "555-555-5555",
    "email": "null@null.com"
},
"shippingMethod": "STANDARD"
```

```
}  
]  
}
```

Response Body

```
}
```

The HTTP 202 response from *Request Checkout Preview* contains information about how to retrieve the results of your job via the ‘Retrieve Checkout Preview Job’ endpoint. Following are the descriptions of the important fields in the response body:

Element Name	Description
id	Checkout id you sent in the request, also your job ID
status	Status of the job
eta	Estimated wait time before polling the jobs endpoint to get your results
links	Relative URL path you can use to poll the jobs endpoint (see nested “ref” field)

```
{  
  "id":  
  "a05dcb8a-79e5-4f69-bc30-213dd93f429c",  
  "status": "PENDING",  
  "eta": 200,  
  "resourceType": "job",  
  "links": {  
    "self": {  
      "ref": "/buy/checkout_previews/v2/  
jobs/a05dcb8a-79e5-4f69-bc30-213dd93f429c"
```

```
}  
}  
}
```

Retrieve Checkout Preview Job

After calling *Request Checkout Preview* and receiving a HTTP 202 response, call *Retrieve Checkout Preview Job* using the same checkout ID to check the status of your job.

To know if the job is done, check the value of the **status** field in the response body as follows:

- "status": "PENDING": job processing has not started
- "status": "IN_PROGRESS": job processing in progress
- "status": "COMPLETED": job has completed

Once you receive a job status of COMPLETED, get the results of your job by parsing the data in the **response** object from this endpoint. Alternatively, follow the link to the *Retrieve Checkout Preview Results* endpoint which is provided in the response body (see **links** object).

TIP: Parsing the 'Completed' job result directly is a best practice because it eliminates doing another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/ checkout_previews /v2/jobs/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier (UUID) for the checkout	string	Required

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorizati	Your access	X		X

Header Name	Description	Member	Guest	Employee
on	token in the format of Bearer {token} indicating the customer is logged in			
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	
appld	Your application identifier		X	

Request Body

There is no body for a GET request.

Response Body

For a job that is in either “PENDING” or “IN_PROGRESS” status, the response is abbreviated and only contains the following:

Element Name	Type	Description
id	string	Checkout id you sent in the request, also your job ID
status	string	Status of the job
eta	integer	Estimated wait time before polling the jobs endpoint to get your results
links	object	Relative URL path you can use to poll the jobs endpoint (see nested ref field)

Sample *Retrieve Checkout Preview Job* response body with “IN_PROGRESS” status:

```
{
  "id": "7a37290b-c724-4f87-aeef-821265853546",
  "status": "IN_PROGRESS",
  "eta": 250,
  "resourceType": "job",
  "links": {
    "self": {
      "ref": "/buy/checkout_previews/v2/jobs/7a37290b-c724-4f87-aeef-821265853546"
    }
  }
}
```

For a job that is in “COMPLETED” status and had no errors, the response also contains a **response** object that has the details of your checkout preview result.

The structure of the **response** object is similar in structure to the request body, with the following notable additions:

Element Name	Type	Description
shippingGroups	array	Array found under response object containing items and corresponding VAS, taxes, shipping address/method/cost. Grouped based on Nike business rules
priceInfo	object	Object containing price details. Found under the items , valueAddedServices , and shippingCosts objects
priceInfo.employeePrice	number	Employee price of the cart item. Only present if an employee price is used when pricing the checkout
taxes	array	Array of tax details. Found under items and shippingCosts objects
taxes.type	enum	Type of tax (e.g. SALESTAX, SHIPPINGTAX, VALUEADDEDTAX)
taxes.rate	number	Tax rate
taxes.total	number	Total tax amount

Element Name	Type	Description
promotionDiscounts	array	Array found under items and shippingGroups containing a list of promotions and their discount amounts
promotionDiscounts. code	string	Promotion code entered by the user
promotionDiscounts. amount	number	Promotion discount amount
promotionDiscounts. id	string	Promotion identifier
promotionDiscounts. displayName	string	Promotion display name
shippingMethod	object	Object found under shippingGroups containing cost of shipping method and estimated delivery date(s)
shippingMethod. id	string	Identifier for the shipping method, e.g. STANDARD for standard ground shipping in the US
shippingMethod. cost	number	Retail cost of shipping via the shipping method
shippingMethod. daysToArrive	n/a	DEPRECATED - do not use
shippingMethod. estim	string	Estimated delivery

Element Name	Type	Description
atedDelivery		date for the items
shippingMethod.estimatedDelivery. estimate dDeliveryDetails	object	Object containing unique identifier of the delivery estimate
shippingMethod.estimatedDelivery. estimatedDeliveryDetails.id	string	Unique identifier (UUID) of the delivery estimate
shippingMethod.estimatedDelivery. estimatedDeliveryDetails.date	string	Estimated delivery date for the items
shippingMethod.estimatedDelivery. estimatedDeliveryDetails.message	string	Message describing the delivery estimate
shippingCosts	object	Object found under shippingGroups containing total shipping costs, discounts, taxes, totals
shippingCosts. price	number	Price of the shipping costs
shippingCosts. discount	number	Shipping costs discount
shippingCosts. total	number	Total price of the shipping costs, not including tax, less any discounts
shippingCosts. taxTotal	number	Total tax amount based on the total

Element Name	Type	Description
promotionCodes	array	Array found under response containing distinct summary of status for the provided promotion codes
promotionCodes. code	string	Provided promotion code
promotionCodes. statuses	string	Status of whether the promotion code was applied, e.g. PROMOTION_APPLIED, PROMOTION_NOT_APPLIED, PROMOTION_INVALID
totals	object	Object under response containing price subtotals for the entire checkout by items, VAS, taxes, discounts, shipping. Total checkout price also included
totals. subtotal	number	Subtotal of the item costs for all items
totals. valueAddedServicesTotal	number	Total of value-added services on the items
totals. taxTotal	number	Total of all taxes applied to the checkout, including VALUEADDEDTAX

Element Name	Type	Description
totals.discountTotal	number	Total of all discounts (excluding shipping discounts) applied to the checkout
totals.shippingTotal	number	Total of all shipping costs, less any shipping discounts, on the checkout
totals.total	number	Total prices of the entire checkout (item costs + shipping costs + taxes (including VALUEADDEDTAX) less any discounts
priceChecksum	string	Found under response , provides checksum for price details. Optionally, you can send it in the request body to <i>Request Checkout Submit</i> (see related section in this guide)

Sample *Retrieve Checkout Preview Job* response body with “COMPLETED” status:

```
{
  "id":
  "87b5430e-48ed-4507-a38f-7faa7f63ecb2",
  "status": "COMPLETED",
  "links": {
```

```
    "self": {
      "ref": "/buy/checkout_previews/v2/
jobs/87b5430e-48ed-4507-a38f-7faa7f63ecb2"
    },
    "result": {
      "ref": "/buy/
checkout_preview_results/v2/
87b5430e-48ed-4507-a38f-7faa7f63ecb2"
    }
  },
  "response": {
    "id":
"87b5430e-48ed-4507-a38f-7faa7f63ecb2",
    "country": "US",
    "currency": "USD",
    "locale": "en_US",
    "shippingGroups": [
      {
        "items": [
          {
            "id":
"87b5430e-48ed-4507-a38f-7faa7f63ecb2",
            "skuId":
"2f127fe4-78d4-5042-a944-b8a4938aff10",
            "quantity": 1,
            "valueAddedServices":
[],
            "priceInfo": {
              "price": 190,
```



```
"valueAddedServices": 0,
    "taxTotal": 0,
    "discount": 0,
    "total": 190
  },
  "taxes": [
    {
      "type":
"SALESTAX",
      "rate": 0,
      "total": 0
    }
  ]
},
"recipient": {
  "firstName": "John",
  "lastName": "Doe",
  "altFirstName": "J",
  "altLastName": "",
  "middleName": ""
},
"shippingAddress": {
  "address1": "1234 NW Test",
  "address2": "Suite 22",
  "address3": "Door 1",
  "city": "Beaverton",
  "state": "OR",
  "postalCode": "97006",
  "country": "US",
```

```
        "county": "Washington"
    },
    "shippingMethod": {
        "id": "STANDARD",
        "cost": 8,
        "daysToArrive": 5,
        "estimatedDelivery":
"2017-07-12T16:42:26.821Z"
    },
    "shippingCosts": {
        "priceInfo": {
            "price": 8,
            "valueAddedServices":
0,

            "taxTotal": 0,
            "discount": 8,
            "total": 0
        },
        "taxes": [
            {
                "type":
"SHIPPINGTAX",

                "rate": 0,
                "total": 0
            }
        ]
    },
    "contactInfo": {
        "phoneNumber":
"5555555555",
```

```
"email": "null@null.com"
```

```
}
```

Retrieve Checkout Preview Results

```
],
```

After calling both the *Request Checkout Preview* and *Retrieve Checkout Preview Job* endpoints, you can call this endpoint to retrieve the result of your Checkout Preview request. This step is optional, as the same result is already available in the response from the *Retrieve Checkout Submit Job* endpoint.

```
"taxTotal": 0,
```

Endpoint Details

```
"discountTotal": 8,
```

```
"total": 190
```

HTTP Method	URI Path	JWT Restricted?
PUT	"priceChecksum": /buy/ "f9b70f748aeb23af6255b3767f0c5595", checkout_preview_ "email": "null@null.com", results/v2/{id} "resourceType":	no

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier for the checkout	string	Required
checkout_preview_result	self: { "ref": "/buy/ results/v2/ 87b5430e-48ed-4507-438f-70aa7f63ecb2" }			

```
},
```

```
"resourceType": "job"
```

Request Checkout Submit

```
}
```

Call the *Request Checkout Submit* endpoint when your user is ready to complete their purchase.

Request Checkout Submit performs the final validations of the user's information, requests payment authorization, and if everything succeeds, submits a checkout to Nike for fulfillment.

Considerations

- Before calling *Request Checkout Submit*, you must have previously called the Payment Preview API to collect the required payment information, most notably the mandatory Payment Preview **id**. See the [Payment Domain Developer's Guide](#) for more info.
- Calling *Request Checkout Preview* is not required before calling *Request Checkout Submit*, but it is recommended in most cases.
- When calling both the Preview and Submit endpoints in succession for a particular checkout, it is **not** required for you to use the same ID in the URL path (i.e. the checkout identifier) for both calls. However, any ID that you use must not have been used previously, else you will receive an idempotent response for the previously-used ID.

Checkout Submit Operates Asynchronously

This endpoint operates **asynchronously** which means that there are extra steps to retrieve the results of your request. Read the Asynchronous Operation section of the [Using NDe APIs](#) guide to learn more.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/checkouts/ v2/{id}	no

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier (UUID) for the checkout	string	Required

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorization	Your access token in the format of Bearer {token} indicating the customer is logged in	X		X
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user,		X	

Header Name	Description	Member	Guest	Employee
	validated by the Edge router and passed through to the service			
appld	Your application identifier		X	
True-Client-IP	IP address of the client, required if X-Forwarded-For is null	X	X	X
X-Forwarded-For	Used to derive the IP address of the client, required if True-Client-IP is null	X	X	X
User-Agent	Browser and operating system of the client calling this endpoint	X	X	X

Optional request headers:

Header Name	Description	Member	Guest	Employee
usertype	nike:swoosh for Nike Employees, nike:plus for Nike+ Customers, otherwise do not send	X		X
Origin-Order-ID	During v1 to v2 cutover, represents the legacy order id associated to the checkout and is used by downstream systems	X	X	X

Request Body

Required parts of the request body:

Element Name	Type	Description	Required?
request	object	Top-level object in request schema	Required
email	string	Email address	Required
country	string	2-alpha	Required

Element Name	Type	Description	Required?
		character ISO 3166 country code, e.g US	
currency	string	ISO 4217 currency code, e.g. USD	Required
locale	string	BCP 47 locale code, e.g. en_US	Required
channel	string	Selling channel name associated with the checkout, e.g. 'SNKRS'	Required
items	array	Array containing list of item objects	Required
paymentToken	string	Unique identifier of the payment details, as obtained from the Payment Preview API in the id field at the top level	Required
valueAddedServices	array	List of value-added service (VAS) line items. One or more VAS line items can be associated with	Optional

Element Name	Type	Description	Required?
		a Nike product (i.e. skuld). Examples of VAS are a customization service for a shoe or a gift-wrapping service	
valueAddedServices.id	string	Unique identifier for the VAS. In nested Instruction object, the following are required:	Optional
valueAddedServices.Instruction.id	string	Instruction unique identifier for the value-added service, related to the various service domains, e.g. design id for Nike iD customization	Optional
valueAddedServices.Instruction.type	string	Instruction Type, e.g. customization/ nike_id (only one currently available), customization/ my_print,	Optional

Element Name	Type	Description	Required?
		customization/ gift_card, buy/ gift_wrap, buy/ gift_message	
promotionCodes	array	Array containing list of promotion codes being applied to the checkout	Optional

TIPS:

- ✓ For the list of supported country code and currency code combinations, see [here](#).
- ✓ To retrieve VAS data to include in your checkout request, call the Merchandised Value Added Services endpoints of the Merchandised Products API. See the [Merchandised Products API Developer's Guide](#) for more information.
- ✓ Optionally you can send the priceChecksum value you got from the *Request Checkout Preview* endpoint in the **priceChecksum** field in the request body. It is used to compare and validate the pricing calculated on a previous request

against the pricing at the time of Checkout Submit.

✓ For China only, you can offer shoppers the option to generate a Fapiao, which is a special tax invoice. If the shopper indicates a preference for Fapiao, they can enter a personal message to be used as a title for the invoice. Just send an **invoiceInfo** array in the request body, similar to the below example (see the request schema for this endpoint for more details):

```
"invoiceInfo": {  
  "type": "ELECTRONIC_FAPIAO",  
  "detail": "The shopper's personal title  
for the invoice"  
}
```

Sample *Request Checkout Submit* request body:

```
{  
  "request": {  
    "email": "null@null.com",  
    "country": "US",  
    "currency": "USD",  
    "locale": "en_US",
```

```
    "channel": "SNKRS",
    "clientInfo": {
      "deviceId": "iPhone"
    },
    "items": [
      {
        "id":
"a05dcb8a-79e5-4f69-bc30-213dd93f429c",
        "skuId": "15611769-e81b-45dd-b28c-
ca0effb272de",
        "quantity": 1,
        "recipient": {
          "firstName": "John",
          "altFirstName": "J",
          "lastName": "Doe",
          "altLastName": "Deer",
          "middleName": "Henry",
          "middleInitial": "H",
          "givenName": "John H. Deer"
        },
        "shippingAddress": {
          "address1": "1234 NW Test",
          "address2": "Suite 22",
          "address3": "Door 1",
          "city": "Beaverton",
          "state": "OR",
          "postalCode": "97006",
          "country": "US",
          "county": "Washington"
        }
      },
```

```
    "contactInfo": {
      "phoneNumber": "555-555-5555",
      "email": "null@null.com"
    },
    "shippingMethod": "STANDARD"
  },
  "paymentToken": "fe2cc7d6-9b40-4b64-81bf-af11c8b43e4",
  "id": "7a37290b-c724-4f87-aeef-821265853546",
  "priceChecksum": "7a37290b-c724-4f87-aeef-821265853546",
  "status": "IN_PROGRESS",
  "eta": 250,
  "resourceType": "job",
  "links": {
    "self": {
      "ref": "/buy/checkouts/v2/jobs/7a37290b-c724-4f87-aeef-821265853546"
    }
  }
}
```

Response Body

The HTTP 202 response from *Request Checkout Submit* contains information about how to retrieve the results of your job from the *Retrieve Checkout Submit Job* endpoint. Following are descriptions of the important fields in the response body:

Element Name	Description
id	Checkout ID you use in the request, also your job ID
status	Status of the job
eta	Estimated wait time before polling the jobs endpoint to get your results
links	Relative URL path you can use to poll the jobs endpoint (see nested "ref" field)

```
{
  "id": "7a37290b-c724-4f87-aeef-821265853546",
  "status": "IN_PROGRESS",
  "eta": 250,
  "resourceType": "job",
  "links": {
    "self": {
      "ref": "/buy/checkouts/v2/jobs/7a37290b-c724-4f87-aeef-821265853546"
    }
  }
}
```

```
}  
}
```

Retrieve Checkout Submit Job

After calling the Request Checkout Submit endpoint and receiving a HTTP 202 response, you can call this endpoint using the same checkout ID to check the status of your job.

To know if the job is done, check the value of the **status** field in the response body as follows:

- "status": "PENDING": job processing has not started
- "status": "IN_PROGRESS": job processing in progress
- "status": "COMPLETED": job has completed

Once you observe a job status of COMPLETED, get the results of your job by parsing the data in the **response** object from this endpoint. Alternatively, follow the link to the *Retrieve Checkout Results* endpoint which is provided in the response body (see **links** object).

TIP: Parsing the 'Completed' job result directly is a best practice because it eliminates doing another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/buy/checkouts/v2/jobs/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier (UUID) for the checkout	string	Required

Request Headers

Required request headers:

Header Name	Description	Member	Guest	Employee
Accept	Content type you will accept in response, application/json is only value allowed	X	X	X
Content-Type	Content type of the request, application/json is only value allowed	X	X	X
Authorizati	Your access	X		X

Header Name	Description	Member	Guest	Employee
on	token in the format of Bearer {token} indicating the customer is logged in			
x-nike-visitorid	Identifier for the guest (i.e. not logged-in) user, validated by the Edge router and passed through to the service		X	
appld	Your application identifier		X	

Request Body

There is no body for a GET request.

Response Body

For a job that is in either “PENDING” or “IN_PROGRESS” status, the response is abbreviated and only contains the following:

Element Name	Type	Description
id	string	Checkout id you sent in the request, also your job ID
status	string	Status of the job
eta	integer	Estimated wait time before polling the jobs endpoint to get your results
links	object	Relative URL path you can use to poll the jobs endpoint (see nested ref field)

Sample *Retrieve Checkout Submit Job* response body with “IN_PROGRESS” status:

```
{
  "id": "7a37290b-c724-4f87-aeef-821265853546",
  "status": "IN_PROGRESS",
  "eta": 250,
  "resourceType": "job",
  "links": {
    "self": {
      "ref": "/buy/checkouts/v2/jobs/7a37290b-c724-4f87-aeef-821265853546"
    }
  }
}
```

For a job that is in “COMPLETED” status and had no errors, the response also contains a **response** object that has the details of your successfully-submitted checkout. The structure of

the **response** object is similar in structure to the request body, with the following notable additions:

Element Name	Type	Description
shippingGroups	array	Array found under response object containing items and corresponding VAS, taxes, shipping address/method/cost. Grouped based on Nike business rules
priceInfo	object	Object containing price details. Found under the items , valueAddedServices , and shippingCosts objects
priceInfo.employeePrice	number	Employee price of the cart item. Only present if an employee price is used when pricing the checkout
taxes	array	Array of tax details. Found under items and shippingCosts objects
taxes.type	enum	Type of tax (e.g. SALESTAX, SHIPPINGTAX, VALUEADDEDTAX)
taxes.rate	number	Tax rate
taxes.total	number	Total tax amount

Element Name	Type	Description
promotionDiscounts	array	Array found under items and shippingGroups containing a list of promotions and their discount amounts
promotionDiscounts. code	string	Promotion code entered by the user
promotionDiscounts. amount	number	Promotion discount amount
promotionDiscounts. id	string	Promotion identifier
promotionDiscounts. displayName	string	Promotion display name
shippingMethod	object	Object found under shippingGroups containing cost of shipping method and estimated delivery date(s)
shippingMethod. id	string	Identifier for the shipping method, e.g. STANDARD for standard ground shipping in the US
shippingMethod. cost	number	Retail cost of shipping via the shipping method
shippingMethod. daysToArrive	n/a	DEPRECATED - do not use
shippingMethod. estim	string	Estimated delivery

Element Name	Type	Description
atedDelivery		date for the items
shippingMethod.estimatedDelivery. estimate dDeliveryDetails	object	Object containing unique identifier of the delivery estimate
shippingMethod.estimatedDelivery. estimatedDeliveryDetails.id	string	Unique identifier (UUID) of the delivery estimate
shippingMethod.estimatedDelivery. estimatedDeliveryDetails.date	string	Estimated delivery date for the items
shippingMethod.estimatedDelivery. estimatedDeliveryDetails.message	string	Message describing the delivery estimate
shippingCosts	object	Object found under shippingGroups containing total shipping costs, discounts, taxes, totals
shippingCosts. price	number	Price of the shipping costs
shippingCosts. discount	number	Shipping costs discount
shippingCosts. total	number	Total price of the shipping costs, not including tax, less any discounts
shippingCosts. taxTotal	number	Total tax amount based on the total

Element Name	Type	Description
promotionCodes	array	Array found under response containing distinct summary of status for the provided promotion codes
promotionCodes. code	string	Provided promotion code
promotionCodes. statuses	string	Status of whether the promotion code was applied, e.g. PROMOTION_APPLIED, PROMOTION_NOT_APPLIED, PROMOTION_INVALID
totals	object	Object under response containing price subtotals for the entire checkout by items, VAS, taxes, discounts, shipping. Total checkout price also included
totals. subtotal	number	Subtotal of the item costs for all items
totals. valueAddedServicesTotal	number	Total of value-added services on the items
totals. taxTotal	number	Total of all taxes applied to the checkout, including VALUEADDEDTAX

Element Name	Type	Description
totals.discountTotal	number	Total of all discounts (excluding shipping discounts) applied to the checkout
totals.shippingTotal	number	Total of all shipping costs, less any shipping discounts, on the checkout
totals.total	number	Total prices of the entire checkout (item costs + shipping costs + taxes (including VALUEADDEDTAX) less any discounts
paymentToken	string	Found under resource , the unique identifier of the payment details in the payment domain
paymentApprovalId	string	Found under resource , the unique identifier of the payment approval
paymentStatus	string	Found under resource , the status of payment approval ("ACCEPT", "PENDING_PAYMENT", "REJECT")
invoiceInfo	array	Found under resource , an array with special

Element Name	Type	Description
		instructions for invoicing. Optional and applies to China only
invoiceInfo. type	string	Type of instruction, e.g. ELECTRONIC_FAPIA O to indicate a Chinese Fapiao tax receipt
invoiceInfo. detail	string	Supporting details for the instruction, e.g. the title to be used with a Fapiao tax receipt
invoiceInfo. taxId	string	Tax Id to be used with a Fapiao tax receipt if the order was placed on behalf of a company

Sample *Retrieve Checkout Submit Job* response body with “COMPLETED” status:

```
{
  "id": "7a37290b-c724-4f87-aeef-821265853546",
  "status": "COMPLETED",
  "resourceType": "job",
  "links": {
    "self": {
      "ref": "/buy/checkouts/v2/jobs/7a37290b-
```

```
c724-4f87-aeef-821265853546"
  },
  "result": {
    "ref": "/buy/checkout_results/v2/
7a37290b-c724-4f87-aeef-821265853546"
  }
},
"response": {
  "id": "7a37290b-
c724-4f87-aeef-821265853546",
  "resourceType": "checkoutResult",
  "links": {
    "self": {
      "ref": "/buy/checkout_results/v2/
7a37290b-c724-4f87-aeef-821265853546"
    }
  },
  "email": "null@null.com",
  "country": "US",
  "currency": "USD",
  "locale": "en_US",
  "orderId": "C000000000001",
  "shippingGroups": [
    {
      "items": [
        {
          "id":
"a05dcb8a-79e5-4f69-bc30-213dd93f429c",
          "skuId": "15611769-e81b-45dd-b28c-
ca0effb272de",
```



```
        "quantity": 1,
        "valueAddedServices": [
            {
                "id":
"88d0475d-30e5-4c2f-9a87-7a31938f8ace",
                "instruction": {
                    "id": "2027261230",
                    "type": "customization/
nike_id"
                },
                "priceInfo": {
                    "price": 10,
                    "discount": 0,
                    "total": 10,
                    "priceSnapshotId":
"12319076-f81c-4fdb-8beb-2510ba74e9fe"
                }
            },
            {
                "id":
"ac9fd9d3-3815-44ce-8b1f-18cce7abd488",
                "instruction": {
                    "id": "1027551960",
                    "type": "customization/
nike_id"
                },
                "priceInfo": {
                    "price": 12,
                    "discount": 0,
                    "total": 12,
```

```
        "priceSnapshotId":
"12319076-f81c-4fdb-8beb-2510ba74e9ff"
    }
}
],
"priceInfo": {
    "price": 200,
    "valueAddedServices": 22,
    "discount": 0,
    "total": 222,
    "taxTotal": 20
},
"taxes": [
    {
        "type": "SALESTAX",
        "rate": 10,
        "total": 20
    }
]
}
],
"recipient": {
    "firstName": "John",
    "altFirstName": "J",
    "lastName": "Doe",
    "altLastName": "Deer",
    "middleName": "Henry"
},
"shippingAddress": {
    "address1": "1234 NW Test",
```

```
        "address2": "Suite 22",
        "address3": "Door 1",
        "city": "Beaverton",
        "state": "OR",
        "postalCode": "97006",
        "country": "US",
        "county": "Washington"
    },
    "contactInfo": {
        "phoneNumber": "555-555-5555",
        "email": "null@null.com"
    },
    "shippingMethod": {
        "id": "STANDARD",
        "cost": 8,
        "daysToArrive": 5,
        "estimatedDelivery":
"2016-02-09T00:00:00.000Z"
    },
    "shippingCosts": {
        "priceInfo": {
            "price": 8,
            "discount": 0,
            "total": 8,
            "taxTotal": 0.8
        },
        "taxes": [
            {
                "type": "SHIPPINGTAX",
                "rate": 10,
```

```
    "total": 0.8
  }
}
```

Retrieve Checkout Results

After calling both the Request Checkout Submit and Retrieve Checkout Submit Job endpoints, you can call this endpoint to retrieve the result of your request. This step is optional, as the same result is already available in the response from the Retrieve Checkout Submit Job endpoint.

```
    "paymentToken": "fe20c7d6-9b40-4b64-81bf-af11c8b43e4",
    "totals": {
      "subtotal": 200,
      "valueAddedServicesTotal": 22,
```

HTTP Method	URI Path	JWT Restricted?
GET	"discountTotal": 0, /buy/ "shippingTotal": 8, checkout_results/ "total": 230.8 v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier (UUID) for the checkout	string	Required

Request Checkout Submit (Launch)

The Request Checkout Submit (Launch) endpoint is used exclusively for Nike Launch

experiences and features [JWT](#) authentication to enforce that. All other types of checkouts need to be sent to the regular Request Checkout Submit endpoint.

The Launch endpoint has the same contract as the Request Checkout Submit endpoint so for additional details see that section.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/buy/ launch_checkouts/ v2/{id}	Yes

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique client-generated identifier (UUID) for the checkout	string	Required

Checkouts Error Handling

Following is a summary of the errors and warnings that can come back in responses from the Checkouts API:



Error Responses

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
200	GET	INVALID_PAYMENT_TYPE	The selected payment type is invalid for the checkout	
200	GET	INVALID_SHIPPING_BILLING_COMBINATION	The shipping and billing country combination is not supported	
200	GET	ITEM_QUANTITY_LIMIT	Shopper has exceeded the per-user quantity limit for the product (total purchase quantity over multiple checkouts).	Notify the user as necessary
200	GET	NO_INVENTORY	Unable to reserve inventory for the SKU	Notify user as necessary
200	GET	OFFER_INVALID	The exclusive	Notify user as

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			access offer is not valid (Launch only)	necessary
200	GET	PAYMENT_INSUFFICIENT	Unable to allocate order total across all payment types. Need more payment	Prompt user to select another payment method
200	GET	PAYMENT_INVALID	"Payment failed"	Check the paymentToken. Correct and retry
200	GET	PAYPAL_AUTH_FAILURE_10411	Express Checkout transaction has expired	Notify the user as necessary
200	GET	PAYPAL_AUTH_FAILURE_10417	Retry using alternative method from PayPal wallet	Notify the user as necessary
200	GET	PAYPAL_AUTH_FAILURE_10422	Retry using alternative method	Notify the user as necessary
200	GET	PAYPAL_AUTH_FAILURE	Error occurred,	Notify the user as

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
		E_10445	retry the transaction	necessary
200	GET	PAYPAL_AUTH_FAILUR E_10486	Retry using alternative method	Notify the user as necessary
200	GET	PAYPAL_AUTH_FAILUR E_11084	PayPal transaction declined	Notify the user as necessary
200	GET	PAYPAL_AUTH_FAILUR E_13113	PayPal payment failed	Notify the user as necessary
200	GET	PRODUCT_NOT_BUYABLE	"Non buyable product(s)"	Notify the user as necessary
200	GET	PRODUCT_NOT_FOUND	Item sku not found or not valid for the country.	Check the skuld. Correct and retry
200	GET	PROMOTION_CODE_INVALID	Promotion code is invalid	Notify the user as necessary
200	GET	QUANTITY_INVALID	"Product(s) exceeded quantity limit". This is on a per-checkout basis.	Check the item quantity. Reduce and retry
200	GET	REJECTED	Request	

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			was rejected	
200	GET	REQUEST_INVALID	“Unable to obtain checkout request”	skulD invalid? Correct and retry
200	GET	SHIPPING_METHOD_INVALID	“Invalid shipping method(s)”	Check the shipping method(s). Correct and retry
200	GET	SYSTEM_ERROR	General system error occurred. Typically, due to a timeout in the job	Submit checkout again
200	GET	UNSUPPORTED_CREDIT_CARD_IS_USER_COUNTRY	The credit card number is from a country that is not supported	
200	GET	UNSUPPORTED_PAYMENT_FOR_COUNTRY	The selected payment type is not supported in the selected billing country	

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
400	PUT	FIELD_INVALID	The value of a field or fields in the request was not valid. Examples include providing too many items, country code and/or brand not supported, etc.	Check the indicated field/value. Correct and retry
400	PUT	MISSING_REQUIRED	A required field or fields in the request was missing. Examples include not providing country, currency etc.	Retry the request while supplying the missing field/value
400	PUT	REQUEST_INVALID	"Invalid request body"	Check for malformed JSON in the request and retry
401	PUT, GET	35	The	Check that

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			operation was requested by an unauthorized user.	your auth token was sent in Authorization request header in format Bearer {token} or that the token has not expired
404	PUT, GET	310	The resource you requested does not exist.	Check the URL. Adjust as necessary and retry
409	PUT	REQUEST_INVALID	“Request conflicts with previous request for same checkout”	Same checkout ID was used previously with different request body. Generate new checkout ID and retry
500	PUT	Server error	Error occurred	Checkout ID not in UUID

HTTP Response Code	Relevant HTTP Method(s)	Error Code	Error Description	Action to Take
			processing the request.	format? Bad shipping method? skuld isn't in UUID format? Line item id not in UUID format?
500	PUT	n/a	Request was structurally invalid, such as malformed JSON.	Check the syntax of the request body, or item quantity for validity

Example error response bodies:

1. Response for a request containing an invalid skuld (Checkout Preview only):

```
{
  "id": "0be43157-32e6-45ea-ad94-6832419a714e",
  "status": "COMPLETED",
  "links": {
    "self": {
      "ref": "/buy/checkout_previews/v2/jobs/0be43157-32e6-45ea-ad94-6832419a714e"
```

```

    },
    "result": {
      "ref": "/buy/checkout_preview_results/v2/0be43157-32e6-45ea-ad94-6832419a714e"
    }
  },
  "error": {
    "message": "Product data not found",
    "httpStatus": 400,
    "code": "PRODUCT_NOT_FOUND",
    "errors": []
  }
}

```

2. HTTP 401 response for a request containing an invalid access token in Authorization header (all Checkouts endpoints):

```

{
  "error_id": "132ef514-5c28-40d8-8c52-8e2a60cd3182",
  "errors": [
    {
      "code": 35,
      "message": "Unauthorized user access"
    }
  ]
}

```

1. HTTP 404 response for request sent to an unrecognized URL (all Checkouts endpoints):

```
{
  "error_id": "0c4a083e-
b86d-471e-9d95-a2d14e7c001c",
  "errors": [
    {
      "code": 310,
      "message": "The resource you
requested does not exist."
    }
  ]
}
```

2. HTTP 500 response for a request where the checkout id in the URL was not in UUID format (Checkout Preview only):

```
{
  "httpStatus": 500,
  "code": "5005",
  "timestamp": 1501001555623,
  "service": "checkoutpreviewscmd",
  "message": "Internal Server Error: type:
class
com.sun.jersey.api.ParamException$PathParamEx
ceptionmessage:
java.lang.IllegalArgumentException: Invalid
UUID string: footrace: "
}
```

3. HTTP 500 response for a request where the checkout id in the URL was not in UUID format (Checkout Submit only):

```
{
  "httpStatus": 500,
  "timestamp": 1501003356822,
  "service": "checkoutscmd",
  "message": "An unhandled error has
occurred."
}
```

4. Response for a request where a required field was missing (Checkout Preview and Checkout Submit only):

```
{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "request.country",
      "message": "Required field",
      "code": "MISSING_REQUIRED"
    }
  ]
}
```

5. Response for a request containing an invalid field value (Checkout Preview and Checkout Submit only):

```
{
  "message": "Validation Failed",
  "errors": [
```

```
{
  "field": "request.country",
  "message": "Invalid field",
  "code": "FIELD_INVALID"
}
```

6. Response for a request containing a line item id that was not in UUID format (Checkout Preview and Checkout Submit only):

```
{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "request.items[0].id",
      "message": "Invalid field",
      "code": "FIELD_INVALID"
    }
  ]
}
```

7. Response for a request where the item quantity limit was exceeded (Checkout Preview and Checkout Submit only):

```
{
  "id":
    "9b0a2af0-cdb5-423f-864f-1a9f8e0a8110",
```



```

"status": "COMPLETED",
"links": {
  "self": {
    "ref": "/buy/checkout_previews/v2/
jobs/9b0a2af0-cdb5-423f-864f-1a9f8e0a8110"
  },
  "result": {
    "ref": "/buy/
checkout_preview_results/v2/
9b0a2af0-cdb5-423f-864f-1a9f8e0a8110"
  }
},
"error": {
  "message": "Product(s) exceeded
quantity limit",
  "httpStatus": 400,
  "errors": [

```

8. Response for a request where the field length limit was exceeded (Checkout Preview and Checkout Submit only):

```

"request.items[0].quantity",
"message":
{skuId=2f127fe4-78d4-5042-a944-b8a4938aff10,
quantity=2000000,quantityLimit=15846db1334",
"status": "COMPLETED";QUANTITY_INVALID"
"links": {
  "self": {
    "ref": "/buy/checkout_previews/v2/
jobs/7a200050-dd7a-48ef-9851-e55846db1334"
  },
  "result": {

```

```

        "ref": "/buy/
checkout_preview_results/v2/
7a200850-dd7a-4def-9851-e55846db1334"
    },
    "error": {
        "message": "Validation Failed",
        "httpStatus": 400,
        "errors": [
            {
                "field":

```

9. Response for a request where the shipping address country did not match the checkout (i.e. top-level) country (Checkout Preview and Checkout Submit only):

```

        "code": "FIELD_INVALID"
    },
    {
        "id": "1589b213-2083-4d9d-83ac-79f4c54abbe9",
        "status": "COMPLETED",
        "resourceType": "job"
    },
    {
        "self": {
            "ref": "/buy/checkout_previews/v2/
jobs/1589b213-2083-4d9d-83ac-79f4c54abbe9"
        },
        "result": {
            "ref": "/buy/
checkout_preview_results/v2/
1589b213-2083-4d9d-83ac-79f4c54abbe9"
        }
    },
    "error": {

```

```

    "message": "Validation Failed",
    "httpStatus": 400,
    "errors": [
      {
        "field":

```

10. Response for a request with an invalid shipping method (Checkout Preview only):

```

    "message": "The shipping address
country does not match the checkout country",
    {
      "code": "FIELD_INVALID"
    },
    "id": "827913ea-bad5-4561-8281-d7fd0667856a",
    "status": "COMPLETED",
    "links": {
      "resourceType": "job"
    },
    "ref": "/buy/checkout_previews/v2/
jobs/827913ea-bad5-4561-8281-d7fd0667856a"
  },
  "result": {
    "ref": "/buy/
checkout_preview_results/v2/827913ea-
bad5-4561-8281-d7fd0667856a"
  }
},
"error": {
  "message": "Invalid shipping method(s)",
  "httpStatus": 400,
  "errors": [
    {
      "field":
"request.items[0].shippingMethod",
      "message": "shippingMethod=null,"

```

11. Response for a request, where the contact phone number included invalid character, e.g. hyphens (Checkout Preview and Checkout Submit only):

```
      "code": "SHIPPING_METHOD_INVALID"
    }
  }
  "id": "9278e33a-19c5-4c71-9b2b-164e19b71291",
  "status": "COMPLETED",
  "resourceType": "job"
  "links": {
    "self": {
      "ref": "/buy/checkout_previews/v2/
jobs/9278e33a-19c5-4c71-9b2b-164e19b71291"
    },
    "result": {
      "ref": "/buy/
checkout_preview_results/v2/
9278e33a-19c5-4c71-9b2b-164e19b71291"
    }
  },
  "error": {
    "message": "Validation Failed",
    "httpStatus": 400,
    "errors": [
      {
        "field":
"request.items[0].contactInfo.phoneNumber",
        "message": "Value includes
invalid characters",
        "code": "FIELD_INVALID"
      }
    ]
  },
  "resourceType": "job"
```

12. Response for a request containing an invalid skuld (Checkout Submit only):

```
{
  "id": "5eaca359-12d2-49ee-a6b4-69619d29a2e6",
  "status": "COMPLETED",
  "error": {
    "message": "Unable to obtain checkout
request",
    "httpStatus": 400,
    "code": "REQUEST_INVALID",
    "errors": []
  },
  "links": {
    "self": {
      "ref": "/buy/checkouts/v2/jobs/
5eaca359-12d2-49ee-a6b4-69619d29a2e6"
    }
  },
  "resourceType": "job"
}
```

13. Response for a request containing an invalid paymentToken (Checkout Submit only):

```
{
  "id": "745ec668-ff96-40cf-afe4-24080b9cd8c7",
  "status": "COMPLETED",
  "error": {
    "message": "Validation Failed",
    "httpStatus": 400,
    "code": "PAYMENT_INVALID",
  }
}
```

```

    "errors": [
      {
        "field": "paymentPreviewId",
        "message": "Payment failed",
        "code": "PAYMENT_INVALID"
      }
    ]
  },
  "links": {
    "self": {
      "ref": "/buy/checkouts/v2/jobs/745ec668-ff96-40cf-afe4-24080b9cd8c7"
    }
  }
}

```

14. Response for a request containing an invalid shipping method (Checkout Submit only):

```

    "resourceType": "job"
  }
}
{
  "id": "4329122c-740f-4fc0-83cf-d8f0b4bdd1c2",
  "status": "COMPLETED",
  "error": {
    "message": "Internal Server Error",
    "httpStatus": 500,
    "code": "INTERNAL_ERROR",
    "errors": []
  },
  "links": {
    "self": {
      "ref": "/buy/checkouts/v2/jobs/4329122c-740f-4fc0-83cf-d8f0b4bdd1c2"
    }
  }
}

```

```
    }  
  },  
  "resourceType": "job"  
}
```

15. HTTP 409 response for a request with a previously-used checkout ID but a new entity in request body (Checkout Submit only):

```
{  
  "message": "Request conflicts with previous  
request for same checkout",  
  "code": "REQUEST_INVALID"  
}
```

16. Response for a request with a skuID that is not 'buyable', e.g. due to upcoming launch (Checkout Preview only):

```
{  
  "id": "9278e33a-19c5-4c71-9b2b-164e19b71291",  
  "status": "COMPLETED",  
  "links": {  
    "self": {  
      "ref": "/buy/checkout_previews/v2/  
jobs/9278e33a-19c5-4c71-9b2b-164e19b71291"  
    },  
    "result": {  
      "ref": "/buy/  
checkout_preview_results/v2/"  
    }  
  }  
}
```

```
9278e33a-19c5-4c71-9b2b-164e19b71291"
```

```
}
```

```
},
```

```
"error": {
```

```
  "message": "Non buyable product(s)",
```

```
  "httpStatus": 400,
```

```
  "errors": [
```

```
    {
```

```
      "field":
```

```
        "request.items[0].skuId",
```

17. Response for a request with a skuld that is not 'buyable', e.g. due to upcoming launch

```
        "message":
```

(Checkout Submit only):

```
        "skuId=386375f9-4908-52fb-bcd7-d43e42a5f5d3,
```

```
productId=352ce8c0-e04a-58ba-8d3c-7398d008495
```

```
    }, status=HOLD,
```

```
    "startDate=2016-06-28T18:30:00Z", "id=98145c66ee7",
```

```
    "addDate=2016-06-28T18:30:00Z", "availability=true,
```

```
    "publishType=LAUNCH",
```

```
    "message": "INVALID_PRODUCT_NOT_BUYABLE"
```

```
    "httpStatus": 401,
```

```
    "code": "REQUEST_INVALID",
```

```
  }, "errors": [
```

```
    "resourceType": "job"
```

```
  }      "field":
```

```
    "request.items[0].skuId",
```

```
    "message":
```

```
    "productPublishType=LAUNCH not compatible
```

```
with launch request source=",
```

```
    "code": "INVALID_LAUNCH_PRODUCT"
```

```
  }
```

```
]
```



```
},
"links": {
  "self": {
    "ref": "/buy/checkouts/v2/jobs/
c6e266c6-a892-4833-b1df-c98145c66ee7"
```

Upgrading to the Latest Version

```
},
"resourceType": "job"

```

Here is the version status of each of the APIs described in this document, along with notes about upgrade paths:

Checkouts

The latest version of the Checkouts endpoints is v2. All Nike experiences are currently using v2. If a v3 of any of these endpoints becomes available, then the process of upgrading will be documented here.

Carts

The latest version of the Carts is v2. Information for upgrading from v1 to v2 is provided below:

Carts v1-to-v2 Endpoint Mapping

Use the following table to understand which v2 endpoint has replaced a corresponding v1 endpoint, and also which endpoints are new with v2:

V1 Endpoint Name	Equivalent V2 Endpoint Name
Create or Update a Cart	Create or Update a Cart by Cart ID
Retrieve Carts by ID	Get a Cart by Cart ID
Retrieve Carts by Filter	Get a Cart by Filter Criteria (Query Param)

V1 Endpoint Name	Equivalent V2 Endpoint Name
Delete All Items from a Cart	Delete All Items from a Cart by Cart ID
None	Modify a Cart by Cart ID
None	Create or Update a Cart by Filter Criteria
None	Modify a Cart by Filter Criteria
None	Get a Cart by Filter Criteria (Path Param)
None	Delete all Items from a Cart by Filter Criteria

Carts v1-to-v2 Other Changes

Request Headers

For all v2 endpoints, the following additional request headers are required for guest (i.e. non-logged-in) users:

Header Name	Description
appld	Unique application identifier of the calling app
x-nike-visitid	Count of visits by the guest user

Query Parameters

For all v2 GET endpoints where query parameters are used, the **fields** query parameter is no longer supported.

Request Body

The following changes apply to all v2 endpoints with a request body:

Field Name	Description of Change
currency	Not required at top level as with v1, instead is optional in items. priceInfo object
items.giftCard. amount	New field added in v2
items. recipient	New field added in v2
items.recipient. firstName	New field added in v2
items.recipient. lastName	New field added in v2
items.recipient. altFirstName	New field added in v2
items.recipient. altLastName	New field added in v2
items.recipient. givenName	New field added in v2
items.recipient. middleInitial	New field added in v2
items.recipient. middleName	New field added in v2
items. shippingAddress	New field added in v2
items.shippingAddress. country	New field added in v2
items.shippingAddress. address1	New field added in v2
items.shippingAddress. address2	New field added in v2
items.shippingAddress. address3	New field added in v2
items.shippingAddress. city	New field added in v2
items.shippingAddress. county	New field added in v2
items.shippingAddress. email	New field added in v2
items.shippingAddress. postalCode	New field added in v2
items.shippingAddress. state	New field added in v2

Response Body

The following changes apply to all v2 endpoints with a response body:

Field Name	Description of Change
items.pricelInfo.fullPrice	New field added in v2
items.pricelInfo.msrp	New field added in v2

Error Messages

Error Code	Description of Change
OUT_OF_STOCK	New code added in v2
INVALID_GIFT_CARD_AMOUNT	New code added in v2

Cart Reviews

The Cart Reviews endpoint are in v1 due to being released more recently. If a v2 of any of these endpoints becomes available, then the process of upgrading will be documented here.

Shipping Options

The Shipping Options endpoint is in v2. If a v3 of this endpoint becomes available, then the process of upgrading will be documented here.

Best Practices

Conditions for Retries

For retry information by Checkout endpoint, visit [Retry Patterns for Checkout Clients](#) in Confluence.

For all Checkout APIs, the general rule is that HTTP 4XX error codes (except for 429) should not be retried but HTTP 5XX errors can be retried. For general information on Nike error retry practices, see [API Error Patterns](#) on Confluence.

Honor the ETAs for Best Performance

For async endpoints that return an ETA, i.e. the estimated time for the job to be completed, it is important for your app to honor the ETA for best performance. For example, if the ETA is 2000ms, your app should wait 2000ms to start polling the /jobs endpoint to avoid consuming network and other resources unnecessarily.

Test Scenarios

Here is an example list of test scenarios for a user experience that is integrating with the Checkout APIs. Note: in this context, inline refers to a regular Nike product as opposed to a customized Nike iD product.

- Single Item (Inline) - Single Payment (Credit Card)
- Single Item (Inline) - Single Payment (Gift Card)
- Single Item (Inline) - Single Payment (PayPal)
- Single Item (NikeID) - Single Payment (Credit Card)
- Single Item (NikeID) - Single Payment (PayPal)
- Single Item (Inline) - Multiple Payment (Credit Card & Gift Card)
- Single Item (NikeID) - Multiple Payment (Credit Card & Gift Card)
- Mixed Items (Inline & NikeID) - Single Payment (Credit Card)
- Mixed Items (Inline & NikeID) - Single Payment (PayPal)
- Mixed Items (Inline & NikeID) - Multiple Payment (Credit Card & Gift Card)

Additionally, it's useful to add scenarios for multi-quantity (i.e. quantity > 1) for Inline items, as well as scenarios with multiple Nike iD items in same checkout.

TIP: While inspecting browser activity on www.nike.com/launch,

you can change your shopping country with the flag icon at the upper right of the homepage. Also, as necessary you can place an order to observe all the checkout calls. Orders can be cancelled via self-service within 30 minutes of submission, otherwise contact Nike Customer Service.

Test Environment

It is recommended to test all Checkout endpoints in the production environment as opposed to the test environment. Using the test environment can have unpredictable results due to the many downstream services which these endpoints are reliant upon in order to provide typical 'production-like' responses.

There are boundaries for testing in production:

- Performance tests at high volumes should never be done in production.
- Calling 'Request a Checkout Submit' in production can result in actual Nike orders being sent for fulfillment, and actual payment methods being authorized and/or charged. Proceed with caution.

Caching Data

None of the endpoints described in this document support caching.

Error Handling: Which JSON Field Had The Error?

In error responses from APIs, Nike uses the [JSON Pointer](#) standard to indicate which field of the request JSON had the error.

However, not all Checkout APIs are the same in this regard. This is due to some APIs having

been built before Nike decided to use JSON Pointer standard.

For example, error responses from the Checkouts v2 API will vary from error responses from the Carts API.

Examples of both:

Checkouts (built before adopting JSON Pointer standard):

```
{
  "message": "Validation Failed",
  "errors": [{
    "field":
"request.items[0].contactInfo.email",
    "code": "INVALID_EMAIL",
    "message": "Invalid email"
  }]
}
```

Carts (built after adopting JSON Pointer standard):

```
{
  "message": "Validation Failed",
  "errors": [{
    "field": "/request/items/0/contactInfo/
email",
    "code": "INVALID_EMAIL",
    "message": "Invalid email"
  }]
}
```

If you are a client of both of the above APIs, you will need to parse error responses in two different ways.

Troubleshooting

Listed below are ways to troubleshoot unexpected responses using this API.

Use Troubleshooting Tools

- Use the general troubleshooting tips in the [Using NDe APIs](#) guide.
- Use a Splunk query (requires access) to check for issues with your request.
- Contact the Buy team on the [#cic-order-integration](#) Slack channel for assistance.

Common Questions

Is it okay to call Checkout APIs if my app is hosted in an Amazon Web Services VPC?

Yes. The APIs are exposed publicly so it shouldn't matter where you are calling from. If you are calling repeatedly from a small set of IP addresses, it might be possible that Nike's bot-mitigation tools could interfere with your ability to make calls. If you are having issues, reach out to us for help.

My Checkout Submit job is taking a long time to complete. What gives?

Checkout Submits initiate a lot of behind-the-scenes API calls, the duration of which is somewhat unpredictable. Depending on the total volume of requests happening at the time your request was submitted, combined with the payment method and shipping country selected by the user, it may take several seconds to get a completed job. Best case is about 5 seconds, worst case can be well over a minute. If the job times out, you will get a 'completed with error' job status.

Glossary

See the [Glossary](#)

Document Change Log

Summary	Date	Description
Initial draft	10/02/2018	Initial Draft
Added Carts v2	03/16/2018	Updates based on Carts v2 API being released
Updated links	03/20/2018	Updated links to point to new dev portal
Updated external links	04/02/2018	Updated external links to open in new browser window, commented out 'Try It Now' buttons
Added Wish Lists API	04/30/2018	Added new Wish Lists API content
Added 'Required?' to tables	06/26/2018	Added required column to tables that were missing it
Updated TOC	10/01/2018	Removed 'In this guide', replaced with sidebar TOC

Related Links

[NDe Documentation Home](#)

[Getting Started](#)

[Business Guides](#)

[Developer's Guides](#)