



ANALYTICS PIPELINE API



DEVELOPER'S GUIDE (DRAFT)

Last Updated: 04/19/2018

Submit Feedback: Dev Portal Slack channel [#devportal](#)

If you've read [Using NDe APIs](#) and [Get Started With Nike Analytics Pipeline](#), this guide provides the details necessary to integrate with the Nike Analytics Pipeline API.

In This Guide:

[API at a Glance](#)

[Terms of Service](#)

[Authentication](#)

[Use Cases](#)

[API Endpoint Quick Reference](#)

[Making Your First API Request](#)

[Using Analytics Pipeline](#)

[Endpoint Details](#)

[Path & Query Parameters](#)

[Request Headers](#)

[Request Body](#)

[Response Body](#)

[Upgrading to the Latest Version](#)

[Troubleshooting](#)

[Glossary](#)

[Release Notes](#)

[Document Change Log](#)


[Related Links](#)

API at a Glance

The Analytics Pipeline API is your single destination to record analytics events, helping both user experiences and web services to track consumer and application behavior.

Because Analytics Pipeline is server-side and Nike-authored, it is much more customizable to your needs than a proprietary, client-side analytics solution.

Analytics events sent to this API are transformed and sent to multiple downstream systems/partners in real-time, allowing many needs to be fulfilled by sending a single event. Future integrations with other partners can be done without necessarily changing the contract of this API, thus making it easier (if not completely transparent) to you.

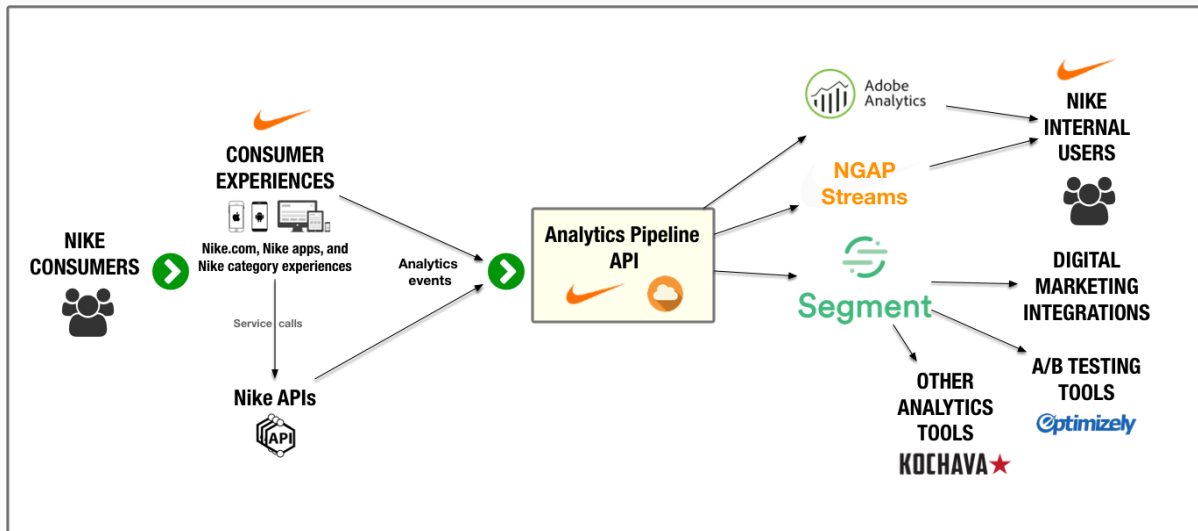

Here are a few ways in which analytics event data can be used:

- Track the success of marketing campaigns via tags or attribution
- Monitor user traffic and conversion metrics
- Track the success of new features (A/B testing)
- Alert on traffic anomalies

Recent success stories include:

- ✓ Found issues with website/feature breakage quickly by alerting on sudden drops in traffic.
- ✓ Track conversions from the addition of Visual Search features to Nike.com.

The following table describes the key details of the API:

Topic	Details
Use this API to	Send all consumer and application tracking events to a single endpoint
Who calls this API	Nike.com PDP UX, Nike.com Visual Search UX, Nike.com Cloud Checkout UX, Buy Domain
Current Version	Analytics Pipeline v1
Scope/Limitations	Analytics events only. All countries supported. Do not use for sales, revenue, or available inventory information
SLAs	Response time (RT) and requests per second (RPS): RT: 500 ms RPS: 500
Domain	Commerce
Prerequisites	None
Contact Info	Slack: #cic-nexus Confluence space: Analytics Pipeline API Team Mailing List: Lst-Nexus.Devops Product Owner: Randy Davis

A Note about Segment

Segment is an analytics API and customer data platform which Nike utilizes. As you saw in the above diagram, it is one of several downstream integrations from the Analytics Pipeline API. By integrating with Segment once, Nike unlocks additional downstream integrations like Optimizely for A/B Testing, Kochava for mobile analytics, and several digital marketing integrations.

Reach out to the Analytics API Product Owner, [Randy Davis](#), for information on the analytics

opportunities available via Segment.

Terms of Service

- Clients must not use analytics data collected with the Analytics Pipeline API for sales, revenue, or available inventory data.
- High usage from a single IP address may be flagged by Nike bot detection and blocked.
- This API is not intended for application monitoring, logging, or reporting on server-side errors.

Authentication

No authentication or authorization is required to use the Analytics Pipeline API.

Use Cases

With the Analytics Pipeline API you can track:



- User-generated actions like clicks, taps, selections of options from a list, text entry, changes of view
- User-submitted searches
- User registrations
- Successful checkouts in a commerce app
- A/B Testing
- Mobile device events
- Metrics on global page events, e.g. page loads in a web app
- Ad campaigns, third-party or internal
- Client-side errors
- Timings of API requests
- Custom events

A Note on Data Transformations

The data you send to this API is transformed (in most cases) to meet the requirements of the

downstream systems to which it is ultimately sent, for example Adobe Analytics.

Here are some screenshots from Adobe Analytics to illustrate what kind of insights you can gain from sending events through this API:

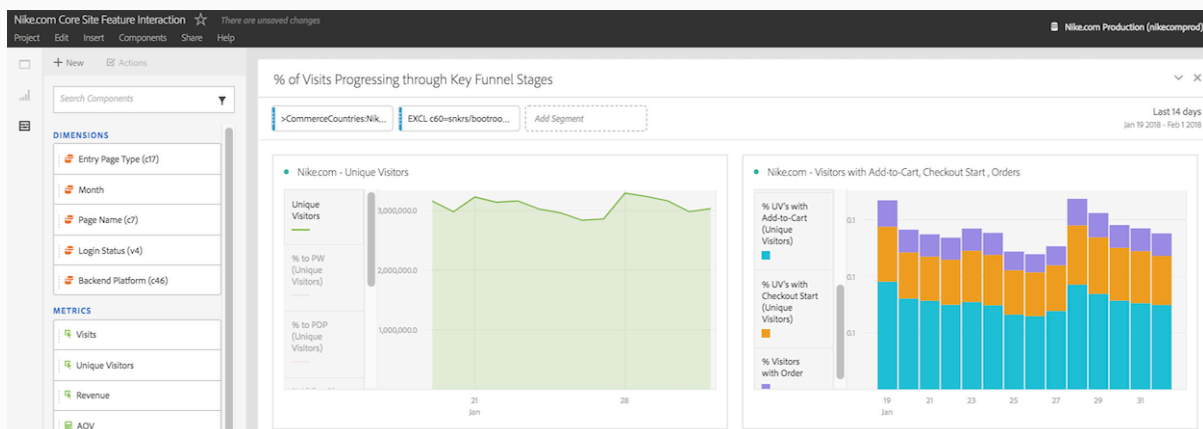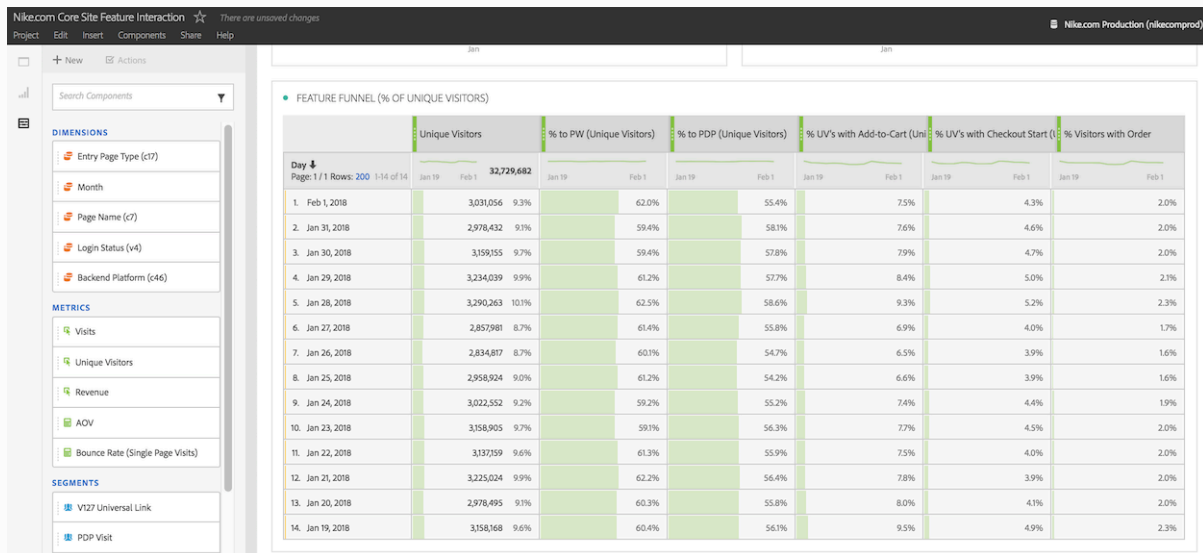

TIP: This guide does not include details of the data transformations. For more info, see [TBD](#).

API Endpoint Quick Reference

Analytics Pipeline API

Endpoint Name	Path	HTTP Method
SEND A NEW EVENT BATCH	/measure/uxevents/v1	POST

Making Your First API Request

For your first Analytics Pipeline API request, send an event that corresponds to a user clicking 'Change Billing Country' in the context of completing checkout in a web app.

Gather Data Needed for the Request

First, gather the data needed to make the request.

URL

In production, all requests to the Analytics Pipeline API go to the same endpoint URL using the POST method:

HTTP Method	Endpoint URL
POST	https://api.nike.com/measure/uxevents/v1

However, for your first request and anytime you are performing tests, use the Test endpoint URL:

<https://experience.test.commerce.nikecloud.com/measure/uxevents/v1>

Headers

All requests must include the **Content-Type** header as follows:

Header Name	Description	Required?
Content-Type	Content type of the request, “application/json” is only value allowed	Yes

Body

To form the request body, answer the following questions by studying the API.md file and related JSON schema files:

- What is the event type that should be used for this event?

The event type **mouse** is described in the API.md as ‘a mouse or touch event’ and is the correct type to use here.

- What are the required fields in the schema which apply to all events AND what are the additional fields are required for this specific event type?

For any request to the Analytics Pipeline API, you will need to combine the required fields from the [Event Batch Schema](#) and [Base Event Schema](#) along with an event-type schema, in this case the [Mouse Event Schema](#).

Note: some event-type schemas specify additional required elements from the Base Event schema.

- What other relevant, optional fields should be included in the event?

This answer will depend on your reasons for tracking the event, and therefore will vary. For the sake of simplicity, only the required fields are included in the below example.

Once you’ve addressed all of the above questions, proceed to form a JSON request body. A

finalized request body could look like this:

```
{
  "$schema": "../../../schemas/eventBatch.json",
  "actorId":
"53449035084208179402477208077095861290",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "id":
"499068e1-cd49-4b06-b6a0-18f8b9831882",
      "timestamp": "2018-01-03T00:53:26.268Z",
      "platform": {
        "type": "web",
        "url": "https://www.nike.com/checkout",
        "pageTitle": "Nike.com Checkout",
        "referrer": "https://secure-
store.nike.com/us/checkout/html/
cart.jsp?l=cart&country=US&lang_locale=en_US&si
te=nikestore&returnURL=https://www.nike.com/t/
air-jordan-1-retro-high-og-orange-mens-shoe-
oe8v08",
        "userAgent": "Mozilla/5.0 (Macintosh;
Intel Mac OS X 10_12_6) AppleWebKit/537.36
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/
537.36",
        "widthInPixels": 1920,
        "heightInPixels": 1080,
        "adobeVisitorId":
"53449035084208179402477208077095861290"
```



```
},
```

Execute the Request

```
"isFunction": false,
```

A cURL command can be used to execute the request from within your app. An example command is shown below (request body omitted for the sake of brevity, but you can use the example above):

```
"application": {
```

```
curl -X POST \
  "name": "checkout",
  "version": "dev-0",
  "environment": "production",
  https://experience.test.commerce.nikecloud.com/
  measure/domain/v1\dotcom",
  -H 'Cache-Control: no-cache', \
  -H 'Content-Type: application/json' \
  -d '{<request body goes here>}'
  "locale": {
```

```
"country": "us",
```

```
"language": "en-us"
```

Parse the Response

```
"eventName":
```

The responses from the Analytics Pipeline API are simple to parse. If the event was successfully recorded, you will get an HTTP 200 response as shown below:

```
"eventType": "mouse",
```

```
"properties": {
```

```
{
  "interactionType": "click",
  "message": "Success"change billing
country",
```

```
"view": {
```

```
"channel": "checkout",
```

If you receive any other response than this, something went wrong. See the [Response Body](#) section for info on error responses.

```
}
```

```
}
```

Using Analytics Pipeline

```
]
```

```
} Analytics Pipeline Overview
```

- [Endpoint Details](#)
- [Path & Query Parameters](#)
- [Request Headers](#)
- [Request Body](#)
- [Response Body](#)

Analytics Pipeline Overview

Use the Analytics Pipeline API as a single destination for tracking your user experience, service, or application events.

Endpoint Details

HTTP Method	URI Path	Restricted?
POST	/measure/ uxevents/v1	No

Path & Query Parameters

There are no path nor query parameters to be used with the Analytics Pipeline API.

Request Headers

Header Name	Description	Required?
Content-Type	Content type of the request, application/json is only value allowed	Required

Request Body

Forming a request body to the Analytics Pipeline API requires combining the following schema information:

- Event Batch: top-most level in the request structure, which is common to all event types. Includes an array of one or more events per the Base Event schema.
- Base Event: schema for the base event, mostly common to all event types. **However, certain event types schemas specify additional required elements from the Base Event schema.**
- Event Type: schema for a particular type of event, **which can specify additional elements that are required from the Base Event schema.**

Put another way, every request must include at minimum the required fields from the Event Batch and Base Event schemas, plus the required fields from an Event Type, plus any additional required fields from the Base Event as specified in that particular Event Type schema.

Event Batch & Base Event

The fields in the base event are described in the below table, by combining the [Event Batch](#) and [Base Event](#) schemas:

Element Name	Description	Required?
\$schema	URL for the JSON schema version used	Optional
actorId	ID representing the principal actor in this event, minimum length of 1 character, e.g. "53449035084208179402477208077095861290"	Required
resourceType	Constant value that describes the type of resource. "dotcom/"	Required

Element Name	Description	Required?
	event_batch” is the only allowed value	
resourceVersion	Constant value that describes the version of this API contract. “v1” is the only allowed value	Required
events	Array of analytics events, minimum of 1	Required
events. eventName	Unique name for this event class, e.g. “click_checkoutChangeBillingCountry”	Required
events. eventTags	Array of event tags, one of “loginAttempt”, “registrationComplete”, “registrationStart”, “userLogIn”	Optional
events.eventTags. items	One or more of “loginAttempt”, “registrationComplete”, “registrationStart”, “userLogIn”	Optional
events. eventType	Unique name for this type of event, e.g. “mouse”	Required
events. timestamp	Date-time of the event, e.g. “1985-04-12T23:20:50.52Z”	Required
events. id	A UUID v4 for this	Required

Element Name	Description	Required?
	event instance	
events. application	Object describing the app in which the event occurred	Required
events.application. name	App name	Required
events.application. version	Semver style or build number of app	Required
events.application. environment	App environment, one of “development”, “test”, or “production”	Required
events.application. domain	Experience domain of app, see list here	Required
events.application. division	Organization which the app domain falls under, e.g. “commerce”	Required
events.application. platform	Technology platform of the app, e.g. “cloud”, “tesla”	Required
events.application. other	Other application data per otherContext schema	Optional
events. locale	Object describing the locale of event	Required
events.locale. country	ISO 3166 country code	Required
events.locale. language	BCP47 language code	Required

Element Name	Description	Required?
events.locale. other	Other locale data per otherContext schema	Optional
events. privacy		Required
events.privacy. isFunctional	Boolean specifying if event is categorized as functional	Required
events.privacy. isMarketing	Boolean specifying if event is categorized as marketing	Required
events.privacy. isPerformance	Boolean specifying if event is categorized as performance	Required
events.privacy. other	Other privacy data per otherContext schema	Optional
events. platform	Object describing app platform. Schema one of /webContext, /serviceContext, /mobileContext from Base Event	Required
events.platform. type	Platform type, “web”	Required
events.platform. pageTitle		Required
events.platform. adobeVisitorId		Optional
events.platform. referrer		Optional
events.platform. userAgent		Optional

Element Name	Description	Required?
events.platform. widthInPixels		Optional
events.platform. heightInPixels		Optional
events.platform. url		Optional
events.platform. type	Platform type, "service"	Required
events.platform. domain		Required
events.platform. resource		Optional
events.platform. version		Optional
events.platform. type	Platform type, "mobile"	Required
events.platform. deviceId		Optional
events.platform. make		Optional
events.platform. model		Optional
events.platform. os		Optional
events.platform.os. name		Optional
events.platform.os. version		Optional
events.platform.os. idfa		Optional
events.platform.os. idfv		Optional

Element Name	Description	Required?
v		
events.platform.os. adid		Optional
events.platform.os. other	Other OS data per otherContext schema	Optional
events.platform. other	Other platform data per otherContext schema	Optional
events. consumer	Object describing the consumer/user context	Optional
events.consumer. anonymousId	A pseudo-unique substitute for a User ID, for cases when you don't have an absolutely unique identifier	Optional
events.consumer. upmId	Nike user profile identifier	Optional
events.consumer. visitWorld	Unite visitor identifier	Required
events.consumer. visitId	Unite visit identifier	Required
events.consumer. adobeMarketingCloudId	The value of the s_vi cookie in the browser	Optional
events.consumer. adobeVisitorId	A value Adobe needs for identity	Optional
events.consumer. isSwosh	Boolean where if true the user is a Nike	Required

Element Name	Description	Required?
	employee	
events.consumer. allowsMarketing	Boolean where if true the user has opted into marketing events being collected	Required
events.consumer. allowsPerformance	Boolean where if true the user has opted into performance events being collected	Required
events.consumer. other	Other consumer data per otherContext schema	Optional
events. marketing	Object containing tracking parameters that tie to the Ad campaign	Optional
events.marketing. campaignKey	The campaign key for a specific Ad vendor	Required
events.marketing. campaignValue	The value for a specific Ad vendors campaign	Required
events.marketing. clickIdKey	The click identifier for a specific Ad vendors campaign	Required
events.marketing. clickIdValue	The click value for a specific user that clicks on a specific Ad	Required
events.marketing. vendorKey	The query parameter key for vendor identification	Required

Element Name	Description	Required?
events.marketing. vendorValue	The query parameter value for vendor identification	Required
events.marketing. siteSource	The query parameter value for SITESRC	Optional
events.marketing. other	Other campaign data per otherContext schema	Optional
events. abTest	Object containing the A/B testing context	Optional
events.abTest. neo	Object containing A/B test data for Neo	Optional
events.abTest.neo. swimlane	String	Optional
events.abTest.neo. profiles	Array	Optional
events.abTest.neo.profiles. name	String	Required
events.abTest.neo.profiles. experiments	Array of experiment data	Required
events.abTest.neo.profiles.experiments. id	String	Required
events.abTest.neo.profiles.experiments. variation	String	Required
events.abTest.neo.profiles.experiments. other	Other experiment data per otherContext schema	Optional
events.abTest.neo.profiles	Other profile data per	Optional

Element Name	Description	Required?
files. other	otherContext schema	
events.abTest.neo. other	Other Neo data per otherContext schema	Optional
events.abTest. optimizely	Array of A/B test data for Optimizely	Optional
events.abTest.optimizely. experimentId	Experiment identifier, string	Optional
events.abTest.optimizely. experimentName	Experiment name, string	Optional
events.abTest.optimizely. variationId	Variation identifier, string	Optional
events.abTest.optimizely. variationName	Variation name, string	Optional
events.abTest. other	Other A/B Test data per otherContext schema	Optional
events. order	Object containing the consumer order context. Cannot be combined with “products” context in same request	Optional
events.order. checkoutId	Generated id of a submitted checkout	Required
events.order. orderId	Id of a submitted order	Optional
events.order. promoCode	Promo code applied to checkout	Optional
events.order.shipping. cost	Shipping cost	Optional

Element Name	Description	Required?
events.order.shipping. method	Shipping method	Optional
events.order.vas. giftWrap	Number	Optional
events.order.vas. other	Number	Optional
events.order. tax	Tax on order	Optional
events.order. discount	Discount on order	Optional
events.order. total	Total of order	Optional
events.order. currency	Currency code on order	Optional
events.order. products	Array of at least one product, see 'events.products' in this table for schema	Optional
events.order. payments	Array of at least one payment on order	Optional
events.order.payment. s.paymentType	Type of payment	Required
events.order.payment. s.stored	Boolean that is true if payment is a stored payment	Required
events.order.payment. s.other	Other payment data per otherContext schema	Optional
events. products	Object containing product context. Cannot be combined with "order" context in same request	Optional

Element Name	Description	Required?
events.products. productid	Product UUID	Required
events.products. brand	Brand of the product	Optional
events.products. category	Category of the product	Optional
events.products. inventoryStatus	Inventory status, one of “coming soon”, “discontinued”, “gift card”, “in stock”, “locked”, “nikeid”, “NONE”, “out of stock”, “preorder”, “unlocked:profile:in stock”, null	Optional
events.products. nikeSize	Nike size code of the product	Optional
events.products. pid	Classic integer style product id	Optional
events.products. priceAmount	Price of product (number)	Optional
events.products. priceCurrency	Currency code of price	Optional
events.products. priceStatus	Price status, one of “clearance”, “reduced”, “regular”, null	Optional
events.products. productName	Name of product	Optional
events.products. prod	Type of product	Optional

Element Name	Description	Required?
uctType		
events.products. quantity	Unit quantity of product (number)	Optional
events.products. skuId	SKU UUID	Optional
events.products. sportsTags	N/A	Optional
events.products. styleColor	Style-color code of product	Optional
events.products. styleType	Style type of product	Optional
events.products. subtitle	Subtitle of product	Optional
events.products. other	Other product data per otherContext schema	Optional
events. other	A non-validated name-spaced region where domain-specific data can be added, per otherContext schema	Optional

Event Types

The following table lists all of the event types along with a description of how they should be used.

Event Type	Description
action	A generic event for sending data otherwise not specified in another

Event Type	Description
	event type
appLaunch	An event to track the launching of an application on a mobile device
changeView	An event representing the user viewing a part of an application. It could represent a page, screen, or section
checkoutConfirmation	A checkout confirmation event from the buy domain
error	A collection of errors generated by the client or a service
loginComplete	An event for tracking a completed login
metric	An event for tracking metric data. It closely follows the Artemis/SignalFx schema
mouse	A mouse or touch event
pageLoad	Performance timings for browser page loads
registrationComplete	An event for tracking a completed registration
search	Event representing a user submitting a search
selection	Event tracking when the user makes a selection. e.g. select box, radio group or checkbox
textInput	Event representing a user entering text in an application. This should be dispatched on blur to avoid too

Event Type	Description
	many events

TIP: Each event-type schema must be combined with the base-event schema in order to have a fully-formed request body.

Next, each event type will be described in detail and a sample request body will be included for each.

Action

Element Name	Description	Required?
events. eventType	Type of event, only “action” is allowed	Required
events. properties	Object	Optional
events.properties. view	Object representing the user viewing part of an application per the baseView schema	Required
events.properties.view. channel		Required
events.properties.view. name		Optional
events.properties.view. viewType		Optional
events.properties.view. contentBoostTags	List of tags describing the enhanced content of the view, e.g.	Optional

Element Name	Description	Required?
	"video", "music", "game"	
events.properties. other	Other event data per otherContext schema	Optional

Sample request body:

```
{
  "actorId":
  "7894228d-5087-415f-80d0-55350568ea57",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "eventName": "generic_event",
      "eventType": "action",
      "application": {
        "name": "pdp",
        "environment": "production",
        "division": "commerce",
        "domain": "dotcom",
        "platform": "cloud",
        "version": ""
      },
      "platform": {
        "type": "web",
        "pageTitle": "Air Jordan 1 Retro High
OG \"Cool Blue\" Men's Shoe. Nike.com",
        "referrer": "https://store.nike.com/us/
```

```
en_us/pw/jordan/ofq",
  "url": "https://www.nike.com/t/air-
jordan-1-retro-high-og-orange-mens-shoe-
oe8v08",
  "adobeVisitorId":
"53449035084208179402477208077095861290",
  "userAgent": "Mozilla/5.0 (Macintosh;
Intel Mac OS X 10_12_6) AppleWebKit/537.36
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/
537.36",
  "heightInPixels": 1080,
  "widthInPixels": 1920
},
"properties": {
  "view": {
    "name": "Air Jordan 1 Retro High OG
\"Cool Blue\" Men's Shoe",
    "channel": "pdp",
    "contentBoostTags": []
  }
},
"locale": {
  "country": "us",
  "language": "en-US"
},
"privacy": {
  "isMarketing": true,
  "isPerformance": true,
  "isFunctiona": false
},
"id": "4aba00f1-02fa-4f9d-
a66d-339ba05b7e30",
"timestamp": "2018-01-03T00:40:35.918Z"
```

}
App Launch
]

Element Name	Description	Required?
events. eventType	Type of event, only “appLaunch” is allowed	Required
events. consumer	Consumer context from Base Event	Required
events. platform	Platform context from Base Event	Required
events.platform. type	Platform type, only “mobile” is allowed	Required
events. marketing	Marketing context from Base Event	Required

Sample request body:

```
{
  "actorId": "7894225087415055350568",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "eventName": "snkrs_ios_open",
      "eventType": "appLaunch",
      "application": {
        "name": "snkrs",
        "environment": "production",
        "division": "commerce",
        "domain": "launch",

```

```
    "platform": "cloud",
    "version": ""
  },
  "consumer": {
    "upmId": "",
    "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "visitId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "isSwoosh": false,
    "allowsMarketing": true,
    "allowsPerformance": true
  },
  "marketing": {
    "campaignKey": "jordan_4_retro",
    "campaignValue":
"30235f5664094b83",
    "clickIdKey": "click_me",
    "clickIdValue":
"30235f5664094b83",
    "vendorKey": "ads_r_us",
    "vendorValue": "123456789"
  },
  "platform": {
    "type": "mobile",
    "deviceId":
"2b6f0cc904d137be2e1730235f5664094b831186",
    "make": "Apple",
    "model": "A1549",
    "os": {
```

```
"name": "ios",  
"version": "11.2.2",  
"idfa":
```

Change View

```
"2b6f0cc904d137be2e1730235f5664094b831186",
```

Element Name	Description	Required?
events. event Type }, "heightInPixels": 1080,	Type of event, only "changeView" is allowed	Required
events. properties }, events. properties.view locale: "country": "us", "language": "en-US"	Object representing the user viewing part of an application per the baseView schema	Required
events. properties.view "privacy": { .channel "isMarketing": true,		Required
events. properties.view "isPerformance": true, .name "isFunctional": false		Optional
events. properties.view }, .viewType "id": "abc123xyz",		Optional
events. properties.view "contentBoostTags" }] }	List of tags describing the enhanced content of the view, e.g. "video", "music", "game"	Optional
events. properties.previousView	Object representing the user previously viewing part of an application per the baseView schema	Required
events. properties.previousView		Required

Element Name	Description	Required?
ousView. channel		
events.properties.previousView. name		Optional
events.properties.previousView. viewType		Optional
events.properties.previousView. contentBoostTags	List of tags describing the enhanced content of the view, e.g. "video", "music", "game"	Optional
events.properties. other	Other event data per otherContext schema	Optional

Sample request body:

```
{
  "actorId":
    "7894228d-5087-415f-80d0-55350568ea57",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "eventName": "load_pdp",
      "eventType": "changeView",
      "application": {
        "name": "pdp",
        "environment": "production",
        "division": "commerce",
        "domain": "dotcom",
```

```
    "platform": "cloud",
    "version": ""
  },
  "consumer": {
    "upmId": "",
    "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "visitId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "isSwoosh": false,
    "allowsMarketing": true,
    "allowsPerformance": true
  },
  "products": [
    {
      "productId": "12063010",
      "brand": "Jordan",
      "category": "Lifestyle",
      "inventoryStatus": "in stock",
      "pid": "12063010",
      "priceAmount": 175,
      "priceCurrency": "usd",
      "priceStatus": "regular",
      "productName": "Air Jordan 1 Retro
High OG \"Cool Blue\" Men's Shoe"
    }
  ],
  "platform": {
    "type": "web",
    "pageTitle": "Air Jordan 1 Retro High
```

```
OG \"Cool Blue\" Men's Shoe. Nike.com",
    "referrer": "https://store.nike.com/us/en_us/pw/jordan/ofq",
    "url": "https://www.nike.com/t/air-jordan-1-retro-high-og-orange-mens-shoe-oe8v08",
    "adobeVisitorId":
"53449035084208179402477208077095861290",
    "userAgent": "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_12_6) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/63.0.3239.84 Safari/537.36",
    "heightInPixels": 1080,
    "widthInPixels": 1920
},
"properties": {
    "view": {
        "name": "Air Jordan 1 Retro High OG \"Cool Blue\" Men's Shoe",
        "channel": "pdp",
        "contentBoostTags": []
    },
    "previousView": {
        "viewType": "unified profile",
        "channel": "login"
    }
},
"locale": {
    "country": "us",
    "language": "en-US"
```



```
    },  
    "privacy": {  
      "isMarketing": true,  
      "isPerformance": true,  
      "isFunctional": false  
    }  
  },  
  "event": {  
    "id": "4aba00f1-02fa-4f9d-a66d-339ba05b7e3a"  
  },  
  "timestamp": "2018-01-03T00:40:35.918Z"  
}
```

Checkout Confirmation

Element Name	Description	Required?
events.eventType	Type of event, only checkoutConfirmation is allowed	Required
events.properties.timestamp	Object	Required
events.properties.checkoutId	Checkout identifier, UUID, client provided	Required
events.properties.orderId	The unique order id generated for this checkout	Required
events.properties.currency	Currency code following the ISO 4217 standard	Required
events.properties.totals	Price details for the checkout in whole	Required
events.properties.totals.subtotal	Subtotal of the item costs for all items	Required
events.properties.totals.valueAddedServiceTotal	Total of value added services on the items	Required
events.properties.totals.taxTotal	Total of all taxes applied to the checkout	Required
events.properties.totals.discountTotal	Total of all discounts applied to the checkout	Required

Element Name	Description	Required?
events.properties.total s.shippingTotal	Total of all shipping costs (less shipping discounts) on the checkout	Required
events.properties.total s.total	Total price of the entire checkout, item costs + shipping costs + taxes (excluding 'VALUEADDEDTAX') less any discounts	Required
events.properties.total s.other	Other totals data per otherContext schema	Optional

Sample request body:

```
{
  "actorId":
    "7894228d-5087-415f-80d0-55350568ea58",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "eventName": "checkout_complete",
      "eventType": "checkoutConfirmation",
      "application": {
        "name": "pdp",
        "environment": "production",
        "division": "commerce",
        "domain": "dotcom",
        "platform": "cloud",
```

```
        "version": "",
    },
    "platform": {
        "type": "web",
        "pageTitle": "Air Jordan 1 Retro High
OG \"Cool Blue\" Men's Shoe. Nike.com",
        "referrer": "https://store.nike.com/us/en_us/pw/jordan/ofq",
        "url": "https://www.nike.com/t/air-jordan-1-retro-high-og-orange-mens-shoe-oe8v08",
        "adobeVisitorId":
"53449035084208179402477208077095861290",
        "userAgent": "Mozilla/5.0 (Macintosh;
Intel Mac OS X 10_12_6) AppleWebKit/537.36
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/537.36",
        "heightInPixels": 1080,
        "widthInPixels": 1920
    },
    "properties": {
        "checkoutId": "986cad33-36bb-4cfd-a733-7e8de0a3dece",
        "orderId": "0123456789876",
        "currency": "USD",
        "totals": {
            "subtotal": 100,

"valueAddedServicesTotal": 0,
            "taxTotal": 5,
```

```

"discountTotal": 5,
"shippingTotal": 10,
"total": 110

```

Error

```

}

```

Element Name	Description	Required?
events. event "locale": { "country": "us" "language": "en-US" }, events. properties "error": { "isMarketing": true, "isFunctional": false }, events. properties.error "message": "4aba00f1-02fa-4f9d-a66d-339ba05b7e30" "field": "timestamp": "2018-01-03T00:40:35.918Z" }, events. properties.view "channel": "name": "viewType": "contentBoostTags":	Type of event, only "us" is allowed Object Array of error data Error message, string Error field, string Object representing the user viewing part of an application per the baseView schema List of tags describing the enhanced content of the view, e.g.	Required Required Required Optional Optional Optional Optional Optional

Element Name	Description	Required?
	"video", "music", "game"	
events.properties.other	Other error data per otherContext schema	Optional

Sample request body:

```
{
  "$schema": "../../../schemas/eventBatch.json",
  "actorId":
    "53449035084208179402477208077095861290",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "id":
        "16d25930-1c95-4cd8-bd39-320f60a0aaaf",
      "timestamp": "2018-01-03T00:57:11.837Z",
      "consumer": {
        "allowsPerformance": true,
        "allowsMarketing": true,
        "upmId": "123456789",
        "visitorId":
          "079ae31b-8282-4fed-8c6e-615c06cf51af",
        "visitId": "13",
        "isSwoosh": true
      },
      "platform": {
        "type": "web",
```

```
    "url": "https://www.nike.com/checkout/payment",
    "pageTitle": "Nike.com Checkout",
    "referrer": "https://secure-store.nike.com/us/checkout/html/cart.jsp?l=cart&country=US&lang_locale=en_US&site=nikestore&returnURL=https://www.nike.com/t/air-jordan-1-retro-high-og-orange-mens-shoe-oe8v08",
    "userAgent": "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_12_6) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/63.0.3239.84 Safari/537.36",
    "widthInPixels": 1920,
    "heightInPixels": 1080,
    "adobeVisitorId":
"53449035084208179402477208077095861290"
  },
  "privacy": {
    "isFunction": false,
    "isPerformance": true,
    "isMarketing": false
  },
  "abTest": {
    "neo": {
      "swimLane": "32",
      "profiles": [
        {
          "name": "main",
          "experiments": [
            {
              "id": "3039-interceptor",
              "variation": "a"
```

```
    },  
    {  
      "id": "3250-interceptor",  
      "variation": "a"  
    },  
    {  
      "id": "3136-interceptor",  
      "variation": "a"  
    }  
  ]  
}  
]  
}  
},  
"application": {  
  "name": "checkout",  
  "version": "dev-0",  
  "environment": "production",  
  "domain": "dotcom",  
  "division": "commerce",  
  "platform": "cloud"  
},  
"locale": {  
  "country": "us",  
  "language": "en-us"  
},  
"eventName":  
"error_checkoutServiceError",  
"eventType": "error",  
"properties": {  
  "view": {  
    "name": "order review",  
    "channel": "checkout"
```

Login Complete

```
"errors": [
```

Element Name	Description	Required?
events.eventType	Type of event only required, "loginComplete" is allowed	Required
events.consumer	Consumer context from the Base Event	Required
events.marketing	Consumer context from the Base Event	Required

```
"productName": "Air Jordan 1 Retro
```

Sample request body:

```
High OS \ COOL Blue\" Men's Shoe",
```

```
"productId":
```

```
{
  "37c1d287-b591-556f-980c-50fba809d8c2",
  "actorId": "7894225087415055350568",
  "skuId": "8406ac5c-5b07-5742-b19a-e02163ebaf95",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": {
    "priceAmount": 105,
    "priceCurrency": "USD",
    {
      "quantity": 1,
      "eventName": "snkfs_ios_login",
      "pid": "12063010",
      "eventType": "loginComplete",
      "brand": "Jordan",
      "application": {
        "productType": "FOOTWEAR",
        "name": "snkfs",
        "subtitle": "Men's Shoe",
        "environment": "production",
        "styleType": "INLINE",
        "division": "commerce",
        "nikeSize": "8.5",
        "domain": "launch",
      },
      "platform": "cloud",
    },
    "version": ""
  },
  "consumer": {
  }
```



```
    "upmId": "",
    "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "visitId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "isSwoosh": false,
    "allowsMarketing": true,
    "allowsPerformance": true
  },
  "marketing": {
    "campaignKey": "jordan_4_retro",
    "campaignValue":
"30235f5664094b83",
    "clickIdKey": "click_me",
    "clickIdValue":
"30235f5664094b83",
    "vendorKey": "ads_r_us",
    "vendorValue": "123456789"
  },
  "platform": {
    "type": "mobile",
    "deviceId":
"2b6f0cc904d137be2e1730235f5664094b831186",
    "make": "Apple",
    "model": "A1549",
    "os": {
      "name": "ios",
      "version": "11.2.2",
      "idfa":
"2b6f0cc904d137be2e1730235f5664094b831186",
```

```

    "idfv":
      "2b6f0cc904d137be2e1730235f5664094b831186"
  Metric
    },
    "heightInPixels": 1080,

```

Element Name	Description	Required?
events.eventType	Type of event, only "metric" is allowed	Required
events.properties.country	Object	Required
events.properties.locale	Object	Required
events.properties.metricName	Metric name, string	Required
events.properties.metricType	Metric type, one of "gauge", "counter", "cumulative_counter", "isPerformance": true, "isFunction": false	Required
events.properties.dimensions	Object	Required
events.properties.timestamp	Metric value, number	Required
events.properties.other	Other metric data per otherContext schema	Optional

Sample request body:

```

{
  "$schema": "../../../schemas/eventBatch.json",
  "actorId":
    "53449035084208179402477208077095861290",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",

```

```
"events": [  
  {  
    "id":  
"99461f51-1d70-4ece-9433-7bffc8a71f8",  
    "timestamp": "2018-01-03T00:44:15.582Z",  
    "consumer": {  
      "allowsPerformance": true,  
      "allowsMarketing": true,  
      "upmId": "123456789",  
      "visitorId":  
"079ae31b-8282-4fed-8c6e-615c06cf51af",  
      "visitId": "13",  
      "isSwoosh": true  
    },  
    "platform": {  
      "type": "web",  
      "url": "https://www.nike.com/checkout",  
      "pageTitle": "Nike.com Checkout",  
      "referrer": "https://secure-  
store.nike.com/us/checkout/html/  
cart.jsp?l=cart&country=US&lang_locale=en_US&si  
te=nikestore&returnURL=https://www.nike.com/t/  
air-jordan-1-retro-high-og-orange-mens-shoe-  
oe8v08",  
      "userAgent": "Mozilla/5.0 (Macintosh;  
Intel Mac OS X 10_12_6) AppleWebKit/537.36  
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/  
537.36",  
      "widthInPixels": 1920,  
      "heightInPixels": 1080,  
    }  
  },  
  {  
    "id":  
"99461f51-1d70-4ece-9433-7bffc8a71f8",  
    "timestamp": "2018-01-03T00:44:15.582Z",  
    "consumer": {  
      "allowsPerformance": true,  
      "allowsMarketing": true,  
      "upmId": "123456789",  
      "visitorId":  
"079ae31b-8282-4fed-8c6e-615c06cf51af",  
      "visitId": "13",  
      "isSwoosh": true  
    },  
    "platform": {  
      "type": "web",  
      "url": "https://www.nike.com/checkout",  
      "pageTitle": "Nike.com Checkout",  
      "referrer": "https://secure-  
store.nike.com/us/checkout/html/  
cart.jsp?l=cart&country=US&lang_locale=en_US&si  
te=nikestore&returnURL=https://www.nike.com/t/  
air-jordan-1-retro-high-og-orange-mens-shoe-  
oe8v08",  
      "userAgent": "Mozilla/5.0 (Macintosh;  
Intel Mac OS X 10_12_6) AppleWebKit/537.36  
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/  
537.36",  
      "widthInPixels": 1920,  
      "heightInPixels": 1080,  
    }  
  }  
]
```

```
      "adobeVisitorId":  
      "53449035084208179402477208077095861290"  
    },  
    "privacy": {  
      "isFunctional": false,  
      "isPerformance": true,  
      "isMarketing": false  
    },  
    "abTest": {  
      "neo": {  
        "swimLane": "32",  
        "profiles": [  
          {  
            "name": "main",  
            "experiments": [  
              {  
                "id": "3039-interceptor",  
                "variation": "a"  
              },  
              {  
                "id": "3250-interceptor",  
                "variation": "a"  
              },  
              {  
                "id": "3136-interceptor",  
                "variation": "a"  
              }  
            ]  
          }  
        ]  
      }  
    }  
  ]  
}
```

```

    },
  },
  "application": {
    "name": "checkout",
    "version": "dev-0",
    "environment": "production",
    "domain": "dotcom",
    "division": "commerce",
    "platform": "cloud",
    "properties": {
      "interaction": "click",
      "country": "us",
      "language": "en-us",
      "target": {
        "eventName": "checkoutPreviewComplete",
        "eventType": "metric",
        "country": "us",
        "properties": {
          "view": {
            "metricName": "firstCheckoutPreviewComplete",
            "metricType": "gauge",
            "dimensions": {
              "successCount": 2
            }
          },
          "channel": "email",
          "metricValue": 6919,
          "name": "firstCheckoutPreviewComplete",
          "viewType": "video",
          "contentBoostTags": ["video", "music"]
        }
      }
    }
  }
}

```

Mouse "application": {

The fields for the **mouse** event type are:

Element Name	Description	Required?
events.eventType	Type of event, only "mouse" is allowed	Required
events.properties	Object	Required
events.properties.interaction	Type of interaction (e.g. "click", "touch", "drag" etc.)	Required
events.properties.country	Country	Required
events.properties.language	Language	Required
events.properties.target	Description of target of interaction, e.g. "checkoutPreviewComplete", "change billing", "country"	Required
events.properties.view	Object representing the user viewing part of an application per the baseView schema	Required
events.properties.view.channel	Channel	Required
events.properties.view.name	Channel	Optional
events.properties.view.viewType	Channel	Optional
events.properties.view.contentBoostTags	List of tags describing the enhanced content of the view, e.g. "video", "music",	Optional

Element Name	Description	Required?
	"game"	
events.properties. other	Other mouse data per otherContext schema	Optional

Sample request body:

```
{
  "$schema": "../../../schemas/eventBatch.json",
  "actorId":
"53449035084208179402477208077095861290",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "id":
"499068e1-cd49-4b06-b6a0-18f8b9831882",
      "timestamp": "2018-01-03T00:53:26.268Z",
      "consumer": {
        "allowsPerformance": true,
        "allowsMarketing": true,
        "upmId": "123456789",
        "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
        "visitId": "13",
        "isSwoosh": true
      },
      "platform": {
        "type": "web",
        "url": "https://www.nike.com/checkout",
```

```
    "pageTitle": "Nike.com Checkout",
    "referrer": "https://secure-
store.nike.com/us/checkout/html/
cart.jsp?l=cart&country=US&lang_locale=en_US&si
te=nikestore&returnURL=https://www.nike.com/t/
air-jordan-1-retro-high-og-orange-mens-shoe-
oe8v08",
    "userAgent": "Mozilla/5.0 (Macintosh;
Intel Mac OS X 10_12_6) AppleWebKit/537.36
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/
537.36",
    "widthInPixels": 1920,
    "heightInPixels": 1080,
    "adobeVisitorId":
"53449035084208179402477208077095861290"
  },
  "privacy": {
    "isFunction": false,
    "isPerformance": true,
    "isMarketing": false
  },
  "abTest": {
    "neo": {
      "swimLane": "32",
      "profiles": [
        {
          "name": "main",
          "experiments": [
            {
              "id": "3039-interceptor",
              "variation": "a"
            }
          ]
        }
      ]
    }
  }
}
```

```
        "id": "3250-interceptor",
        "variation": "a"
    },
    {
        "id": "3136-interceptor",
        "variation": "a"
    }
]
}
]
}
},
"application": {
    "name": "checkout",
    "version": "dev-0",
    "environment": "production",
    "domain": "dotcom",
    "division": "commerce",
    "platform": "cloud"
},
"locale": {
    "country": "us",
    "language": "en-us"
},
"eventName":
"click_checkoutChangeBillingCountry",
    "eventType": "mouse",
    "properties": {
        "interactionType": "click",
        "mouseTarget": "change billing
country",
        "view": {
            "channel": "checkout",
```


Page Load "name": "tunnel"
}

Element Name	Description	Required?
events.products	Type of event, only "page load" is allowed.	Required
events.eventType	"productName": "Air Jordan 1 Retro High OG \	Required
events.properties	"productId": "37c1d287-b591-556f-980c-50fba809d8c2",	Required
events.properties.nav	"styleColor": "AJ5997-455",	Required
events.properties.resp	"skuId": "8406ac5c-5b07-5742-b19a-e02163ebaf95",	Required
events.properties.dom	"priceAmount": 105,	Required
events.properties.dom	"priceCurrency": "USD",	Required
events.properties.dom	"quantity": 1,	Required
events.properties.dom	"pid": "12063010",	Required
events.properties.dom	"first": "Jordan",	Required
events.properties.dom	"productType": "FOOTWEAR",	Required
events.properties.dom	"subtitle": "Men's Shoe",	Required
events.properties.dom	"styleType": "INLINE",	Required
events.properties.dom	"nikeSize": "8.5"	Optional
events.properties.dom	Other page data per otherContext schema	

Sample request body:

```

}
{
  "$schema": "../../../schemas/eventBatch.json",
  "actorId":
    "53449035084208179402477208077095861290",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",

```

```
"events": [  
  {  
    "id": "ccde90ce-  
edac-47a1-bad8-391d0d13c813",  
    "timestamp": "2018-01-03T00:44:12.007Z",  
    "consumer": {  
      "allowsPerformance": true,  
      "allowsMarketing": true,  
      "upmId": "",  
      "visitorId": "",  
      "visitId": "",  
      "isSwoosh": false  
    },  
    "platform": {  
      "type": "web",  
      "url": "https://www.nike.com/checkout",  
      "pageTitle": "Nike.com Checkout",  
      "referrer": "https://secure-  
store.nike.com/us/checkout/html/  
cart.jsp?l=cart&country=US&lang_locale=en_US&si  
te=nikestore&returnURL=https://www.nike.com/t/  
air-jordan-1-retro-high-og-orange-mens-shoe-  
oe8v08",  
      "userAgent": "Mozilla/5.0 (Macintosh;  
Intel Mac OS X 10_12_6) AppleWebKit/537.36  
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/  
537.36",  
      "widthInPixels": 1920,  
      "heightInPixels": 1080,  
      "adobeVisitorId":
```

```
"53449035084208179402477208077095861290"
```

```
  },
  "privacy": {
    "isFunction": false,
    "isPerformance": true,
    "isMarketing": false
  },
  "abTest": {
    "neo": {
      "swimLane": "32",
      "profiles": [
        {
          "name": "main",
          "experiments": [
            {
              "id": "3039-interceptor",
              "variation": "a"
            },
            {
              "id": "3250-interceptor",
              "variation": "a"
            },
            {
              "id": "3136-interceptor",
              "variation": "a"
            }
          ]
        }
      ]
    }
  }
}
```

```
},
"application": {
  "name": "checkout",
  "version": "dev-0",
  "environment": "production",
  "domain": "dotcom",
  "division": "commerce",
  "platform": "cloud"
},
"locale": {
  "country": "us",
  "language": "en-us"
},
"eventName": "pageLoad",
"eventType": "pageLoad",
"properties": {
  "view": {
    "name": "APP_SHELL",
    "channel": "checkout"
  },
  "previousView": {
    "name": "loading",
    "channel": "checkout"
  },
  "navigationStartInMS": 1514940248663,
  "responseEndInMS": 1514940252002,
  "domContentLoadedInMS": 3339,
  "domCompleteInMS": 3339,
  "firstPaintInMS": 3339,
  "pageLoadInMS": 3339
}
```

```

    }
  }
}

```

Registration Complete

```

}

```

Element Name	Description	Required?
events. eventType	Type of event, only "registrationComplete" is allowed	Required
events. consumer	Consumer context from Base Event	Required
events. marketing	Marketing context from Base Event	Required

Sample request body:

```

{
  "actorId": "7894225087415055350568",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "eventName": "snkrs_ios_register",
      "eventType": "registrationComplete",
      "application": {
        "name": "snkrs",
        "environment": "production",
        "division": "commerce",
        "domain": "launch",
        "platform": "cloud",

```

```
    "version": "",
  },
  "consumer": {
    "upmId": "",
    "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "visitId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
    "isSwoosh": false,
    "allowsMarketing": true,
    "allowsPerformance": true
  },
  "marketing": {
    "campaignKey": "jordan_4_retro",
    "campaignValue":
"30235f5664094b83",
    "clickIdKey": "click_me",
    "clickIdValue":
"30235f5664094b83",
    "vendorKey": "ads_r_us",
    "vendorValue": "123456789"
  },
  "platform": {
    "type": "mobile",
    "deviceId":
"2b6f0cc904d137be2e1730235f5664094b831186",
    "make": "Apple",
    "model": "A1549",
    "os": {
      "name": "ios",
```

```
"version": "11.2.2",
```

```
"idfa":
```

Search
"2b6f0cc904d137be2e1730235f5664094b831186",

```
"idfv":
```

The following common elements are required:

```
"2b6f0cc904d137be2e1730235f5664094b831186"
```

Element Name	Description	Required?
events.eventType	"heightInPixels": 1080, Type of event, only "widthInPixels": 1920 "search" is allowed	Required
events.properties	Object	Required

```
"country": "us",
```

The above must be combined with one of the following:

```
"language": "en-US"
```

Element Name	Description	Required?
events.properties.itemIndex	"privacy": { Integer index of the search item as it's presented to the user "isMarketing": true, "isPerformance": true, "isFunction": false in the list of search items	Optional
events.properties.searchItem	"id": "abc123xyz", A type-ahead or autocomplete item the user selects "timestamp": "2018-01-03T00:40:35.918Z"	Optional
events.properties.searchText	The search text the user entered	Required
events.properties.view	Object representing the user viewing part of an application per the baseView schema	Optional
events.properties.view.channel		Required
events.properties.view		Optional

Element Name	Description	Required?
.name		
events.properties.view .viewType		Optional
events.properties.view .contentBoostTags	List of tags describing the enhanced content of the view, e.g. “video”, “music”, “game”	Optional
events.properties. other	Other search data per otherContext schema	Optional

OR

Element Name	Description	Required?
events.properties. searchText	The search text the user entered	Required
events.properties. searchType	The type of search used, “userEntered” allowed only	Required
events.properties. view	Object representing the user viewing part of an application per the baseView schema	Optional
events.properties.view .channel		Required
events.properties.view .name		Optional
events.properties.view .viewType		Optional

Element Name	Description	Required?
events.properties.view .contentBoostTags	List of tags describing the enhanced content of the view, e.g. “video”, “music”, “game”	Optional
events.properties. other	Other search data per otherContext schema	Optional

OR

Element Name	Description	Required?
events.properties. item Index	Integer index of the search item as it’s presented to the user in the list of search items	Optional
events.properties. searchItem	A type-ahead or autocomplete item the user selects	Required
events.properties. searchText	The search text the user entered	Required
events.properties. searchType	The type of search used, “typeahead” or “visualSearch” allowed only	Required
events.properties. view	Object representing the user viewing part of an application per the baseView schema	Optional
events.properties.view .channel		Required

Element Name	Description	Required?
events.properties.view .name		Optional
events.properties.view .viewType		Optional
events.properties.view .contentBoostTags	List of tags describing the enhanced content of the view, e.g. "video", "music", "game"	Optional
events.properties. other	Other search data per otherContext schema	Optional

Sample request body:

```
{
  "actorId": "123456789",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "id":
"c3656c76-c2d9-4b73-be32-140b795d9521",
      "timestamp": "2018-01-03T00:34:12.701Z",
      "eventName":
"click_navOnsiteSearchTypeahead",
      "eventType": "search",
      "application": {
        "name": "search",
        "environment": "production",
```

```
    "division": "commerce",
    "domain": "dotcom",
    "platform": "legacy",
    "version": "2.0.0"
  },
  "consumer": {
    "allowsMarketing": true,
    "allowsPerformance": true,
    "isSwoosh": true,
    "upmId": "123456789",
    "visitId": "13",
    "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af"
  },
  "platform": {
    "type": "web",
    "pageTitle": "Official Jordan Store.
Nike.com",
    "referrer": "https://www.nike.com/us/
en_us/e/nike-plus-membership",
    "url": "https://store.nike.com/us/
en_us/pw/jordan/ofq",
    "adobeVisitorId":
"53449035084208179402477208077095861290",
    "userAgent": "Mozilla/5.0 (Macintosh;
Intel Mac OS X 10_12_6) AppleWebKit/537.36
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/
537.36",
    "heightInPixels": 1080,
    "widthInPixels": 1920
```

```

    },
    "properties": {
Selection "itemIndex": 0,
        "searchItem": "jordan",

```

Element Name	Description	Required?
events. searchText	String "jordan",	Required
events. eventType	"searchType": "typeahead" Type of event, only "view": { "selection" is allowed	Required
events. properties	"name": "visual search modal", Object Required "channel": "visual search"	Required
events.properties. selectionTarget	String	Required
events.properties. selectionValue	String "country": "us",	Required
events.properties. view	"language": "en" Object representing the user viewing part of an application per the baseView schema "privacy": { "isMarketing": false,	Optional
events.properties. view.channel	"performance": true, "isFunction": false	Required
events.properties.view. .name		Optional
events.properties.view. .viewType		Optional
events.properties.view. .contentBoostTags	List of tags describing the enhanced content of the view, e.g. "video", "music", "game"	Optional
events.properties. other	Other selection data per otherContext schema	Optional

Sample request body:

```
{
  "$schema": "../../../schemas/eventBatch.json",
  "actorId":
"53449035084208179402477208077095861290",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "id": "9414ce5e-ec83-4b1f-
a08d-6b73af9b65d8",
      "timestamp": "2018-01-03T00:51:07.153Z",
      "consumer": {
        "allowsPerformance": true,
        "allowsMarketing": true,
        "upmId": "123456789",
        "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
        "visitId": "13",
        "isSwoosh": true
      },
      "platform": {
        "type": "web",
        "url": "https://www.nike.com/checkout",
        "pageTitle": "Nike.com Checkout",
        "referrer": "https://secure-
store.nike.com/us/checkout/html/
cart.jsp?l=cart&country=US&lang_locale=en_US&si
te=nikestore&returnURL=https://www.nike.com/t/
air-jordan-1-retro-high-og-orange-mens-shoe-
```

oe8v08",

```
"userAgent": "Mozilla/5.0 (Macintosh;
Intel Mac OS X 10_12_6) AppleWebKit/537.36
(KHTML, like Gecko) Chrome/63.0.3239.84 Safari/
537.36",
```

```
  "widthInPixels": 1920,
```

```
  "heightInPixels": 1080,
```

```
  "adobeVisitorId":
```

```
"53449035084208179402477208077095861290"
```

```
},
```

```
"privacy": {
```

```
  "isFunction": false,
```

```
  "isPerformance": true,
```

```
  "isMarketing": false
```

```
},
```

```
"abTest": {
```

```
  "neo": {
```

```
    "swimLane": "32",
```

```
    "profiles": [
```

```
      {
```

```
        "name": "main",
```

```
        "experiments": [
```

```
          {
```

```
            "id": "3039-interceptor",
```

```
            "variation": "a"
```

```
          },
```

```
          {
```

```
            "id": "3250-interceptor",
```

```
            "variation": "a"
```

```
          },
```

```
          {
```

```
            "id": "3136-interceptor",
```

```
            "variation": "a"
```

```

    }
  }
]
}
},
"application": {
  "name": "checkout",
  "version": "dev-0",
  "environment": "production",
  "domain": "dotcom",
  "division": "commerce",
  "platform": "cloud"
},
"locale": {
  "country": "us",
  "language": "en-us"
},
"eventName":
"checkbox_checkoutSaveCardForLaterUse",
"eventType": "selection",
"properties": {
  "selectionTarget": "save card for
later use",
  "selectionValue": "selected",
  "view": {
    "name": "payment",
    "channel": "checkout"
  }
},
"products": [
  {
    "productName": "Air Jordan 1 Retro

```

High OG \"Cool Blue\" Men's Shoe\",
Text Input

"productId":

"37c1d287-b591-556f-980c-50fba809d8c2",

Element Name	Description	Required?
events.eventType	skuIdType of event only	Required
"styleColor": "AJ5997-455",	"textInput" is allowed	
events.properties	"priceAmount": 105,	Required
events.properties.inputTarget	"priceCurrency": "USD" String "quantity": 1,	Required
events.properties.inputValue	"pid": "12063010", String "brand": "Jordan",	Required
events.properties.view	"productType": "FOOTWEAR", Object representing the user viewing part of an application per the baseView schema "subtitle": "Men's Shoe", "styleType": "INLINE", "nikeSize": "8.5"	Optional
events.properties.view.channel		Required
events.properties.view.name		Optional
events.properties.view.viewType		Optional
events.properties.view.contentBoostTags	List of tags describing the enhanced content of the view, e.g. "video", "music", "game"	Optional
events.properties.other	Other text input data per otherContext schema	Optional

Sample request body:


```
{
  "actorId": "7894225087415055350568",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "eventName": "snkrs_ios_text_input",
      "eventType": "textInput",
      "properties": {
        "inputTarget": "someTextBox",
        "inputValue": "some text"
      },
      "application": {
        "name": "snkrs",
        "environment": "production",
        "division": "commerce",
        "domain": "launch",
        "platform": "cloud",
        "version": ""
      }
    },
  ],
```

```
    "consumer": {
      "upmId": "",
      "visitorId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
      "visitId":
"079ae31b-8282-4fed-8c6e-615c06cf51af",
      "isSwoosh": false,
      "allowsMarketing": true,
      "allowsPerformance": true
    },
  ],
```

```
"marketing": {
  "campaignKey": "jordan_4_retro",
  "campaignValue":
"30235f5664094b83",
  "clickIdKey": "click_me",
  "clickIdValue":
"30235f5664094b83",
  "vendorKey": "ads_r_us",
  "vendorValue": "123456789"
},
"platform": {
  "type": "mobile",
  "deviceId":
"2b6f0cc904d137be2e1730235f5664094b831186",
  "make": "Apple",
  "model": "A1549",
  "os": {
    "name": "ios",
    "version": "11.2.2",
    "idfa":
"2b6f0cc904d137be2e1730235f5664094b831186",
    "idfv":
"2b6f0cc904d137be2e1730235f5664094b831186"
  },
  "heightInPixels": 1080,
  "widthInPixels": 1920
},
"locale": {
  "country": "us",
  "language": "en-US"
},
"privacy": {
  "isMarketing": true,
```

```

        "isPerformance": true,
        "isFinal": false
    },
    "id": "abc123xyz",
    "timestamp": "2018-01-03T00:40:35.918Z"
}

```

Response Body

The response body format is described below.

Element Name	Description	Required?
message	Response message	Required
message.eventBatchErrors	Optional	

Sample HTTP 200 success response:

```

{
  "message": "Success"
}

```

Sample HTTP 400 error responses:

Scenario: request did not have the required **events** property

```

{
  "message": {
    "eventBatchErrors": [
      {
        "keyword": "required",
        "dataPath": "",
        "schemaPath": "#/required",
        "params": {
          "missingProperty": "events"
        },
        "message": "should have

```

```

    required property 'events'
  }
]
}
}

```

Scenario: request had blank **actorId** property

```

{
  "message": {
    "eventBatchErrors": [
      {
        "keyword": "minLength",
        "dataPath": ".actorId",
        "schemaPath": "#/properties/
actorId/minLength",
        "params": {
          "limit": 1
        },
        "message": "should NOT be
shorter than 1 characters"
      }
    ]
  }
}

```

Sample HTTP 500 error response:

Scenario: the API is having an issue taking the request.

```

{
  "error_id":
  "65b35de2-9e2e-4ba5-afc2-4f687cbf33a7",
  "errors": [
    {
      "code": 10,
      "message": "An error occurred
while fulfilling the request"
    }
  ]
}

```

Upgrading to the Latest Version

Use the following tables to help your upgrade process from Analytics Pipeline v1 to v2.

The first table shows the v1-v2 mapping for the fields in the Event Batch & Base Event schema.

The remaining tables show the mappings for the fields that are specific to each Event Type.

Event Batch & Base Event Schema Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes	
\$schema	URL for the JSON schema version used	N/A (deprecated)	N/A		

V1 Field Name	Description	V2 Field Name	Description	Notes	
actorId	ID representing the principal actor in this event, minimum length of 1 character, e.g. "5344903 50842081 79402477 20807709 5861290"	actorId	(same)		
resource Type	Constant value that describes the type of resource. "dotcom/event_batch" is the only allowed value	resource Type	(same)		
resource Version	Constant value that describes the version of	resource Version	(same)	Even for v2, use "v1" here	

V1 Field Name	Description	V2 Field Name	Description	Notes	
	this API contract. “v1” is the only allowed value				
events	Array of analytics events, minimum of 1	events	(same)		
events.eventName	Unique name for this event class, e.g. “click_checkoutChangeBillingCountry”	events.event	Name of the action the user performed		
events.eventTags	Array of event tags, one of “loginAttempt”, “registrationComplete”, “registrationStart”, “userLogin”	events.eventTags	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
events.eventType	Unique name for this type of event, e.g. "mouse"	events.eventType	(same)		
events.timestamp	Date-time of the event, e.g. "1985-04-12T23:20:50.52Z"	events.timestamp	(same)		
events.id	A UUID v4 for this event instance	events.eventId	(same)		
events.application.name	App name	events.context.app.name	(same)		
events.application.version	Semver style or build number of app	events.context.app.version	(same)		
events.application.environment	App environment, one of "development", "test", or "production"	events.context.app.environment	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
events.application. domain	Experience domain of app, see list here	events.context.app. domain	(same)		
events.application. division	Organization which the app domain falls under, e.g. "commerce"	events.context.app. division	(same)		
events.application. platform	Technology platform of the app, e.g. "cloud", "tesla"	events.context.app. platform	(same)		
events.local. country	ISO 3166 country code	events.context. locale	(same)		
events.local. language	BCP47 language code	events.context. language	(same)		
events.privacy. isFunctional	Boolean specifying if event is categorized as	N/A (deprecated)	N/A		

V1 Field Name	Description	V2 Field Name	Description	Notes	
	functional				
events.privacy.isMarketing	Boolean specifying if event is categorized as marketing	events.context.privacy.isMarketing			
events.privacy.isPerformance	Boolean specifying if event is categorized as performance	events.context.privacy.isPerformance			
events.platform.type	Platform type, "web"	N/A (deprecated)	N/A		
events.platform.pageTitle		events.context.page.title			
events.platform.adobeVisitorId		events.context.consumer.adobeVisitorId			
events.platform.referrer		events.context.page.referrer			
events.platform.user		events.context.user			

V1 Field Name	Description	V2 Field Name	Description	Notes	
rAgent		Agent			
events.platform. widthInPixels		events.context.screen. width			
events.platform. heightInPixels		events.context.screen. height			
events.platform. url		events.context.page. url			
events.platform. type	Platform type, "service"	N/A (deprecated)	N/A		
events.platform. domain		events.context.app. domain			
events.platform. resource		events.context.app. resource			
events.platform. version		events.context.app. version			
events.platform. type	Platform type, "mobile"		N/A (deprecated)	N/A	
events.platform. deviceId		events.context.device. id			

V1 Field Name	Description	V2 Field Name	Description	Notes	
events.platform. make		events.context.device. manufacturer			
events.platform. model		events.context.device. model			
events.platform.os. name		events.context.os. name			
events.platform.os. version		events.context.os. version			
events.platform.os. idfa		events.context.device. id			
events.platform.os. idfv		events.context.device. id			
events.platform.os. adid		events.context.device. id			
events.platform.os. other	Other OS data per otherContext schema	N/A (deprecated)	N/A		
events.platform. other	Other platform data per	N/A (deprecated)	N/A		

V1 Field Name	Description	V2 Field Name	Description	Notes	
	otherContext schema				
events.consumer. anonymousId	A pseudo-unique substitute for a User ID, for cases when you don't have an absolutely unique identifier	events. anonymousId	(same)		
events.consumer. userId	Nike user profile identifier	events. userId	A unique identifier for the user in your database		
events.consumer. visitorId	Unite visitor identifier	N/A (deprecated)	N/A		
events.consumer. visitId	Unite visit identifier	events.context.consumer. visitId	(same)		
events.consumer. adobeMarketingCloud	The value of the s_vi cookie in the	events.context.consumer. adobeMarketing	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
udId	browser	etingCloudId			
events.consumer.adobeVisitId	A value Adobe needs for identity	events.context.consumer.adobeVisitId	(same)		
events.consumer.isSwoosh	Boolean where if true the user is a Nike employee	events.context.consumer.isSwoosh	(same)		
events.consumer.allowsMarketing	Boolean where if true the user has opted into marketing events being collected	events.context.consumer.allowsMarketing	(same)		
events.consumer.allowsPerformance	Boolean where if true the user has opted into performance events being collected	events.context.consumer.allowsPerformance	(same)		
events.co	Other	N/A	N/A		

V1 Field Name	Description	V2 Field Name	Description	Notes	
consumer.other	consumer data per otherContext schema	(deprecated)			
events.marketing.campaignKey	The campaign key for a specific Ad vendor	events.context.campaign.source	(same)		
events.marketing.campaignValue	The value for a specific Ad vendors campaign	events.context.campaign.value	(same)		
events.marketing.clickIdKey	The click identifier for a specific Ad vendors campaign	N/A (deprecated)	N/A		
events.marketing.clickIdValue	The click value for a specific user that clicks on a specific Ad	N/A (deprecated)	N/A		
events.marketing.ve	The query parameter	N/A (deprecated)	N/A		

V1 Field Name	Description	V2 Field Name	Description	Notes	
ndorKey	key for vendor identification	ed)			
events.marketing. vendorValue	The query parameter value for vendor identification	N/A (deprecat ed)	N/A		
events.marketing. siteSource	The query parameter value for SITESRC	N/A (deprecat ed)	N/A		
events.marketing. other	Other campaign data per otherContext schema	N/A (deprecat ed)	N/A		
events.abTest.neo. swimlane	String	events. swimlane	(same)		
events.abTest.neo.profiles. name	Experiment name, string	events. experimentName	(same)		
events.abTest.neo.profiles.experiments	Experiment identifier, string	events. experimentId	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
.id					
events.ab Test.neo. profiles.ex periments .variation	Variation identifier, string	events.va riationId	(same)		
events.ab Test.neo. profiles.ex periments .other	Other experiment data per otherContext schema				
events.ab Test.neo. profiles.ot her	Other profile data per otherContext schema				
events.ab Test.neo. other	Other Neo data per otherContext schema	N/A (deprecat ed)	N/A		
events.ab Test.opti mizely.ex perimentI d	Experiment identifier, string	events.ex perimentI d	(same)		
events.ab Test.opti	Experiment name,	events.ex periment	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
mizely.experimentName	string	Name			
events.abTest.optimizely.variationId	Variation identifier, string	events.variationId	(same)		
events.abTest.optimizely.variationName	Variation name, string	N/A (deprecated)	N/A		
events.abTest.other	Other A/B Test data per otherContext schema	N/A (deprecated)	N/A		
events.order.checkoutId	Generated id of a submitted checkout	events.checkoutId	(same)		
events.order.orderId	Id of a submitted order	events.orderId	(same)		
events.order.promoCode	Promo code applied to checkout	events coupon	(same)		
events.order	Shipping	events.shipping	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
der.shipping.cost	cost	shipping			
events.order.shipping.method	Shipping method	events.shippingMethod	(same)		
events.order.valueAddedGiftWrap	Number	events.valueAddedServicesTotal	Total of all value-added services on the order		
events.order.valueAddedOther	Number	events.valueAddedServicesTotal	Total of all value-added services on the order		
events.order.tax	Tax on order	events.tax	(same)		
events.order.discount	Discount on order	events.discount	(same)		
events.order.total	Total of order	events.total	(same)		
events.order.currency	Currency code on order	events.currency	(same)		
events.order.products	Array of at least one	N/A			

V1 Field Name	Description	V2 Field Name	Description	Notes	
cts	product, see 'events.products' in this table for mapping				
events.order.payments. paymentType	Type of payment	events. paymentMethod	(same)		
events.order.payments. stored	Boolean that is true if payment is a stored payment	events. paymentStored	(same)		
events.order.payments. other	Other payment data per otherContext schema	N/A (deprecated)	N/A		
events.products. productId	Product UUID	events. productId	(same)		
events.products. brand	Brand of the product	events. brand	(same)		
events.pr	Category	events. ca	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
products.category	of the product	category			
events.products.inventoryStatus	Inventory status, one of "coming soon", "discontinued", "gift card", "in stock", "locked", "nikeid", "NONE", "out of stock", "preorder", "unlocked:profile:in stock", null	events.inventoryStatus	(same)		
events.products.nikeSize	Nike size code of the product	events.size	(same)		
events.products.productId	Classic integer style product id	events.productId	(same)		
events.products.priceAmount	Price of product (number)	events.*price	(same)		

V1 Field Name	Description	V2 Field Name	Description	Notes	
t					
events.products. priceCurrency	Currency code of price	events. currency	(same)		
events.products. priceStatus	Price status, one of "clearance", "reduced", "regular", null	N/A (deprecated)	N/A		
events.products. productName	Name of product	events. name	(same)		
events.products. productType	Type of product	events. type	(same)		
events.products. quantity	Unit quantity of product (number)	events. quantity	(same)		
events.products. skuId	SKU UUID	events. sku	(same)		
events.pr	N/A	N/A	N/A		

V1 Field Name	Description	V2 Field Name	Description	Notes	
products.sportsTags		(deprecated)			
events.products.styleColor	Style-color code of product	events.variant	Variant of the product		
events.products.styleType	Style type of product	events.style	Style of the product		
events.products.subtitle	Subtitle of product	events.subtitle	(same)		
events.products.other	Other product data per otherContext schema	N/A (deprecated)	N/A		
events.other	A non-validated name-spaced region where domain-specific data can be added, per otherContext schema	N/A (deprecated)	N/A		

Action: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events. eventType	Type of event, only “action” is allowed	events. eventType	(same)	
events.properties. view	Object representing the user viewing part of an application per the baseView schema			
events.properties. other	Other event data per otherContext schema	N/A (deprecated)	N/A	

App Launch: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events. eventType	Type of event, only “appLaunch” is allowed	events. eventType	(same)	

V1 Field Name	Description	V2 Field Name	Description	Notes
events. consumer	Consumer context from Base Event	See Event Batch & Base Event table	N/A	
events. platform	Platform context from Base Event	See Event Batch & Base Event table	N/A	
events. platform.type	Platform type, only “mobile” is allowed	N/A (deprecated)	N/A	
events. marketing	Marketing context from Base Event	See ‘Event Batch & Base Event’ table	N/A	

Change View: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events. eventType	Type of event, only “changeView” is allowed	events. eventType	(same)	
events. properties.view	Object representing the user			

V1 Field Name	Description	V2 Field Name	Description	Notes
	viewing part of an application per the baseView schema			
events.properties.previousView	Object representing the user viewing part of an application per the baseView schema			
events.properties.other	Other event data per otherContext schema	N/A (deprecated)	N/A	

Checkout Confirmation: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only "checkoutConfirmation" is allowed	events.eventType	(same)	
events.property	Checkout	events.checkout	(same)	

V1 Field Name	Description	V2 Field Name	Description	Notes
events. checkoutId	identifier, UUID, client provided	checkoutId		
events.properties. orderId	The unique order id generated for this checkout	events. orderId	(same)	
events.properties. currency	Currency code following the ISO 4217 standard	events. currency	(same)	
events.properties. totals	Price details for the checkout in whole	events. totals	(same)	
events.properties. totals.subtotal	Subtotal of the item costs for all items	events. totals.subtotal	(same)	
events.properties. totals.valueAddedServicesTotal	Total of value added services on the items	events. valueAddedServicesTotal	(same)	
events.properties. totals.taxTotal	Total of all taxes applied to the checkout	events. tax	(same)	

V1 Field Name	Description	V2 Field Name	Description	Notes
events.properties.totals. discountTotal	Total of all discounts applied to the checkout	events. discount	(same)	
events.properties.totals. shippingTotal	Total of all shipping costs (less shipping discounts) on the checkout	events. shipping	(same)	
events.properties.totals. total	Total price of the entire checkout, item costs + shipping costs + taxes (excluding 'VALUEADDEDTAX') less any discounts	events. totals	(same)	
events.properties.totals. other	Other totals data per otherContext schema	N/A (deprecated)	N/A	

Error: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only "error" is allowed	events.eventType	(same)	
events.properties.errors.code	Error code, string	events.properties.errors.code	(same)	
events.properties.errors.message	Error message, string	events.properties.errors.message	(same)	
events.properties.errors.field	Error field, string	events.properties.errors.field	(same)	
events.properties.view	Object representing the user viewing part of an application per the baseView schema			
events.properties.other	Other error data per otherContext schema	N/A (deprecated)	N/A	

Login Complete: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only "loginComplete" is allowed	events.eventType	(same)	
events.consumer	Consumer context from the Base Event	See Event Batch & Base Event table	N/A	
events.marketing	Consumer context from the Base Event	See Event Batch & Base Event table	N/A	

Metric: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only "metric" is allowed	events.eventType	(same)	
events.properties.metricName	Metric name, string	events.properties.metric.name	(same)	
events.properties	Metric type,	events.properties	(same)	

V1 Field Name	Description	V2 Field Name	Description	Notes
erties. metric Type	one of “gauge”, “counter”, “cumulative_counter”	erties. metric .type		
events.prop erties. dimen sions	Object	events.prop erties. metric .dimensions	(same)	
events.prop erties. metric Value	Metric value, number	events.prop erties. metric .value	(same)	
events.prop erties. other	Other metric data per otherContext schema	N/A (deprecated)	N/A	

Mouse: Event Type Mapping

The fields for the **mouse** event type are:

V1 Field Name	Description	V2 Field Name	Description	Notes
events. event Type	Type of event, only “mouse” is allowed	events. event tType	(same)	
events.prop erties. intera ctionType	Type of interaction (e.g. “click”, “touch”,	events.prop erties. intera ctionType	(same)	

V1 Field Name	Description	V2 Field Name	Description	Notes
	“drag”, etc.)			
events.properties. mouseTarget	Description of target of interaction, e.g. “change billing country”	events.properties. mouseTarget	(same)	
events.properties. view	Object representing the user viewing part of an application per the baseView schema			
events.properties. other	Other mouse data per otherContext schema	N/A (deprecated)	N/A	

Page Load: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events. eventType	Type of event, only “pageLoad” is allowed	events. eventType	(same)	

V1 Field Name	Description	V2 Field Name	Description	Notes
events.properties. navigationStartInMS		events.properties. navigationStartInMS	(same)	
events.properties. responseEndInMS		events.properties. responseEndInMS	(same)	
events.properties. domContentLoadedInMS		events.properties. domContentLoadedInMS	(same)	
events.properties. domCompleteInMS		events.properties. domCompleteInMS	(same)	
events.properties. firstPaintInMS		events.properties. firstPaintInMS	(same)	
events.properties. pageLoadInMS		events.properties. pageLoadInMS	(same)	
events.properties. other	Other page data per otherContext schema	N/A (deprecated)	N/A	

Registration Complete: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only “registration Complete” is allowed	events.eventType	(same)	
events.consumer	Consumer context from Base Event	See Event Batch & Base Event table	N/A	
events.marketing	Marketing context from Base Event	See Event Batch & Base Event table	N/A	

Search: Event Type Mapping

The following common elements are required:

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only “search” is allowed	events.eventType	(same)	

The above must be combined with one of the following:

V1 Field Name	Description	V2 Field Name	Description	Notes
events.properties. selectedIndex	Integer index of the search item as it's presented to the user in the list of search items	N/A (deprecated)	N/A	
events.properties. searchItem	A type-ahead or autocomplete item the user selects	events.query. .item	(same)	
events.properties. searchText	The search text the user entered	events.query. .text	(same)	
events.properties. view	Object representing the user viewing part of an application per the baseView schema			
events.properties. other	Other search data per otherContext schema	N/A (deprecated)	N/A	

OR

V1 Field Name	Description	V2 Field Name	Description	Notes
events.properties. searchText	The search text the user entered	events.query. .text	(same)	
events.properties. searchType	The type of search used, "userEntered" allowed only	events.query. .type	(same)	
events.properties. view	Object representing the user viewing part of an application per the baseView schema			
events.properties. other	Other search data per otherContext schema	N/A (deprecated)	N/A	

OR

V1 Field Name	Description	V2 Field Name	Description	Notes
events.properties. itemIndex	Integer index of the search item as it's presented to the user in	N/A (deprecated)	N/A	

V1 Field Name	Description	V2 Field Name	Description	Notes
	the list of search items			
events.properties. searchItem	A type-ahead or autocomplete item the user selects	events.query. item	(same)	
events.properties. searchText	The search text the user entered	events.query. text	(same)	
events.properties. searchType	The type of search used, "typeahead" or "visualSearch" allowed only	events.query. type	(same)	
events.properties. view	Object representing the user viewing part of an application per the baseView schema			
events.properties. other	Other search data per otherContext schema	N/A (deprecated)	N/A	

Selection: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only "selection" is allowed	events.eventType	(same)	
events.properties.selectionTarget	String	events.selectionTarget	(same)	
events.properties.selectionValue	String	events.selectionValue	(same)	
events.properties.view	Object representing the user viewing part of an application per the baseView schema			
events.properties.other	Other selection data per otherContext schema	N/A (deprecated)	N/A	

Text Input: Event Type Mapping

V1 Field Name	Description	V2 Field Name	Description	Notes
events.eventType	Type of event, only "textInput" is allowed	events.eventType	(same)	
events.properties.inputTarget	String	TBD		
events.properties.inputValue	String	TBD		
events.properties.view	Object representing the user viewing part of an application per the baseView schema			
events.properties.other	Other text input data per otherContext schema	N/A (deprecated)	N/A	

Troubleshooting

Listed below are ways to troubleshoot unexpected responses using this API.

Use Troubleshooting Tools

1. Check for validation errors logged in Splunk [here](#)
2. Use the sample requests in this document or those provided [here](#) as a guide to forming valid requests for each event type.

Glossary

See the [Glossary](#)

Release Notes

There are no release notes at this time.

Document Change Log

Summary	Date	Description
Initial draft	02/27/2018	Initial Draft
Updated links	03/20/2018	Updated links to point to new dev portal
Updated external links	04/03/2018	Updated external links to open in new browser window

Related Links

[NDe Documentation Home](#)

[Getting Started](#)

[Business Guides](#)

[Developer's Guides](#)