



ANALYTICS PIPELINE V2 API



DEVELOPER'S GUIDE (DRAFT)

Last Updated: 10/01/2018

Submit Feedback: Dev Portal Slack channel [#devportal](#)


If you've read [Using NDe APIs](#) and [Get Started With Nike Analytics Pipeline](#), this guide provides the details necessary to integrate with the Nike Analytics Pipeline v2 API.

API at a Glance

The Analytics Pipeline v2 API is your single destination to record analytics events, helping both user experiences and web services to track consumer and application behavior.

Because Analytics Pipeline is server-side and Nike-authored, it is much more customizable to your needs than a proprietary, client-side analytics solution.

Analytics events sent to this API are transformed and sent to multiple downstream systems/partners in real-time, allowing many needs to be fulfilled by sending a single event. Future integrations with other partners can be done without necessarily changing the contract of this API, thus making it easier (if not completely transparent) to you.

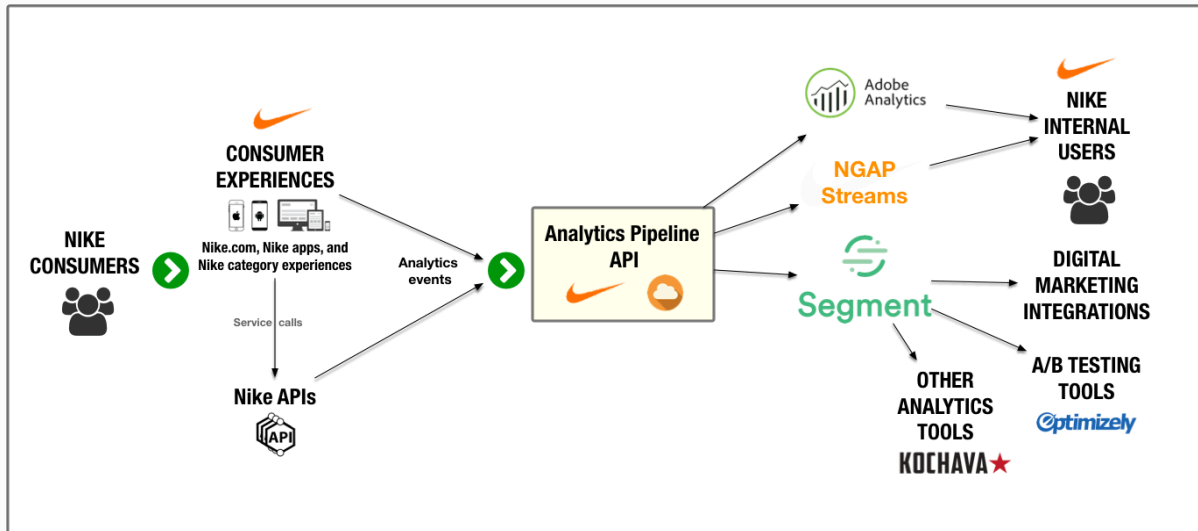

Here are a few ways in which analytics event data can be used:

- Track the success of marketing campaigns via tags or attribution
- Monitor user traffic and conversion metrics
- Track the success of new features (A/B testing)
- Alert on traffic anomalies

Should I Use v1 or v2 of this API?

If you are integrating with Analytics Pipeline for the first time, use v2 as it is the most current version of the API.

The following table describes the key details of the API:

Topic	Details
Use this API to	Send all consumer and application tracking events to a single endpoint
Who calls this API	TBD
Current Version	Analytics Pipeline v2
Scope/Limitations	Analytics events only. All countries supported. Do not use for sales, revenue, or available inventory

Topic	Details
	information
SLAs	Response time (RT) and requests per second (RPS): RT: 500 ms RPS: 500
Domain	Commerce
Prerequisites	None
Contact Info	Slack: #cic-nexus Confluence space: Analytics Pipeline API Team Mailing List: Lst-Nexus.Devops Product Owner: Randy Davis

A Note about Segment

Segment is an analytics API and customer data platform which Nike utilizes. As you saw in the above diagram, it is one of several downstream integrations from the Analytics Pipeline API. By integrating with Segment once, Nike unlocks additional downstream integrations like Optimizely for A/B Testing, Kochava for mobile analytics, and several digital marketing integrations.

Reach out to the Analytics API Product Owner, [Randy Davis](#), for information on the analytics opportunities available via Segment.

Terms of Service

- Clients must not use analytics data collected with the Analytics Pipeline v2 API for sales, revenue, or available inventory data.
- High usage from a single IP address may be flagged by Nike bot detection and blocked.
- This API is not intended for application monitoring, logging, or reporting on server-side errors.

Authorization

No authentication or authorization is required to use the Analytics Pipeline v2 API.

Use Cases


With the Analytics Pipeline v2 API you can track:



- User-generated actions like clicks, taps, selections of options from a list, text entry, changes of view
- User-submitted searches
- User registrations
- Successful checkouts in a commerce app
- A/B Testing
- Mobile device events
- Metrics on global page events, e.g. page loads in a web app
- Ad campaigns, third-party or internal
- Client-side errors
- Timings of API requests
- Custom events

A Note on Data Transformations

The data you send to this API is transformed (in most cases) to meet the requirements of the downstream systems to which it is ultimately sent, for example Adobe Analytics.

Here are some screenshots from Adobe Analytics to illustrate what kind of insights you can gain from sending events through this API:



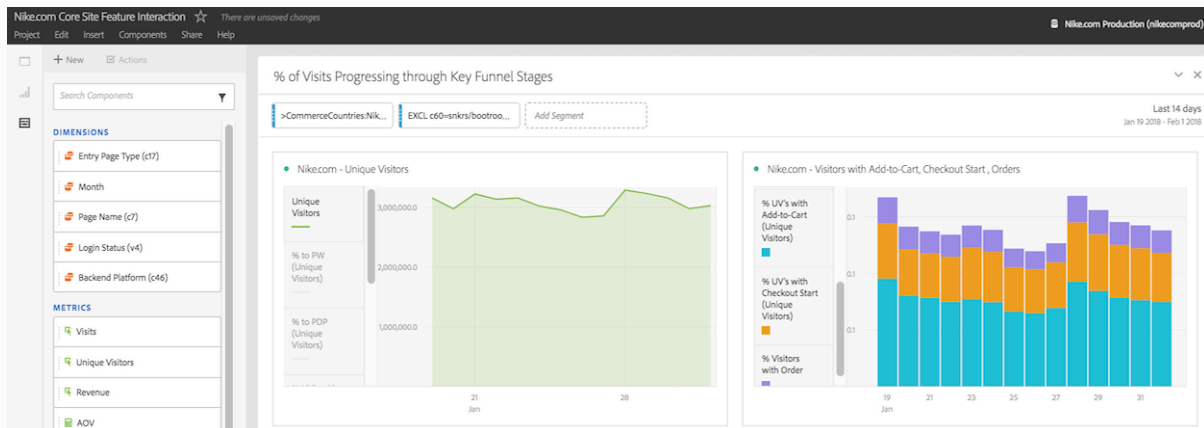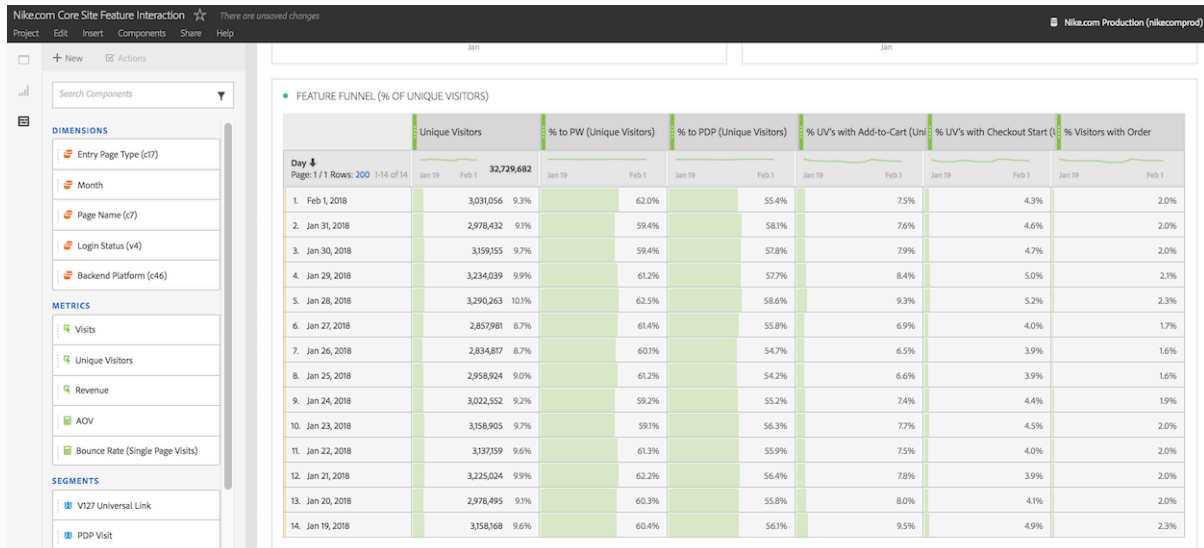

API Endpoint Quick Reference

For more information about each service and to try them out through the UI, visit the Nike Developer Portal through the links below.

Analytics Pipeline v2 API

Endpoint Name	Path	HTTP Method
SEND A NEW EVENT BATCH	/measure/uxevents/v1	POST

Making Your First API Request

For your first Analytics Pipeline v2 API request, send an event that corresponds to a user clicking 'Change Billing Country' in the context of completing checkout in a web app.

Gather Data Needed for the Request

First, gather the data needed to make the request.

URL

In production, all requests to the Analytics Pipeline v2 API go to the same endpoint URL using the POST method:

HTTP Method	Endpoint URL
POST	https://api.nike.com/measure/uxevents/v1

However, for your first request and anytime you are performing tests, use the Test endpoint URL:

<https://experience.test.commerce.nikecloud.com/measure/uxevents/v1>.

TIP: The URL for v2 is the same as

v1.

Headers

All requests must include the **Content-Type** header as follows:

Header Name	Description	Required?
Content-Type	Content type of the request, “application/json” is only value allowed	Yes

Body

To form the request body, answer the following questions by studying the API.md file:

- What is the event type that should be used for this event?

The event type **mouse** is described in the API.md as ‘a mouse or touch event’, and is the correct type to use here.

- What are the required fields in the schema which apply to all events AND what are the additional fields are required for this specific event type?

See the [Request Body](#) section for details on how to combine the various schemas into a properly-formed request.

- What other relevant, optional fields should be included in the event?

This answer will depend on your reasons for tracking the event, and therefore will vary.

Once you’ve addressed all of the above questions, proceed to form a JSON request body. A finalized request body could look like this:

```
{  
  "actorId": "7894225087415055350568",
```

```
"resourceType": "dotcom/event_batch",
"resourceVersion": "v1",
"events": [
  {
    "schemaVersion": 2,
    "properties": {
      "interactionType": "interactionType",
      "mouseTarget": "mouseTarget",
      "channel": "channel"
    },
    "userId": "upmId",
    "event": "eventName",
    "context": {
      "app": {
        "environment": "development",
        "domain": "domain",
        "division": "division",
        "platform": "platform",
        "name": "name",
        "version": "version",
        "build": "version"
      },
      "privacy": {
        "isMarketing": true,
        "isPerformance": true
      },
      "consumer": {
        "visitId": "visitId",
        "isSwoosh": true,
        "allowsMarketing": true,
```



```
        "allowsPerformance": true
    },
    "campaign": {
        "name": "campaignValue",
        "source": "campaignKey"
    },
    "locale": "language"
},
"timestamp": "1985-04-12T23:20:50.52Z",
"productId": "productId",
"brand": "brand",
"category": "category",
"inventoryStatus": "coming soon",
"size": "nikeSize",
"pid": "pid",
"price": 1,
"name": "productName",
"type": "productName",
"quantity": 1,
"sku": "skuId",
"style": "styleType",
"subtitle": "subtitle",
"eventType": "mouse",
"eventTags": [
    "loginAttempt"
],
"eventId": "id",
"platform": "web",
"experimentName": "name",
"experimentId": "id",
```

```
    "variationId": "variation"
  }
```

Execute the Request

A cURL command can be used to execute the request from within your app. An example command is shown below (request body omitted for the sake of brevity, but you can use the example above):

```
curl -X POST \

https://experience.test.commerce.nikecloud.com/
measure/uxevents/v1 \
  -H 'Cache-Control: no-cache' \
  -H 'Content-Type: application/json' \
  -d '{<request body goes here>}'
```

Parse the Response

The responses from the Analytics Pipeline v2 API are simple to parse. If the event was successfully recorded, you will get an HTTP 200 response as shown below:

```
{
  "message": "Success"
}
```

If you receive any other response than this, something went wrong. See the [Response Body](#) section for info on error responses.

Using Analytics v2 Pipeline

- [Analytics Pipeline Overview](#)
- [Endpoint Details](#)
- [Path & Query Parameters](#)
- [Request Headers](#)
- [Request Body](#)
- [Response Body](#)

Analytics Pipeline Overview

Use the Analytics Pipeline v2 API as a single destination for tracking your user experience, service, or application events.

Endpoint Details

HTTP Method	URI Path	Restricted?
POST	/measure/ uxevents/v1	No

Path & Query Parameters

There are no path nor query parameters to be used with the Analytics Pipeline v2 API.

Request Headers

Header Name	Description	Required?
Content-Type	Content type of the request, application/	Required

Header Name	Description	Required?
	json is only value allowed	


Request Body

Forming a request body to the Analytics Pipeline v2 API requires combining the following schema information:

- [Event Batch](#): top-most level in the request structure, which is common to all event types. Includes an array of one or more events.
- [Common Fields](#): common fields to be included for each event
- One of the following schemas: [Page](#), [Track](#), [Identify](#)
- All of the following schemas: [A-B Test](#), [E-commerce](#), [Nike](#)



Analytics Pipeline API v2 How to Combine Schemas

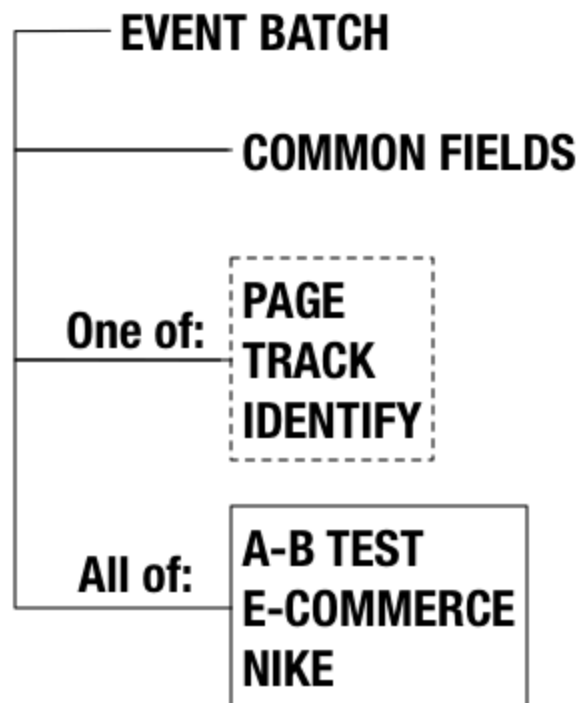

Note: the Nike schema contains a field, **eventType**, that is a direct carryover from v1 (i.e. same exact values must be used). See more below on [Event Types](#).

Next, we will discuss the details of each of the above schemas, including which fields are required.

Batch & Common Fields

The fields in the [Batch](#) and [Common Fields](#) schemas are described in the below table:

Element Name	Description	Required?
\$schema	URL for the JSON schema version used	Optional
actorId	ID representing the principal actor in this event, minimum length of 1 character, e.g. "53449035084208179402477208077095861290"	Required
resourceType	Constant value that describes the type of resource. "dotcom/event_batch" is the only allowed value	Required
resourceVersion	Constant value that describes the version of this API contract. "v1" is the only allowed value	Required
events	Array of analytics events, minimum of 1	Required
events. anonymousId	A pseudo-unique substitute for a User ID, for cases when you don't have a unique identifier.	Required if userId is not present
events. userId	A unique identifier for the user in your	Required if anonymousId is not

Element Name	Description	Required?
	database	present
events. type	Type of event, one of “track”, “page”, “identify”	Optional
events. event	The name of the action the user performed	Optional
events.context. active	Boolean for whether a user is active	Optional
events.context.app. name	App name	Optional
events.context.app. version	Semver style or build number of app	Optional
events.context.app. build	Semver style or build number of app	Optional
events.context.campaign. name	The value for a specific Ad vendors campaign	Optional
events.context.campaign. source	The campaign key for a specific Ad vendor	Optional
events.context.campaign. medium	TBD	Optional
events.context.campaign. term	TBD	Optional
events.context.campaign. content	TBD	Optional
events.context.device. id	User's device identifier	Optional

Element Name	Description	Required?
events.context.device. manufacturer	User's device manufacturer	Optional
events.context.device. model	Device model	Optional
events.context.device. name	TBD	Optional
events.context.device. type	TBD	Optional
events.context.device. version	TBD	Optional
events.context. ip	Current user's IP address	Optional
events.context.library. name	Library name	Optional
events.context.library. version	Library version	Optional
events.context. locale	Locale string for the current user, e.g. "en-US"	Optional
events.context.location. city	User's city name	Optional
events.context.location. country	User's ISO-3166 country code	Optional
events.context.location. latitude	User's latitude	Optional
events.context.location. longitude	User's longitude	Optional
events.context.location	TBD	Optional

Element Name	Description	Required?
n.region		
events.context.location.speed	TBD	Optional
events.context.network.bluetooth	TBD	Optional
events.context.network.carrier	TBD	Optional
events.context.network.cellular	TBD	Optional
events.context.network.wifi	TBD	Optional
events.context.os.name	User's operating system name	Optional
events.context.os.version	User's operating system version	Optional
events.context.page.hash	TBD	Optional
events.context.page.path	TBD	Optional
events.context.page.referrer	TBD	Optional
events.context.page.search	TBD	Optional
events.context.page.title	TBD	Optional
events.context.page.url	TBD	Optional
events.context.referrer	TBD	Optional

Element Name	Description	Required?
.type		
events.context.referrer .name	TBD	Optional
events.context.referrer .url	TBD	Optional
events.context.referrer .link	TBD	Optional
events.context.screen. density	TBD	Optional
events.context.screen. height	Screen height in pixels	Optional
events.context.screen. width	Screen width in pixels	Optional
events.context. timezone	TBD	Optional
events.context.traits. track	TBD	Optional
events.context.traits. identify	TBD	Optional
events.context. userAgent	TBD	Optional
events.integrations. All	Boolean where if true the message should be sent to all destinations	Optional
events. originalTimestamp	Time on the client device when call was invoked	Optional

Element Name	Description	Required?
events. sentAt	Time on client device when call was sent	Optional
events. receivedAt	Time on Segment server clock when the call was received	Optional
events. timestamp	Calculated by Segment to correct client-device clock skew	Optional

Page, Track, Identify

Each request must contain **ONE** of the following three schemas:

Page

Element Name	Description	Required?
name	Name of the page	Required
events.properties. name	Name of the page - This is reserved for future use	
events.properties. path	Path portion of the URL of the page	
events.properties. referrer	Full URL of the previous page	
events.properties. search	Query string portion of the URL of the page	
events.properties. title	Title of the page	
events.properties. url	Full URL of the page	

Track

Element Name	Description	Required?
events.properties. revenue	Amount of revenue an event result in	
events.properties. currency	Currency of the revenue an event result in	
events.properties. currency	An abstract value to associate with an event	

Identify

Element Name	Description	Required?
events. anonymousId	A pseudo-unique substitute for a User ID, for cases when you don't have an absolutely unique identifier.	Required
events. userId	A unique identifier for the user in your database	
events.traits.address. city	City of a user	
events.traits.address. country	Country of a user	
events.traits.address. postalCode	Postal code of a user	

Element Name	Description	Required?
events.traits.address. state	State of a user	
events.traits.address. street	Street of a user	
events.traits. age	Street address of a user	
events.traits. avatar	Street address of a user	
events.traits. birthday	Street address of a user	
events.traits.company. name	Street address of a user	
events.traits.company. id	Street address of a user	
events.traits.company. industry	Street address of a user	
events.traits.company. employee_count	Street address of a user	
events.traits.company. plan	Street address of a user	
events.traits. createdAt	Date the user's account was first created (as string)	
events.traits. description	Description of the user	
events.traits. email	Email address of a user	
events.traits. firstName	First name of user	

Element Name	Description	Required?
e		
events.traits. gender	Gender of a user	
events.traits. id	Unique ID in your database for a user	
events.traits. lastName	Last name of a user	
events.traits. name	Full name of a user	
events.traits. phone	Phone number of a user	
events.traits. title	Title of a user	
events.traits. username	User's username, should be unique to each user	
events.traits. website	Website of a user	

A/B Test, E-Commerce, Nike

Each request must contain **ALL** of the following schemas:

A/B Test

Element Name	Description	Required?
events. swimLane	TBD	Optional
events. experimentName	TBD	Optional
events. experimentId	TBD	Optional
events. variationId	TBD	Optional

E-Commerce

Element Name	Description	Required?
events. orderId	The id of the completed order	Optional
events. checkoutId	The generated id of a submitted order	Optional
events. coupon	Coupon/promo code applied	Optional
events. tax	Total tax associated with the transaction	Optional
events. discount	Total discount associated with the transaction	Optional
events. total	Revenue with discounts and coupons added in	Optional
events. subtotal	TBD	Optional
events. valueAddedServicesTotal	TBD	Optional
events. currency	Currency of the transaction	Optional
events. shipping	Shipping cost associated with the transaction	Optional
events. shippingMethod	The chosen shipping method	Optional
events. productId	TBD	Optional
events. brand	Brand associated with the product	Optional

Element Name	Description	Required?
events. category	Product category	Optional
events. inventoryStatus	Product inventory status, one of “in stock”, “coming soon”, “preorder”, “out of stock”, “locked”, “unlocked:profile:in stock”, “nikeid”, “gift card”, “NONE”, null	Optional
events. size	Product size	Optional
events. pid	Classic integer style product id	Optional
events. price	Price of the product	Optional
events. name	Name of the product	Optional
events. type	Type of product	Optional
events. quantity	Quantity of product	Optional
events. sku	SKU of product	Optional
events. style	Style of product	Optional
events. subtitle	Subtitle of product	Optional
events. paymentMethod	Payment method chosen	Optional
events. paymentStored	Boolean where if true the payment method is stored	Optional
events.query. type	The type of search used, e.g. “userEntered”,	Optional

Element Name	Description	Required?
	“typeahead”, “visualSearch”	
events.query. text	Text the user entered to generate a search	Optional
events.query. item	Topic of the search, either the user-entered text or the type-ahead, auto-complete or visual-search item the user selected	Optional
events. variant	Variant of the product	Optional

Nike

Element Name	Description	Required?
events. eventType	The type of event, see Event Types	Optional
events. eventTags	Array of event tags, minimum of 1	Optional
events. eventId	A UUID v4 for this event instance	Optional
events. platform	Platform type, one of “web”, “domain, or “mobile”	Optional
events.context.app. environment	App environment, one of “development”, “test”, or “production”	Optional
events.context.app. domain	Experience domain of app, see list here	Optional

Element Name	Description	Required?
events.context.app. resource	Name of API resource of the	Optional
events.context.app. division	Organization which the app domain falls under, e.g. "commerce"	Optional
events.context.app. platform	Technology platform of the app, e.g. "cloud", "tesla"	Optional
events.context.privacy. isMarketing	Boolean specifying if event is categorized as marketing-related	Optional
events.context.privacy. isPerformance	Boolean specifying if event is categorized as performance-related	Optional
events.context.consumer. adobeVisitorId	Adobe identifier for Adobe Analytics (Omniure)	Optional
events.context.consumer. visitId	Unite visit identifier	Optional
events.context.consumer. isSwoosh	Boolean where if true the user is a Nike employee	Optional
events.context.consumer. allowsMarketing	Boolean where if true the user has opted into marketing events being collected	Optional
events.context.consumer. allowsPerforman	Boolean where if true the user has opted	Optional

Element Name	Description	Required?
ce	into performance events being collected	
events.context.consumer. savedAddressCount	Number of addresses the consumer has saved	Optional
events.properties. selectionTarget	TBD	Optional
events.properties. selectionValue	TBD	Optional
events.properties. navigationStartInMs	TBD	Optional
events.properties. responseEndInMs	TBD	Optional
events.properties. domContentLoadedInMs	TBD	Optional
events.properties. firstPaintInMs	TBD	Optional
events.properties. interactionType	Type of interaction (e.g. “click”, “touch”, “drag”, etc.)	Optional
events.properties. mouseTarget	Description of target of interaction, e.g. “change billing country”	Optional
events.properties. channel	TBD	Optional
events.properties.previousView. name	TBD	Optional
events.properties.previousView. name	TBD	Optional

Element Name	Description	Required?
ousView. channel		
events.properties.errors. code	Error code, string	Optional
events.properties.errors. message	Error message, string	Optional
events.properties.errors. field	Error field, string	Optional
events.properties.metrics. name	Metric name, string	Optional
events.properties.metrics. type	Metric type, one of “gauge”, “counter”, “cumulative_counter”	Optional
events.properties.metrics. dimensions	Object	Optional
events.properties.metrics. value	Metric value, number	Optional

Event Types

The following table lists all of the possible values that should be sent in the **eventType** field, along with the context in which they should be used (Note: no changes from v1):

Event Type	Description
action	A generic event for sending data otherwise not specified in another event type
appLaunch	An event to track the launching of an application on a mobile device

Event Type	Description
changeView	An event representing the user viewing a part of an application. It could represent a page, screen, or section
checkoutConfirmation	A checkout confirmation event from the buy domain
error	A collection of errors generated by the client or a service
loginComplete	An event for tracking a completed login
metric	An event for tracking metric data. It closely follows the Artemis/SignalFx schema
mouse	A mouse or touch event
pageLoad	Performance timings for browser page loads
registrationComplete	An event for tracking a completed registration
search	Event representing a user submitting a search
selection	Event tracking when the user makes a selection. e.g. select box, radio group or checkbox
textInput	Event representing a user entering text in an application. This should be dispatched on blur to avoid too many events

Sample Requests by Event Type

Action

```
{
  "actorId": "7894225087415055350568",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "schemaVersion": 2,
      "properties": {
        "channel": "channel"
      },
      "userId": "upmId",
      "event": "eventName",
      "context": {
        "app": {
          "environment": "development",
          "domain": "domain",
          "division": "division",
          "platform": "platform",
          "name": "name",
          "version": "version",
          "build": "version"
        }
      },
      "privacy": {
        "isMarketing": true,
        "isPerformance": true
      }
    }
  ]
}
```

```
"consumer": {
  "visitId": "visitId",
  "isSwoosh": true,
  "allowsMarketing": true,
  "allowsPerformance": true
},
"campaign": {
  "name": "campaignValue",
  "source": "campaignKey"
},
"locale": "language"
},
"timestamp": "1985-04-12T23:20:50.52Z",
"productId": "productId",
"brand": "brand",
"category": "category",
"inventoryStatus": "coming soon",
"size": "nikeSize",
"pid": "pid",
"price": 1,
"name": "productName",
"type": "productName",
"quantity": 1,
"sku": "skuId",
"style": "styleType",
"subtitle": "subtitle",
"eventType": "action",
"eventTags": [
  "loginAttempt"
],
"eventId": "id",
"platform": "web",
"experimentName": "name",
```

```
    "experimentId": "id",
    "variationId": "variation"
  }
  N/A
}
```

Change View

```
{
  "actorId": "7894225087415055350568",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "schemaVersion": 2,
      "properties": {
        "channel": "channel",
        "previousView": {
          "name": "name",
          "channel": "channel"
        }
      },
      "userId": "upmId",
      "event": "eventName",
      "context": {
        "app": {
          "environment": "development",
          "domain": "domain",
          "division": "division",
          "platform": "platform",
          "name": "name",
          "version": "version",
          "build": "version"
        }
      }
    }
  ]
}
```



```
    },
    "privacy": {
      "isMarketing": true,
      "isPerformance": true
    },
    "consumer": {
      "visitId": "visitId",
      "isSwoosh": true,
      "allowsMarketing": true,
      "allowsPerformance": true
    },
    "campaign": {
      "name": "campaignValue",
      "source": "campaignKey"
    },
    "locale": "language"
  },
  "timestamp": "1985-04-12T23:20:50.52Z",
  "productId": "productId",
  "brand": "brand",
  "category": "category",
  "inventoryStatus": "coming soon",
  "size": "nikeSize",
  "pid": "pid",
  "price": 1,
  "name": "productName",
  "type": "productName",
  "quantity": 1,
  "sku": "skuId",
  "style": "styleType",
  "subtitle": "subtitle",
  "eventType": "changeView",
  "eventTags": [
```

Checkout Confirmation

```
    "loginAttempt": true,
  ],
  "eventId": "id",
  {
    "platform": "web",
    "experimentName": "name",
    "actorId": "7894225087415055350568",
    "experimentId": "id",
    "resourceType": "dotcom/event_batch",
    "variationId": "variation",
    "resourceVersion": "v1",
  },
  "events": [
  ] {
}
  "schemaVersion": 2,
  "userId": "upmId",
  "event": "eventName",
  "context": {
    "app": {
      "environment": "development",
      "domain": "domain",
      "division": "division",
      "platform": "platform",
      "name": "name",
      "version": "version",
      "build": "version"
    },
  },
  "privacy": {
    "isMarketing": true,
    "isPerformance": true
  },
  "consumer": {
    "visitId": "visitId",
    "isSwoosh": true,
    "allowsMarketing": true,
    "allowsPerformance": true
  }
}
```

```
    },
    "campaign": {
      "name": "campaignValue",
      "source": "campaignKey"
    },
    "locale": "language"
  },
  "timestamp": "1985-04-12T23:20:50.52Z",
  "subtotal": 1,
  "valueAddedServicesTotal": 1,
  "productId": "productId",
  "brand": "brand",
  "category": "category",
  "inventoryStatus": "coming soon",
  "size": "nikeSize",
  "pid": "pid",
  "price": 1,
  "name": "productName",
  "type": "productName",
  "quantity": 1,
  "sku": "skuId",
  "style": "styleType",
  "subtitle": "subtitle",
  "eventType": "checkoutConfirmation",
  "eventTags": [
    "loginAttempt"
  ],
  "eventId": "id",
  "platform": "web",
  "experimentName": "name",
  "experimentId": "id",
  "variationId": "variation"
}
```

```
Error  
}
```

```
{  
  "actorId": "7894225087415055350568",  
  "resourceType": "dotcom/event_batch",  
  "resourceVersion": "v1",  
  "events": [  
    {  
      "schemaVersion": 2,  
      "properties": {  
        "channel": "channel"  
      },  
      "userId": "upmId",  
      "event": "eventName",  
      "context": {  
        "app": {  
          "environment": "development",  
          "domain": "domain",  
          "division": "division",  
          "platform": "platform",  
          "name": "name",  
          "version": "version",  
          "build": "version"  
        },  
        "privacy": {  
          "isMarketing": true,  
          "isPerformance": true  
        },  
        "consumer": {  
          "visitId": "visitId",
```

```
    "isSwoosh": true,
    "allowsMarketing": true,
    "allowsPerformance": true
  },
  "campaign": {
    "name": "campaignValue",
    "source": "campaignKey"
  },
  "locale": "language"
},
"timestamp": "1985-04-12T23:20:50.52Z",
"productId": "productId",
"brand": "brand",
"category": "category",
"inventoryStatus": "coming soon",
"size": "nikeSize",
"pid": "pid",
"price": 1,
"name": "productName",
"type": "productName",
"quantity": 1,
"sku": "skuId",
"style": "styleType",
"subtitle": "subtitle",
"eventType": "error",
"eventTags": [
  "loginAttempt"
],
"eventId": "id",
"platform": "web",
"experimentName": "name",
"experimentId": "id",
"variationId": "variation"
```

Login Complete
}

N/A

Metric

```
{
  "actorId": "7894225087415055350568",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "schemaVersion": 2,
      "properties": {
        "metric": {
          "name": "metricName",
          "type": "gauge",
          "value": 1
        }
      },
      "userId": "upmId",
      "event": "eventName",
      "context": {
        "app": {
          "environment": "development",
          "domain": "domain",
          "division": "division",
          "platform": "platform",
          "name": "name",
          "version": "version",
          "build": "version"
        }
      }
    }
  ]
}
```

```
    },
    "privacy": {
      "isMarketing": true,
      "isPerformance": true
    },
    "consumer": {
      "visitId": "visitId",
      "isSwoosh": true,
      "allowsMarketing": true,
      "allowsPerformance": true
    },
    "campaign": {
      "name": "campaignValue",
      "source": "campaignKey"
    },
    "locale": "language"
  },
  "timestamp": "1985-04-12T23:20:50.52Z",
  "productId": "productId",
  "brand": "brand",
  "category": "category",
  "inventoryStatus": "coming soon",
  "size": "nikeSize",
  "pid": "pid",
  "price": 1,
  "name": "productName",
  "type": "productName",
  "quantity": 1,
  "sku": "skuId",
  "style": "styleType",
  "subtitle": "subtitle",
  "eventType": "metric",
  "eventTags": [
```

```

    "loginAttempt"
  ],
  "eventId": "id",
  {
    "platform": "web",
    "actorId": "7894225087415055350568",
    "experimentName": "name",
    "experimentId": "id",
    "resourceType": "dotcom/event_batch",
    "variationId": "variation",
    "resourceVersion": "v1",
  },
  "events": [
  ] {
}
  "schemaVersion": 2,
  "properties": {
    "interactionType": "interactionType",
    "mouseTarget": "mouseTarget",
    "channel": "channel"
  },
  "userId": "upmId",
  "event": "eventName",
  "context": {
    "app": {
      "environment": "development",
      "domain": "domain",
      "division": "division",
      "platform": "platform",
      "name": "name",
      "version": "version",
      "build": "version"
    },
  },
  "privacy": {
    "isMarketing": true,
    "isPerformance": true
  },
}

```



```
"consumer": {
  "visitId": "visitId",
  "isSwoosh": true,
  "allowsMarketing": true,
  "allowsPerformance": true
},
"campaign": {
  "name": "campaignValue",
  "source": "campaignKey"
},
"locale": "language"
},
"timestamp": "1985-04-12T23:20:50.52Z",
"productId": "productId",
"brand": "brand",
"category": "category",
"inventoryStatus": "coming soon",
"size": "nikeSize",
"pid": "pid",
"price": 1,
"name": "productName",
"type": "productName",
"quantity": 1,
"sku": "skuId",
"style": "styleType",
"subtitle": "subtitle",
"eventType": "mouse",
"eventTags": [
  "loginAttempt"
],
"eventId": "id",
"platform": "web",
"experimentName": "name",
```

Page Load "experimentId": "id",
"variationId": "variation"

```
}  
  
{ ]  
} "actorId": "7894225087415055350568",  
  "resourceType": "dotcom/event_batch",  
  "resourceVersion": "v1",  
  "events": [  
    {  
      "schemaVersion": 2,  
      "properties": {  
        "channel": "channel",  
        "previousView": {  
          "name": "name",  
          "channel": "channel"  
        }  
      },  
      "userId": "upmId",  
      "event": "eventName",  
      "context": {  
        "app": {  
          "environment": "development",  
          "domain": "domain",  
          "division": "division",  
          "platform": "platform",  
          "name": "name",  
          "version": "version",  
          "build": "version"  
        },  
        "privacy": {  
          "isMarketing": true,
```

```
    "isPerformance": true
  },
  "consumer": {
    "visitId": "visitId",
    "isSwoosh": true,
    "allowsMarketing": true,
    "allowsPerformance": true
  },
  "campaign": {
    "name": "campaignValue",
    "source": "campaignKey"
  },
  "locale": "language"
},
"timestamp": "1985-04-12T23:20:50.52Z",
"productId": "productId",
"brand": "brand",
"category": "category",
"inventoryStatus": "coming soon",
"size": "nikeSize",
"pid": "pid",
"price": 1,
"name": "productName",
"type": "productName",
"quantity": 1,
"sku": "skuId",
"style": "styleType",
"subtitle": "subtitle",
"eventType": "pageLoad",
"eventTags": [
  "loginAttempt"
],
"eventId": "id",
```

```
    "platform": "web",
    "experimentName": "name",
    "experimentId": "id",
    "variationId": "variation"
  }
}
```

Registration Complete

N/A

Search

```
]
{
  "actorId": "7894225087415055350568",
  "resourceType": "dotcom/event_batch",
  "resourceVersion": "v1",
  "events": [
    {
      "schemaVersion": 2,
      "properties": {
        "channel": "channel",
        "previousView": {},
        "errors": {},
        "metric": {}
      },
      "userId": "12345",
      "event": "testPageLoad",
      "context": {
        "abTest": {
          "neo": {
            "profiles": {
              "experiments": {}
            }
          }
        }
      }
    }
  ]
}
```

```
},
"app": {
  "environment": "development",
}
```

```
    "domain": "dotcom",
    "division": "commerce",
    "platform": "cloud",
    "name": "omniture-test",
    "version": "0.0.1",
    "build": "0.0.1"
  },
  "previousApp": {},
  "privacy": {
    "isMarketing": true,
    "isPerformance": true
  },
  "consumer": {
    "adobeVisitorId": "adobeVisitorId
value",
    "visitId": "0365cb0c-
ed76-11e6-bc64-92361f002671"
  },
  "campaign": {},
  "device": {},
  "library": {},
  "locale": "en-us",
  "location": {
    "country": "us"
  },
  "page": {
    "referrer": "http://www.nike.com/
referringPage",
    "title": "A Test Page",
    "url": "http://www.nike.com/testPage"
  },
  "referrer": {},
  "screen": {
```

Selection

"height": 980,

"width": 1900

```
    },
    {
      "traits": {},
      "actorId": "userAgent": "eventsTester.0.0.1",
      "resourceType": "dotcom/event_batch",
      "integrations": {},
      "resourceVersion": "v1",
      "timestamp": "1985-04-12T23:20:50.52Z",
      "events": [
        {
          "eventType": "search",
          "eventId": "5cfe1c1d-0319-4c6a-b18d-80119632f1e1",
          "schemaVersion": 2,
          "properties": {
            "platform": "web",
            "selectionTarget": "selectionTarget",
            "selectionValue": "selectionValue",
            "channel": "channel"
          }
        }
      ],
      "userId": "upmId",
      "event": "eventName",
      "context": {
        "app": {
          "environment": "development",
          "domain": "domain",
          "division": "division",
          "platform": "platform",
          "name": "name",
          "version": "version",
          "build": "version"
        }
      },
      "privacy": {
        "isMarketing": true,
        "isPerformance": true
      }
    },
```

```
"consumer": {
  "visitId": "visitId",
  "isSwoosh": true,
  "allowsMarketing": true,
  "allowsPerformance": true
},
"campaign": {
  "name": "campaignValue",
  "source": "campaignKey"
},
"locale": "language"
},
"timestamp": "1985-04-12T23:20:50.52Z",
"productId": "productId",
"brand": "brand",
"category": "category",
"inventoryStatus": "coming soon",
"size": "nikeSize",
"pid": "pid",
"price": 1,
"name": "productName",
"type": "productName",
"quantity": 1,
"sku": "skuId",
"style": "styleType",
"subtitle": "subtitle",
"eventType": "selection",
"eventTags": [
  "loginAttempt"
],
"eventId": "id",
"platform": "web",
"experimentName": "name",
```

Text Input "experimentId": "id",
"variationId": "variation"

```
}  
  
{ ]  
} "actorId": "7894225087415055350568",  
  "resourceType": "dotcom/event_batch",  
  "resourceVersion": "v1",  
  "events": [  
    {  
      "schemaVersion": 2,  
      "properties": {  
        "channel": "channel"  
      },  
      "userId": "upmId",  
      "event": "eventName",  
      "context": {  
        "app": {  
          "environment": "development",  
          "domain": "domain",  
          "division": "division",  
          "platform": "platform",  
          "name": "name",  
          "version": "version",  
          "build": "version"  
        },  
        "privacy": {  
          "isMarketing": true,  
          "isPerformance": true  
        },  
        "consumer": {  
          "visitId": "visitId",
```



```
    "isSwoosh": true,
    "allowsMarketing": true,
    "allowsPerformance": true
  },
  "campaign": {
    "name": "campaignValue",
    "source": "campaignKey"
  },
  "locale": "language"
},
"timestamp": "1985-04-12T23:20:50.52Z",
"productId": "productId",
"brand": "brand",
"category": "category",
"inventoryStatus": "coming soon",
"size": "nikeSize",
"pid": "pid",
"price": 1,
"name": "productName",
"type": "productName",
"quantity": 1,
"sku": "skuId",
"style": "styleType",
"subtitle": "subtitle",
"eventType": "textInput",
"eventTags": [
  "loginAttempt"
],
"eventId": "id",
"platform": "web",
"experimentName": "name",
"experimentId": "id",
"variationId": "variation"
```

```
}
```

Response Body

```
}
```

Element Name	Description	Required?
message	Response message	Required

Sample HTTP 200 success response:

```
{
  "message": "Success"
}
```

Sample HTTP 400 error responses:

Scenario: request did not have the required **events** property

```
{
  "message": {
    "eventBatchErrors": [
      {
        "keyword": "required",
        "dataPath": "",
        "schemaPath": "#/required",
        "params": {
          "missingProperty": "events"
        },
        "message": "should have
required property 'events'"
      }
    ]
  }
}
```

```
}  
}
```

Scenario: request had blank **actorId** property

```
{  
  "message": {  
    "eventBatchErrors": [  
      {  
        "keyword": "minLength",  
        "dataPath": ".actorId",  
        "schemaPath": "#/properties/  
actorId/minLength",  
        "params": {  
          "limit": 1  
        },  
        "message": "should NOT be  
shorter than 1 characters"  
      }  
    ]  
  }  
}
```

Sample HTTP 500 error response:

Scenario: the API is having an issue taking the request.

```
{  
  "error_id":
```

```
"65b35de2-9e2e-4ba5-afc2-4f687cbf33a7",
  "errors": [
    {
      "code": 10,
      "message": "An error occurred
while fulfilling the request"
    }
  ]
}
```

Upgrading to the Latest Version

If you are currently using version 1 of this API and need information for upgrading, see the [Analytics Pipeline v1 Developer's Guide](#).

Troubleshooting

Listed below are ways to troubleshoot unexpected responses using this API.

Use Troubleshooting Tools

1. Check for validation errors logged in Splunk [here](#)
2. Use the sample requests in this document or those provided [here](#) as a guide to forming valid requests for each event type.

Glossary

See the [Glossary](#)

Document Change Log

Summary	Date	Description
Initial draft	02/14/2018	Initial Draft
Updated external links	04/03/2018	Updated external links to open in new browser window
Updated TOC	10/01/2018	Removed 'In this guide', replaced with sidebar TOC

Related Links

[NDe Documentation Home](#)

[Getting Started](#)

[Business Guides](#)

[Developer's Guides](#)