



ADDING PAYMENT TO YOUR EXPERIENCE

Last Updated: 10/01/2018

Use the Payment API to allow customers to pay for Nike products.


If you've read [Using NDe APIs](#) and [Payment Overview](#), this guide provides the details necessary to integrate with the Nike Payment APIs.

API at a Glance

Topic	Details
Use this API to	List payment options Save payment methods Initiate a PayPal Billing Agreement Initiate an ApplePay payment Allocate payment amount across payment types Validate and authorize payment
Who calls this API	SNKRS app (Web/iOS/Android), Nike app (iOS/Android), Nike.com
Version	Payment ApplePay v2 Payment Approval v2 Payment Credit Card Submit v1 Payment Deferred Payment v1 Payment Options v2 Payment Preview v2 Stored Payment v1 Payment Wallet v1

Topic	Details
SLA response time (rt) and requests per second (rps)	Payment Applepay rt: 350ms rps:40 Payment Approval rt: 250ms rps: 200 Payment Credit Card Submit ?ms Payment Deferred Payment ?ms Payment Options rt: 250ms rps:700 Payment Preview rt: 250ms rps:300 Stored Payment ?ms Payment Wallet rt: 300ms rps: 200
Domain	Commerce
Prerequisites	API Registration
Contact Info	Slack #cic-payment Confluence space: CiC Payment Product Owner: Sree Krishna

TIP: SLAs vary per endpoint for the Payment APIs. In the figures listed above, the highest response time and lowest requests per second *for the API overall* were shown.

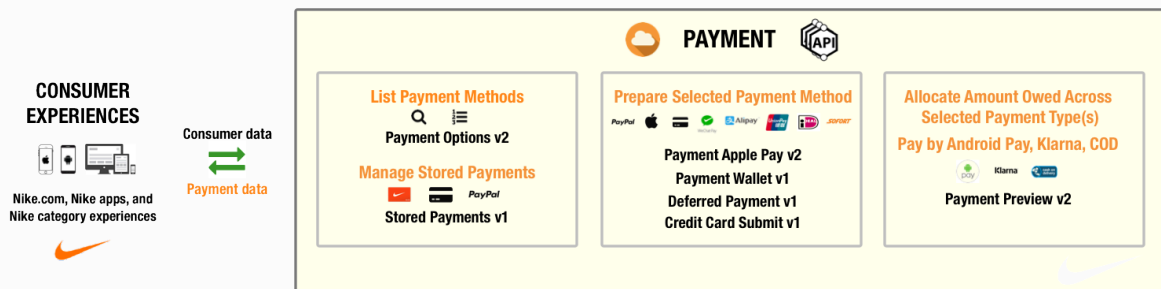

Terms of Service

It is recommended that you send a caller ID header in every request to this API to help

troubleshoot unexpected responses. See the Registration section of the [Using NDe APIs](#) guide on how to create and register your caller ID.

Authentication

Access Tokens

Most calls through the Nike API gateway (api.nike.com) require an access token be sent in the request header. This allows Nike to verify that your app is authorized to perform the action on behalf of the user.

Access tokens are obtained by calling Nike Unite services prior to calling the API which you ultimately want to reach.

To find out more on how to call Unite services to obtain access tokens, see the Authorization section of the [Using NDe APIs](#) guide.

JSON Web Token

A few of the endpoints in the Payment APIs require the additional authorization of a JSON Web Token (JWT). For more, see the JWT section of [Using NDe APIs](#).

Use Cases

I want to...	API(s) to use
List payment options List billing countries based on shipping country	Payment Options Service
List a customer's stored payments Update a customer's Credit Card information Add or delete a customer's stored payment Change a customer's default payment	Stored Payment Service


I want to...	API(s) to use
method	
Allocate amount owed across payment types	Payment Preview Service
Validate and authorize payment	Payment Approval Service
Store and retrieve Credit Card information	Credit Card Submit Service
Pay by Apple Pay	Payment ApplePay Service
Pay by PayPal	Payment Wallet Service
Pay by a deferred payment method where payment is made after the order is placed	Deferred Payment Service

Example Implementations

Payment API flows vary based on the payment method and the user experience. Listed below are a few examples of Payment API usage.


Sample Credit Card Payment Flow

In this Payment flow, the customer chooses to pay by Credit Card that is saved as a stored payment method. The customer must provide the CVV for validation because the shipping address passed into the call is either new or different from previous shipping addresses on past orders.

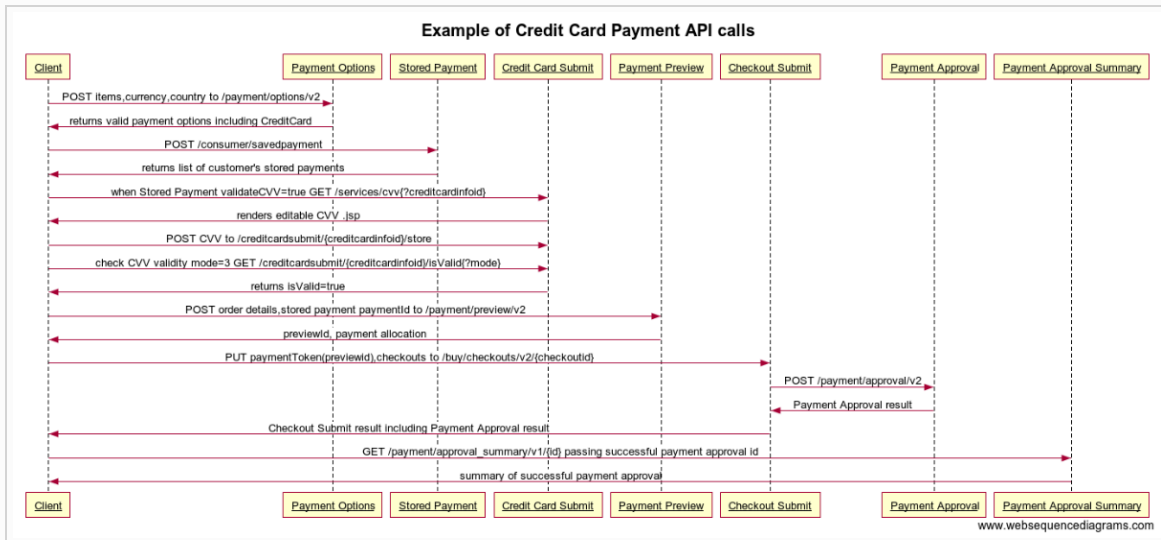


Sample PayPal Express flow

In this flow, the customer is redirected to the PayPal site after choosing to pay by PayPal Express in the Nike experience. The customer selects the shipping and billing addresses on the PayPal site. Based on the PayPal token, the Payment Wallet service returns the shipping and billing addresses from PayPal for display on the order confirmation.

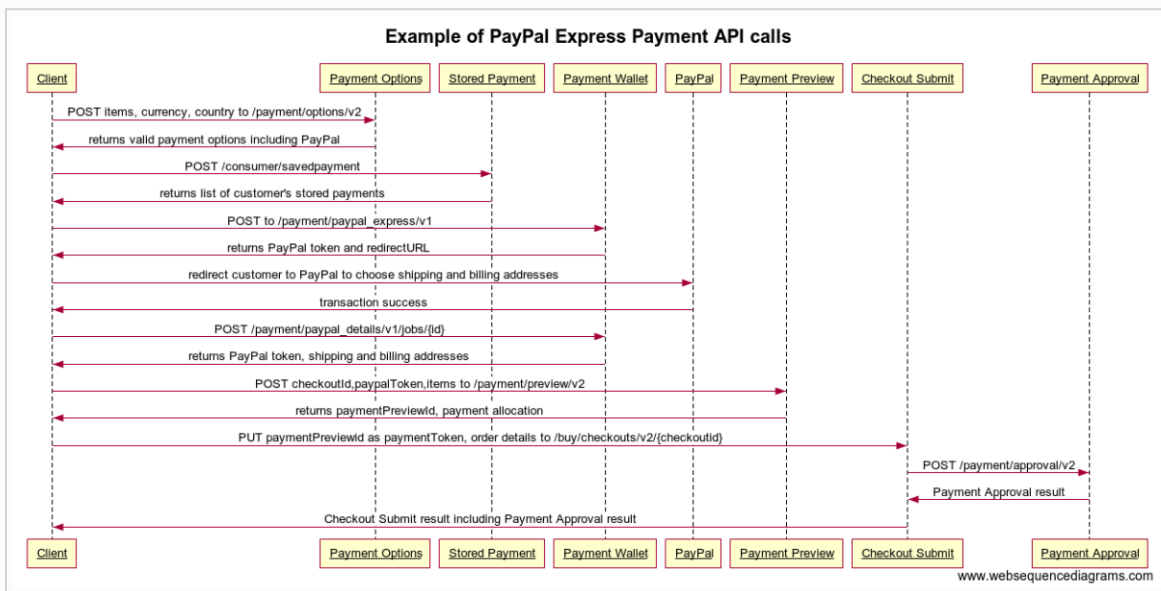


Sample PayPal Mark flow

In this flow, the customer chooses to pay by PayPal Mark and provides the shipping address in the Nike experience. From order review, the customer is redirected to the PayPal site to select the billing address and pay. Based on the PayPal token, the Payment Wallet service returns the shipping and billing addresses from PayPal for display on the order confirmation.

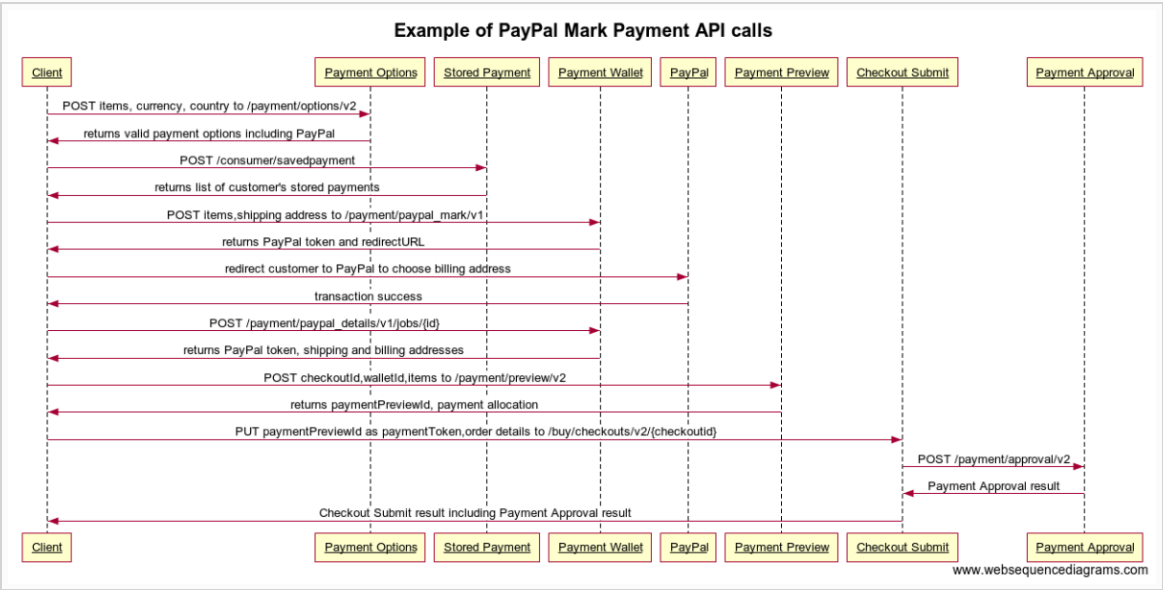


Sample Apple Pay flow

In the example Payment API flow below, the customer chooses to pay by Apple Pay in a Safari web browser.

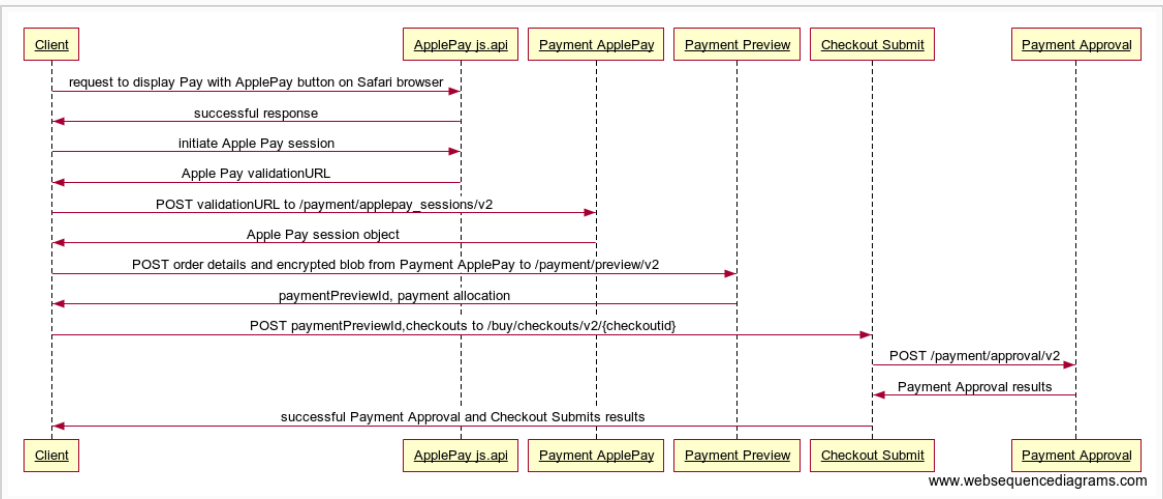

Sample Deferred Payment flow

In this flow, the customer chooses to pay by a payment method that will be authorized and captured after the Nike order has been placed. This is a typical flow for China payment methods such as WeChat and Alipay.

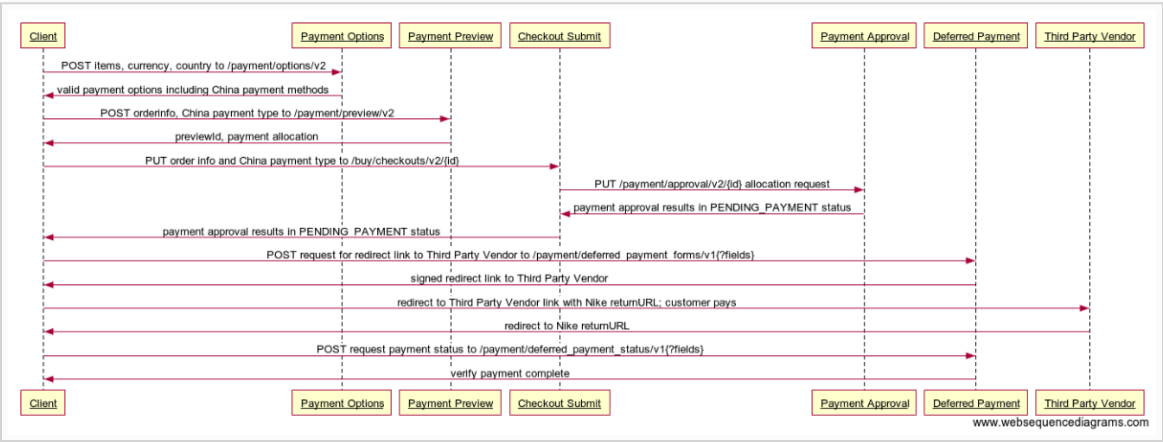

API Endpoint Quick Reference

For source code, visit the [Payment Repository](#).

PAYMENT APPLEPAY

Endpoint Name	Path	HTTP Method
START APPLE PAY SESSION	/payment/applepay_sessions/v2/	POST

PAYMENT APPROVAL

Endpoint Name	Path	HTTP Method
SUBMIT ORDER	/payment/approval/v2/	POST

Endpoint Name	Path	HTTP Method
PAYMENTS FOR APPROVAL		
SUBMIT ORDER PAYMENTS FOR APPROVAL	/payment/approval/v2/{id}	PUT
RETRIEVE PAYMENT APPROVAL JOB	/payment/approval/v2/jobs/{id}	GET
ORDER PAYMENTS APPROVAL RESULT	/payment/approval_results/v2/{id}	GET
VOID PAYMENT APPROVAL	/payment/approval_results/v2/	DELETE
GET PAYMENT APPROVAL SUMMARY	/payment/approval_summary/v1/{id}	GET

PAYMENT CREDIT CARD SUBMIT

Endpoint Name	Path	HTTP Method
GET CREDIT CARD INFO WITH CVV	/services/{id}	GET
GET CREDIT CARD INFO WITHOUT CVV	/services/add{?id, language}	GET
GET CVV	/services/cvv{?id}	GET
GET EXPIRY DATE AND CVV	/services/expcvv{?id}	GET
VALIDATE CREDIT CARD PERSISTENCE	/creditcardsubmit/{id}/isValid{?mode}	GET

Endpoint Name	Path	HTTP Method
STORE CREDIT CARD INFO	/creditcardsubmit/{id}/store	POST
GET CREDIT CARD INFO BY ID	/creditcardsubmit/{id}	GET
VALIDATE CREDIT CARD PERSISTENCE BY ID AND MODE	/creditcardsubmit/{id}/isValidDate{?mode}	GET

PAYMENT DEFERRED PAYMENT

Endpoint Name	Path	HTTP Method
DEFERRED PAYMENT FOR WECHAT WITH CODE REQUIRED	/payment/deferred_wechat_payments/v1	POST
GET DEFERRED PAYMENT WECHAT JOB STATUS BY ID	/payment/deferred_wechat_payments/v1/jobs/{id}	GET
DEFERRED PAYMENT FORM	/payment/deferred_payment_forms/v1	POST
DEFERRED PAYMENT FORM JOB STATUS BY ID	/payment/deferred_payment_forms/v1/jobs/{id}	GET
DEFERRED PAYMENT STATUS	/payment/deferred_payment_status/v1	POST
DEFERRED PAYMENT STATUS JOB STATUS BY	/payment/deferred_payment_status/	GET

Endpoint Name	Path	HTTP Method
ID	v1/jobs/{id}	

PAYMENT OPTIONS

Endpoint Name	Path	HTTP Method
GET PAYMENT OPTIONS FOR AN ORDER	/payment/options/v2	POST
ALLOWABLE BILLING COUNTRIES FOR A SHIPPING COUNTRY	/payment/options/v2/{shippingCountry}	GET
VALIDATE PAYMENTS	/payment/validate_payments/v2	POST

PAYMENT PREVIEW

Endpoint Name	Path	HTTP Method
PAYMENT PREVIEW	/payment/preview/v2	POST
PAYMENT PREVIEW RESULT BY ID	/payment/preview_results/v2/{id}	GET
PAYMENT PREVIEW JOB STATUS BY ID	/payment/preview/v2/jobs/{id}	GET

STORED PAYMENT

Endpoint Name	Path	HTTP Method
INITIATE PAYPAL BILLING AGREEMENT	/consumer/ paypalagreement	GET
SAVE PAYMENT BY USER PROFILE	/consumer/savepayment	POST
DELETE STORED PAYMENTS BY USER PROFILE	/consumer/ storedpayments	DELETE
FETCH STORED PAYMENTS BY USER PROFILE	/consumer/ storedpayments	POST
UPDATE CREDIT CARD DETAILS	/consumer/ storedpayments/{payment _id}	PUT
DELETE PAYMENT BY ID	/consumer/ storedpayments/{payment _id}	DELETE
FETCH STORED PAYMENT BY ID	/consumer/ storedpayments/{payment _id}	GET
VALIDATE CVV FOR SHIPPING ADDRESS	/consumer/ storedpayments/{payment _id}	POST
FETCH GIFT CARD BY ID	/consumer/ storedpayments/ giftcard/{payment_id}	GET
CREATE/UPDATE ATG PAYMENT	/consumer/ storedpayments/synch	POST

Endpoint Name	Path	HTTP Method
DELETE ATG PAYMENT	/consumer/ storedpayments/ synch/{payment_token}	DELETE

PAYMENT WALLET

Endpoint Name	Path	HTTP Method
PAYPAL DETAILS	/payment/paypal_details/ v1	POST
PAYPAL DETAIL JOB STATUS BY ID	/payment/paypal_details/ v1/jobs/{id}	GET
PAYPAL EXPRESS	/payment/paypal_express/ v1	POST
PAYPAL EXPRESS JOB STATUS BY ID	/payment/paypal_express/ v1/jobs/{v1}	GET
PAYPAL MARK	/payment/paypal_mark/v1	POST
PAYPAL MARK JOB STATUS BY ID	/payment/paypal_mark/v1/ jobs/{id}	GET

Caching Data

The Payment API makes use of data caching to optimize service SLAs. The first time data is fetched or when the cache expires, the Payment service makes a call to get the latest data and adds it to the cache.

The PaymentWallet, PaymentPreview, PaymentApproval and StoredPayments services handle gift card balances. Retrieving the balance of a gift card requires a call to a third-party gift card provider, which can slow down the Payment service's response, especially in high

volume traffic. To avoid this scenario, the private gift card Service, which is responsible for retrieving gift card data and is called by the PaymentWallet, PaymentPreview, PaymentApproval and StoredPayments services, caches the gift card balance after retrieval. The cache time varies based on the balance. If the gift card has a positive balance, the gift card service caches the balance for 5 minutes; If the gift card has a 0 balance, the gift card service caches the balance for 30 minutes.

The PaymentOptions, PaymentWallet, PaymentPreview and PaymentApproval services use product and SKU data as part of validation. For performance reasons, these services cache product and SKU data for 30 minutes in order to reduce the amount of calls to the [Merchandised Products API](#) to get the latest data.

Making Your First API request

For your first API request, send a POST request to the *Get Payment Options for an Order* endpoint of the Payment API to list the valid payment options for the country of Denmark with a Checkout total of 266.98 Euro.

1. Gather Data Needed for the Request

Header Name	Header Value
Content-Type	application/json; charset=UTF-8
Accept	application/json; charset=UTF-8
Authorization	See the Authorization section of the Using NDe APIs guide on how to get this value

HTTP Method	Endpoint URI
POST	https://api.nike.com/payment/options/v2

Body:

```
{
  "country": "DE",
  "billingCountry": "DE",
  "currency": "EUR",
  "total": 266.98
}
```

2. Execute the request

Using the values gathered in step 1, here is the resulting cURL command:

```
curl -X POST --header 'Content-Type: application/json;
charset=UTF-8' --header 'Accept: application/json' --header
'upmid: 14546445000' --header 'Authorization: Bearer
eyJhbGciOiJSUzI1NiIsImtpZCI6ImU3OWQ4ZjU1LTExN2ItNGUxMy04OTU3LTc5Yz
Q2Y2FmNjY2ZHNpZyJ9.eyJpYXQiOiJlMDM0MjQ0MzQsImV4cCI6MTUwMzQyODAzNCw
iaXNzIjoib2FldGgyYWNjIiwianRpIjoingFhZDBiYzktOTE5YS00NjA1LTkzMzgtZ
GQ3NzkxYWZRMzYzExIiwibGF0IjoixNTAzNDI0NDM0LCJhdWQiOiJjb20ubmlrZS5kaWd
pdGFsIiwic3ViIjoiiY29tLm5pa2UuY29tbWVYI2Uub21lZ2EuZHZHJvaWQiLCJzYnQio
iJuaWt1OmFwcCI6Im9yZyI6InByb2QiLCJzY3AiOlsiY29tbWVYI2UiXSwicHJuaWt1
iMTixNDY0NDQwODIiLCJwcnQiOiJuaWt1OnBsdXMiOiJuaWt1OnBsdXMiOiJuaWt1OnBsdXMi
eOIEezT7jD-9pBABK-eL337DwVQn-
JFrjLksnI-0Pfnz2k_ncL_LSOvWyXijKHgOhsOv7wcvWa7mMsr4L5WmNN2apAeH_EI
HhSFxM67dCy3uPYQg8SukhtUpaTN4aUghoqBuCR6fouWNq-
REoUeLEbcY95KG7_gV3LA1viGgo4WA6GkDoFlYTX030WE3YLbPxDy3W_xRGsM6xIRw
CJykJO0_FOjIHaldOKxAvTq-
zV2GWlBC8SeZNFOPVvM_bcoXuBek8PEqQEaRvilMt_5DwxgIyiLiM30xJz4auNLtTm
ryQ1B04CDYxIaJLyMYAhA' -d '{ \
  "country": "DE", \
  "billingCountry": "DE", \
  "currency": "EUR", \
```

```

        "total": 266.98 \
    }' 'https://api.nike.com/payment/options/
v2?access_token=eyJhbGciOiJSUzI1NiIsImtpZCI6ImU3OWQ4ZjU1LTExN2ItNG
UxMy04OTU3LTc5YzQ2Y2FmNjY2ZHNpZyJ9.eyJpYXQiOjE1MDM0MjQ0MzQsImV4cCI
6MTUwMzQyODAzNCwiaXNzIjoib2FldGgyYWNjIiwianRpIjoingFhZDBiYzktOTE5Y
S00NjA1LTkzMzgtZGQ3NzZkxYWmYzExIiwibGF0IjoxNTAzNDI0NDM0LCJhdWQiOiJ
jb20ubmlrZS5kaWdpdGFsIiwic3ViIjoiiY29tLm5pa2UuY29tbWVY2Uub21lZ2EuZ
HJvaWQiLCJzYnQiOiJuaWtlOmFwcCIsIm9yZyI6InByb2QiLCJzY3AiOlsiY29tbWV
yY2UiXSwicHJuaWtlOmFwcCIsIm9yZyI6InByb2QiLCJzY3AiOlsiY29tbWV
p22gsRzenNfdKz7AeOIUEezT7jD-9pBABK-eL337DwVQn-
JFrjLksnI-0Pfnz2k_nCL_LSOvWyXijKHgOhsOv7wcvWa7mMsr4L5WmNN2apAeH_EI
HhSFxm67dCy3uPYQg8SukhtUpaTN4aUghoqBuCR6fouWNq-
REoUeLEbcY95KG7_gV3LA1viGgo4WA6GkDoFlYTX030wE3YLbPxDy3W_xRGsM6xIRw
CJykJO0_FojiHaldOKxAvTq-
zV2GWlBC8SezNFOPVvM_bcoXuBek8PEqQEaRvi1Mt_5DwxgIyiLiM30xJz4auNLtTm
ryQ1B04CDYxIaJLyMYAhA'

```

3. Parse the Response

Assuming no errors, you will receive a response body similar to the following:

```

{
  "country": "DE",
  "billingCountry": "DE",
  "paymentOptions": [
    {
      "name": "Klarna",
      "displayName": "Klarna"
    },
    {
      "name": "Paypal",

```

```
    "displayName": "PayPal"
  },
  {
    "name": "CreditCard",
    "displayName": "Credit Card",
    "types": [
      {
        "name": "Visa",
        "displayName": "Visa"
      },
      {
        "name": "MasterCard",
        "displayName": "MasterCard"
      },
      {
        "name": "AmericanExpress",
        "displayName": "American Express"
      },
      {
        "name": "InternationalMaestro",
        "displayName": "Maestro (International)"
      }
    ]
  },
  {
    "name": "Sofort",
    "displayName": "Sofort"
  },
  {
    "name": "GiftCard",
```



```
        "displayName": "GiftCard"
      }
    ]
  }
}
```

Listed in the response are the the `country` and `billingCountry` passed in the request, as well as the name and `displayName` of each payment method valid for your Nike UPMID, shopping in country and billing country. Your user experience would display the `displayName` to the customer and pass the payment's name to endpoint requests requiring a payment type.

Using Payment Options

- [Get Payment Options for an Order](#)
- [Allowable Billing Countries for a Shipping Country](#)
- [Validate Payments](#)

Payment Options Overview

Use the Payment Options service to list valid payment options or list valid billing countries based on a shipping country. Valid payment options are calculated based on [Nike UPMID](#), shopping country, billing country, currency, (product) items and value-added services. See [Adding Cart & Checkout to Your Experience](#) for more information on items in Checkout.

All endpoints of this service are synchronous.

Get Payment Options for an Order

- Lists valid payment options
- Calculates results based on calling application, shipping country, billing country, user type, items and value-added services
- Sorts results according to business rules

The Payment Options for an Order endpoint validates all products matching the UUID items passed in the request body. The endpoint has a product cache that expires every 15 minutes. If the product is not found in cache, it contacts the Merchandised Products API to get the latest product data. If the call is successful, Payment Options for an Order adds the product to its product cache and performs validation. If the Merchandised Product service is unreachable, Payment Options for an Order defaults the product type to “INLINE” and continues validating the product. In this way, Payment Options for an Order is not adversely affected by other services that are unavailable and minimizes calls to external services through caching.

Even though items is an optional request field, it is recommended that you pass it if available so product validation is performed as early as possible in the purchase flow.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/paymentoptions/ options/v2	no

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ It is a best practice to send all optional request headers, if the data is available, to avoid unexpected responses.

Request Body

Element Name	Type	Description	Required?
country	string	ISO2 country code of customer's shopping country e.g. US	Required
billingCountry	string	ISO2 country code of customer's billing country e.g US	Required
currency	string	Currency code the customer will pay for Checkout in e.g. USD. Supported currency codes .	Required
clientBrowser	string	Browser used by client, WECHAT or null	Optional

Element Name	Type	Description	Required?
clickAndCollect	boolean	True indicates this is a “click and collect” order, default is false	Optional
total	number	Order total e.g. 1999.0 (double)	Optional
items	array	Array of product ids in the customer’s Checkout items, UUID format	Optional
shippingMethods	array	List of shipping methods, e.g. NEXT_DAY, STANDARD	Optional

TIP: It is a best practice to send all of the optional request body fields, if the data is available, to avoid unexpected responses.

Sample *Get Payment Options for an Order* Request Body

```
{
  "country": "GR",
  "billingCountry": "GR",
  "currency": "EUR",
  "total": 266.98,
  "clickAndCollect": "false",
  "items": [
```

```

        "e8791c09-cd7e-5b72-bab3-5d3490c2bd06",
        "e484acd3-259f-5624-bc65-e10231e4628d"
    ]
}

```

Response Body

Element Name	Type	Description	Required?
country	string	ISO2 country code of customer's shopping country e.g. US	Required
billingCountry	string	ISO2 country code of customer's billing country e.g. US	Required
paymentOptions	array	Array of valid payment options	Required
paymentOptions. name	string	Internal payment option name e.g. CreditCard	Required
paymentOptions. displayName	string	Display payment option name e.g. Credit Card	Required
paymentOptions. excludes	string	List of excluded payment types based on this payment type	Optional
paymentOptions. types	array	List of sub-types for a payment	Optional

Element Name	Type	Description	Required?
		option	
paymentOptions.types.name	string	Sub-type internal name of payment option, e.g. MasterCard	Optional
paymentOptions.types.displayName	string	Sub-type display name of payment option, e.g. Master Card	Optional
paymentOptions.charge	object	Object containing info about the charge	Optional
paymentOptions.charge.amount	number	The amount of the charge	Required
paymentOptions.charge.currency	string	The currency of the charge	Required
message	string	Top-level error message	Optional
errors	array	Array of error objects	Optional
errors.field	string	JSON field name causing error	Optional
errors.code	string	Error code	Optional
errors.message	string	Error message	Optional

Sample *Get Payment Options for an Order* 200 Successful Response

```
{
```

```
"country": "GR",
"billingCountry": "GR",
"paymentOptions": [
  {
    "name": "CreditCard",
    "displayName": "Credit Card",
    "types": [
      {
        "name": "Visa",
        "displayName": "Visa"
      },
      {
        "name": "MasterCard",
        "displayName": "MasterCard"
      },
      {
        "name": "AmericanExpress",
        "displayName": "American Express"
      },
      {
        "name": "VisaElectron",
        "displayName": "Visa Electron"
      },
      {
        "name": "InternationalMaestro",
        "displayName": "Maestro (International)"
      }
    ]
  },
  {
```

```
    "name": "Paypal",
    "displayName": "PayPal"
  },
  {
    "name": "GiftCard",
    "displayName": "GiftCard",
    "excludes": [
      "COD"
    ]
  }
]
}
```

Sample *Get Payment Options for an Order* 400 Error Response

```
{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "currency",
      "code": "MISSING_REQUIRED",
      "message": "Required field"
    },
    {
      "field": "total",
      "code": "INVALID_NUMBER",
      "message": "Order total is invalid"
    },
    {
      "field": "items",
```



```
      "code": "INVALID_PRODUCT",  
      "message": "One or more product ids are invalid"  
    }  
  ]  
}
```

Error Codes

Code	Description
INVALID_REQUEST	returned when the request contains invalid information
MISSING_REQUIRED	returned when the request does not contain required information
INVALID_PRODUCT	returned when one or more item ids is invalid
INVALID_NUMBER	returned when amount is not in a valid number format

Allowable Billing Countries for a Shipping Country

- Lists supported billing countries for a shipping country
- Results are unsorted

TIP: The customer's billing address country must be in the billing country result list in order to purchase.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/paymentoptions/ options/ v2/{shippingCountry}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required
shippingCountry	Path	ISO2 country code customer is shopping in e.g. IE	Required	

Let's take a look at some *Allowable Billing Countries for a Shipping Country* scenarios.

I Want to List	Sample Query
allowed billing countries for shipping country IE	http://api.nike.com/payment/options/v2/IE

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required

Header Name	Description	Required?
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

There is no request body for GET requests.

Response Body

Element Name	Type	Description	Required?
shippingCountry	string	ISO2 country code customer is shopping in	Required
billingCountries	array	Array of allowed billing countries for a shipping country	Required
billingCountries.country	string	ISO2 country code	Required
httpStatus	string	Status code present when service returns in error	Optional

Element Name	Type	Description	Required?
timestamp	string	Timestamp present when service returns in error	Optional
message	string	Top-level error message present when service returns in error	Optional
errors	string	Array of error objects present when service returns in error	Optional
errors.field	string	JSON field name causing error	Optional
errors.code	string	Error code	Optional
errors.message	string	Error message	Optional

Sample Allowable Billing Countries for a Shipping Country 200 Success Response

```
{
  "shippingCountry": "IE",
  "billingCountries": [
    {
      "country": "DE"
    },
    {
      "country": "NO"
    },
    {
      "country": "BE"
    }
  ]
}
```

```
},  
{  
  "country": "FI"  
},  
{  
  "country": "PT"  
},  
{  
  "country": "DK"  
},  
{  
  "country": "LU"  
},  
{  
  "country": "FR"  
},  
{  
  "country": "HU"  
},  
{  
  "country": "BR"  
},  
{  
  "country": "SE"  
},  
{  
  "country": "SI"  
},  
{  
  "country": "GB"
```

```
},
{
  "country": "IE"
},
{
  "country": "US"
},
{
  "country": "CA"
},
{
  "country": "CH"
},
{
  "country": "GR"
},
{
  "country": "IT"
},
{
  "country": "ES"
},
{
  "country": "AT"
},
{
  "country": "AU"
},
{
  "country": "CZ"
```

```
    },
    {
      "country": "PL"
    },
    {
      "country": "NL"
    }
  ]
}
```

Sample *Allowable Billing Countries for a Shipping Country* 400 Error response

```
{
  "httpStatus": 400,
  "timestamp": 1499973327248,
  "message": "Validation Failed",
  "errors": [
    {
      "code": "INVALID_COUNTRY",
      "field": "shippingCountry",
      "message": "Shipping country is not recognized or invalid."
    }
  ]
}
```

Error Codes

Code	Description
INVALID_COUNTRY	Returned when the request URI country

Code	Description
	parameter contains invalid country

Validate Payments

Use this endpoint to validate a list of payment options for a given shipping country.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/payment/ validate_payments/v2	no

Request Headers

Header Name	Required?	Description
Accept	Required	Content type accepted in response, application/json is only value allowed
Content-Type	Required	Content type of the request, application/json is only value allowed
Authorization	Required	Your access token in the format of Bearer {token}

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and

usertype headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

✓ It is a best practice to send all optional request headers, if the data is available, to avoid unexpected responses.

Request Body

Element Name	Type	Description	Required?
country	string	ISO2 country code of customer's shipping country e.g. US	Required
payments	array	Array of payment objects to validate	Required
payments. id	string	Payment ID generated by client	Required
payments. billingCountry	string	Billing country code	Required
payments. type	string	type of payment, one of CreditCard, ApplePay, GiftCard, PayPal	Required
payments. cardType	string	type of credit card, e.g. Visa	Optional

TIP: It is a best practice to send all of the optional request body fields, if the data is available, to avoid unexpected responses.

Sample *Validate Payments* Request Body

```
{
  "country": "US",
  "payments": [
    {
      "id": "1",
      "billingCountry": "US",
      "type": "CreditCard",
      "cardType": "Visa"
    },
    {
      "id": "2",
      "billingCountry": "DE",
      "type": "CreditCard",
      "cardType": "Visa"
    },
    {
      "id": "3",
      "billingCountry": "GB",
      "type": "CreditCard",
      "cardType": "Maestro"
    },
    {
      "id": "4",
```

```

        "billingCountry": "IT",
        "type": "CreditCard",
        "cardType": "CarteSi"
    },
    {
        "id": "5",
        "billingCountry": "FR",
        "type": "PayPal"
    }
]
}

```

Response Body

Element Name	Type	Description	Required?
country	string	ISO2 country code of customer's shopping country e.g. US	Required
payments	array	Array of validated payments	Required
payments. id	string	Payment ID generated by client	Required
payments. billingCountry	string	Billing country code	Required
payments. type	string	Type of payment, one of CreditCard, ApplePay, GiftCard, PayPal	Required

Element Name	Type	Description	Required?
payments. cardType e	string	Type of credit card, e.g. Visa	Optional
payments. valid	boolean	True if shopping in country and payment information are valid, false if not	Required

Sample *Validate Payments* 200 Successful Response

```
{
  "country": "US",
  "payments": [
    {
      "id": "1",
      "billingCountry": "US",
      "type": "CreditCard",
      "cardType": "Visa",
      "valid": true
    },
    {
      "id": "2",
      "billingCountry": "DE",
      "type": "CreditCard",
      "cardType": "Visa",
      "valid": true
    },
    {
      "id": "3",
```

```
    "billingCountry": "GB",
    "type": "CreditCard",
    "cardType": "Maestro",
    "valid": false
  },
  {
    "id": "4",
    "billingCountry": "IT",
    "type": "CreditCard",
    "cardType": "CarteSi",
    "valid": false
  },
  {
    "id": "5",
    "billingCountry": "FR",
    "type": "PayPal",
    "valid": true
  }
]
```

Sample *Validate Payments* 400 Error Response

```
{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "country",
      "code": "MISSING_REQUIRED",
      "message": "Required field"
    }
  ]
}
```

```
    },  
    {  
      "field": "payments/billingCountry",  
      "code": "MISSING_REQUIRED",  
      "message": "Required field"  
    }  
  ]  
}
```

Error Codes

Code	Description
INVALID_REQUEST	returned when the request contains invalid information
MISSING_REQUIRED	returned when the request does not contain required information

Using Stored Payment

- [Initiate PayPal Billing Agreement](#)
- [Save Payment by User Profile](#)
- [Delete All Stored Payments by User Profile](#)
- [List Stored Payments by User Profile](#)
- [Update Stored Payment by ID](#)
- [Delete Stored Payment by ID](#)
- [List Stored Payment by ID](#)
- [Validate CVV by Shipping Address](#)
- [Update Default Stored Payment](#)
- [List Saved Gift Card Payment by ID](#)

Stored Payments Overview

The Stored Payment service is used to administer (add/update/delete/list) a customer's stored payments. A customer must register and log in as a Nike member to use Stored Payment. Guest customers are not supported. In a shopping flow, this service can be used to display the customer's stored payments to allow the customer to choose a payment method to pay for their order, change their default payment method, and add or delete a payment method. This service also handles initiating a PayPal Billing Agreement so a customer can pre-authorize PayPal payments.

All endpoints of this service are synchronous.

Initiate PayPal Billing Agreement

Use this endpoint as a first step in creating a PayPal billing agreement for the PayPal payment type. For instance, the Nike Web Launch experience calls this endpoint when a customer adds PayPal as a stored payment type in Payment Settings. A PayPal Billing Agreement preauthorizes Nike to charge the customer's PayPal account for a purchase without requiring the customer to visit the PayPal site to manually authorize the purchase. Once a customer accepts the PayPal Billing Agreement and stores it, the customer does not need to authorize each payment before submitting a Nike order. Use the `requestToken` and `redirectURL` in the response to redirect the customer to the appropriate PayPal experience to accept the PayPal Billing Agreement. It eases the barrier to purchase by avoiding redirecting the customer to PayPal during the purchase process.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	<code>/consumer/ paypalagreement{?ret urnUrl,cancelUrl,onl ytoken,design,locale ,currency}</code>	no

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
returnUrl	Query	URL to redirect to after the customer accepts the billing agreement	String	Required
cancelUrl	Query	URL to redirect to after the	String	Required

Parameter	Type	Description	Data Type	Required?
		customer cancels accepting the billing agreement		
onlytoken	Query	flag indicating to return only the paypalToken. '1' returns only the PayPal token field. '0' or null returns all fields	String	Optional
design	Query	determines the redirectURL to PayPal. inContext displays a PayPal Express window as an overlay on the Nike experience. mobile redirects from the Nike experience to PayPal's mobile- optimized experience. default	String	Optional

Parameter	Type	Description	Data Type	Required?
		redirects from the Nike experience to PayPal's web experience. default is the default value		
locale	Query	locale of shopping in country. defaults to en_US	String	Optional
currency	Query	shopping in currency. defaults to USD	String	Optional

Let's take a look at some *Initiate PayPal Billing Agreement* scenarios

I want to	Sample Query
Initiate a PayPal Billing agreement on a Mobile device	https://api.nike.com/commerce/storedpayments/consumer/paypalagreement?returnUrl=http://nike.com/SNKRS/PayPalAuthenticationSucceeded&cancelUrl=http://nike.com/SNKRS/PayPalAuthenticationDidNotSucceed&design=mobile
Initiate a PayPal Billing agreement for EURO currency, locale en_GB, and display PayPal window as an overlay	https://api.nike.com/commerce/storedpayments/consumer/paypalagreement?returnUrl=http://nike.com/SNKRS/

I want to	Sample Query
	PayPalAuthenticationSucceeded&cancel Url=http://nike.com/SNKRS/ PayPalAuthenticationDidNotSucceed&de sign=inContext&locale=en_GB¤cy =EUR

Request Body

There is no request body for a GET request.

Response Body

Element Name	Type	Description	Required?
requestSuccess	boolean	True if request succeeded, false if error	Optional
transactionTimestamp	string	Transaction timestamp in ms, 2017-08-23T14:59:57.700+0000	Optional
responseCode	integer	0 indicates success, 98 indicates failure	Optional
referenceCode	string	Service name initiating billing agreement call, e.g. `storedpayment**	Optional
account	string	PayPal account. USD, EUR or GBP	Required
currency	string	Currency used to	Required

Element Name	Type	Description	Required?
		look up the PayPal account. USD, EUR, GBP, DKK, SEK or PLN	
requestToken	string	Good for 15 minutes and is used to request a permanent access token (paypalToken)	Required
paypalToken	string	Permanent access token used to generate a signature and timestamp to make authorized PayPal API calls	Required
correlationId	string	Unique id for PayPal response. used to query transaction in PayPal	Optional
redirectURL	string	PayPal URL to redirect the customer to to initiate a PayPal Billing Agreement	Required
requestId	string	UUID of the request	Required

Sample *Initiate PayPal Billing Agreement* 200 success response

```
{
  "requestSuccess" : true,
  "responseCode" : 0,
  "referenceCode" : "storedpayment",
  "transactionTimestamp" : "2017-08-23T14:59:57.700+0000",
  "account" : "USD",
  "currency" : "USD",
  "requestToken" : "e8e69e64-6ff3-4692-9f09-19cadf7d762e",
  "paypalToken" : "EC-2ML17569H9664211U",
  "correlationId" : "3df6ee6834412",
  "redirectURL" : "https://www.paypal.com/cgi-bin/
webscr?cmd=_express-checkout&token=EC-2ML17569H9664211U",
  "requestId" : "e8e69e64-6ff3-4692-9f09-19cadf7d762e"
}
```

Next, you need to get customer approval by redirecting the customer to the PayPal redirectURL returned in the response. At PayPal, the customer provides payment details and both approves and subscribes to the Billing Agreement. Once the customer accepts the PayPal Billing Agreement, PayPal redirects to the returnUrl provided in the call. If the customer cancels the transaction, PayPal redirects the customer to the cancelURL provided in the call.

The next Stored Payment endpoints you might want to call for the PayPal Billing Agreement flow are savepayment to store the PayPal payment method once the customer authorizes the Billing Agreement, and storedpayment to display all of the customer's saved payment methods.

Save Payment for User Profile

Use this endpoint to save a payment type for a Nike UPMID. See [Supported Stored Payment Types](#) to view types and storage limits. The request body varies depending upon the payment type and whether the endpoint is called pre-authorization or post-authorization. The

typical flow for saving a Credit Card for user profile is:

1. [Store Credit Card Info](#) to securely transmit credit card information to the PCI-certified Credit Cards submit service, passing a new UUID as the creditCardInfold
2. [Validate Credit Card Info](#) to check that the credit card information was received
3. [Save Payment for User Profile](#), passing the creditCardInfold to look up the credit card information and save it to long term storage
4. [List Stored Payment by Payment Id](#) to return masked credit card information to display to the customer and confirm that the credit card was securely stored

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/consumer/ savepayment	no

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the upmid (for logged in customers), appId and

usertype headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

The request body varies depending upon the type of payment being saved. The table below lists all possible request fields regardless of payment type.

Credit Card

Element Name	Type	Description	Required?	
type	string	Type of payment method	Required	
creditCardInfo Id	string	Id returned from the Payment Service's Credit Card Submit endpoint. used as common id between Nike and third-party systems.	Required	
isDefault	boolean	Flag indicating this saved payment method is the default	Optional	

Element Name	Type	Description	Required?	
currency	string	Credit Card currency. Supported currency codes.	Optional	
cybersourceRequestId	string	CyberSource-generated requestId number returned from Payment Approval Service , required post-auth	Optional	
cybersourceRequestToken	string	CyberSource-generated token returned from Payment Approval Service , required post-auth	Optional	
referenceId	string	CyberSource-generated reference number returned from Payment Approval Service	Optional	

Element Name	Type	Description	Required?	
accountName	string	Returned from Payment Approval Service	Optional	
billingAddress	object	Billing address object, required for CreditCard type	Optional	
billingAddress. firstName	string	Billing first name	Required	
billingAddress. lastName	string	Billing last name	Required	
billingAddress. address1	string	Billing address line 1	Required	
billingAddress. address2	string	Billing address line 2	Optional	
billingAddress. address3	string	Billing address line 3	Optional	
billingAddress. city	string	Billing city	Required	
billingAddress. postalCode	string	Billing postal code	Optional	
billingAddress. state	string	Billing state	Optional	
billingAddress. country	string	Billing country	Required	

Element Name	Type	Description	Required?	
billingAddress. phoneNumber	string	Billing phone number	Optional	
billingAddress. email	Optional	string	Billing email address	Optional

This is a sample *Save Payment for User Profile* POST request to save a Credit Card before it has been authorized, which requires creditCardInfoId, currency and account be passed in the request.

`https://api.nike.com/commerce/storedpayments/consumer/savepayment`

```
{
  "type": "CreditCard",
  "creditCardInfoId":
"724928394823492374982374932840239402394e0Z0961",
  "isDefault": false,
  "currency": "USD",
  "cybersourceRequestId": "",
  "cybersourceRequestToken": "",
  "referenceId": "",
  "account": "",
  "billingAddress": {
    "firstName": "William",
    "lastName": "Bowerman",
    "address1": "One Bowerman Drive",
    "address2": "",
    "address3": "",
```

```
    "city": "Beaverton",
    "postalCode": "97005",
    "state": "OR",
    "country": "US",
    "phoneNumber": "781-555-1212",
    "email": "test@nike.com"
  }
}
```

This is a sample *Save Payment for User Profile* POST request to save a Credit Card after it has been authorized, which requires `cybersourceRequestId`, `cybersourceRequestToken`, `currency` and `account` to be passed in the request.

```
{
  "type": "CreditCard",
  "creditCardInfoId":
    "724928394823492374982374932840239402394e0Z0961",
  "isDefault": false,
  "currency": "USD",
  "cybersourceRequestId": "222",
  "cybersourceRequestToken": "233322",
  "referenceId": "",
  "account": "",
  "billingAddress": {
    "firstName": "William",
    "lastName": "Bowerman",
    "address1": "One Bowerman Drive",
    "address2": "",
    "address3": "",
  }
}
```

```

    "city": "Beaverton",
    "postalCode": "97005",
    "state": "OR",
    "country": "US",
    "phoneNumber": "781-555-1212",
    "email": "test@nike.com"
  }
}

```

Gift Card Request Body

Element Name	Type	Description	Required?
type	string	Type of payment method, always 'GiftCard'	Required
accountNumber	string	gift card/ CyberSource voucher account number	Required
pin	string	Gift card personal identification number	Optional
gcExpiryDate	string	Gift card expiration date	Optional
currency	string	Gift card currency. Supported currency codes.	Optional
isDefault	boolean	True if this is the default saved payment method,	Optional

Element Name	Type	Description	Required?
		false if not	

This is a sample *Save Payment for User Profile* POST request to save a gift card, which requires `accountNumber` be passed in the request.

```
{
  "type": "GiftCard",
  "accountNumber": "1234567890123456",
  "pin": "434343",
  "gcExpiryDate": "2099-12-31T08:00:56.305+0000",
  "currency": "USD",
  "isDefault": true
}'
```

PayPal Request Body

Element Name	Type	Description	Required?
type	string	Type of payment method, always 'PayPal'	Required
paypalToken	string	PayPal token returned from the Billing Agreement	Required
currency	string	PayPal currency. See a list of supported currency codes .	Optional
isDefault	boolean	True if this is the default saved	Optional

Element Name	Type	Description	Required?
		payment method, false if not	

This is a sample *Save Payment for User Profile* POST request to save PayPal as a stored payment, which requires paypalToken be passed in the request.

```
{
  "type": "Paypal",
  "paypalToken": "EC-4F8459024C476322H",
  "currency": "USD",
  "isDefault": true
}
```

Deferred Payment Request Body

Element Name	Type	Description	Required?
type	string	Type of deferred payment method	Required
bankName	string	Name of bank taking deferred payment	Optional
isDefault	boolean	True if this is the default saved payment method, false if not	Optional

This is a sample *Save Payment for User Profile* POST request to save Alipay Deferred Payment as a stored payment, which requires the Alipay type be passed in the request.

```
{  
  "type": "Alipay",  
  "bankName": "First Bank of China",  
  "isDefault": true  
}
```

Response Body

Element Name	Type	Description	Required?
status	string	Success when request completed without error	Optional
httpStatus	integer	Status code present when service returns in error	Optional
timestamp	integer	Timestamp present when service returns in error	Optional
message	string	Error message present when service returns in error	Optional
service	string	Name of service, always storedpayments	Optional
code	string	Error code	Optional

Sample *Save Payment for User Profile 201* success response

```
{
  "status": "success"
}
```

Sample *Save Payment for User Profile* 400 Error Response

```
{
  "httpStatus": 400,
  "code": "99154",
  "timestamp": 1427304058885,
  "service": "storedpayments",
  "message": "One or more required parameters missing.."
}
```

Delete All Stored Payments for User Profile

Use this endpoint to delete all Stored Payments for a Nike UPMID. This is a synchronous endpoint that is restricted.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
DELETE	/consumer/ storedpayments	yes

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in	Required

Header Name	Description	Required?
	response, application/json is only value allowed	
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required
X-Nike-AppId	Client application id calling this service (as listed in Eureka) used to verify endpoint access	Required
X-Nike-Authorization	JWT signed by client application	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

There is no request body for a DELETE request.

Sample *Delete All Stored Payments for User Profile* DELETE request

```
https://api.nike.com/consumer/storedpayments
```

Response Body

There is no content returned for a successful response.

This endpoint is unavailable to Try It Out because it is JWT-restricted

List Stored Payments by User Profile

Use this endpoint to list the stored payment types for a Nike UPMID. Account numbers are masked in the response.

If the request does not contain a shipping address or the shipping address sent does not match a shipping address in a previously placed order, the validateCVV key will be set to true in the response for Credit Card payment types. This flag indicates that the Credit Card’s CVV must be provided and validated before the customer can pay for their order using the credit card in the checkout flow.

If not filtering by the `type` URI parameter, all stored payment types are returned.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/consumer/ storedpayments{?curr ency,type,includebal ance,validateshippin g}	no

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required

Header Name	Description	Required?
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the upmid (for logged in customers), appId and usertype headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Query & Path Parameters

Header Name	Type	Description	Data Type	Required?
type	Query	type of payment method used to filter results, one of CreditCard, Gift Card, Paypal	String	Optional
currency	Query	currency code of the payment type Supported currency codes	String	Optional
includebalanc	Query	flag indicating	Boolean	Optional

Header Name	Type	Description	Data Type	Required?
e		to return the balance on gift card stored payment types. default is true.		
validateshipping	Query	flag indicating to validate billing and shipping country combination for stored payment	Boolean	Optional

Let's take a look at some *List Stored Payments by User Profile* scenarios.

I want to list all of a customer's...	Sample Query
gift card stored payments and return the balance in Euro	https://api.nike.com/consumer/storedpayments?currency=EUR&type=GiftCard&includebalance=true
stored payments	https://api.nike.com/consumer/storedpayments
stored payments and validate the shipping country is valid for the billing country	https://api.nike.com/consumer/storedpayments?validateshipping=true

Request Body

No request body is required. If shippingAddress is sent in the request body, the required fields are indicated below.

Element Name	Type	Description	Required?
address1	string	Shipping address line 1	Required
address2	string	Billing address line 2	Optional
address3	string	Billing address line 3	Optional
city	string	Billing city	Required
postalCode	string	Billing postal code	Optional
state	string	Billing state	Optional
country	string	Billing country	Required

Sample *List Stored Payments by User Profile* request for credit card

<https://api.nike.com/consumer/storedpayments?currency=USD>

```
{
  "address1": "One Bowerman Drive",
  "address2": "",
  "address3": "",
  "city": "Beaverton",
  "state": "OR",
  "postalCode": "97005",
  "country": "US"
}
```

Sample *List Stored Payments by User Profile* request for non-credit card payment types such as PayPal or gift card:

{ }

Response Body

Element Name	Type	Description	Required?
payments	array	Array of stored payments	Required
type	string	Type of stored payment, either GiftCard or CreditCard	Required
paymentId	string	Unique ID for legacy system	Required
cardType	string	Type of credit card, e.g. MasterCard	Optional
balance	number	Remaining GiftCard balance, present for GiftCard type	Optional
accountNumber	string	Masked GiftCard or CreditCard account number with last 4 digits	Required
expiryYear	string	Year credit card expires, present for CreditCard	Optional
expiryMonth	string	Month credit card expires, present for CreditCard	Optional
isExpired	boolean	True if payment	Optional

Element Name	Type	Description	Required?
		method is expired, false if not	
isDefault	boolean	True if this is the default payment method, false if not	Required
name	string	Customer-supplied nickname for payment type	Optional
validateCVV	boolean	True indicates CVV needs to be validated before purchase, present for CreditCard	Optional
pin	string	Gift card PIN, present for GiftCard payment type	Optional
gcExpiryDate	string	Gift card expiration date, present for GiftCard	Optional
currency	string	ISO currency code used to display GiftCard balance	Optional
status	string	Status of gift card, present for GiftCard	Optional
payer	string	PayPal email address of customer, present for PayPal	Optional
payerId	string	Customer's PayPal	Optional

Element Name	Type	Description	Required?
		ID, present for PayPal	
validForShippingCountry	boolean	True if billing/shipping country combination is valid, false if not	Optional
billingAddress	object	Billing address of customer, required for CreditCard	Optional
billingAddress. firstName	string	Billing first name	Required
billingAddress. lastName	string	Billing last name	Required
billingAddress. address1	string	Billing address line 1	Required
billingAddress. address2	string	Billing address line 2	Optional
billingAddress. address3	string	Billing address line 3	Optional
billingAddress. city	string	Billing city	Required
billingAddress. postalCode	string	Billing postal code	Optional
billingAddress. state	string	Billing state	Optional
billingAddress. country	string	Billing country	Required
billingAddress. phoneNumber	string	Billing phone number	Optional

Element Name	Type	Description	Required?
billingAddress.email	string	Billing email address	Optional
httpStatus	integer	Status code present when service returns in error	Optional
timestamp	integers	Timestamp present when service returns in error	Optional
message	string	Error message present when service returns in error	Optional
service	string	Name of service, always storedpayments	Optional
code	string	Error code	Optional

The sample *List Stored Payments by User Profile* 200 response below returns a customer's stored credit card, gift card and PayPal payment types.

```
{
  "payments": [
    {
      "paymentId": "1686062b-4246-4c3b-ac96-e82a0efae7a0",
      "type": "CreditCard",
      "cardType": "Visa",
      "accountNumber": "XXXXXXXXXXXX9765",
      "expiryYear": "2018",
```

```
"expiryMonth": "06",
"validateCVV": true,
"isExpired": false,
"isDefault": false,
"name": "my Visa",
"billingAddress": {
  "firstName": "William",
  "lastName": "Bowerman",
  "address1": "One Bowerman Drive",
  "city": "Beaverton",
  "postalCode": "97005",
  "state": "OR",
  "country": "US",
  "phoneNumber": "413-555-1234",
  "email": "test@nike.com"
}
},
{
  "type": "GiftCard",
  "accountNumber": "XXXXXXXXXXXXXXXXX2346",
  "isDefault": "true",
  "balance": 100.0,
  "status": "valid",
  "pin": "123456"
},
{
  "paymentId": "661aea5d-31b6-4ac4-8830-1d61d2c7b043",
  "type": "Paypal",
  "isDefault": false,
  "payer": "xxxx.here@tothere.com",
```

```
        "payerId": "XXXXH9Q76ZT28"
      }
    ]
  }
}
```

The sample *List Stored Payments by User Profile 200* success response is returned when the customer has no stored payments.

```
{}
```

The sample *List Stored Payments by User Profile 200* success response below is returned when the customer has a gift card as a stored payment and no gift card balance was requested.

```
{
  "payments": [
    {
      "paymentId": "pid6dfa0847-282a-4d9e-aa6a-3e509aeb6ce1",
      "type": "GiftCard",
      "accountNumber": "XXXXXXXXXXXXXXXX3532",
      "isDefault": false,
      "gcExpiryDate": "2099-12-31T08:00:56.305+0000"
    },
    {
      "paymentId": "pidd4c99e1e-3a89-40aa-9d1a-88b26e74d959",
      "type": "GiftCard",
      "accountNumber": "XXXXXXXXXXXXXXXX4307",
      "isDefault": false,
      "gcExpiryDate": "2099-12-31T08:00:56.305+0000"
    }
  ]
}
```

```
},
{
  "paymentId": "pid68f5cbd6-1646-4c2e-a085-bbe4097b45d3",
  "type": "GiftCard",
  "accountNumber": "XXXXXXXXXXXXXXXX4319",
  "isDefault": false,
  "gcExpiryDate": "2099-12-31T08:00:56.305+0000"
},
{
  "paymentId": "piddeb9f14b-63bc-4637-be28-35107be9d0e1",
  "type": "GiftCard",
  "accountNumber": "XXXXXXXXXXXXXXXX4323",
  "isDefault": false,
  "gcExpiryDate": "2099-12-31T08:00:56.305+0000"
},
{
  "paymentId": "pid657457e8-9041-4f20-890c-42e2f3ad9a81",
  "type": "GiftCard",
  "accountNumber": "XXXXXXXXXXXXXXXX4342",
  "isDefault": false,
  "gcExpiryDate": "2099-12-31T08:00:56.305+0000"
},
{
  "paymentId": "pid38ea1414-306b-4138-b3b5-c3b6bad0cbd5",
  "type": "GiftCard",
  "accountNumber": "XXXXXXXXXXXXXXXX4362",
  "isDefault": false,
  "gcExpiryDate": "2099-12-31T08:00:56.305+0000"
},
{
```

```
    "paymentId": "pid037a6ddc-73d0-49fd-9403-dedf7e16e583",
    "type": "GiftCard",
    "accountNumber": "XXXXXXXXXXXXXXXX4381",
    "isDefault": false,
    "gcExpiryDate": "2099-12-31T08:00:56.305+0000"
  }
]
}
```

The sample *List Stored Payments by User Profile* 200 success response below is returned when the customer has AliPay as a stored payment.

```
{
  "type": "Alipay",
  "isDefault": true,
  "paymentId": "pid83080432049320943204",
  "bankName": "First Bank of China"
}
```

The sample *List Stored Payments by User Profile* 400 Error Response is returned when there is a 4xx status code error.

```
{
  "httpStatus": 400,
  "code": "99154",
  "timestamp": 1427304058885,
  "service": "storedpayments",
  "message": "One or more required parameters missing.."
}
```

List Stored Payment by Payment ID

Use this endpoint to list stored payment details for a paymentId. This endpoint is primarily for gift cards but it can be called for any type of stored payment. When listing a gift card payment type and you don't need the balance, pass `includebalance=false` as a URI parameter for a quicker response. Setting this parameter to false prevents the Stored Payments service from making a balance call to the gift card provider. Because this endpoint returns sensitive information, it requires the JWT `X-Nike-Authorization` and `X-Nike-AppId` headers. It is a synchronous endpoint.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/consumer/ storedpayments/{payment_id}{?includebalance}	yes

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required
X-Nike-AppId	Client application id calling	Required

Header Name	Description	Required?
	this service (as listed in Eureka) used to verify endpoint access	
X-Nike-Authorization	JWT signed by client application	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Query & Path Parameters

Header Name	Type	Description	Data Type	Required?
payment_id	Path	Id of the stored payment. If unknown, get a list of all stored payments for a Nike UPMID by calling the <code>/consumer/storedpayments{?currency,type,includebalance}</code> endpoint.	String	Required

Header Name	Type	Description	Data Type	Required?
		The payment_id for each saved payment type is returned in the response.		
includebalance	Query	True returns the gift card balance, false does not. Defaults to true	Boolean	Optional

Request Body

There is no body in a GET request.

Let's take a look at some *List Stored Payment by Payment ID* scenarios.

I want to	Sample Query
List the stored payment for ID	<code>https://api.nike.com/consumer/storedpayments/pid79847893284923483924</code>
List the gift card stored payment for ID and do not include the balance	<code>https://api.nike.com/consumer/storedpayments/pid794873294382948324823042?includebalance=false</code>
List the gift card stored payment for ID and include the balance	<code>https://api.nike.com/consumer/storedpayments/pid794873294382948324823042</code>

Sample *List Stored Payment by Payment ID* request

<https://api.nike.com/consumer/storedpayments/79847893284923483924>

Response Body

For credit cards, the credit card account number is not returned. The `paymentToken` from CyberSource is returned instead which is used to look up the credit card information in CyberSource as well as in Stored Payment. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
type	string	Payment type e.g. CreditCard	Required
paymentToken	string	Subscription id assigned to this payment by CyberSource for credit card type; PayPal billing agreement id for PayPal type; random UUID for GiftCard type	Required
cardType	string	Type of credit card, required for CreditCard type	Required
accountNumber	string	Unmasked credit card or gift card account number	Required
expiryYear	string	Year credit card expires, required for CreditCard type	Required

Element Name	Type	Description	Required?
expiryMonth	string	Month credit card expires, required for CreditCard type	Required
name	string	Customer's nickname for this Stored Payment	Required
isDefault	boolean	True if this is the default Stored Payment, false if not. Defaults to false.	Required
billingAddress	object	Billing address of customer, required for CreditCard	Optional
billingAddress. firstName	string	Billing first name	Required
billingAddress. lastName	string	Billing last name	Required
billingAddress. address1	string	Billing address line 1	Required
billingAddress. address2	string	Billing address line 2	Optional
billingAddress. address3	string	Billing address line 3	Optional
billingAddress. city	string	Billing city	Required
billingAddress. postalCode	string	Billing postal code	Optional
billingAddress. state	string	Billing state	Optional

Element Name	Type	Description	Required?
e			
billingAddress. country	string	Billing country	Required
billingAddress. phoneNumber	string	Billing phone number	Optional
billingAddress. email	string	Billing email address	Optional
paymentId	string	UUID passed in as a path parameter	Optional
balance	number	Gift card balance for GiftCard payment type. Not returned if includebalance query parameter is false	Optional
pin	string	Gift card PIN number for GiftCard payment type	Optional
gcExpiryDate	string	Gift card expiration date in milliseconds	Optional
currency	string	Checkout currency ISO code. Defaults to USD.	Optional
payer	string	Customer's PayPal email address	Optional
payerId	string	PayPal generated unique id	Optional

Element Name	Type	Description	Required?
bankName	string	Bank name for China payments	Optional

Sample *List Stored Payment by ID* CreditCard type response body:

```
{
  "paymentId": "440aea5d-31b6-4ac4-8830-1d61d2c7b234",
  "type": "CreditCard",
  "cardType": "VISA",
  "accountNumber": "4111647583926789",
  "name": "My Visa",
  "expiryYear": "2018",
  "expiryMonth": "6",
  "isDefault": "false",
  "billingAddress": {
    "email": "test@nike.com",
    "firstName": "William",
    "lastName": "Bowerman",
    "address1": "One Bowerman Drive",
    "city": "Beaverton",
    "state": "OR",
    "postalCode": "97005",
    "country": "US",
    "phoneNumber": "4131231234"
  }
  "isExpired": false,
  "validateCVV": true
}
```

Sample *List Stored Payment by ID* GiftCard type response body:

```
{
  "paymentId": "770aea5d31b64ac488301d61d2c7b052",
  "type": "GiftCard",
  "accountNumber": "6758395874622415",
  "isDefault": "true",
  "paymentToken": "482d7398-501d-40bb-a7b1-2990c631d8d5",
  "balance": 45.00,
  "gcExpiryDate": "2020-10-10T00:00:00.000+0000",
  "pin": "123456",
  "currency": "USD"
}
```

Sample *List Stored Payment by ID* PayPal type response body:

```
{
  "paymentId": "7661aea5d-31b6-4ac4-8830-1d61d2c7b043",
  "type": "PayPal",
  "isDefault": "false",
  "payer": "test@nike.com",
  "payerId": "FUCTH9Q76ZT2832323",
  "paymentToken": "EC-80547893284923483970"
}
```

Sample *List Stored Payment by ID* Alipay type response body:

```
{
  "paymentId": "79847893284923483924",
  "type": "Alipay",
  "bankName": "First Bank of China",
}
```

```
"isDefault": "yes"
}
```

This endpoint is unavailable to Try It Out because it is JWT-restricted

List Gift Card by Payment Id

Use this endpoint to list a details for a customer's saved gift card. This is a synchronous service.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/consumer/ storedpayments/ giftcard/{payment_id }{?currency}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
payment_id	Path	Unique identifier (UUID)	String	Required
currency	Query	ISO currency code	String	Optional

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Response Body

Element Name	Type	Description	Required?
paymentId	string	UUID passed in as a path parameter	Optional
type	string	Payment type, GiftCard only	Required
balance	number	Gift card balance for GiftCard payment type. Not	Optional

Element Name	Type	Description	Required?
		returned if includebalance query parameter is false	
status	string	One of valid or invalid	Optional
paymentToken	string	Payment token	Required
accountNumber	string	Masked gift card account number, last 4 digits are returned	Optional
isExpired	boolean	True indicates gift card is expired, false if not	Optional
isDefault	boolean	True if this is the default Stored Payment, false if not, defaults to false	Optional
pin	string	PIN for gift card	Optional
gcExpiryDate	string	Optional	gift card expiration date in milliseconds
currency	string	Currency ISO code, defaults to USD	Optional
httpStatus	string	Status code present when service returns in error	Optional
timestamp	string	Timestamp present	Optional

Element Name	Type	Description	Required?
		when service returns in error	
message	string	Error message present when service returns in error	Optional
service	string	Name of service, always storedpayments	Optional
code	string	Error code	Optional

Sample *List Gift Card by Payment Id* 200 success response:

```
{
  "paymentId": "pid3798fdd8-6e0d-4f88-bddb-5ad25eefda18",
  "type": "GiftCard",
  "balance": 100.0,
  "status": "valid",
  "accountNumber": "XXXXXXXXXXXXXXXX4373",
  "isDefault": false,
  "currency": "USD",
  "gcExpiryDate": "2099-12-31T08:00:38.261+0000"
}
```

Sample *List Gift Card by Payment Id* 400 error response:

```
{
  "httpStatus": 400,
```

```
"code": "99154",
"timestamp": 1427304058885,
"service": "storedpayments",
"message": "One or more required parameters missing.."
}
```

Update Stored Payment by ID

Use this endpoint to update a customer's CreditCard or GiftCard type Stored Payment. No other payment types can be updated using this endpoint. You can update the credit card expiration month, expiration year, billing address and default payment type flag. The credit card account number cannot be changed.

You can update the default payment flag for a gift card.

This is a synchronous service.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/consumer/ storedpayments/{payment_id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
payment_id	Path	Unique identifier (UUID)	String	Required

Request Headers

Name	Description
Accept	Content type accepted in response, application/json is only value allowed
Content-Type	Content type of the request, application/json is only value allowed
Authorization	Your access token in the format of Bearer {token}

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Let's take a look at some *Update Credit Card by User Profile Details* scenarios:

I want to update a customer's	Sample Query
Credit card with payment ID 1686062b-4246-4c3b-ac96-e82a0efae7a0	https://api.nike.com/consumer/storedpayments/1686062b-4246-4c3b-ac96-e82a0efae7a0
Gift card with payment ID pid3798fdd8-6e0d-4f88-bddb-5ad25eefd a18	https://api.nike.com/consumer/storedpayments/pid3798fdd8-6e0d-4f88-bddb-5ad25eefda18

Request Body

Element Name	Type	Description	Required?
type	string	Payment type	Required
cardType	string	Type of credit card	Optional
accountNumber	string	Obfuscated credit card or gift card number	Optional
expiryYear	string	Year that credit card expires YYYY format	Optional
expiryMonth	string	Month that credit card expires MM format	Optional
name	string	Customer's nickname for this Stored Payment	Optional
isDefault	boolean	True makes this payment the default and sets all other stored payments to false. Defaults to false	Optional
billingAddress	object	Billing address of customer, required for CreditCard	Optional
billingAddress.first Name	string	Billing first name	Required
billingAddress.last Name	string	Billing last name	Required

Element Name	Type	Description	Required?
billingAddress. address1	string	Billing address line 1	Required
billingAddress. address2	string	Billing address line 2	Optional
billingAddress. address3	string	Billing address line 3	Optional
billingAddress. city	string	Billing city	Required
billingAddress. postalCode	string	Billing postal code	Optional
billingAddress. state	string	Billing state	Optional
billingAddress. country	string	Billing country	Required
billingAddress. phoneNumber	string	Billing phone number	Optional
billingAddress. email	string	Billing email address	Optional

Sample *Update Credit Card by User Profile* credit card request body:

```
{
  "type": "CreditCard",
  "cardType": "Visa",
  "accountNumber" : "",
  "expiryYear": "2018",
  "expiryMonth": "06",
  "name": "My Visa Credit Card",
  "isDefault": false,
```

```
"billingAddress": {
  "email": "test@nike.com",
  "firstName": "William",
  "lastName": "Bowerman",
  "address1": "One Bowerman Drive",
  "city": "Beaverton",
  "state": "OR",
  "postalCode": "97005",
  "country": "US",
  "phoneNumber": "4131231234"
}
}
```

Sample *Update Credit Card by User Profile* gift card request body:

```
{
  "type": "GiftCard",
  "accountNumber": "",
  "isDefault": true
}
```

Response Body

The HTTP 202 response from *Update Credit Card by User Profile* contains the results because this is a synchronous endpoint. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
status	string	“success” present when information	Optional

Element Name	Type	Description	Required?
		was updated successfully	
httpStatus	integer	Status code present when service returns in error and httpStatus is not 202	Optional
timestamp	integer	Timestamp present when service returns in error	Optional
message	string	Error message present when service returns in error	Optional
service	string	Name of service, always storedpayments	Optional
code	string	Error code	Optional

Sample 202 success *Update Credit Card by User Profile* response body:

```
{
  "status": "success"
}
```

Sample 404 error *Update Credit Card by User Profile* response body:

```
{
```

```
"httpStatus": 404,  
"code": "99152",  
"timestamp": 1427304058885,  
"service": "storedpayments",  
"message": "No payment found for id 99051"  
}
```

Update Default Stored Payment by User Profile

Use this endpoint to set a Stored Payment to the default payment. It removes the default flag on the current default Saved Payment and adds it to the Saved Payment matching the payment_id path parameter. The default payment type is typically used by the client to pre-select a payment method in the shopping flow.

This is a synchronous endpoint.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/consumer/ storedpayments/{payment_id}/default	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
payment_id	Path	Unique identifier (UUID) of Stored Payment to	String	Required

Parameter	Type	Description	Data Type	Required?
		make default		

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

No body is required.

Sample *Update Default Stored Payment by User Profile* request URI:

`http://api.nike.com/consumer/storedpayments/`

7661aea5d-31b6-4ac4-8830-1d61d2c7b043/default

Response Body

The HTTP 202 response from *Update Default Stored Payment by User Profile* contains the results. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
status	string	“success” present when information was updated successfully	Optional
httpStatus	integer	Status code present when service returns in error and httpStatus is not 202	Optional
timestamp	integer	Timestamp present when service returns in error	Optional
message	string	Error message present when service returns in error	Optional
service	string	Name of service, always storedpayments	Optional
code	string	Error code	Optional

Sample 202 success *Update Default Stored Payment by User Profile* response body:

```
{
  "status": "success"
}
```

Sample 404 error *Update Default Stored Payment by User Profile* response body:

```
{
  "httpStatus": 404,
  "code": "99152",
  "timestamp": 1427304058885,
  "service": "storedpayments",
  "message": "No payment found for id 99051"
}
```

Delete Stored Payment by ID

Use this endpoint to delete a stored payment by id. For example, this endpoint would be called when the customer deletes a stored payment when managing their payment information in the experience.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
DELETE	/consumer/ storedpayments/{payment_id}	no

Path & Query Parameters

Parameter	Description	Data Type	Required?
payment_id	Unique identifier (UUID) of the Stored Payment to delete	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

No request body required.

Sample *Delete Stored Payment by ID* URI request:

```
https://api.nike.com/consumer/storedpayments/  
pid3798fdd8-6e0d-4f88-bddb-5ad25eefda18
```

Response Body

The HTTP 204 response from *Delete Stored Payment by ID* returns no content.

Element Name	Type	Description	Required?
httpStatus	integer	Status code present when service returns in error and httpStatus is not 202	Optional
timestamp	integer	Timestamp present when service returns in error	Optional
message	string	Error message present when service returns in error	Optional
service	string	Name of service, always storedpayments	Optional
code	string	Error code	Optional

Sample 400 error response:

```
{
```

```
{
  "httpStatus": 400,
  "code": "99154",
  "timestamp": 1427304058885,
  "service": "storedpayments",
  "message": "One or more required parameters missing.."
}
```

Validate Credit Card CVV by Shipping Address

This endpoint validates a CVV based on the request shipping address. If the shipping address does not match a shipping address on a past order or is not sent, the response indicates that the CVV needs to be validated. Note that billing address is returned.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
POST	/consumer/ storedpayments/{payment_id}	yes

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
payment_id	Path	Unique identifier (UUID) for this Stored Payment	String	Required

Request Headers

HeaderName	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required
X-Nike-AppId	Client application id calling this service (as listed in Eureka) used to verify endpoint access	Required
X-Nike-Authorization	JWT signed by client application	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Shipping address is optional but if sent, the required and optional fields are listed below.

Element Name	Type	Description	Required?
address1	string	Shipping address line 1	Required
address2	string	shipping address line 2	Optional
address3	string	Shipping address line 3	Optional
city	string	Shipping address city	Required
state	string	shipping address state	Optional
postalCode	string	Shipping address postal code	Optional
country	type	Shipping address country	Required

Sample *Validate Credit Card CVV by Shipping Address* request body:

```
{
  "address1": "One Bowerman Drive",
  "address2": "",
  "address3": "",
  "city": "Beaverton",
  "state": "OR",
  "postalCode": "97005",
  "country": "US"
}
```


Response Body

Element Name	Type	Description	Required?
paymentId	string	UUID payment ID	Optional
type	string	Payment type CreditCard, ApplePay etc.	Required
cardType	string	Type of credit card, e.g. Visa	Optional
balance	number	Balance of gift card	Optional
accountNumber	string	Masked account number	Required
expiryYear	string	Year credit card expires	Optional
expiryMonth	string	Month credit card expires	Optional
isDefault	boolean	True indicates this payment method is the default	Optional
paymentToken	string	Token common to different systems such as CyberSource	Required
name	string	Nickname for the stored payment	Optional
validateCVV	boolean	True indicates the customer needs to revalidate the credit card CVV before purchase	Optional

Element Name	Type	Description	Required?
pin	string	Gift card PIN	Optional
gcExpiryDate	string	Gift card expiration date	Optional
currency	string	ISO currency code for gift card	Optional
status	string	Status of gift card, one of valid or invalid	Optional
billingAddress	object	Customer's billing address object	Optional
billingAddress. firstName	string	Billing first name	Required
billingAddress. lastName	string	Billing last name	Required
billingAddress. address1	string	Billing address line 1	Required
billingAddress. address2	string	Billing address line 2	Optional
billingAddress. address3	string	Billing address line 3	Optional
billingAddress. city	string	Billing city	Required
billingAddress. postalCode	string	Billing postal code	Optional
billingAddress. state	string	Billing state	Optional
billingAddress. country	string	Billing country	Required

Element Name	Type	Description	Required?
billingAddress. phoneNumber	string	Billing phone number	Optional
billingAddress. email	string	Billing email address	Optional
httpStatus	integer	Status code present when service returns in error and httpStatus is not 200	Optional
timestamp	integer	Timestamp present when service returns in error	Optional
message	string	Error message present when service returns in error	Optional
service	string	Name of service, always storedpayments	Optional
code	string	Error code	Optional

Sample *Validate Credit Card CVV by Shipping Address* 200 response body for credit card:

```
{
  "type": "CreditCard",
  "cardType": "VISA",
  "accountNumber": "XXXXXXXXXXXX1111",
  "expiryYear": "2018",
```

```
"expiryMonth": "3",
"isExpired": false,
"isDefault": true,
"paymentToken": "4383642751515000001516",
"validateCVV": true,
"billingAddress": {
  "email": "fromhere@tother.com",
  "firstName": "William",
  "lastName": "Bowerman",
  "address1": "One Bowerman Drive",
  "city": "Springifield",
  "state": "OR",
  "postalCode": "97005",
  "country": "US"
}
}
```

This endpoint is unavailable to Try It Out because it is JWT-restricted

Using Payment Preview

- [Payment Preview](#)
- [Payment Preview Job Status by ID](#)
- [Payment Preview Result by ID](#)

This service is used to preview the allocation of payment amounts across one or more payment methods selected by the customer.

Payment Preview Overview

Nike customers can pay by one or more gift cards/Vouchers and another payment type such as PayPal or credit card. The Payment Preview service allocates payment to the gift card/

Voucher with the highest balance first and then to the rest of the gift cards on Checkout in ascending balance order. If the total balance of all gift cards/Vouchers is less than the order amount, the service allocates the balance of the order to a second payment type.

Payment Preview

The `paymentPreviewId` returned by this service is a required key when calling [Request Checkout Submit](#) in the BUY API to validate and authorize/debit payment before submitting a Checkout to Nike for fulfillment.

This endpoint operates **asynchronously** which means that there are extra steps to retrieve the results of your request. Read the Asynchronous Operation section of the [Using NDe APIs](#) guide to learn more about working with asynchronous Nike APIs.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/payment/preview/v2{?fields}	no

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Path & Query Parameters

Element Name	Type	Description	Data Type	Required?
fields	Parameter	Comma-separated list of keys to return in response e.g. <code>fields=total,currency</code>	string	Optional

Request Body

Element Name	Type	Description	Required?	
checkoutId	string	Checkout UUID payments are associated to. Typically generated by Checkout API .	Required	

Element Name	Type	Description	Required?	
total	double	Checkout total amount	Required	
currency	string	See supported currency codes	Required	
country	string	See supported country codes	Required	
clientBrowser	string	Browser request was made from, WECHAT required for WeChat type, otherwise null	Optional	
walletId	string	paymentToken returned from PayPal Mark endpoint, required for PayPal Mark	Optional	
items	array	Array of Checkout items. Each of the items has a UUID productId and shippingAddress object	Required	

Element Name	Type	Description	Required?	
items. productid	string	Product UUID of item	Required	
items. shipping Address	object	Shipping address of customer	Required	
items.shipping Address. address1	string	Shipping address line 1	Required	
items.shipping Address. address2	string	Shipping address line 2	Optional	
items.shipping Address. address3	string	Shipping address line 3	Optional	
items.shipping Address. city	string	Shipping address city	Required	
items.shipping Address. state	string	Shipping address state	Optional	
items.shipping Address. postal Code	string	Shipping address postal code	Optional	
items.shipping Address. country	string	Shipping address country ISO code	Required	
items.shipping Address. county	string	Shipping address county, holds	Optional	

Element Name	Type	Description	Required?	
		non-US regional data, required in CN and JP		
paymentInfo	array	Array of <code>paymentInfo</code> , one for each Checkout payment type, required except for PayPal Mark flow	Required	
paymentInfo.id	string	UUID payment id generated by the caller	Required	
paymentInfo.paymentId	string	<code>paymentId</code> returned from Stored Payment service if this is a non-GiftCard Stored Payment, required for payment that is stored in Stored Payment	Optional	
paymentInfo.type	string	See Supported Payment Types	Required	

Element Name	Type	Description	Required?	
paymentInfo. cardType	string	Type of credit card, e.g. MasterCard	Optional	
paymentInfo. creditCardInfoId	string	UUID token used to look up credit card data, required for CreditCard type that is not stored	Optional	
paymentInfo. paymentData	string	Encrypted clob signature returned from ApplePay Service, required for ApplePay type	Optional	
paymentInfo. accountNumber	string	Gift card number or masked credit card number	Optional	
paymentInfo. giftCardPin	string	PIN number for gift card	Optional	
paymentInfo. bankName	string	Bank name for deferred payment type, required for iDeal type; optional for Alipay, Tenpay, Unionpay	Optional	

Element Name	Type	Description	Required?	
paymentInfo. paypalToken	string	PayPal-assigned Token, required for PayPal Mark and Express flows	Optional	
paymentInfo. dateOfBirth	string	Customer's date of birth, required for Klarna payment type in AT, DE, NL billing countries	Optional	
paymentInfo. gender	string	Customer's gender, required for Klarna payment type in AT, DE, NL billing countries, one of MALE, FEMALE, UNKNOWN	Optional	
paymentInfo. personalId	string	Customer's personal ID number, required for Klarna payment type	Optional	

Element Name	Type	Description	Required?	
		in some billing countries		
paymentInfo. returnURL	string	Nike URL to return to after customer successfully pays for an order at a third party site, required for Sofort and iDeal	Optional	
paymentInfo. cancelURL	string	Nike URL to return to after customer cancels paying for an order at a third party site, required for Sofort and iDeal	Optional	
paymentInfo. businessName	string	Business name where customer pays for order in person, required for Konbini, one of SevenEleven, Kmart, FamilyMart, Payease,	Optional	

Element Name	Type	Description	Required?	
		Lawson, CircleKSuncus, Ministop		
paymentInfo.billingInfo	object	Object containing name, address, contactInfo objects	required for all payment methods except PayPal	Required
paymentInfo.billingInfo.name	string	Billing name information	Required	
paymentInfo.billingInfo.name.firstName	string	Billing first name	Required	
paymentInfo.billingInfo.name.alternateFirstName	string	Billing alternate first name	Optional	
paymentInfo.billingInfo.name.lastName	string	Billing last name	Required	
paymentInfo.billingInfo.name.alternateLastName	string	Billing alternate last name	Optional	
paymentInfo.billingInfo.name.middleName	string	Billing middle name	Optional	
paymentInfo.billingInfo.address	object	Billing address information	Required	

Element Name	Type	Description	Required?	
paymentInfo.billingInfo.addresses. address1	string	Billing address line 1	Required	
paymentInfo.billingInfo.addresses. address2	string	Billing address line 2	Optional	
paymentInfo.billingInfo.addresses. address3	string	Billing address line 3	Optional	
paymentInfo.billingInfo.addresses. city	string	Billing address city	Required	
paymentInfo.billingInfo.addresses. state	string	Billing address state	Optional	
paymentInfo.billingInfo.addresses. postalCode	string	Billing address postalCode	Optional	
paymentInfo.billingInfo.addresses. country	string	Billing address country	Required	
paymentInfo.billingInfo. contactInfo	object	Billing contact information	Required	
paymentInfo.billingInfo.contactInfo. phoneNumber	string	Billing contact phone number	Required	

Element Name	Type	Description	Required?	
paymentInfo.billingInfo.contactInfo. email	string	Billing contact email address	Required	

PaymentInfo for CreditCard type has a required creditCardInfo generated from the *Stored CreditCard Info* service if payment is not stored in Stored Payment. This is a PCI-required token used to look up credit card information.

Sample *Payment Preview* request for one gift card and one credit card that is not stored:

```
{
  "checkoutId": "15611769-e81b-45dd-b28c-ca0effb272de34",
  "total": 350.75,
  "currency": "USD",
  "country": "US",
  "items": [
    {
      "productId": "15611769-e81b-45dd-b28c-ca0effb272de",
      "shippingAddress": {
        "address1": "One Bowerman Drive",
        "address2": "",
        "address3": "",
        "city": "Beaverton",
        "state": "OR",
        "postalCode": "97005",
        "country": "US",
        "county": "Hampden"
      }
    }
  ]
}
```

```
],
"paymentInfo": [
  {
    "id": "15611769-e81b-45dd-b28c-ca0effb272de88",
    "type": "GiftCard",
    "paymentId": "15611769-e81b-45dd-b28c-ca0effb272de212",
    "billingInfo": {
      "name": {
        "firstName": "Theodore",
        "altFirstName": "",
        "lastName": "Bowerman",
        "altLastName": "",
        "middleName": ""
      },
      "address": {
        "address1": "One Bowerman Drive",
        "address2": "",
        "address3": "",
        "city": "Beaverton",
        "state": "OR",
        "postalCode": "97005",
        "country": "US"
      },
      "contactInfo": {
        "phoneNumber": "413-555-1234",
        "email": "test@nike.com"
      }
    }
  },
  {

```



```
    "id": "15611769-e81b-45dd-b28c-ca0effb272de94032",
    "type": "CreditCard",
    "paymentId": "15611769-e81b-45dd-b28c-ca0effb272de342",
    "creditCardInfoId": "15611769-e81b-45dd-b28c-
ca0effb272de4302948",
    "billingInfo": {
      "name": {
        "firstName": "William",
        "altFirstName": "",
        "lastName": "Bowerman",
        "altLastName": "",
        "middleName": ""
      },
      "address": {
        "address1": "One Bowerman Drive",
        "address2": "",
        "address3": "",
        "city": "Beaverton",
        "state": "OR",
        "postalCode": "97005",
        "country": "US"
      },
      "contactInfo": {
        "phoneNumber": "413-555-1234",
        "email": "test@nike.com"
      }
    }
  }
]
```

Sample PayPal Mark *Payment Preview* request:

TIP: Request must include `walletId` and not include `paymentInfo`

```
{
  "checkoutId": "05830580385038953405-r34-5r",
  "total": 266.98,
  "currency": "USD",
  "country": "US",
  "walletId": "EC-1234567ABC",
  "items": [
    {
      "productId": "15611769-e81b-45dd-b28c-ca0effb272de",
      "shippingAddress": {
        "address1": "One Bowerman Drive",
        "address2": "",
        "address3": "",
        "city": "Beaverton",
        "state": "OR",
        "postalCode": "97005",
        "country": "US",
        "county": "Hampden"
      }
    }
  ]
}
```

Sample PayPal Express *Payment Preview* request:

TIP: Request must not include `walletId` and include `paymentInfo`

```
{
  "checkoutId": "4424253",
  "total": 300.00,
  "currency": "USD",
  "country": "US",
  "items": [
    {
      "productId": "e8791c09-cd7e-5b72-bab3-5d3490c2bd06",
      "shippingAddress": {
        "address1": "One Bowerman Drive",
        "address2": "",
        "address3": "",
        "city": "Beaverton",
        "state": "OR",
        "postalCode": "97005",
        "country": "US",
        "county": "Hampden"
      }
    }
  ],
  "paymentInfo": [
    {
      "id": "101",
      "type": "Paypal",
      "paypalToken": "EC-72492839482349237498",
    }
  ]
}
```

```
"billingInfo": {
  "name": {
    "firstName": "William",
    "altFirstName": "Theo",
    "lastName": "Bowerman",
    "altLastName": "",
    "middleName": ""
  },
  "address": {
    "address1": "One Bowerman Drive",
    "address2": "",
    "address3": "",
    "city": "Beaverton",
    "state": "OR",
    "postalCode": "97005",
    "country": "US"
  },
  "contactInfo": {
    "phoneNumber": "503-555-1234",
    "email": "test@nike.com"
  }
}
}
```

Sample Apple Pay *Payment Preview* request

TIP: Request must include encrypted paymentData

```
{
  "checkoutId": "05830580385038953405-r34-5r",
  "total": 266.98,
  "currency": "USD",
  "country": "US",
  "items": [
    {
      "productId": "15611769-e81b-45dd-b28c-ca0effb272de",
      "shippingAddress": {
        "address1": "One Bowerman Drive",
        "address2": "",
        "address3": "",
        "city": "Beaverton",
        "state": "OR",
        "postalCode": "97005",
        "country": "US",
        "county": "Hampden"
      }
    }
  ],
  "paymentInfo": [
    {
      "id": "900281409857-8180234802395",
      "paymentId": "13290498923403275",
      "type": "ApplePay",
      "cardType": "Visa",
    }
  ]
}
```

```
"accountNumber": "xxxxxxxxxxxx1234",
"paymentData": "someEncryptedClob",
"billingInfo": {
  "name": {
    "firstName": "William",
    "altFirstName": "Theo",
    "lastName": "Bowerman",
    "altLastName": "",
    "middleName": ""
  },
  "address": {
    "address1": "One Bowerman Drive",
    "address2": "",
    "address3": "",
    "city": "Beaverton",
    "state": "OR",
    "postalCode": "97005",
    "country": "US"
  },
  "contactInfo": {
    "phoneNumber": "503-555-1234",
    "email": "test@nike.com"
  }
}
]
```

Sample WeChat *Payment Preview* request:

TIP: Request must include “WECHAT” in
clientBrowser

```
{
  "checkoutId": "05830580385038953405-r34-5r",
  "total": 266.98,
  "currency": "CNY",
  "country": "CN",
  "clientBrowser": "WECHAT",
  "items": [
    {
      "productId": "15611769-e81b-45dd-b28c-ca0effb272de",
      "shippingAddress": {
        "address1": "Wangfujing St",
        "address2": "B1层B130-B135COSTA新东安店",
        "address3": "新东安广场1层130-131",
        "city": "Dongchehng",
        "state": "Beijing",
        "country": "CN"
      }
    }
  ],
  "paymentInfo": [
    {
      "id": "284621849629347214e82",
      "type": "Alipay",
      "paymentId": "9085329583043242325",
      "billingInfo": {
```

```
"name": {
  "firstName": "耐克专卖店",
  "altFirstName": "",
  "lastName": "北京",
  "altLastName": "",
  "middleName": ""
},
"address": {
  "address1": "Wangfujing St",
  "address2": "B1层B130-B135COSTA新东安店",
  "address3": "新东安广场1层130-131",
  "city": "Dongchehng",
  "state": "Beijing",
  "country": "CN"
},
"contactInfo": {
  "phoneNumber": "+86 10 8518 6164",
  "email": "email@nike.com"
}
}
]
}
```

Sample Klarna *Payment Preview* request:

```
{
  "checkoutId": "4424253",
  "total": 220.00,
  "currency": "ATS",
```



```
"country": "AT",
"items": [
  {
    "productId": "e8791c09-cd7e-5b72-bab3-5d3490c2bd06",
    "shippingAddress": {
      "address1": "1000 NW Alps Ave",
      "address2": "",
      "address3": "",
      "city": "Rafing",
      "state": "Holla",
      "postalCode": "7081",
      "country": "AT",
      "county": "Wallafred"
    }
  }
],
"paymentInfo": [
  {
    "id": "101",
    "type": "Klarna",
    "dateOfBirth": "1988-01-01",
    "gender": "MALE",
    "personalId": "112233",

    "billingInfo": {
      "name": {
        "firstName": "Hans",
        "altFirstName": "",
        "lastName": "Hauferman",
        "altLastName": "",
```

```
        "middleName": ""
    },
    "address": {
        "address1": "1000 NW Alps Ave",
        "address2": "RG-2092",
        "address3": "#123",
        "city": "Rafing",
        "state": "Holla",
        "postalCode": "7081",
        "country": "AT"
    },
    "contactInfo": {
        "phoneNumber": "998-555-1234",
        "email": "email@nike.com"
    }
}
]
```

Response Body

The HTTP 200 response from *Payment Preview* contains information about how to retrieve the results of your job via the *Payment Preview Job* endpoint. Listed below are the response body fields.

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint, used to	Required

Element Name	Type	Description	Required?
		look up the job status	
status	string	Status of the job. one of “PENDING”, “IN_PROGRESS”, “COMPLETED”	Required
eta	integer	Time in milliseconds to wait before polling the jobs endpoint to get your results, present when status is not “COMPLETED”	Required
resourceType	string	Enum always payment/preview/jobs	Required
links	string	Relative URL path to poll the jobs endpoint (see nested <code>ref</code> field)	Required
response	object	Populated when job is in “COMPLETED” status, this object gives details of your payment preview result	Optional
response.id	string	UUID of preview results	Required

Element Name	Type	Description	Required?
response. resourceType	string	Enum, always payment/ preview_results	Required
response. total	number	Total amount	Required
response. currency	string	Currency of total amount	Required
response. payments	array	Array of payment objects	Required
response.payments. .id	string	ID of this payment method	Required
response.payments. .type	string	One of “CreditCard”, “GiftCard”, “Paypal”, “ApplePay”, “Sofort”, “iDeal”, “Klarna”, “COD”, “Alipay”, “Tenpay”, “UnionPay”, “WeChat”, “Konbini”, “Promotion”, “AndroidPay”	Required
response.payments. .amount	number	Amount allocated to this payment method	Required
response.payments. .bankName	string	Bank name for this payment method for AliPay, TenPay and UnionPay	Optional

Element Name	Type	Description	Required?
response.payments .businessName	string	Business name for this payment method for Konbini, enum one of “SevenEleven”, “Kmart”, “FamilyMart”, “Payease”, “Lawson”, “CircleKSuncus”, “Ministop”	Optional
response.payments .charge	number	Additional amount charged for using this payment type	Optional
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error. httpStatus	integer	Status code present when service returns in error	Optional
error. message	string	Top level error message present when service returns in error	Optional
error. code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional

Element Name	Type	Description	Required?
error.id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional
error.errors.field	string	JSON field name causing error	Required
error.errors.code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors.message	string	Error message	Required

TIP: Promotion is an indicator that the entire order is allocated to a promotion.

Sample *Payment Preview* 202 response with an IN_PROGRESS status:

```
{
  "id": "4dbe5dc7-6b0d-41fe-b276-b17393a3yrtd",
  "status": "IN_PROGRESS",
  "resourceType": "job",
  "links": {
    "result": {
```

```

        "ref": "/payment/preview_results/v2/4dbe5dc7-6b0d-41fe-
b276-b17393a3yrtd"
      },
      "self": {
        "ref": "/payment/preview/v2/jobs/4dbe5dc7-6b0d-41fe-
b276-b17393a3yrtd"
      }
    }
  }
}

```

Sample *Payment Preview* 400 error response:

```

{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "total",
      "code": "INVALID_FIELD",
      "message": "Invalid value."
    },
    {
      "field": "checkoutId",
      "code": "MISSING_REQUIRED",
      "message": "Required field"
    },
    {
      "field": "paymentInfo[1].type",
      "code": "INVALID_PAYMENT_TYPE",
      "message": "Not supported payment method."
    }
  ]
}

```

```
]
}
```

Sample *Payment Preview* request with “COMPLETED” status with the amount allocated across two gift cards and one credit card. Because the job is complete, the response does not contain an eta field.

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe783424",
  "resourceType": "payment/preview/jobs",
  "status": "COMPLETED",
  "links": {
    "self": {
      "ref": "/payment/preview/v2/jobs/
2722be3a-0341-11e6-b512-3e1d05defe78432"
    }
  },
  "response": {
    "resourceType": "payment/preview_results",
    "id": "5803485039503495",
    "total": 305.99,
    "currency": "USD",
    "payments": [
      {
        "id": "48204830259030503850935",
        "type": "GiftCard",
        "amount": 100.95
      },
      {
        "id": "9804823040234902",
```



```

      "type": "GiftCard",
      "amount": 99.05
    },
    {
      "id": "48204830259034230",
      "type": "CreditCard",
      "amount": 105.99
    }
  ],
  "links": {
    "self": {
      "ref": "/payment/preview_results/v2/2722be3a-0341-11e6-b512-3e1d05defe783424"
    }
  }
}

```

Error Code	Description
INVALID_FIELD	Returned when request contains an invalid field value
MISSING_REQUIRED	Returned when request is missing a required field value
INVALID_PAYMENT_TYPE	Returned when request contains an invalid payment type

Payment Preview Job Status by ID

Use this endpoint to check the status of the *Payment Preview* job. After receiving a HTTP 202 from the *Payment Preview* call and waiting the duration of the **eta** time, call *Payment*

Preview Job Status by ID using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status. To know if the job is done, check the value of the status field in the response body as follows:

- “status”: “PENDING”: job processing has not started
- “status”: “IN_PROGRESS”: job processing in progress
- “status”: “COMPLETED”: job has completed

Once you receive a job status of “COMPLETED”, get the results of your job by parsing the data in the response object from this endpoint. Alternatively, follow the link to the *Payment Preview Job Status by ID* endpoint which is provided in the links object response body.

TIP: Parsing the “COMPLETED” job result directly is a best practice because it eliminates making another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/payment/preview/v2/jobs/{id}{?fields}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier (UUID) for the job	String	Required

Parameter	Type	Description	Data Type	Required?
fields	Query	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike

Edge Router based on the access token in the Authorization header populated by Nike Unite.

- ✓ Get the {id} path parameter from the id job UUID in the *Payment Preview* response.

Sample *Payment Preview Job by ID* request URI:

```
https://api.nike.com/payment/preview/v2/jobs/  
2722be3a-0341-11e6-b512-3e1d05defe783424
```

Response Body

The *Payment Preview Job Status by ID* response is identical to the [Payment Preview Response Body](#) except that the resource type value is payment/preview/jobs.

Payment Preview Result by ID

After calling the *Payment Preview* to start the job and *Payment Preview Job* to check that the status of the job is “COMPLETED”, you can optionally call the *Payment Preview Result by ID* endpoint to retrieve the result of the Payment Preview job. It is optional because the Payment Preview result is also returned in the *Payment Preview Job* when it is in “COMPLETED” status.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/payment/ preview_results/ v2/{id}{?fields}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier (UUID) for the job	String	Required
fields	Query	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ Get the `{id}` path parameter from the `id` job UUID in the *Payment Preview* response.

Sample Payment Preview Results request: https://api.nike.com/payment/preview_results/v2/2722be3a-0341-11e6-b512-3e1d05defe783424

Response Body

The HTTP 200 response from *Payment Preview Job Results* contains information about the results of your job. Listed below are the response body fields.

Element Name	Type	Description	Required?
resourceType	string	Enum always payment/preview_results	Required
id	string	UUID of preview results	Required
total	number	Total amount	Required
currency	string	Currency of total amount	Required
payments	array	Array of payment objects	Required
payments. id	string	Id for this payment	Required

Element Name	Type	Description	Required?
payments. type	string	Enum one of “CreditCard”, “GiftCard”, “Paypal”, “ApplePay”, “Sofort”, “iDeal”, “Klarna”, “COD”, “Alipay”, “Tenpay”, “UnionPay”, “WeChat”, “Konbini”, “Promotion”, “AndroidPay”	Required
payments. amount	number	Amount allocated to this payment method	Required
payments. bankName	string	Bank name for this payment method for AliPay, TenPay and UnionPay	Optional
payments. businessName	string	Business name for this payment method for Konbini, enum one of “SevenEleven”, “Kmart”, “FamilyMart”, “Payease”, “Lawson”, “CircleKSuncus”, “Ministop”	Optional
payments. charge	number	Additional amount	Optional

Element Name	Type	Description	Required?
		charged for using this payment type	
links	string	Relative URL path to poll the jobs endpoint (see nested <code>ref</code> field)	Required

TIP: Promotion is an indicator that the entire order is allocated to a promotion.

Sample Payment Preview Results response for two gift cards and a credit card:

```
{
  "resourceType": "payment/preview_results",
  "id": "2722be3a-0341-11e6-b512-3e1d05defe783424",
  "total": 305.99,
  "currency": "USD",
  "payments": [
    {
      "id": "48204830259030503850935",
      "type": "GiftCard",
      "amount": 100.95
    },
    {
      "id": "9804823040234902",
      "type": "GiftCard",
      "amount": 99.05
    }
  ]
}
```



```

    },
    {
      "id": "48204830259034230",
      "type": "CreditCard",
      "amount": 105.99
    }
  ],
  "links": {
    "self": {
      "ref": "/payment/preview_results/v2/2722be3a-0341-11e6-b512-3e1d05defe783424"
    }
  }
}

```

Using Payment Approval

- [Submit Order Payments for Approval](#)
- [Submit Order Payments for Approval](#)
- [Retrieve Payment Approval Job](#)
- [Order Payments Approval Result](#)
- [Void Payment Approval](#)
- [Get Payment Approval Summary](#)

Payment Approval Overview

This service performs fraud check, validation and authorization/debit for all payment types on a customer's Checkout. It must be called after Payment Preview so order allocation is already calculated and the paymentPreviewId is assigned. This service uses the paymentPreviewId to look up the Checkout payment methods so it does not require that the

payments be passed in on the request. This service also voids a previous authorization/debit.

This endpoint operates **asynchronously** which means that there are extra steps to retrieve the results of your request. Read the Asynchronous Operation section of the [Using NDe APIs](#) guide to learn more about working with asynchronous Nike APIs.

Submit Order Payments for Approval (POST)

This service validates the payment allocation performed by the Payment Preview service, recalculating if necessary, and evaluates that the selected payment methods and items on Checkout are valid. If one or more payment type validations fail, all payment type authorizations (in the case of credit cards and PayPal)/debits (in the case of gift cards) are rolled back. There is no need to pass in the Checkout payment types in the body as the service looks them up using the checkoutId and paymentPreviewId in the request body.

TIP: This endpoint is intended to be a service-to-service call. [Request Checkout Submit](#) calls the PaymentApproval endpoint as a last step in the order flow to validate and authorize/debit payment before submitting a Checkout to Nike for fulfillment. A client should not call this service directly.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/payment/approval/v2	yes

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required
X-Nike-AppId	Client application id calling this service (as listed in Eureka) used to verify endpoint access	Required
X-Nike-Authorization	JWT signed by client application	Required

TIP: When calling this endpoint through the public router, the **upmid** (for logged in customers), **appId** and **usertype** headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
priority	string	HIGH priority	Optional

Element Name	Type	Description	Required?
		results go into a separate queue and are processed before DEFAULT requests, one of HIGH or DEFAULT. defaults to DEFAULT	
request	object	Object containing payment approval information	Required
request. checkoutId	string	UUID generated by the client identifying the Checkout	Required
request. paymentPreviewId	string	Id returned from Payment Preview service for this Checkout	Required
request. orderNumber	string	Order number generated by the calling service	Required
request. currency	string	Shopping currency code. Defaults to USD	Required
request. locale	string	Locale of shopping country. Defaults to en_US	Optional
request. clientBrowser	string	Required for WeChat payment	Optional

Element Name	Type	Description	Required?
		type, "WECHAT" or null	
request. organizationCode	string	Organization code for the business unit. Also referred to as enterpriseCode e.g. NIKEUS	Optional
request. country	string	ISO code for shopping country	Required
request. priceInfo	object	Object containing total amount of Checkout	Required
request.priceInfo. price	number	Net amount of Checkout minus applied discounts	Required
request.priceInfo. discount	number	Net amount of discounts applied	Optional
request.priceInfo. total	number	Checkout total amount before discount	Required
request.priceInfo. taxTotal	number	Total tax amount	Required
request. shippingCost	object	Object containing total amount of shipping costs	Required
request.shippingCost. price	number	Net shipping cost	Required
request.shippingCo	number	Discount applied to	Optional

Element Name	Type	Description	Required?
st.discount		shipping cost	
request.shippingCost.total	number	Total shipping cost	Required
request.shippingCost.taxTotal	number	Shipping cost tax	Required
request.shippingAddresses	array	Array of recipient, shippingAddress, contactInfo and shippingMethod objects	Required
request.shippingAddresses.recipient	object	recipient object	Required
request.shippingAddresses.recipient.firstName	string	Shipping address first name	Required
request.shippingAddresses.recipient.alternateFirstName	string	Shipping address alternate first name	Optional
request.shippingAddresses.recipient.lastName	string	Shipping address last name	Required
request.shippingAddresses.recipient.alternateLastName	string	Shipping address alternate last name	Optional
request.shippingAddresses.recipient.middleName	string	Shipping address middle name	Optional
request.shippingAddresses.shippingAddress	object	Shipping address object	Required

Element Name	Type	Description	Required?
ddress			
request.shippingAddresses.shippingAddress. address1	string	Shipping address line 1	Required
request.shippingAddresses.shippingAddress. address2	string	Shipping address line 2	Optional
request.shippingAddresses.shippingAddress. address3	string	Shipping address line 3	Optional
request.shippingAddresses.shippingAddress. city	string	Shipping address city	Required
request.shippingAddresses.shippingAddress. state	string	Shipping address state	Optional
request.shippingAddresses.shippingAddress. postalCode	string	Shipping address postalCode	Optional
request.shippingAddresses.shippingAddress. country	string	Shipping address country	Required
request.shippingAddresses.shippingAddress. county	string	Shipping address county, holds non-US regional data, required in CN and JP	Optional
request.shippingAddresses. contactInf	object	Shipping address contact info object	Required

Element Name	Type	Description	Required?
o			
request.shippingAddresses.contactInfo. phoneNumber	string	Shipping address contact info phone number	Required
request.shippingAddresses.contactInfo. email	string	Shipping address contact info email address	Required
request.shippingAddresses.shippingMethod**	object	Shipping method object	Required
request.shippingAddresses.shippingMethod. id	string	Shipping method identifier	Required
request.shippingAddresses.shippingMethod. cost	number	Cost of shipping method	Required
request.shippingAddresses.shippingMethod. daysToArrive	integer	Number of days it takes the inventory to travel from warehouse to customer	Required
request.shippingAddresses.shippingMethod. estimatedDelivery	string	Estimated date of arrival at customer shipping address, in milliseconds	Required
request.shippingAddresses. promotionDetails	array	Array of promotion details	Optional
request.shippingAd	string	Promotion display	Required

Element Name	Type	Description	Required?
dressess.promotion Details. displayNam e		name	
request. items	array	Array of Checkout items	Required
request.items. quan tity	integer	Amount of this item	Required
request.items. skul d	string	Stock keeping unit of this item	Required
request.items. price Info	array	Array of priceInfo objects, one for each item in Checkout	Required
request.items.pricel nfo. price	number	Net price of item/ service	Required
request.items.pricel nfo. discount	number	Discount applied to item/service	Optional
request.items.pricel nfo. total	number	Total price for item/ service (price - discount)	Required
request.items.pricel nfo. taxTotal	number	Tax due for item/ service	Required
request.items. prom otionDetails	array	Array of promotion objects applied to each item/service	Optional
request.items.prom otionDetails. promo tionId	string	Id of promotion	Required

Element Name	Type	Description	Required?
request.items.promotionDetails. couponCode	string	Coupon code of promotion	Optional
request.items.promotionDetails. displayName	string	Display name of promotion	Required
request. clientInfo	object	Contains information about client making the Payment Approval request	Required
request.clientInfo. deviceId	string	'Fingerprint' of the device making the request	Optional
request.clientInfo. ipAddress	string	IP address of the client making the request	Optional

Sample *Submit Order Payments for Approval* request body:

```
{
  "priority": "HIGH",
  "request": {
    "checkoutId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
    "paymentPreviewId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
    "orderNumber": "C000000123456",
    "currency": "USD",
    "locale": "en_US",
    "organizationCode": "NIKEUS",
```

```
"country": "US",
"priceInfo": {
  "price": 208,
  "discount": 0,
  "total": 228.8,
  "taxTotal": 20.8
},
"shippingCost": {
  "price": 8,
  "discount": 0,
  "total": 8,
  "taxTotal": 0.8
},
"shippingAddresses": [
  {
    "recipient": {
      "firstName": "William",
      "altFirstName": "Dr.",
      "lastName": "Bowerman",
      "altLastName": "Suess",
      "middleName": ""
    },
    "shippingAddress": {
      "address1": "One Bowerman Drive",
      "address2": "",
      "address3": "",
      "city": "Beaverton",
      "state": "OR",
      "postalCode": "97005",
      "country": "US"
    }
  }
]
```

```
    },
    "contactInfo": {
      "phoneNumber": "781-555-1212",
      "email": "test@nike.com"
    },
    "shippingMethod": {
      "id": "STANDARD",
      "cost": 8,
      "daysToArrive": 5,
      "estimatedDelivery": "2016-02-09T00:00:00.000Z"
    },
    "promotionDetails": [
      {
        "promotionId": "1",
        "couponCode": "1",
        "displayName": "Free Ship"
      }
    ]
  },
  "items": [
    {
      "quantity": 1,
      "skuId": "15611769-e81b-45dd-b28c-ca0effb272de",
      "priceInfo": {
        "price": 200,
        "discount": 0,
        "total": 220,
        "taxTotal": 20
      }
    },
  ],
```

```

        "promotionDetails": [
            {
                "promotionId": "1",
                "couponCode": "1",
                "displayName": "10% Off Jordan"
            }
        ]
    },
    "clientInfo": {
        "deviceId":
"deviceFingerprintGeneratedByToolSuchAsIOVation",
        "ipAddress": "127.0.0.1"
    }
}

```

Response Body

The HTTP 202 response from *Submit Order Payments for Approval* contains information about how to retrieve the results of your job via the *Retrieval Payment Approval Job* endpoint. The response body fields are listed below.

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint, used to look up the job status	Required
status	string	Status of the job.	Required

Element Name	Type	Description	Required?
		one of “PENDING”, “IN_PROGRESS”, “COMPLETED”	
eta	integer	Time in milliseconds to wait before polling the jobs endpoint to get your results, present when status is not “COMPLETED”	Required
resourceType	string	Enum, always “job”	Required
links	string	Relative URL path to poll the jobs endpoint (see nested <code>ref</code> field)	Required
response	object	Populated when job is in “COMPLETED” status, this object gives details of your payment preview result	Optional
response.id	string	UUID of approval results	Required
response.orderNumber	string	Order number generated by the calling service	Required
response.fraudDecision	string	Results of fraud check, enum of	Required

Element Name	Type	Description	Required?
		“approve”, “decline”, “review”, “unknown”	
response. status	string	Result of payment approval request. if fraudDecision is “decline”, status is “REJECT”. enum of “ACCEPT”, “PENDING_PAYMENT”, “REJECT”	Required
response. payments	array	Array of payments objects for the payment approval request	Required
response.payments. .authId	string	UUID for the payment authorization	Required
response.payments. .paymentId	string	UUID for the payment on this order	Required
response.payments. .account	string	Merchant account used for the transaction	Optional
response.payments. .currency	string	ISO currency code used for the transaction	Optional
response.payments. .requestId	string	Vendor-provided request ID	Optional
response.payments	string	Vendor-provided	Optional

Element Name	Type	Description	Required?
.requestToken		request token	
response.payments .balance	number	Gift card balance	Optional
response.payments .debitAmount	number	Amount of the transaction	Optional
response.payments .pin	string	Gift card PIN	Optional
response.payments .reconciliationId	string	Vendor-provided reconciliationId	Optional
response.payments .accountNumber	string	Account number or gift card number	Optional
response.payments .expirationDate	string	Gift card expiration date	Optional
response.payments .cvCode	string	Credit card CVV validation code	Optional
response.payments .subscriptionId	string	Vendor-supplied subscriptionId for credit card	Optional
response.payments .cardNumber	string	Masked credit card number	Optional
response.payments .cardType	string	Type of credit card, e.g. MasterCard	Optional
response.payments .expirationMonth	string	Month credit card expires	Optional
response.payments .expirationYear	string	Year credit card expires	Optional
response.payments	string	Third party vendor-	Optional

Element Name	Type	Description	Required?
.responseType		supplied responseType	
response.payments .authorizationAmount	number	Amount authorized for the transaction	Optional
response.payments .authorizationExpiration	string	Date authorization expires after which payment approval must be requested again	Optional
response.payments .transactionTimestamp	string	Timestamp of transaction	Optional
response.payments .authorizationCode	string	Authorization code of transaction	Optional
response.payments .avsCode	string	Vendor-supplied address verification code for transaction	Optional
response.payments .referenceCode	string	PayPal-supplied reference code	Optional
response.payments .createSubscription	boolean	True indicates subscription id will be created for this transaction	Optional
response.payments .billingAgreementId	string	PayPal-supplied billing agreement id	Optional

Element Name	Type	Description	Required?
response.payments .createBillingAgreement	boolean	True indicates PayPal billing agreement will be created for this transaction	Optional
response.payments .payer	string	Customer's email address for PayPal	Optional
response.payments .payerId	string	PayPal-supplied payerId	Optional
response.payments .payerStatus	string	PayPal payer status	Optional
response.payments .paypalOrderId	string	PayPal-supplied order ID	Optional
response.payments .paypalToken	string	PayPal-supplied token	Optional
response.payments .billingInfo	object	object containing name, address, and contactInfo objects	Optional
response.payments .billingInfo.name	object	Object containing customer's name information	Required
response.payments .billingInfo.name.firstName	string	Shipping address first name	Required
response.payments .billingInfo.name.altFirstName	string	Shipping address alternate first name	Optional
response.payments .billingInfo.name.lastName	string	Shipping address last name	Required

Element Name	Type	Description	Required?
stName			
response.payments .billingInfo.name. alt LastName	string	Shipping address alternate last name	Optional
response.payments .billingInfo.name. mi ddleName	string	Shipping address middle name	Optional
response.payments .billingInfo. address	object	Object containing customer's address information	Required
response.payments .billingInfo.address. address1	string	Shipping address line 1	Required
response.payments .billingInfo.address. address2	string	Shipping address line 2	Optional
response.payments .billingInfo.address. address3	string	Shipping address line 3	Optional
response.payments .billingInfo.address. city	string	Shipping address city	Required
response.payments .billingInfo.address. state	string	Shipping address state	Optional
response.payments .billingInfo.address. postalCode	string	Shipping address postalCode	Optional
response.payments	string	Shipping address	Required

Element Name	Type	Description	Required?
.billingInfo.address. country		country	
response.payments .billingInfo. contactInfo	object	Object containing customer's contact information	Required
response.payments .billingInfo.contactInfo. phoneNumber	string	Shipping address contact info phone number	Required
response.payments .billingInfo.contactInfo. email	string	Shipping address contact info email address	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error. httpStatus	integer	Status code present when service returns in error	Optional
error. message	string	Top level error message present when service returns in error	Optional
error. code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error. id	string	Error id	Optional

Element Name	Type	Description	Required?
errors	array	Array of error objects present when service returns in error	Optional
error.errors. field	string	JSON field name causing error	Required
error.errors. code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors. message	string	Error message	Required

Sample **Submit Order Payments for Approval** 202 response with an IN_PROGRESS status:

```
{
  "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
  "status": "IN_PROGRESS",
  "eta": 5000,
  "resourceType": "job",
  "links": {
    "self": {
      "ref": "/payment/approval/v2/jobs/ae6575a7-8c0e-44ef-b91b-440bdaf2070b"
    }
  }
}
```

Sample **Submit Order Payments for Approval** 400 error response:

```
{
  "message": "Validation Failed",
  "errors": [
    {
      "field": "request.orderNumber",
      "code": "MISSING_REQUIRED",
      "message": "request.orderNumber is a required field"
    },
    {
      "field": "request.priceInfo.price",
      "code": "INVALID_FIELD",
      "message": "request.priceInfo.price is invalid"
    },
    {
      "field": "request.paymentPreviewId",
      "code": "INVALID_FIELD",
      "message": "request.paymentPreviewId is invalid"
    },
    {
      "field": "request.currency",
      "code": "INVALID_FIELD",
      "message": "request.currency is invalid"
    }
  ]
}
```

Sample **Submit Order Payments for Approval** response with “COMPLETED” status with the amount allocated across one gift card and a credit card. Because the job is complete, the response does not contain an **eta** field.

```
{
  "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
  "resourceType": "job",
  "status": "COMPLETED",
  "links": {
    "self": {
      "ref": "/payment/approval/v2/jobs/ae6575a7-8c0e-44ef-
b91b-440bdaf2070b"
    },
    "result": {
      "ref": "/payment/approval_results/v2/ae6575a7-8c0e-44ef-
b91b-440bdaf2070b"
    }
  },
  "response": {
    "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
    "orderNumber": "C000033239876",
    "fraudDecision": "approve",
    "status": "ACCEPT",
    "payments": [
      {
        "authId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
        "paymentId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
        "type": "GiftCard",
        "account": "usgivex",
        "currency": "USD",
        "requestId": "122933",
        "requestToken": "122933",
        "balance": 184.5,
        "debitAmount": 10,
```

```
    "pin": "160375",
    "reconciliationId": "122933",
    "accountNumber": "6060101121022400640",
    "transactionTimestamp": "2016-06-04T00:47:44.554Z",
    "expirationDate": "2016-06-11T00:30:20.000Z"
  },
  {
    "authId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
    "paymentId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
    "type": "CreditCard",
    "account": "nikeemeagc",
    "currency": "USD",
    "requestId": "4290333907755000001516",
    "requestToken": "Ahj/
7wSR0Siv6+E8m+fYGCmLBilYNW7VqyT+DUqHUQBT+DUqHUTSB0IEn4QyaSX+gWx7Sz
AnI6JRX9fCeTfPsAAAwR5B",
    "cvCode": "M",
    "subscriptionId": "4290333907755000001516",
    "cardNumber": "XXXXXXXXXXXXXXXXXX5859",
    "cardType": "Visa",
    "expirationMonth": "04",
    "expirationYear": "2017",
    "responseType": "AUTH",
    "authorizationAmount": 84.5,
    "transactionTimestamp": "2016-06-04T00:47:44.554Z",
    "authorizationExpiration": "2016-06-11T00:30:20.000Z",
    "authorizationCode": "390775500",
    "reconciliationId": "122933",
    "avsCode": "X",
    "billingInfo": {
```



```
    "name": {
      "firstName": "William",
      "altFirstName": "",
      "lastName": "Bowerman",
      "altLastName": "",
      "middleName": ""
    },
    "address": {
      "address1": "One Bowerman Drive",
      "address2": "Terra T/C",
      "address3": "#123",
      "city": "Beaverton",
      "state": "OR",
      "postalCode": "97005",
      "country": "US"
    },
    "contactInfo": {
      "phoneNumber": "503-555-1234",
      "email": "email@nike.com"
    }
  }
},
"links": {
  "self": {
    "ref": "/payment/approval_results/v2/ae6575a7-8c0e-44ef-b91b-440bdaf2070b"
  }
}
}
```

```
}
```

Sample PayPal **Submit Order Payments for Approval** response body with “COMPLETED” status:

```
{
  "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
  "resourceType": "job",
  "status": "COMPLETED",
  "links": {
    "self": {
      "ref": "/payment/approval/v2/jobs/ae6575a7-8c0e-44ef-
b91b-440bdaf2070b"
    },
    "result": {
      "ref": "/payment/approval_results/v2/ae6575a7-8c0e-44ef-
b91b-440bdaf2070b"
    }
  },
  "response": {
    "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
    "orderNumber": "C000033239876",
    "fraudDecision": "approve",
    "status": "ACCEPT",
    "payments": [
      {
        "authId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
        "paymentId": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
        "type": "Paypal",
        "account": "USD",
```

```
"authorizationAmount": 30,
"referenceCode": "test123",
"createSubscription": false,
"billingAgreementId": "B-4VA40851C6219744E",
"createBillingAgreement": false,
"transactionTimestamp": "2016-06-04T00:47:44.554Z",
"authorizationExpiration": "2016-06-11T00:30:20.000Z",
"authorizationCode": "75H976675W4903900",
"payer": "testuser@example.com",
"payerId": "PKXXRRCMNCH7W",
"payerStatus": "verified",
"paypalOrderId": "O-82T97001MR966554L",
"paypalToken": "EC-82T97001MR966554L",
"requestId": "75H976675W4903900",
"requestToken": "75H976675W4903900",
"reconciliationId": "dff689224d550",
"billingInfo": {
  "name": {
    "firstName": "William",
    "altFirstName": "",
    "lastName": "Bowerman",
    "altLastName": "",
    "middleName": ""
  },
  "address": {
    "address1": "One Bowerman Drive",
    "address2": "Terra T/C",
    "address3": "#123",
    "city": "Beaverton",
    "state": "OR",
```

```
        "postalCode": "97005",
        "country": "US"
    },
    "contactInfo": {
        "phoneNumber": "503-555-1234",
        "email": "email@nike.com"
    }
}

],
"links": {
    "self": {
        "ref": "/payment/approval_results/v2/ae6575a7-8c0e-44ef-
b91b-440bdaf2070b"
    }
}
}
```

This endpoint is unavailable to Try It Out because it is JWT-restricted

Submit Order Payments for Approval (PUT)

This service is identical to the [Submit Order Payments for Approval \(POST\)](#) endpoint except that it allows the calling service to determine the Payment Approval id to be passed in as a path parameter. This is helpful if the Payment Approval response times out and the calling service needs to call [Void Payment Approval](#) endpoint with the paymentApprovalId to reverse the Payment Approval request.

TIP: This endpoint is intended to be a service-to-service call. [Checkout Submit](#) calls the PaymentApproval endpoint as a last step in the order flow to validate and authorize/debit payment before submitting a Checkout to Nike for fulfillment. A client should not call this service directly.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
PUT	/payment/approval/ v2/{id}	yes

Path & Query Parameters

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required
X-Nike-AppId	Client application id calling this service (as listed in Eureka) used to verify endpoint access	Required

Name	Description	Required?
X-Nike-Authorization	JWT signed by client application	Required

Request and Response

See the [Submit Checkouts Payment for Approval \(POST\)](#) for request and response details.

This endpoint is unavailable to Try It Out because it is JWT-restricted

Retrieve Payment Approval Job

Use this endpoint to check the status of the *Submit Checkouts Payment for Approval* job. After receiving a HTTP 202 from the *Submit Checkouts Payment for Approval* call and waiting the duration of the eta time, call *Retrieval Payment Approval Job* endpoint using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status.

To know if the job is done, check the value of the status field in the response body as follows:

- “status”: “PENDING”: job processing has not started
- “status”: “IN_PROGRESS”: job processing in progress
- “status”: “COMPLETED”: job has completed

Once you receive a job status of “COMPLETED”, get the results of your job by parsing the data in the response object from this endpoint. Alternatively, follow the link to the *Retrieval Payment Approval Job* endpoint which is provided in the links object response body.

TIP: Parsing the “COMPLETED” job result directly is a best practice because it eliminates making another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/payment/approval/ v2/jobs/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier (UUID) for the job	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router,

the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

✓ Get the `{id}` path parameter from the `id` job UUID in the *Submit Checkouts Payment for Approval* response.

Sample *Retrieval Payment Approval Job* request URI:

```
https://api.nike.com/payment/preview/v2/jobs/  
2722be3a-0341-11e6-b512-3e1d05defe783424
```

Response Body

The *Retrieval Payment Approval Job* response is identical to the [Submit Order Payments for Approval Response Body](#).

Sample *Retrieval Payment Approval Job* response body with “IN_PROGRESS” status:

```
{  
  "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",  
  "resourceType": "job",  
  "status": "IN_PROGRESS",  
  "links": {  
    "self": {  
      "ref": "/payment/approval/v2/jobs/ae6575a7-8c0e-44ef-  
b91b-440bdaf2070b"  
    },  
    "result": {
```



```
        "ref": "/payment/approval_results/v2/ae6575a7-8c0e-44ef-  
b91b-440bdaf2070b"  
    }  
}  
}
```

Order Payments Approval Result

After calling *Submit Checkouts Payment for Approval* to start the job and *Retrieve Payment Approval Job* to verify the status of the job is “COMPLETED”, you can optionally call this endpoint to retrieve the result of your Payment Approval job. This step is optional because the Payment Approval result is also returned in the *Retrieve Payment Approval Job* when it is in COMPLETED status. The Document Order Management System (DOMS) is currently the only service that calls this endpoint.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/payment/ approval_results/ v2/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Unique identifier (UUID)	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request URI

Sample *Order Payments Approval Result* request URI:

```
https://api.nike.com/payment/approval_results/v2/  
ae6575a7-8c0e-44ef-b91b-440bdaf2070b
```

Response Body

The response is identical to the *Retrieval Payment Approval Job* endpoint except that the results are not wrapped in a response object.

Element Name	Type	Description	Required?
id	string	UUID of approval results	Required
orderNumber	string	Order number generated by the calling service	Required
fraudDecision	string	Results of fraud check, enum of "approve", "decline", "review", "unknown"	Required
status	string	Result of payment approval request. if fraudDecision is "decline", status is "REJECT". enum of "ACCEPT", "PENDING_PAYMENT", "REJECT"	Required
payments	array	Array of payments objects for the payment approval request	Required
payments. authId	string	UUID for the payment authorization	Required
payments. paymentId	string	UUID for the payment on this order	Required
payments. account	string	Merchant account used for the	Optional

Element Name	Type	Description	Required?
		transaction	
payments. currency	string	ISO currency code used for the transaction	Optional
payments. requestId	string	Vendor-provided request ID	Optional
payments. requestToken	string	Vendor-provided request token	Optional
payments. balance	number	Gift card balance	Optional
payments. debitAmount	number	Amount of the transaction	Optional
payments. pin	string	Gift card PIN	Optional
payments. reconciliationId	string	Vendor-provided reconciliationId	Optional
payments. accountNumber	string	Account number or gift card number	Optional
payments. expirationDate	string	Gift card expiration date	Optional
payments. cvCode	string	Credit card CVV validation code	Optional
payments. subscriptionId	string	Vendor-supplied subscriptionId for credit card	Optional
payments. cardNumber	string	Masked credit card number	Optional
payments. cardType	string	Type of credit card, e.g. MasterCard	Optional

Element Name	Type	Description	Required?
payments. expirationMonth	string	Month credit card expires	Optional
payments. expirationYear	string	Year credit card expires	Optional
payments. responseType	string	Third party vendor-supplied responseType	Optional
payments. authorizationAmount	number	Amount authorized for the transaction	Optional
payments. authorizationExpiration	string	Date authorization expires after which payment approval must be requested again	Optional
payments. transactionTimestamp	string	Timestamp of transaction	Optional
payments. authorizationCode	string	Authorization code of transaction	Optional
payments. avsCode	string	Vendor-supplied address verification code for transaction	Optional
payments. referenceCode	string	PayPal-supplied reference code	Optional
payments. createSubscription	boolean	True indicates subscription id will be created for this transaction	Optional
payments. billingAg	string	PayPal-supplied	Optional

Element Name	Type	Description	Required?
reementId		billing agreement id	
payments. createBillingAgreement	boolean	True indicates PayPal billing agreement will be created for this transaction	Optional
payments. payer	string	Customer's email address for PayPal	Optional
payments. payerId	string	PayPal-supplied payerId	Optional
payments. payerStatus	string	PayPal payer status	Optional
payments. paypalOrderId	string	PayPal-supplied order ID	Optional
payments. paypalToken	string	PayPal-supplied token	Optional
payments. billingInfo	object	Object containing name, address, and contactInfo objects	Optional
payments.billingInfo. name	object	Object containing customer's name information	Required
payments.billingInfo.name. firstName	string	Shipping address first name	Required
payments.billingInfo.name. altFirstName	string	Shipping address alternate first name	Optional
payments.billingInfo	string	Shipping address	Required

Element Name	Type	Description	Required?
o.name. lastName		last name	
payments.billingInf o.name. altLastName	string	Shipping address alternate last name	Optional
payments.billingInf o.name. middleName	string	Shipping address middle name	Optional
payments.billingInf o. address	object	Object containing customer's address information	Required
payments.billingInf o.address. address1	string	Shipping address line 1	Required
payments.billingInf o.address. address2	string	Shipping address line 2	Optional
payments.billingInf o.address. address3	string	Shipping address line 3	Optional
payments.billingInf o.address. city	string	Shipping address city	Required
payments.billingInf o.address. state	string	Shipping address state	Optional
payments.billingInf o.address. postalCode	string	Shipping address postalCode	Optional
payments.billingInf o.address. country	string	Shipping address country	Required

Element Name	Type	Description	Required?
payments.billingInfo. contactInfo	object	Object containing customer's contact information	Required
payments.billingInfo. contactInfo.phoneNumber	string	Shipping address contact info phone number	Required
payments.billingInfo. contactInfo.email	string	Shipping address contact info email address	Required
links.self. ref	string	Link to this resource	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error. httpStatus	integer	Status code present when service returns in error	Optional
error. message	string	Top level error message present when service returns in error	Optional
error. code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error. id	string	Error id	Optional

Element Name	Type	Description	Required?
errors	array	Array of error objects present when service returns in error	Optional
error.errors. field	string	JSON field name causing error	Required
error.errors. code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors. message	string	Error message	Required

Void Payment Approval

This endpoint voids a Payment Approval request. If a credit card was used in the original Payment Approval request, this endpoint reverses the authorization. If a gift card was used in the original Payment Approval request, it reverses the debit.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
DELETE	/payment/ approval_results/ v2/{id}	yes

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	payment approval Unique identifier (UUID)	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required
X-Nike-AppId	Client application id calling this service (as listed in Eureka) used to verify endpoint access	Required
X-Nike-Authorization	JWT signed by client application	Required

TIP: When calling this endpoint through the public router, the **upmid** (for logged in customers), **appId** and **usertype**

headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

There is no request body for the Void Payment Approval endpoint.

Sample *Void Payment Approval* request URI:

```
https://api.nike.com/payment/approval_results/v2/  
ae6575a7-8c0e-44ef-b91b-440bdaf2070b
```

Response Body

The HTTP 204 response from *Void Payment Approval* has no response body.

This endpoint is not available to Try It Out because it is JWT-restricted

Get Payment Approval Summary

Use this endpoint to retrieve a summary of a Payment Approval call that completed successfully. It returns masked account numbers and is available for 30 minutes. Unlike the [Payment Approval](#) endpoint, this endpoint can be called by either a client or another service. The results of this endpoint can be used to display payment approval results on an order confirmation page.

It is a synchronous endpoint so the results are returned in the response and does not require polling a separate endpoint.

If the Payment Approval result is not either in `ACCEPT` or `PENDING_PAYMENT` status, a 404 response is returned.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/payment/ approval_summary/ v1/{id}	no

Request Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	payment approval Unique identifier (UUID)	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the **upmid** (for logged in customers), **appld** and **usertype** headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

This is a GET request so there is no request body.

Sample *Payment Approval Summary* request URI:

```
https://api.nike.com/payment/approval_summary/v1/  
ae6575a7-8c0e-44ef-b91b-440bdaf2070b
```

TIP: Note that this is a v1 service

Response Body

The HTTP 200 response from *Payment Approval Summary* contains the results. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
id	string	UUID of approval results	Required
orderNumber	string	Order number generated by the calling service	Required

Element Name	Type	Description	Required?
status	string	Result of payment approval request. if fraudDecision is “decline”, status is “REJECT”. enum of “ACCEPT”, “PENDING_PAYMENT”, “REJECT”	Required
payments	array	Array of payments objects for the payment approval request	Required
payments. type	string	Type of payment	Required
payments. currency	string	ISO currency code used for the transaction	Optional
payments. amount	number	Amount of the transaction	Optional
payments. accountNumber	string	Account number or gift card number	Optional
payments. cardType	string	Type of credit card, e.g. MasterCard	Optional
payments. expirationMonth	string	Month credit card expires	Optional
payments. expirationYear	string	Year credit card expires	Optional
payments. payer	string	Customer’s email address for PayPal	Optional
payments. bankName	string	Bank name for	Optional

Element Name	Type	Description	Required?
me		deferred payment vendors, e.g. Alipay	
payments. billingInfo	object	Object containing name, address, and contactInfo objects	Optional
payments.billingInfo. name	object	Object containing customer's name information	Required
payments.billingInfo.name. firstName	string	Shipping address first name	Required
payments.billingInfo.name. altFirstName	string	Shipping address alternate first name	Optional
payments.billingInfo.name. lastName	string	Shipping address last name	Required
payments.billingInfo.name. altLastName	string	Shipping address alternate last name	Optional
payments.billingInfo.name. middleName	string	Shipping address middle name	Optional
payments.billingInfo. address	object	Object containing customer's address information	Required
payments.billingInfo.address. address1	string	Shipping address line 1	Required
payments.billingInfo.address. address2	string	Shipping address line 2	Optional

Element Name	Type	Description	Required?
2			
payments.billingInfo.address. address3	string	Shipping address line 3	Optional
payments.billingInfo.address. city	string	Shipping address city	Required
payments.billingInfo.address. state	string	Shipping address state	Optional
payments.billingInfo.address. postalCode	string	Shipping address postalCode	Optional
payments.billingInfo.address. country	string	Shipping address country	Required
payments.billingInfo. contactInfo	object	Object containing customer's contact information	Required
payments.billingInfo.contactInfo. phoneNumber	string	Shipping address contact info phone number	Required
payments.billingInfo.contactInfo. email	string	Shipping address contact info email address	Required
links.self. ref	string	Link to this resource	Required

Below is a sample response body for a *Payment Approval Summary* request. It contains masked payment information for GiftCard and CreditCard payment types:


```
{
  "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
  "orderNumber": "C000098769876",
  "status": "ACCEPT",
  "payments": [
    {
      "type": "GiftCard",
      "currency": "USD",
      "amount": 10,
      "accountNumber": "60*****0640",
      "billingInfo": {
        "name": {
          "firstName": "William",
          "altFirstName": "",
          "lastName": "Bowerman",
          "altLastName": "",
          "middleName": ""
        },
        "address": {
          "address1": "One Bowerman Drive",
          "address2": "",
          "address3": "",
          "city": "Beaverton",
          "state": "OR",
          "postalCode": "97005",
          "country": "US"
        },
        "contactInfo": {
          "phoneNumber": "415-555-1234",
          "email": "test@nike.com"
        }
      }
    }
  ]
}
```

```
    }
  }
},
{
  "type": "GiftCard",
  "currency": "USD",
  "amount": 19.58,
  "accountNumber": "60*****0236",
  "billingInfo": {
    "name": {
      "firstName": "William",
      "altFirstName": "",
      "lastName": "Bowerman",
      "altLastName": "",
      "middleName": ""
    },
    "address": {
      "address1": "One Bowerman Drive",
      "address2": "",
      "address3": "",
      "city": "Beaverton",
      "state": "OR",
      "postalCode": "97005",
      "country": "US"
    },
    "contactInfo": {
      "phoneNumber": "415-555-1234",
      "email": "test@nike.com"
    }
  }
}
```

```
},
{
  "type": "CreditCard",
  "currency": "USD",
  "accountNumber": "XXXXXXXXXXXXXXXXXX5859",
  "cardType": "Visa",
  "expirationMonth": "04",
  "expirationYear": "2017",
  "amount": 84.5,
  "billingInfo": {
    "name": {
      "firstName": "William",
      "altFirstName": "",
      "lastName": "Bowerman",
      "altLastName": "",
      "middleName": ""
    },
    "address": {
      "address1": "One Bowerman Drive",
      "address2": "",
      "address3": "",
      "city": "Beaverton",
      "state": "OR",
      "postalCode": "97005",
      "country": "US"
    },
    "contactInfo": {
      "phoneNumber": "415-555-1234",
      "email": "test@nike.com"
    }
  }
}
```

```
    }
  }
],
"links": {
  "self": {
    "ref": "/payment/approval_summary/v1/ae6575a7-8c0e-44ef-
b91b-440bdaf2070b"
  }
}
}
```

Below is a sample *Payment Approval Summary* response for the PayPal payment type:

```
{
  "id": "ae6575a7-8c0e-44ef-b91b-440bdaf2070b",
  "orderNumber": "C000098769876",
  "status": "ACCEPT",
  "payments": [
    {
      "type": "Paypal",
      "account": "USD",
      "amount": 30,
      "payer": "test@nike.com",
      "billingInfo": {
        "name": {
          "firstName": "William",
          "altFirstName": "",
          "lastName": "Bowerman",
          "altLastName": "",
          "middleName": ""
        }
      }
    }
  ]
}
```

```

    },
    "address": {
      "address1": "One Bowerman Drive",
      "address2": "",
      "address3": "",
      "city": "Beaverton",
      "state": "OR",
      "postalCode": "97005",
      "country": "US"
    },
    "contactInfo": {
      "phoneNumber": "415-555-1234",
      "email": "test@nike.com"
    }
  }
},
"links": {
  "self": {
    "ref": "/payment/approval_summary/v1/ae6575a7-8c0e-44ef-
b91b-440bdaf2070b"
  }
}
}

```

Error Codes

Listed below are the error codes returned from Payment Approval service:

Error Code	Error Message	
	INVALID_FIELD	Invalid field in the request
	AUTH_FAILURE	Authorization failed for a payment
	INSUFFICIENT_FUNDS	Not enough funds on the gift card or in PayPal
	JOB_TIMEOUT	Unable to complete the approval request in 30 secs
	SYSTEM_ERROR	Error occurred processing the approval request
	FRAUD_REJECT	Fraud vendor rejected the request based on the order detail
	QUANTITY_LIMIT	Consumer has reached the max quantity limit for the product
	INTERNATIONAL_BIN	The credit card number is from a country that is not supported
	INVALID_PAYMENT_TYPE	The selected payment type is invalid for the order
	INVALID_SHIPPING_BILLING_COMBINATION	The shipping and billing country combination is supported
	UNSUPPORTED_PAYMENT_FOR_COUNTRY	The selected payment type is not supported in the selected billing country. (Ex. PayPal in Poland)

Error Code	Error Message	
	INVALID_CVV	The security code is invalid.
	INVALID_CREDIT_CARD_NUMBER	The credit card number is invalid
	INVALID_BANK_COUNTRY	Check the billing country value to make sure they are set to the correct country
	MORE_PAYMENT_REQUIRED	Unable to allocate the order total across all payment types. Need more payment.
	PAYPAL_AUTH_FAILURE_10411	Inform the customer that the Express Checkout transaction has expired and they need to restart the transaction
	PAYPAL_AUTH_FAILURE_10417	Instruct the customer to retry the transaction using an alternative payment method from the customers PayPal wallet. The transaction did not complete with the customers selected payment method.
	PAYPAL_AUTH_FAILURE_10422	Instruct the customer to use a different funding source
	PAYPAL_AUTH_FAILURE_	Inform the customer an

Error Code	Error Message	
	10445	error occurred and to retry the transaction
	PAYPAL_AUTH_FAILURE_10486	Redirect the customer back to PayPal to select a different funding source or to add a new funding source.
	PAYPAL_AUTH_FAILURE_11084	Inform the customer that PayPal declined the transaction and to contact PayPal Customer Service
	PAYPAL_AUTH_FAILURE_13113	Inform the buyer that PayPal declined the transaction and to contact PayPal Customer Service
	PAYMENT_AUTH_FAILURE_236	Wait a few minutes and resend the request.
	INVALID_GC_OR_PIN	Inform the customer the gift card and/or PIN is not valid.
	GC_EXPIRED	Inform the customer the gift card is expired.
	GC_BALANCE_EXCEEDED	Inform the customer the gift card balance has been exceeded.
	KLARNA_ERROR_2102	AMOUNT. Inform the customer to choose an alternative payment method.

Error Code	Error Message	
	KLARNA_ERROR_2105	UNPAID_BILLS. Inform the customer to pay their unpaid Klarna invoices before shopping with Klarna
	KLARNA_ERROR_2201	PNO. Inform the customer that the personal number they entered is not the correct format
	KLARNA_ERROR_2205	UNDER_AGED. Inform the customer that he/she must be 18 years old or older to pay with Klarna
	KLARNA_ERROR_3107	ADDRESS. Inform the customer that the address could not be verified. Edit the address and try again.
	KLARNA_ERROR_3111	ZIP. Inform the customer that the postal code they entered is not in the correct format. Edit the postal code and try again.
	KLARNA_ERROR_3201	CELLNO. Inform the customer that the mobile phone number they entered is not in the correct format. Edit the mobile phone number and try again.
	KLARNA_ERROR_3203	EMAIL. Inform the customer that the email

Error Code	Error Message	
		address they entered is not in the correct format. Edit the email address and try again.
	KLARNA_ERROR_3205	CITY. Inform the customer that the city is incorrect. Edit the city and try again.
	KLARNA_ERROR_3215	DATE_OF_BIRTH. Inform the customer that the date of birth is not in the correct format. Edit the date of birth and try again.
	KLARNA_ERROR_3218	HOUSE_NUMBER. Inform the customer that the house number is incorrect. Edit the house number and try again.
	KLARNA_ERROR_3302	BAD_LAST_NAME. Inform the customer that the last name is incorrect. Edit the last name and try again.
	KLARNA_ERROR_3303	BAD_FIRST_NAME. Inform the customer that the first name is incorrect. Edit the first name and try again.
	KLARNA_ERROR_9109	RESERVATION NUMBER DOES NOT EXIST. Inform the customer that the reservation number does not exist.

Error Code	Error Message	
	KLARNA_ERROR_9119	TIMEOUT. Inform the customer of that a system error occurred and to either try again or choose an alternative payment method.

Using Credit Card Submit

- [Add Credit Card Info with CVV](#)
- [Add Credit Card Info without CVV](#)
- [Add CVV](#)
- [Add CVV and Expiration Date](#)
- [Validate Credit Card Info](#)
- [Store Credit Card Info](#)
- [List Credit Card Info](#)
- [List Credit Card Info and Validate Status](#)

Credit Card Submit Overview

This service lists, modifies, deletes and stores a customer's credit card and Apple Pay information. This service accommodates both PCI-certified and non-PCI-certified experiences. Endpoints for non-PCI-certified experiences render an iFrame to collect and retrieve credit card and Apple Pay information. For PCI-certified experiences, it offers endpoints to manage a customer's credit card and Apple Pay information directly.

Add Credit Card Info with CVV

This endpoint is intended to be called by experiences that are not [PCI-certified](#). This endpoint renders an iFrame with the masked credit card number, expiration date, and CVV matching the creditCardInfold passed in the path parameter. If the creditCardInfold is not

found, the iFrame renders blank credit card number, date and CVV fields for editing. When each field has a value, the iFrame calls the [Store Credit Card Info](#) endpoint and temporarily stores new or updated values. As a last step, the iFrame calls the [Validate Credit Card Info](#) endpoint to validate the new or updated credit card data.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/services/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Query	creditCardInfoId in UUID format generated by the client	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the **upmid** (for logged in customers), **appld** and **usertype** headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Sample request URI:

```
https://paymentcc.nike.com/services?id=24afd5dc-  
b523-491c-8282-8bed57cd2029&ctx=checkout&language=en
```

Response Body

The response body of this endpoint is the iFrame with editable credit card number, expiration date and CVV editable fields pre-populated with values looked up based on the creditCardInfold id path parameter.

ADD CARD		
Card Number	Expiration Date	Security Code
	MM/YY	XXX

Add Credit Card Info without CVV

This endpoint is intended to be called by experiences that are not [PCI-certified](#). This endpoint renders an iFrame with the masked credit card number and expiration date matching the creditCardInfold passed in the path parameter. If the creditCardInfold is not found, the iFrame renders blank credit card number and date fields for editing. When each field has a value, the iFrame calls the [Store Credit Card Info](#) endpoint and temporarily stores

new or updated values. As a last step, the iFrame calls the [Validate Credit Card Info](#) endpoint to validate the new or updated credit card data.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/services/ add{?id,language}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Query	creditCardInfoId in UUID format generated by the client	String	Required
language	Query	BCP 47 language-country tag associated with this Checkout, en-IE	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required

Name	Description	Required?
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the **upmid** (for logged in customers), **appld** and **usertype** headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Sample request URI:

```
https://paymentcc.nike.com/services/add?id=0e13e71d-e952-46af-b3f5-e476befd43ce&language=en
```

Response Body

The response body of this endpoint is the iFrame with editable credit card number and expiration date fields pre-populated with values looked up based on the creditCardInfold id path parameter.

Number	MM/YY
--------	-------

Add CVV Information

This endpoint is intended to be called by experiences that are not [PCI-certified](#). This

endpoint renders an iFrame with an editable CVV field. When the customer provides a CVV value, the iFrame calls the [Store Credit Card Info](#) endpoint and temporarily stores the CVV if it found a credit card matching the credit card Info id path parameter. As a last step, the iFrame calls the [Validate Credit Card Info](#) endpoint to validate the updated CVV.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/services/cvv/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Query	creditCardInfoId in UUID format generated by the client	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Sample request URI:

```
https://paymentcc.nike.com/services/cvv?id=0e13e71d-e952-46af-b3f5-e476befd43ce&language=en
```

Response Body

The response body of this endpoint is the iFrame with an editable CVV field.

Security Code

XXX

Add CVV and Expiration Date

This endpoint is intended to be called by experiences that are not [PCI-certified](#). This endpoint renders an iFrame with an editable credit card expiration date and CVV fields. When the customer provides the appropriate values, the iFrame calls the [Store Credit Card Info](#) endpoint and temporarily stores the data if it found a credit card matching the credit card Info id path parameter. As a last step, the iFrame calls the [Validate credit card Info](#) endpoint to validate the updated expiration date and CVV values.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/services/ expcvv{?id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Query	creditCardInfoId in UUID format generated by the client	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router,

the upmid (for logged in customers), appId and usertype headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Sample request URI:

```
https://paymentcc.nike.com/services/expcvv?id=0e13e71d-e952-46af-b3f5-e476befd43ce&language=en
```

Response Body

The response body of this endpoint is the iFrame with editable expiration date and CVV fields prepopulated with values looked up based on the creditCardInfold id path parameter.

MM/YY	CVV
-------	-----

Validate Credit Card Info

This endpoint is typically called immediately after the [Store Credit Card Info](#) endpoint to validate credit card information. The mode query parameter determines which credit card values to validate. It is a synchronous endpoint.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/creditcards/submit/{id}/isValid{?mode}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	creditCardInfoId in UUID format generated by the client	String	Required
mode	Query	flag indicating which credit card fields to validate. default is 1 1 = credit card number, expiration month and year, cvv 2 = credit card number, expiration month and year 3 = cvv 4 = expiration month and year, cvv	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json	Required

Name	Description	Required?
	is only value allowed	
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

Sample *Validate Credit Card Info* URI:

```
https://paymentcc.nike.com/creditcardssubmit/24afd5dc-
b523-491c-8282-8bed57cd2029/isValid?mode=3
```

Response Body

Each field in the response body is flagged either true or false. True indicates the value is valid; false indicates invalid. The fields returned in the body are:

Element Name	Type	Description	Required?
exp	boolean	True indicates expiration month and year are valid, false if not	Optional
cc	boolean	True indicates credit card number is valid, false if not	Optional
cvv	boolean	True indicates CVV is valid, false if not	Optional
isValid	boolean	True indicates credit card is valid,	Optional

Element Name	Type	Description	Required?
		false if not	

Sample *Validate Credit Card Info* response body for mode=1:

```
{
  "exp": true,
  "cc": true,
  "cvv": true,
  "isValid": true
}
```

Sample *Validate Credit Card Info* response body for mode=2:

```
{
  "exp": true,
  "cc": true,
  "isValid": true
}
```

Sample *Validate Credit Card Info* response body for mode=3:

```
{
  "cvv": true,
  "isValid": true
}
```

Sample *Validate Credit Card Info* response body for mode=4:

```
{
  "exp": true,
  "cvv": true,
  "isValid": true
}
```

Store Credit Card Info

This endpoint temporarily stores credit card information for validation and purchase.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
POST	/creditcardsubmit/{id}/store	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	creditCardInfoId in UUID format generated by the client	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in	Required

Name	Description	Required?
	response, application/json is only value allowed	
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

Request Body

Element Name	Type	Description	Required?
paymentInfolId	string	Id under which data is stored	Optional
accountNumber	string	Masked credit card number	Optional
cardType	string	Type of credit card e.g. VISA, defaults to UNKNOWN	Optional
cvNumber	string	Masked cvv number	Optional
startMonth	string	Credit card start month	Optional
startYear	string	Credit card start year	Optional
expirationMonth	string	Month credit card expires	Optional
expirationYear	string	Year credit card	Optional

Element Name	Type	Description	Required?
		expires	
creditCardInfoId	string	UUID by which credit card data is stored. This is generated by the client when storing a new credit card.	Optional
paymentType	string	Credit card type (market) for Apple Pay only	Optional
paymentData	string	Encrypted payment data, for Apple Pay only	Optional

Sample *Credit Card Submit Store* Request headers and body:

<https://paymentcc.nike.com/services/creditcardssubmit/0e13e71d-e952-46af-b3f5-e476befd43ce/store>

```
{
  accountNumber:"4111111111111111",
  cardType:"VISA",
  creditCardInfoId:"bb3360c5-82c3-4d00-b806-a8bf3876f5ae",
  cvNumber:"123",
  expirationMonth:"12",
  expirationYear:"2020"
}
```

Response Body

This endpoint returns no response body.

List Credit Card Info

This endpoint updates and retrieves masked credit card information for a creditCardInfo.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/creditcardsubmit/{id}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	creditCardInfoId in UUID format generated by the client	String	Required

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

Sample request URI: <https://paymentcc.nike.com/creditcardsubmit/bb3360c5-82c3-4d00-b806-a8bf3875555>

Response Body

Element Name	Type	Description	Required?
paymentInfold	string	Id under which payment is stored, typically same as creditCardInfold	Optional
paymentInfoType	string	Type of payment, CreditCard or ApplePay	Optional
accountNumber	string	Masked credit card number	Optional
cardType	string	Type of credit card, required when not paying by Apple Pay	Optional
cvNumber	string	Masked credit card CVV number	Optional
startMonth	string	Month that credit card begins	Optional
startYear	string	Year that credit card begins	Optional
expirationMonth	string	Month that credit card expires	Optional
expirationYear	string	Year that credit card expires	Optional
creditCardInfold	string	creditCardInfold used to call the	Optional

Element Name	Type	Description	Required?
		Store Credit Card Info endpoint to temporarily store the customer's credit card information	
paymentType	string	Credit card type stored in Apple Pay, required when paying by Apple Pay	Optional

Sample *List Credit Card Info* credit card response body:

```
{
  "paymentInfoId": "CCTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentInfoType": "CreditCard",
  "accountNumber": "41XXXXXXXXXX1111",
  "cardType": "Visa",
  "cvNumber": "XXX",
  "issueNumber": null,
  "startMonth": null,
  "startYear": null,
  "expirationMonth": "2",
  "expirationYear": "2017",
  "subscriptionId": null,
  "creditCardInfoId": "CCTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentType": null
}
```

Sample *List Credit Card Info* Apple Pay response body:

```
{
  "paymentInfoId": "APPLEPAYTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentInfoType": "ApplePay",
  "accountNumber": "XXXXXXXXXXXX1111",
  "creditCardInfoId": "CCTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentType": "visa"
}
```

List Credit Card Info and Validate Status

This endpoint retrieves masked credit card information and validation status of individual credit card fields for a creditCardInfoId.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
GET	/creditcards/submit/{id}/isValidData{?mode}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	creditCardInfoId in UUID format generated by the client	String	Required
mode	Query	flag indicating	String	Optional

Parameter	Type	Description	Data Type	Required?
		which credit card fields to validate. default is 1 1 = credit card number, expiration month and year, cvv 2 = credit card number, expiration month and year 3 = cvv 4 = expiration month and year, cvv		

Request URI

Sample request URI: <https://paymentcc.nike.com/creditcardsubmit/bb3360c5-82c3-4d00-b806-a8bf3875555/isValidData?mode=3>

Response Body

Element Name	Type	Description	Required?
paymentInfold	string	Id payment is stored under, typically same as `creditCardInfold**`	Optional
accountNumber	string	Masked credit card	Optional

Element Name	Type	Description	Required?
		number	
cardType	string	Type of credit card, required when not paying by Apple Pay	Optional
cvNumber	string	Masked credit card CVV number	Optional
startMonth	string	Month credit card begins	Optional
startYear	string	Year credit card begins	Optional
expirationMonth	string	Month credit card expires	Optional
expirationYear	string	Year credit card expires	Optional
creditCardInfolId	string	Id used to call the Store credit card Info endpoint to temporarily store the customer's credit card information	Optional
paymentType	string	Credit card type stored in Apple Pay, required when paying by Apple Pay	Optional
cc	boolean	Indicates if credit card number is	Optional

Element Name	Type	Description	Required?
		valid or not, one of true or false	
cvv	boolean	Indicates if CVV is valid or not, one of true or false	Optional
isValid	boolean	Indicates payment method as a whole is valid or not, one of true or false	Optional

Sample *List Credit Card Info and Validate Status* credit card response body:

```
{
  "paymentInfoId": "CCTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentInfoType": "CreditCard",
  "accountNumber": "41XXXXXXXXXX1111",
  "cardType": "Visa",
  "cvNumber": "XXX",
  "issueNumber": null,
  "startMonth": null,
  "startYear": null,
  "expirationMonth": "02",
  "expirationYear": "2017",
  "subscriptionId": null,
  "creditCardInfoId" | "CCTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentType": null,
  "exp": true,
  "cc": true,
  "cvv": true,
```



```
"isValid": true
}
```

Sample *List Credit Card Info and Validate Status* Apple Pay response body:

```
{
  "paymentInfoId": "APPLEPAYTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentInfoType": "ApplePay",
  "accountNumber": "XXXXXXXXXXXX1111",
  "creditCardInfoId": "CCTESTINFOID-ABCDEFGH-IJKLMNOP",
  "paymentType": "visa"
}
```

Error Code	Description
INTERNAL_ERROR	Returned when there was an unspecified error processing the request
UNABLE_TO_SAVE_CCINFO	Returned when the credit card was not saved successfully
NOT_FOUND	Returned when there is no credit card with credit card info id passed in the request
CARD_NUMBER_HAS_INVALID_CHARS	Returned when the credit card number in the request has invalid characters
CARD_NUMBER_DOESNT_MATCH_TYPE	Returned when the credit card number does not match the credit card type
CARD_LENGTH_NOT_VALID	Returned when the credit card number length is invalid
CARD_NUMBER_NOT_VALID	Returned when the credit card number is not valid

Error Code	Description
CARD_EXPIRED	Returned when the credit card number has expired
CVV_NUMBER_HAS_INVALID_CHARS	Returned when the credit card CVV has invalid characters
CVV_NUMBER_LENGTH_INVALID	Returned when the credit card CVV length is invalid
CARD_EXPIRY_HAS_INVALID_MONTH	Returned when the credit card expiration month is invalid
CARD_EXPIRY_HAS_INVALID_YEAR	Returned when the credit card expiration year is invalid
PAYMENT_DATA_NOT_VALID	Returned when the ApplePay payment data length is invalid

Using Apple Pay

- [Start Apple Pay Session](#)

Apple Pay Overview

When paying with Apple Pay on a Safari Web browser, this service initializes an Apple Pay payment session through the Apple gateway. When you pass in a validationURL to the *Start Apple Pay Session* endpoint, the service provides the necessary information to Apple Pay to identify Nike as a merchant that accepts Apple Pay payments, and starts a new Apple Pay session.

For example, the SNKR's Web experience calls this endpoint after calling Apple Pay's Javascript library to verify that the Apple Pay button can be displayed as a payment type. SNKR's Web sends the encrypted response data from this endpoint to Apple. Apple in turn notifies the customer on their iPhone, iWatch or iPad to verify their purchase on that device. Once the customer verifies the payment on the device, the purchase process flow continues

very similarly to the credit card flow.

Prerequisites for the customer who wishes to pay by ApplePay on a Safari Web Browser assumes the customer has:

access to a Mac and either an iPhone, iWatch, or iPad

installed latest macOS Sierra on Mac

installed iOS 10 on iPhone, iWatch, or iPad

set up Apple Pay on iPhone, iWatch, or iPad

logged into the same iCloud account on their Mac as on their iPhone, iWatch, or iPad

The customer must complete this checklist in order for the Pay with Apple Pay button to display on SNKR's Web in Safari.

Start Apple Pay Session

Use this endpoint to initiate an ApplePay session.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/payment/ applepay_sessions/v2	no

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required

Name	Description	Required?
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
validationURL	string	URL to call to validate you as a merchant and initiate an Apple Pay payment session	Required

TIP: See the Apple Pay Developer's site for the list of supported domain names for Apple Test and Production environments for the [validationURL](#)

Sample *Start Apple Pay Session* request body:

```
{
```

```
"validationURL":"https://apple-pay-gateway-pr-pod1.apple.com/
paymentservices/startSession"
}
```

Response Body

The HTTP 200 response from *Start Apple Pay Session* contains the merchant session object with key/value pairs needed by Apple Pay to complete the customer's Apple Pay purchase. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
epochTimestamp	string	Timestamp of transaction	Optional
merchantSessionIdentifier	string	Apple Pay session identifier to be used in each Apple Pay transaction	Required
nonce	string	One-time-use only string	Optional
merchantIdentifier	string	Unique ID identifying to Apple that you can accept Apple Pay payments	Optional
domainName	string	Domain name associated with your Apple Pay Payment Processing Certificate	Required

Element Name	Type	Description	Required?
displayName	string	Name of the experience	Required
signature	string	Encrypted signature	Optional

Sample *Start Apple Pay Session* response body:

```
{
  "epochTimestamp":1502822443275,
  "merchantSessionIdentifier
": "BDC4DE12845D49C5B363AAAD4EC7E899_2101F68F6980DFE07DEF987B1CAF2
961766C119C8FDCBB33566B1A97F33C9C3",
  "nonce": "d08a43fc",

  "merchantIdentifier": "EDBF308EB4D295BD3BC54C16B0D4732AF96CEB76A847
498AD81C0674A35FAF37",
  "domainName": "www.nike.com",
  "displayName": "Nike Apple Pay Prod",

  "signature": "020101310f300d06096086480165030402010500308006092a864
886f70d0107010000a080308203e23"
}
```

Error Code	Description
MISSING_REQUIRED	returned when the request is missing a required field value
INVALID_FIELD	returned when the request contains an

Error Code	Description
	invalid field value
INVALID_JSON	returned when the request is not valid JSON

Using Payment Wallet

- [PayPal Express](#)
- [PayPal Express Job Status by ID](#)
- [PayPal Mark](#)
- [PayPal Mark Job Status by ID](#)
- [PayPal Details](#)
- [PayPal Details Job Status by ID](#)

Payment Wallet Overview

When paying with PayPal, this service initializes a PayPal session and generates a PayPal redirect URL and token. It also retrieves and validates PayPal meta data. There is an endpoint for PayPal Express and a separate endpoint for PayPal Mark flows. The PayPal Express flow allows the customer to choose a saved or add a new shipping and billing address at the PayPal site rather than in the Nike experience. The PayPal Mark flow allows the customer to choose an existing or add a new shipping address in the Nike experience and choose a saved or add a new billing address at the PayPal site.

This endpoint operates **asynchronously** which means that there are extra steps to retrieve the results of your request. Read the Asynchronous Operation section of the [Using NDe APIs](#) guide to learn more about working with asynchronous Nike APIs.

PayPal Express

This endpoint passes in Checkout information including totals, items, pricing and other information so a session can be initiated at PayPal. The service returns a paypalToken and

redirectURL in the response. When the customer is ready to Pay, the experience redirects to the PayPal redirectURL passing the paypalToken. PayPal uses the token to look up the session and permits the customer to pay. When the customer successfully pays or cancels the payment on the PayPal site, PayPal redirects the customer to either the returnUrl or cancelURL passed in the request body.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
PUT	/payment/ paypal_express/ v1{?fields}	no

Path & Query Parameters

Parameter	Description	Data Type	Required?
fields	comma-separated list of fields to return in response. If null, all fields are returned.	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required

Name	Description	Required?
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
request	array	Array of objects	Required
request.currency	string	ISO currency code of shopping in country. defaults to USD	Required
request.locale	string	Locale of shopping in country. defaults to en_US	Required
request.country	string	ISO2 shopping in country code. defaults to en_US	Required
request.returnURL	string	Nike URL to return to after customer successfully pays for an order at the	Required

Element Name	Type	Description	Required?
		PayPal site	
request. cancelURL	string	Nike URL to return to after customer successfully cancels an order at the PayPal site	Required
request. priceInfo	string	Object containing Checkout pricing information	Required
request.priceInfo. price	number	Net amount of Checkout minus applied discounts	Required
request.priceInfo. discount	number	Net amount of discounts applied	Optional
request.priceInfo. total	number	Checkout total amount before discount	Required
request.priceInfo. taxTotal	number	Total tax amount	Required
request. paymentInfo	array	Array of objects containing payment information	Optional
request.paymentInfo. id	string	UUID generated by client for this payment	Required
request.paymentInfo. type	string	Only value allowed is "GiftCard"	Required
request.paymentInfo. paymentId	string	paymentId from Stored Payments	Optional

Element Name	Type	Description	Required?
		service, required if this is a stored payment	
request.paymentInfo. accountNumber	string	Gift card number, required for GiftCard type	Optional
request.paymentInfo. giftCardPin	string	Gift card PIN number, required for GiftCard type	Optional
request. shippingInfo	object	Object of shipping information	Optional
request.shippingInfo. cost	object	Object of shipping cost information	Optional
request.shippingInfo. cost.price	number	Net shipping amount (double)	Required
request.shippingInfo. cost.discount	number	Discount on net shipping amount (double), such as a promotion	Optional
request.shippingInfo. cost.total	number	Total shipping amount (double)	Required
request.shippingInfo. cost.taxTotal	number	Total tax on net shipping amount (double)	Required
request. items	array	Array of Checkout items/services	Required
request.items. quantity	integer	Quantity of Checkout item	Required

Element Name	Type	Description	Required?
request.items. skuld	string	Stock keeping unit id of Checkout item, UUID format, from Merchandising service	Required
request.items. priceInfo	object	Object containing price information for this Checkout item	Required
request.items.priceInfo. price	number	Net price of Checkout item/ service minus applied discounts	Required
request.items.priceInfo. employeePrice	number	Net employee price of item/service	Optional
request.items.priceInfo. discount	number	Discount applied to net price of Checkout item/ service, such as a promotion	Optional
request.items.priceInfo. total	number	Total item/service price after discount is applied (price - discount)	Required
request.items.priceInfo. taxTotal	number	Total tax amount item/service	Required

Sample *PayPal Express* request body:

```
{
  "request": {
    "currency": "USD",
    "locale": "en_US",
    "country": "US",
    "returnURL": "http://www.nike.com/snkrs/thread/return/863e7283-abel-4a4b-bb55-200340b35044",
    "cancelURL": "http://www.nike.com/snkrs/thread/cancel/863e7283-abel-4a4b-bb55-200340b35044",
    "priceInfo": {
      "price": 208.1,
      "discount": 0.1,
      "total": 228.8,
      "taxTotal": 20.8
    },
  },
  "paymentInfo": [
    {
      "id": "15611769-e81b-45dd-b28c-ca0effb272de88",
      "type": "GiftCard",
      "paymentId": "15611769-e81b-45dd-b28c-ca0effb272de212"
    }
  ],
  "items": [
    {
      "quantity": 1,
      "skuId": "15611769-e81b-45dd-b28c-ca0effb272de",
      "priceInfo": {
        "price": 200.1,
        "discount": 0.1,
        "total": 200,
```

```
        "taxTotal": 20.1
    }
}
]
}
}
```

Response Body

The HTTP 202 response from *PayPal Express* contains information about how to retrieve the results of your job via the *PayPal Express Job by ID* endpoint. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint used to look up the job status	Required
status	string	Status of the job. one of "PENDING", "IN_PROGRESS", "COMPLETED"	Required
eta	integer	If status is not COMPLETED, estimated wait time in milliseconds before polling the jobs endpoint to get results	Optional
links	string	Relative URL path	Optional

Element Name	Type	Description	Required?
		to poll the jobs endpoint (see nested <code>ref</code> field)	
resourceType	string	Resource type, always payment/ paypal_express/ jobs	Required
links.self.ref	string	Relative link to job	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error.httpStatus	integer	Status code present when service returns in error	Optional
error.message	string	Top level error message present when service returns in error	Optional
error.code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error.id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional

Element Name	Type	Description	Required?
error.errors. field	string	JSON field name causing error	Required
error.errors. code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors. message	string	Error message	Required
response	object	If status is COMPLETED, response object is present	Optional
response. resourceType	string	Resource type, always payment/paypal_express	Required
response. paypalToken	string	PayPal express token	Required
response. redirectURL	string	PayPal redirect URL customer follows to pay	Required

Sample *PayPal Express* response body:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",
  "status": "PENDING",
```



```
{
  "eta": 2000,
  "resourceType": "payment/paypal_express/jobs",
  "links": {
    "self": {
      "ref": "/payment/paypal_express/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe78"
    }
  }
}
```

PayPal Express Job by ID

Use this endpoint to check the status of the *PayPal Express* job. After receiving a HTTP 202 from the *PayPal Express* call and waiting the duration of the eta time, call this endpoint using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status.

To know if the job is done, check the value of the status field in the response body as follows:

- “status”: “PENDING”: job processing has not started
- “status”: “IN_PROGRESS”: job processing in progress
- “status”: “COMPLETED”: job has completed

Once you receive a job status of “COMPLETED”, get the results of your job by parsing the data in the response object from this endpoint.

TIP: Parsing the “COMPLETED” job result directly is a best practice because it eliminates making another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/payment/ paypal_express/v1/ jobs/{id}{?fields}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	creditCardInfoId in UUID format generated by the client	String	Required
fields	Query	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned		Optional

Request Headers

Header Name	Description	Required?
Accept	Content type accepted in	Required

Header Name	Description	Required?
	response, application/json is only value allowed	
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ Get the `{id}` path parameter from the `id` job UUID in the PayPal Express response.

Sample *PayPal Express Job by ID* request URI

```
https://api.nike.com/payment/paypal_express/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe783424
```

Response Body

The HTTP 200 response from *PayPal Express* contains information about how to retrieve the results of your job via the 'PayPal Express Job' endpoint. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
id	string	Job UUID same as the one returned from <i>PayPal Express</i> endpoint	Required
resourceType	string	Enum, always payment/ paypal_express/ jobs	Required
status	string	Enum one of “PENDING”, “IN_PROGRESS”, “COMPLETED”	Required
eta	integer	Present when status is not “COMPLETED,” caller should wait this time in ms before polling the job	Optional
links.self. ref	string	Relative link to job	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error. httpStatus	integer	Status code present when service returns in error	Optional

Element Name	Type	Description	Required?
error.message	string	Top level error message present when service returns in error	Optional
error.code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error.id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional
error.errors.field	string	JSON field name causing error	Required
error.errors.code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors.message	string	Error message	Required
response	object	Present when status is "COMPLETED" and gives detailed job results	Optional
response.resource Type	string	Enum always payment/	Required

Element Name	Type	Description	Required?
		paypal_express	
response. paypalToken	string	PayPal-generated token	Required
response. redirectURL	string	Redirect URL to the PayPal site	Required

Sample *PayPal Express Job by ID* response body:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe783424",
  "resourceType": "payment/paypal_express/jobs",
  "status": "COMPLETED",
  "links": {
    "self": {
      "ref": "/payment/paypal_express/v1/jobs/2722be3a-0341-11e6-b512-3e1d05defe783424"
    }
  },
  "response": {
    "resourceType": "payment/paypal_express",
    "paypalToken": "EC-7U206006SF029170Y",
    "redirectURL": "https://www.sandbox.paypal.com/cgi-bin/webscr?cmd=_express-checkout&token=EC-7U206006SF029170Y"
  }
}
```

PayPal Mark

Similar to the [PayPal Express](#) endpoint, the PayPal Mark endpoint passes in Checkout

information including totals, items, pricing, shipping address and other information so a Mark session can be initiated at PayPal. The service returns a paypalToken and redirectURL in the response. When the customer is ready to Pay, the experience redirects to the PayPal redirectURL passing the paypalToken. PayPal uses the token to look up the session and permits the customer to pay. When the customer successfully pays or cancels the payment on the PayPal site, PayPal redirects the customer to either the returnUrl or cancelURL passed in the request body.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
POST	/payment/ paypal_mark/ v1{?fields}	no

Path & Query Parameters

Name	Description	Required?
fields	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required

Name	Description	Required?
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
request	array	Array of objects	Required
request.currency	string	ISO currency code of shopping in country. defaults to USD	Required
request.locale	string	Locale of shopping in country. defaults to en_US	Required
request.country	string	ISO code of shopping in country. defaults to en_US	Required

Element Name	Type	Description	Required?
request. returnURL	string	Nike URL to return to after customer successfully pays for an order at the PayPal site	Required
request. cancelURL	string	Nike URL to return to after customer successfully cancels an order at the PayPal site	Required
request. priceInfo	object	Object containing Checkout pricing information	Required
request.priceInfo. price	number	Net amount of Checkout minus applied discounts	Required
request.priceInfo. discount	number	Net amount of discounts applied	Optional
request.priceInfo. total	number	Checkout total amount before discount	Required
request.priceInfo. taxTotal	number	Total tax amount	Required
request. paymentInfo	array	Array of objects containing payment information	Optional
request.paymentInfo. id	string	UUID generated by client for this payment	Required

Element Name	Type	Description	Required?
request.paymentInfo.type	string	GiftCard	Required
request.paymentInfo.paymentId	string	paymentId from Stored Payments service, required if this is a stored payment	Optional
request.paymentInfo.accountNumber	string	Gift card number, required for GiftCard type	Optional
request.paymentInfo.giftCardPin	string	Gift card PIN number, required for GiftCard type	Optional
request.shippingInfo	object	Object containing recipient, address, contactInfo and cost objects	Required
request.shippingInfo.recipient	object	Object containing customer shipping contact information	Required
request.shippingInfo.recipient.firstName	string	Billing first name	Required
request.shippingInfo.recipient.altFirstName	string	Billing alternate first name	Optional
request.shippingInfo.recipient.lastName	string	Billing last name	Required

Element Name	Type	Description	Required?
request.shippingInf o.recipient. altLast Name	string	Billing alternate last name	Optional
request.shippingInf o.recipient. middle Name	string	Billing middle name	Optional
request.shippingInf o. address	object	Object containing customer shipping address information	Required
request.shippingInf o.address. address 1	string	Billing address line 1	Required
request.shippingInf o.address. address 2	string	Billing address line 2	Optional
request.shippingInf o.address. address 3	string	Billing address line 3	Optional
request.shippingInf o.address. city	string	Billing address city	Required
request.shippingInf o.address. state	string	Billing address state	Optional
request.shippingInf o.address. postalC ode	string	Billing address postalCode	Optional
request.shippingInf o.address. country	string	Billing address country	Required
request.shippingInf o. contactInfo	object	Object containing customer email	Required

Element Name	Type	Description	Required?
		address and phone number	
request.shippingInfo.address.contactInfo. phoneNumber	string	Customer's billing phone number	Required
request.shippingInfo.address.contactInfo. email	string	Customer's email address	Required
request.shippingInfo.address. cost	object	Shipping cost information	Required
request.shippingInfo.address.cost. price	number	Net shipping amount	Required
request.shippingInfo.address.cost. discount	number	Discount on net shipping amount	Optional
request.shippingInfo.address.cost. total	number	Total shipping amount	Required
request.shippingInfo.address.cost. taxTotal	number	Tax total on net shipping amount	Required
request. items	array	Array of objects containing Checkout items	Required
request.items. quantity	integer	Quantity of Checkout item	Required
request.items. skuid	string	Stock keeping unit id of Checkout	Required

Element Name	Type	Description	Required?
		item, UUID format, from Merchandising service	
request.items. priceInfo	object	Object containing price information for this Checkout item	Required
request.items.priceInfo. price	number	Net price of Checkout item (double)	Required
request.items.priceInfo. employeePrice	number	Net employee price of item/service (double)	Required
request.items.priceInfo. discount	number	Discount applied to net price	Optional
request.items.priceInfo. total	number	Total price for item/service (price-discount)	Required
request.items.priceInfo. taxTotal	number	Total tax amount for item/service	Required

Sample *PayPal Mark* request body:

```
{
  "request": {
    "currency": "USD",
    "locale": "en_US",
    "country": "US",
```

```
"returnURL": "http://www.nike.com/snkrs/thread/return/
863e7283-abel-4a4b-bb55-200340b35044",
"cancelURL": "http://www.nike.com/snkrs/thread/cancel/
863e7283-abel-4a4b-bb55-200340b35044",
"priceInfo": {
  "price": 208.1,
  "discount": 0.1,
  "total": 228.9,
  "taxTotal": 20.9
},
"paymentInfo": [
  {
    "id": "15611769-e81b-45dd-b28c-ca0effb272de88",
    "type": "GiftCard",
    "paymentId": "15611769-e81b-45dd-b28c-ca0effb272de212"
  }
],
"shippingInfo": {
  "recipient": {
    "firstName": "William",
    "altFirstName": "",
    "lastName": "Bowerman",
    "altLastName": "",
    "middleName": ""
  },
  "address": {
    "address1": "1 Bowerman Dr",
    "address2": "RG-2092",
    "address3": "#123",
    "city": "Beaverton",
```

```
    "state": "OR",
    "postalCode": "97005",
    "country": "US"
  },
  "contactInfo": {
    "phoneNumber": "503-555-1234",
    "email": "email@nike.com"
  },
  "cost": {
    "price": 8.1,
    "discount": 0.1,
    "total": 8,
    "taxTotal": 0.8
  }
},
"items": [
  {
    "quantity": 1,
    "skuId": "15611769-e81b-45dd-b28c-ca0effb272de",
    "priceInfo": {
      "price": 200.1,
      "discount": 0.1,
      "total": 200,
      "taxTotal": 20.1
    }
  }
]
}
```

Response Body

The HTTP 202 response from *PayPal Mark* contains information about how to retrieve the results of your job via the *PayPal Express Job by ID* endpoint. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint used to look up the job status	Required
status	string	Status of the job. one of "PENDING", "IN_PROGRESS", "COMPLETED"	Required
eta	integer	If status is not COMPLETED, estimated wait time in milliseconds before polling the jobs endpoint to get results	Optional
links	string	Relative URL path to poll the jobs endpoint (see nested <code>ref</code> field)	Optional
resourceType	string	Resource type, always payment/ paypal_express/ jobs	Required
links.self.ref	string	Relative link to job	Required

Element Name	Type	Description	Required?
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error.httpStatus	integer	Status code present when service returns in error	Optional
error.message	string	Top level error message present when service returns in error	Optional
error.code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error.id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional
error.errors.field	string	JSON field name causing error	Required
error.errors.code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYME	Required

Element Name	Type	Description	Required?
		NT_TYPE"	
error.errors. message	string	Error message	Required
response	object	If status is COMPLETED, response object is present	Optional
response. resourceType	string	Resource type, always payment/paypal_express	Required
response. paypalToken	string	PayPal express token	Required
response. redirectURL	string	PayPal redirect URL customer follows to pay	Required

Sample *PayPal Mark* response body in "PENDING" status:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",
  "status": "PENDING",
  "eta": 2000,
  "resourceType": "payment/paypal_mark/jobs",
  "links": {
    "self": {
      "ref": "/payment/paypal_mark/v1/jobs/2722be3a-0341-11e6-b512-3e1d05defe78"
    }
  }
}
```

```
}
```

PayPal Mark Job by ID

Use this endpoint to check the status of the *PayPal Mark* job. After receiving a HTTP 202 from the *PayPal Mark* call and waiting the duration of the eta time, call this endpoint using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status.

Endpoint Details

To know if the job is done, check the value of the status field in the response body as follows:

- “status”: “PENDING”: job processing has not started
- “status”: “IN_PROGRESS”: job processing in progress
- “status”: “COMPLETED”: job has completed

Once you receive a job status of “COMPLETED”, get the results of your job by parsing the data in the response object from this endpoint.

TIP: Parsing the “COMPLETED” job result directly is a best practice because it eliminates making another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/payment/ paypal_mark/v1/	no

HTTP Method	URI Path	JWT Restricted
	jobs/{id}{?fields}	

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	creditCardInfoId in UUID format generated by the client	String	Required
fields	Query	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned		Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the	Required

Name	Description	Required?
	request, application/json is only value allowed	
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ Get the `{id}` path parameter from the `id` job UUID in the PayPal Mark response.

Sample PayPal Mark Job by ID request URI:

```
https://api.nike.com/payment/paypal_mark/v1/jobs/2722be3a-0341-11e6-b512-3e1d05defe78
```

Response Body

The HTTP 200 response from *PayPal Mark* contains information about how to retrieve the results of your job via the *PayPal Mark Job by ID* endpoint. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
id	string	UUID job ID	Required

Element Name	Type	Description	Required?
		generated by the endpoint used to look up the job status	
status	string	Status of the job. one of "PENDING", "IN_PROGRESS", "COMPLETED"	Required
eta	integer	If status is not COMPLETED, estimated wait time in milliseconds before polling the jobs endpoint to get results	Optional
links	string	Relative URL path to poll the jobs endpoint (see nested <code>ref</code> field)	Optional
resourceType	string	Resource type, always payment/ paypal_express/ jobs	Required
links.self.ref	string	Relative link to job	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional

Element Name	Type	Description	Required?
error. httpStatus	integer	Status code present when service returns in error	Optional
error. message	string	Top level error message present when service returns in error	Optional
error. code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error. id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional
error.errors. field	string	JSON field name causing error	Required
error.errors. code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors. message	string	Error message	Required
response	object	If status is COMPLETED, response object is	Optional

Element Name	Type	Description	Required?
		present	
response. resourceType	string	Resource type, always payment/paypal_express	Required
response. paypalToken	string	PayPal express token	Required
response. redirectURL	string	PayPal redirect URL customer follows to pay	Required

Sample *PayPal Mark Job by ID* response body:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",
  "resourceType": "payment/paypal_mark/jobs",
  "status": "COMPLETED",
  "links": {
    "self": {
      "ref": "/payment/paypal_mark/v1/jobs/2722be3a-0341-11e6-b512-3e1d05defe78"
    }
  },
  "response": {
    "resourceType": "payment/paypal_mark",
    "paypalToken": "EC-7U206006SF029170Y",
    "redirectURL": "https://www.sandbox.paypal.com/cgi-bin/webscr?cmd=_express-checkout&token=EC-7U206006SF029170Y"
  }
}
```


PayPal Details

This endpoint retrieves and validates PayPal data, including shipping and billing information and the PayPal token. Call this endpoint after calling either the *PayPal Mark* or *PayPal Express* endpoint.

Endpoint Details

HTTP Method	URI Path	JWT Restricted?
POST	/payment/ paypal_details/ v1{?fields}	no

Request Parameters

Parameter	Type	Description	Data Type	Required?
fields	Query	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned		Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
request	object	Request object	Required
request.paypalToken	string	PayPal-assigned token returned from either the <i>PayPal Mark</i> or <i>PayPal Express</i> endpoints	Required
request.shoppingC	string	Shopping country.	Required

Element Name	Type	Description	Required?
country		Defaults to en_US	

Sample *PayPal Details* request body:

```
{
  "request": {
    "paypalToken": "EC-7U206006SF029170Y",
    "shoppingCountry": "US"
  }
}
```

Response Body

The HTTP 202 response from *PayPal Details* contains information about how to retrieve the results of your job via the *PayPal Details Job by ID* endpoint. Following are descriptions of the important fields in the response body:

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint used to look up the job status	Required
status	string	Status of the job. one of "PENDING", "IN_PROGRESS", "COMPLETED"	Required
eta	integer	If status is not COMPLETED, estimated wait time	Optional

Element Name	Type	Description	Required?
		in milliseconds before polling the jobs endpoint to get results	
resourceType	string	Resource type, always payment/ paypal_details	Required
links.self. ref	string	Relative link to job to poll the jobs endpoint	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error. httpStatus	integer	Status code present when service returns in error	Optional
error. message	string	Top level error message present when service returns in error	Optional
error. code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error. id	string	Error id	Optional
errors	array	Array of error objects present	Optional

Element Name	Type	Description	Required?
		when service returns in error	
error.errors. field	string	JSON field name causing error	Required
error.errors. code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors. message	string	Error message	Required
response	object	If status is COMPLETED, response object is present	Optional
response. resourceType	string	Resource type, always payment/paypal_details	Required
response. paypalToken	string	PayPal express token	Required
response. shippingInfo	string	Object containing recipient ,address,contactInfo objects	Required
response.shippingInfo. recipient	object	Object containing customer shipping contact information	Required

Element Name	Type	Description	Required?
response.shippingInfo.recipient. firstName	string	Billing first name	Required
response.shippingInfo.recipient. altFirstName	string	Billing alternate first name	Optional
response.shippingInfo.recipient. lastName	string	Billing last name	Required
response.shippingInfo.recipient. altLastName	string	Billing alternate last name	Optional
response.shippingInfo.recipient. middleName	string	Billing middle name	Optional
response.shippingInfo. address	object	Object containing customer shipping address information	Required
response.shippingInfo.address. addresses1	string	Billing address line 1	Required
response.shippingInfo.address. addresses2	string	Billing address line 2	Optional
response.shippingInfo.address. addresses3	string	Billing address line 3	Optional
response.shippingInfo.address. city	string	Billing address city	Required

Element Name	Type	Description	Required?
response.shippingInfo.address. state	string	Billing address state	Optional
response.shippingInfo.address. postalCode	string	Billing address postalCode	Optional
response.shippingInfo.address. country	string	Billing address country	Required
response.shippingInfo. contactInfo	object	Object containing customer email address and phone number	Required
response.shippingInfo.contactInfo. phoneNumber	string	Customer's billing phone number	Required
response.shippingInfo.contactInfo. email	string	Customer's email address	Required
response. billingInfo	object	Object containing name, address, and contactInfo objects	Required
response.billingInfo. name	object	Object containing customer's name information	Required
response.billingInfo.name. firstName	string	Shipping address first name	Required
response.billingInfo.name. altFirstName	string	Shipping address alternate first name	Optional

Element Name	Type	Description	Required?
response.billingInfo .name. lastName	string	Shipping address last name	Required
response.billingInfo .name. altLastName e	string	Shipping address alternate last name	Optional
response.billingInfo .name. middleName e	string	Shipping address middle name	Optional
response.billingInfo .address	object	Object containing customer's address information	Required
response.billingInfo .address. address1	string	Shipping address line 1	Required
response.billingInfo .address. address2	string	Shipping address line 2	Optional
response.billingInfo .address. address3	string	Shipping address line 3	Optional
response.billingInfo .address. city	string	Shipping address city	Required
response.billingInfo .address. state	string	Shipping address state	Optional
response.billingInfo .address. postalCode de	string	Shipping address postalCode	Optional
response.billingInfo .address. country	string	Shipping address country	Required
response.billingInfo .contactInfo	object	Object containing customer's contact	Required

Element Name	Type	Description	Required?
		information	
response.billingInfo. contactInfo. phone Number	string	Shipping address contact info phone number	Required
response.billingInfo. contactInfo. email	string	Shipping address contact info email address	Required

Sample *PayPal Details* 202 response body in “PENDING” status:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",
  "status": "PENDING",
  "eta": 2000,
  "resourceType": "payment/paypal_details/jobs",
  "links": {
    "self": {
      "ref": "/payment/paypal_details/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe78"
    }
  }
}
```

Sample *PayPal Details* 400 response body:

```
{
  "message": "Validation Failed",
  "errors": [
    {
```

```

        "field": "/request/shoppingCountry",
        "code": "INVALID_FIELD",
        "message": "Invalid value."
    },
    {
        "field": "/request/paypalToken",
        "code": "MISSING_REQUIRED",
        "message": "Missing value."
    }
]
}

```

PayPal Details Job by ID

Use this endpoint to check the status of the *PayPal Details* job. After receiving a HTTP 202 from the *PayPal Details* call and waiting the duration of the eta time, call this endpoint using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status.

Endpoint Details

To know if the job is done, check the value of the status field in the response body as follows:

- “status”: “PENDING”: job processing has not started
- “status”: “IN_PROGRESS”: job processing in progress
- “status”: “COMPLETED”: job has completed

Once you receive a job status of “COMPLETED”, get the results of your job by parsing the data in the response object from this endpoint.

TIP: Parsing the “COMPLETED” job result directly is a best practice because it eliminates making another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/payment/ paypal_details/v1/ jobs/{id}{?fields}	no

Path & Query Parameters

Parameter	Type	Description	Data Type	Required?
id	Path	Job ID in UUID format generated by the client	String	Required
fields	Query	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ Get the `{id}` path parameter from the `id` job UUID in the *PayPal Details* response.

Sample PayPal Details Job by ID request URI

```
https://api.nike.com/payment/paypal_details/v1/jobs/  
2722be3a-0341-11e6-b512-3e1d05defe78
```

Response Body

The response body is the same as is returned in the *PayPal Details* response body. See the

detailed response field list in the [PayPal Details Response Body](#)

The HTTP 200 response from *PayPal Details* contains information about how to retrieve the results of your job via the 'PayPal Details Job' endpoint. Following are descriptions of the important fields in the response body:

Sample *PayPal Details Job by ID* 200 response body in "COMPLETED" status:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe783424",
  "resourceType": "payment/paypal_details/jobs",
  "status": "COMPLETED",
  "links": {
    "self": {
      "ref": "/payment/paypal_details/v1/jobs/2722be3a-0341-11e6-b512-3e1d05defe78432"
    }
  },
  "response": {
    "resourceType": "payment/paypal_details",
    "paypalToken": "EC-7U206006SF029170Y",
    "shippingInfo": {
      "recipient": {
        "firstName": "William",
        "altFirstName": "",
        "lastName": "Bowerman",
        "altLastName": "",
        "middleName": ""
      },
      "address": {
        "address1": "1 Bowerman Dr",
        "address2": "RG-2092",
        "address3": "#123",
```

```
    "city": "Beaverton",
    "state": "OR",
    "postalCode": "97005",
    "country": "US"
  },
  "contactInfo": {
    "phoneNumber": "503-555-1234",
    "email": "email@nike.com"
  }
},
"billingInfo": {
  "recipient": {
    "firstName": "William",
    "altFirstName": "",
    "lastName": "Bowerman",
    "altLastName": "",
    "middleName": ""
  },
  "address": {
    "address1": "1 Bowerman Dr",
    "address2": "RG-2092",
    "address3": "#123",
    "city": "Beaverton",
    "state": "OR",
    "postalCode": "97005",
    "country": "US"
  },
  "contactInfo": {
    "phoneNumber": "503-555-1234",
    "email": "email@nike.com"
```

```
}  
}  
}  
}
```

Error Code	Description
MISSING_REQUIRED	returned when the request is missing a required field value
INVALID_FIELD	returned when the request contains an invalid field value
INVALID_JSON	returned when the request is not valid JSON

Using Deferred Payment

- [Deferred Payment Form](#)
- [Deferred Payment Form Job](#)
- [Deferred Payment Status](#)
- [Deferred Payment Status Job](#)
- [Deferred Payment WeChat](#)
- [Deferred Payment WeChat Job](#)

Deferred Payment Overview

When paying for a Nike Checkout through a third-party vendor, this service generates the values needed to open and pay at a third-party website or app. This service is used for experiences that support the iDeal, Sofort and/or China payment types. The Payment API supported China payment types are Alipay, Tenpay, UnionPay and WeChat.

This endpoint operates **asynchronously** which means that there are extra steps to retrieve the results of your request. Read the Asynchronous Operation section of the [Using NDe APIs](#)

guide to learn more about working with asynchronous Nike APIs.

Deferred Payment Form

Use this endpoint to generate a signed link used to redirect the customer to pay at a third-party site or app. In the case of WeChat, see the [Deferred Payment WeChat](#) endpoint.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/payment/ deferred_payment_for ms/v1{?fields}	no

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the

Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
request	object	Object containing approvalId, orderNumber, returnUrl, experienceType	Required
approvalId	string	UUID approvalId returned by the Payment Approval service	Required
orderNumber	string	Checkout order number	Required
returnURL	string	URL to redirect to after successful payment is made at the third-party site	Required
experienceType	string	One of DESKTOP,MOBILE, APP	Required

Sample *Deferred Payment Form* request:

```
{  
  "request": {
```

```
    "approvalId": "2722be3a-0341-11e6-b512-3e1d05defe783424",
    "orderNumber": "CA0000001234",
    "returnURL": "https://www.nike.com/snkrs/thread/
dac5cabbf257a14c275289931f0f2121041df12b",
    "experienceType": "DESKTOP"
  }
}
```

Response Body

The HTTP 202 response from *Deferred Payment Form* contains information about how to retrieve the results of your job via the ‘Deferred Payment Form Job’ endpoint. Listed below are the response body fields.

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint used to look up the job status	Required
status	string	Status of the job. one of “PENDING”, “IN_PROGRESS”, “COMPLETED”	Required
eta	integer	If status is not COMPLETED, estimated wait time in milliseconds before polling the jobs endpoint to get results	Optional

Element Name	Type	Description	Required?
resourceType	string	Resource type, always payment/deferred_payment_forms	Required
links.self. ref	string	Relative link to job to poll the jobs endpoint	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error. httpStatus	integer	Status code present when service returns in error	Optional
error. message	string	Top level error message present when service returns in error	Optional
error. code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional
error. id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional
error.errors. field	string	JSON field name	Required

Element Name	Type	Description	Required?
		causing error	
error.errors.code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors.message	string	Error message	Required
response	object	If status is COMPLETED, response object is present	Optional
response.qrCodeURL	string	URL that generates a QR code that the customer can use to open the third party app or website	Optional
response.resourceType	string	Enum always payment/deferred_payment_forms	Required
response.form	object	Form object	Optional
response.form.action	string	Form action URL with query parameters, for GET form method	Required
response.form.method	string	Form HTTP	Required

Element Name	Type	Description	Required?
hod		method, one of GET, POST	
response.form.fields	array	Vendor-specific array of form fields when the method is POST	Optional
response.form.fields.name	string	Form field name	Optional
response.form.fields.value	string	Form field value	Optional

Sample *Deferred Payment Form* 202 response in “PENDING” status:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",
  "status": "PENDING",
  "eta": 300,
  "resourceType": "payment/deferred_payment_forms/jobs",
  "links": {
    "self": {
      "ref": "/payment/deferred_payment_forms/v1/jobs/2722be3a-0341-11e6-b512-3e1d05defe78"
    }
  }
}
```

Sample *Deferred Payment Form* 400 response:

```
{
```

```
"message": "Validation Failed",
"errors": [
  {
    "field": "/request/experienceType",
    "code": "INVALID_FIELD",
    "message": "Invalid value."
  },
  {
    "field": "/request/returnURL",
    "code": "MISSING_REQUIRED",
    "message": "Required field"
  }
]
}
```

Error Code	Description
MISSING_REQUIRED	returned when the request is missing a required field value
INVALID_FIELD	returned when the request contains an invalid field value
INVALID_JSON	returned when the request is not valid JSON

Deferred Payment Form Job Status by Id

Use this endpoint to check the status of the *Deferred Payment Form* job. After receiving a HTTP 202 from the *Deferred Payment Form* call and waiting the duration of the eta time, call *Deferred Payment Form Job Status by Id* using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status. In the case of WeChat, see the [Deferred Payment WeChat](#) endpoint.

To know if the job is done, check the value of the `status` field in the response body as follows:

- `"status": "PENDING"`: job processing has not started
- `"status": "IN_PROGRESS"`: job processing in progress
- `"status": "COMPLETED"`: job has completed

Once you receive a job status of `COMPLETED`, get the results of your job by parsing the data in the `response` object from this endpoint. Alternatively, follow the link to the *Deferred Payment Form Job* endpoint which is provided in the `links` object response body.

TIP: Parsing the ‘COMPLETED’ job result directly is a best practice because it eliminates making another service call.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
GET	/payment/deferred_payment_forms/v1/jobs/{id}?{fields}	no

Path & Query Parameters

Parameter	Description	Data Type	Required?
id	Unique identifier UUID for the job	String	Required
fields	comma-separated list of fields to return from the	String	Optional

Parameter	Description	Data Type	Required?
	response body for a job in the COMPLETED status. If null, all response fields are returned.		

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ Get the `{id}` path parameter from the `id` job UUID in the Deferred Payment Form response.

Sample *Deferred Payment Form Job* request URI:

```
https://api.nike.com/payment/deferred_payment_forms/v1/jobs/  
2722be3a-0341-11e6-b512-3e1d05defe78
```

Response Body

The HTTP 202 response from *Deferred Payment Form Job* contains information about how to retrieve the results of your job via the ‘Deferred Payment Form Job’ endpoint. The response body is the same as is returned in the [Deferred Payment Form](#) except that the resourceType is payment/deferred_payment_forms.

Deferred Payment Status

Use this endpoint to validate the Deferred Payment with the third-party Vendor.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/payment/ deferred_payment_status/v1{?fields}	no

Path & Query Parameters

Parameter	Description	Data Type	Required?
fields	comma-separated list of fields to return from the response body for a job in the COMPLETED	String	Optional

Parameter	Description	Data Type	Required?
	status. If null, all response fields are returned.		

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
request	object	Object containing	Required

Element Name	Type	Description	Required?
		approvalId, `VendorData**	
request. approvalId	string	UUID approvalId returned by the Payment Approval service	Required
request. vendorData	object	Object containing key/value pairs coming from the vendor redirect	Required
request.vendorData .parameters	object	Data returned from the payment vendor redirect	Required
request.vendorData .parameters. name	string	Request parameter name	Optional
request.vendorData .parameters. value	string	Request parameter value	Optional

Sample *Deferred Payment Status* request:

```
{
  "request": {
    "approvalId": "2722be3a-0341-11e6-b512-3e1d05defe783424",
    "vendorData": {
      "parameters": [
        {
          "name": "out_trade_no",
          "value": "A01234556"
        }
      ],
    }
  },
}
```

```
{
  {
    "name": "trade_no",
    "value": "T1234556"
  },
  {
    "name": "signature",
    "value": "83503850340kg045345-0934-590359-30535"
  }
]
}
}
```

Response Body

The HTTP 200 response from *Deferred Payment Status* contains information about how to retrieve the results of your job via the *Deferred Payment Status Job* endpoint. Listed below are the response body fields:

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint used to look up the job status	Required
status	string	Status of the job. one of "PENDING", "IN_PROGRESS", "COMPLETED"	Required
eta	integer	If status is not	Optional

Element Name	Type	Description	Required?
		COMPLETED, estimated wait time in milliseconds before polling the jobs endpoint to get results	
resourceType	string	Resource type, always payment/ deferred_payment_ status	Required
links.self.ref	string	Relative link to job to poll the jobs endpoint	Required
error	object	Error object containing details of the cause(s) of error, present when service returns in error	Optional
error.httpStatus	integer	Status code present when service returns in error	Optional
error.message	string	Top level error message present when service returns in error	Optional
error.code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional

Element Name	Type	Description	Required?
error.id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional
error.errors.field	string	JSON field name causing error	Required
error.errors.code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors.message	string	Error message	Required
response	object	If status is COMPLETED, response object is present	Optional
response.resource Type	string	Enum always payment/deferred_payment_status	Required
response.status	string	Payment status in third-party system, enum one of "UNKNOWN", "PAYMENT_SUCCESSFUL",	Required

Element Name	Type	Description	Required?
		"PAYMENT_PENDI NG", "PAYMENT_FAILE D", "PAYMENT_REFU NDED", "PAYMENT_REFU ND_FAILED", "PAYMENT_CANC ELLED"	
response. amount	number	Amount paid	Required

Sample *Deferred Payment Status* response in "PENDING" status:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",
  "status": "PENDING",
  "resourceType": "payment/deferred_payment_status",
  "eta": 300,
  "links": {
    "self": {
      "ref": "/payment/deferred_payment_status/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe78"
    }
  }
}
```

Error Code	Description
MISSING_REQUIRED	returned when the request is missing a required field value

Error Code	Description
INVALID_FIELD	returned when the request contains an invalid field value
INVALID_JSON	returned when the request is not valid JSON

Deferred Payment Status Job Status by Id

Use this endpoint to check the status of the *Deferred Payment Status* job. After receiving a HTTP 202 from the *Deferred Payment Status* call and waiting the duration of the eta time, call this endpoint using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status.

Endpoint Details

To know if the job is done, check the value of the status field in the response body as follows:

- “status”: “PENDING”: job processing has not started
- “status”: “IN_PROGRESS”: job processing in progress
- “status”: “COMPLETED”: job has completed

Once you receive a job status of “COMPLETED”, get the results of your job by parsing the data in the response object from this endpoint.

TIP: Parsing the “COMPLETED” job result directly is a best practice because it eliminates making another service call.

HTTP Method	URI Path	JWT Restricted
GET	/payment/	no

HTTP Method	URI Path	JWT Restricted
	deferred_payment_status/v1/jobs/{id}?{fields}	

Path & Query Parameters

Parameter	Description	Data Type	Required?
id	Unique identifier UUID for the job	String	Required
fields	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned.	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the	Required

Name	Description	Required?
	format of Bearer {token}	

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ Get the `{id}` path parameter from the `id` job UUID in the Deferred Payment Status response.

Sample Deferred Payment Status Job request URI:

```
https://api.nike.com/payment/deferred_payment_status/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe78
```

Response Body

The HTTP 200 response from *Deferred Payment Status Job* contains information about how to retrieve the results of your job via the 'Deferred Payment Status Job' endpoint. The fields in the response are the same as those returned from the [Deferred Payment Status](#) except the `resourceType` is `payment/deferred_payment_status/jobs`.

Sample Deferred Payment Status Job response in "IN_PROGRESS" status with header:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe783424",
  "status": "IN_PROGRESS",
```

```
"resourceType": "payment/deferred_payment_status/jobs",
"links": {
  "self": {
    "ref": "/payment/deferred_payment_status/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe783424"
  }
}
}
```

Sample *Deferred Payment Status Job* response in “COMPLETED” status:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe783424",
  "status": "COMPLETED",
  "resourceType": "payment/deferred_payment_status/jobs",
  "links": {
    "self": {
      "ref": "/payment/deferred_payment_status/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe783424"
    }
  },
  "response": {
    "resourceType": "payment/deferred_payment_status",
    "status": "PAYMENT_SUCCESSFUL",
    "amount": 7283.64
  }
}
```

Deferred Payment WeChat

Use this endpoint to generate the necessary values to initiate a session in the WeChat Pay Browser Phone App from the browser. See [JSAPI WeChat Browser](#) and [WeChat Documentation](#) for JavaScript implementation details. Note that this endpoint should be used for the Mobile Web or Desktop/WeChat flows only. The Mobile Web flow opens the WeChat Payment app directly when it is time to pay for the Nike Checkout; the Desktop flow generates a QR code when it is time to pay for the Nike Checkout that when followed, opens the WeChat Payment App on the customer's Mobile device.

Endpoint Details

HTTP Method	URI Path	JWT Restricted
POST	/payment/ deferred_wechat_paym ents/v1{?fields}	no

Path & Query Parameters

Parameter	Description	Data Type	Required?
fields	comma-separated list of fields to return from the response body for a job in the COMPLETED status. If null, all response fields are returned.	String	Optional

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIP: When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.

Request Body

Element Name	Type	Description	Required?
request	object	Request object	Required
request.approvalId	string	UUID approvalId returned by the Payment Approval service	Required
request.orderNumber	string	Checkout order number	Required

Element Name	Type	Description	Required?
request.code	string	Code returned by the Payment Approval service	Required

Sample *Deferred Payment WeChat* Request:

```
{
  "request": {
    "approvalId": "2722be3a-0341-11e6-b512-3e1d05defe783424",
    "orderNumber": "CA0000001234",
    "code": "041MaL7k2zfjRH0q6q7k29dJ7k2MaL75"
  }
}
```

Response Body

The HTTP 200 response from *Deferred Payment WeChat* contains information about how to retrieve the results of your job via the *Deferred Payment WeChat Job* endpoint. The response body fields are listed below.

Element Name	Type	Description	Required?
id	string	UUID job ID generated by the endpoint used to look up the job status	Required
status	string	Status of the job. one of "PENDING", "IN_PROGRESS", "COMPLETED"	Required

Element Name	Type	Description	Required?
eta	integer	If status is not COMPLETED, estimated wait time in milliseconds before polling the jobs endpoint to get results	Optional
resourceType	string	Resource type, always payment/deferred_wechat_payments	Required
links.self. ref	string	Relative link to job to poll the jobs endpoint	Required
error	object	Present when service throws 5xx error and cannot complete the request	Optional
error. httpStatus	integer	Status code present when service returns in error	Optional
error. message	string	Top level error message present when service returns in error	Optional
error. code	string	Enum of JOB_TIME or SYSTEM_ERROR	Optional

Element Name	Type	Description	Required?
error.id	string	Error id	Optional
errors	array	Array of error objects present when service returns in error	Optional
error.errors.field	string	JSON field name causing error	Required
error.errors.code	string	Enum of error codes, one of "MISSING_REQUIRED", "INVALID_FIELD", "INVALID_JSON", "INVALID_PAYMENT_TYPE"	Required
error.errors.message	string	Error message	Required
response	object	Response object	Optional
response.resourceType	string	Only "payment/deferred_wechat_payments" is allowed	Required
response.appld	string	Nike application id assigned by WeChat	Required
response.signType	string	Type of signature scheme used MD5	Required
response.paySign	string	Signature proving the request came from Nike	Required

Element Name	Type	Description	Required?
response. nonceStr	string	One-time-use only generated string	Required
response. package	string	WeChat-generated prepay id assigned to this transaction	Required
response. timestamp	string	Timestamp of transaction	Required

Sample *Deferred Payment WeChat* response in “PENDING” status:

```
{
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",
  "status": "PENDING",
  "resourceType": "payment/deferred_wechat_payments/jobs",
  "eta": 300,
  "links": {
    "self": {
      "ref": "/payment/deferred_wechat_payments/v1/jobs/2722be3a-0341-11e6-b512-3e1d05defe78"
    }
  }
}
```

Deferred WeChat Payment Job Status by Id

Use this endpoint to check the status of the *Deferred WeChat Payment* job. After receiving a HTTP 202 from the *Deferred WeChat Payment* call and waiting the duration of the eta time, call this endpoint using the same UUID to check the status of your job. If the status is not COMPLETED, continue the cycle of waiting the eta period and checking the job status.

Endpoint Details

To know if the job is done, check the value of the status field in the response body as follows:

- “status”: “PENDING”: job processing has not started
- “status”: “IN_PROGRESS”: job processing in progress
- “status”: “COMPLETED”: job has completed

Once you receive a job status of “COMPLETED”, get the results of your job by parsing the data in the response object from this endpoint.

TIP: Parsing the “COMPLETED” job result directly is a best practice because it eliminates making another service call.

HTTP Method	URI Path	JWT Restricted
GET	/payment/deferred_wechat_payments/v1/jobs/{id}?{fields}	no

Path & Query Parameters

Parameter	Description	Data Type	Required?
id	Unique identifier UUID for the job	String	Required
fields	comma-separated list of fields to return from the response body for	String	Optional

Parameter	Description	Data Type	Required?
	a job in the COMPLETED status. If null, all response fields are returned.		

Request Headers

Name	Description	Required?
Accept	Content type accepted in response, application/json is only value allowed	Required
Content-Type	Content type of the request, application/json is only value allowed	Required
Authorization	Your access token in the format of Bearer {token}	Required

TIPS:

- ✓ When calling this endpoint through the public router, the `upmid` (for logged in customers), `appId` and `usertype` headers are automatically added by the Nike Edge Router based on the access token in the Authorization header populated by Nike Unite.
- ✓ Get the `{id}` path parameter from the `id` job UUID in the Deferred Payment Form response.

Sample Deferred WeChat Payment Job request URI:

`https://api.nike.com/payment/deferred_wechat_payments/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe78`

Response Body

The HTTP 200 response from *Deferred WeChat Payment Job* contains information about how to retrieve the results of your job via the 'Deferred WeChat Payment Job' endpoint. The response body fields are the same as those returned in the [Deferred Payment WeChat](#) response except the resourceType is payment/deferred_wechat_payments/jobs.

Sample *Deferred Payment Form Job* response in "IN_PROGRESS" status:

```
{  
  "id": "2722be3a-0341-11e6-b512-3e1d05defe78",  
  "resourceType": "payment/deferred_payment_forms/jobs",  
  "status": "IN_PROGRESS",  
  "links": {  
    "self": {  
      "ref": "/payment/deferred_wechat_payments/v1/jobs/  
2722be3a-0341-11e6-b512-3e1d05defe78"  
    }  
  }  
}
```

Sample *Deferred WeChat Payment Job* response in "COMPLETED" status:

```
{  
  "id": "2722be3a-0341-11e6-b512-3e1d05defe783424",  
  "resourceType": "payment/deferred_wechat_payments/jobs",  
  "status": "COMPLETED",  
}
```

```
"links": {
  "self": {
    "ref": "/payment/deferred_wechat_payments/v1/jobs/
2722be3a-0341-11e6-b512-3e1d05defe783424"
  }
},
"response": {
  "resourceType": "payment/deferred_wechat_payments",
  "appId": "wx2421b1c4370ec43b",
  "signType": "MD5",
  "paySign": "70EA570631E4BB79628FBCA90534C63FF7FADD89",
  "nonceStr": "e61463f8efa94090b1f366cccfbbb444",
  "package": "prepay_id=u802345jgfgjsdfgsdg888",
  "timeStamp": " 1395712654"
}
}
```

Error Code	Description
MISSING_REQUIRED	returned when the request is missing a required field value
INVALID_JSON	returned when the request is not valid JSON

Upgrading to the latest version

All experiences are using the versions listed in the [API at a Glance](#) section above. There are no upgrade instructions at this time.

Best Practices

Polling

To avoid excessive job polling of asynchronous endpoints, wait the number of milliseconds returned in the job request eta before checking the job status.

Retry Conditions

For all Payment APIs, the general rule is that requests resulting in a HTTP 4XX response should not be retried without modification to the request data, but HTTP 5XX errors can be retried as is. For general information on Nike error retry practices, see [API Error Patterns](#) on Confluence.

The exception to the 4xx response rule is the 429 response, indicating that there are too many requests coming in for the service to handle. When a service returns a 429, the call should be retried a maximum of two times, using the value returned in the `Retry-After` header to determine when to make the follow-up call.

Troubleshooting

Listed below are some techniques to troubleshoot problems using the Payment API.

Query Splunk With a Trace ID

In order to abide by PCI-compliance rules, payment logging requires special Splunk access. As a result, you can not query Splunk by Trace ID as a trouble-shooting tool to track down why a payment request failed. If need help from the Payment Team, post your problem to the [#cic-payment](#) Slack channel with details such as:

- experience in which you encountered the error, iOS SNKRS app, nike.com web, Android SNKRS app, direct endpoint call etc.
- time request failed

- Trace ID
- request URI and body (if not GET request)
- error codes and error messages

Inspect Browser Activity in a Live Experience

Try using your browser's built-in tools for inspecting web service calls made from a live Nike experience such as [SNKRS Web](#). Or, set up Charles and your favorite device to proxy service calls made from the Nike SNKRS or Nike+ Apps. Sometimes seeing what other experiences are doing might address your question or concern.

TIP: While inspecting <http://www.nike.com/launch>, you can change your shopping country with the flag icon at the upper right of the homepage to test different locales. Place orders in different countries with different payment methods to view the Payment call flow with other CiC services. Orders can be cancelled via self-service within 30 minutes of submission, otherwise contact Nike Customer Service.

Glossary

Term	Definition
Authorization (of payment)	Temporary hold on funds in a customer's account for a future charge
Deferred Payment	Third-party bank through which a customer pays for their Nike order after it is placed

Term	Definition
PCI-DSS	Payment Card Industry Data Security Standard provides secure standards for handling credit card data. All Nike CiC payment services are PCI-DSS compliant.
Void (of payment)	reverses a successful Authorization

Supported Stored Payment Types

The Stored Payment Service supports storing these types of payment:

Payment Type Description	Value	Storage Limit
Alipay	AliPay	1
Apple Pay	ApplePay	1
Credit Card	CreditCard	4
Gift Card	GiftCard	10
PayPal	PayPal	1
Tenpay	TenPay	1
UnionPay	UnionPay	1
WeChat	WeChat	1

Payment Options by Country

See the [Global Payment Options](#) for a list of supported payment types by shipping and billing country.

Document Change Log

Summary	Date	Description
Initial draft	01/08/2018	Initial Draft
Layout changes	02/13/2018	Updated doc layout per new API Doc standard
Updated links	03/20/2018	Updated links to point to new dev portal
Updated external links	04/03/2018	Updated external links to open in new browser window
Updated API.md links	05/14/2018	Updated API.md links to point to new dev portal
Updated request/response tables	07/01/2018	Normalized formatting of request/response tables
Updated TOC	10/01/2018	Removed 'In this guide', replaced with sidebar TOC

Related Links

[NDe Docs Home](#)

[Get Started](#)