



ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

Table of Contents

- Introduction 2
- Get a List of Product Threads 5
- Get a Product Thread by ID 9
- Upgrading to the Latest Version 9
- API Quick Reference 26
- Best Practices 27
- Troubleshooting 28
- Terms of Service 30
- Contacting the Team 30
- Glossary 31
- Document Change Log 31
- Related Links 31

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

Last Updated: 01/18/2019

Use the **Product Feeds API** (<https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api>) to show relevant Nike product-related content, including details about the products with images, videos, and more.

TIP: Before using this guide, you should have completed **Using NDe APIs** (<https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html>) and **Product Feeds Overview** (<https://developer.niketech.com/nde-docs/doc/commerce/product/overview-product-feeds.html>).

Introduction


The **Product Feeds API** (<https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api>) provides product data and content in the form of Cards, Threads, and Feeds.

(https://developer.niketech.com/nde-docs/doc/commerce/product/nike_app_annotated.html)

What are Cards, Threads, and Feeds?

- **Cards** contain Nike product information or content such as notifications about upcoming Nike events.
- Related Cards are organized into **Threads** that tell a Nike story.
- Multiple Threads can be displayed in **Feeds**, customized for your users based on their chosen preferences in a Nike experience.

For more on Cards, Threads, and Feeds, see the [Product Feeds Confluence Space](https://confluence.nike.com/display/DEN/Product+And+Feeds+API) (<https://confluence.nike.com/display/DEN/Product+And+Feeds+API>).

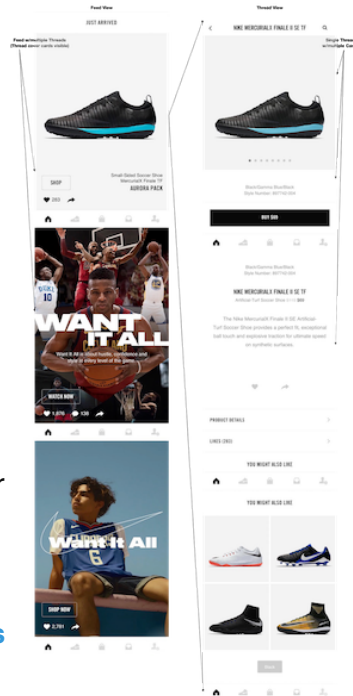

What Product Data and Content are Available?

The [Product Feeds API](https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api) (<https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api>) combines data from many Nike Cloud APIs. To understand the variety of data available, and the sources of data, use the following table:

Cloud API	Data Type	Examples	Data Source
Merchandised Product Information	Product attributes per style-color, country	styleCode, colorCode, status, genders, sportTags	Prodigy & Product Information Services
Merchandised Product Price	Pricing per style-color, country	msrp, currentPrice, discounted, currency	Prodigy & Product Information Services
Merchandised Product SKU	SKU-related attributes per style-color-size, country	gtin, nikeSize, localizedSize, commodityCode	Prodigy & Product Information Services

Cloud API	Data Type	Examples	Data Source
Merchandised Product Content	Display-oriented content by style, country	colorDescription, fullTitle, colors, bestFor, athletes, widths	Prodigy & Product Information Services
Product Inventory Availability	Inventory availability by style-color	true/false	Sterling
SKU Inventory Availability	Inventory availability by style-color-size	true/false	Sterling
Published Content	Authored cards and threads	title, seo slug, image URL, video URL, text	Nike CMS (Content Management System)
Launch Views	Launch attributes by style-color (SNKRS, Bootroom only)	method, startEntryDate, stopEntryDate	Launch Admin Tool
Customized PreBuilds	Customized prebuild (e.g. suggested NikeID shoe design)	designId, status, merchGroup	Consumer experiences, Prodigy

TIP: Another great way to evaluate the types of data returned is to analyze a [sample API response \(https://bitbucket.nike.com/projects/PFA/repos/productfeedv2/browse/API/response/thread/multiple.json\)](https://bitbucket.nike.com/projects/PFA/repos/productfeedv2/browse/API/response/thread/multiple.json).

What are Channels and Why Do I Need One?

A channel is a distinct experience where Nike products are showcased and made available for purchase, e.g. SNKRS, Nike.com. Each channel has a unique **channelId** (channel identifier), which along with **language** and **marketplace**, allows you to get the appropriate

data for your experience.

TIP: A Feed can be associated with one or more channels, opening up the personalized Feed to many Nike experiences.

Get a List of Product Threads

✓ **List all Product Threads for a channel, language, marketplace, feed ID, SEO slug, style-color, gender, keywords, and more**

Now you know what Cards, Threads, and Feeds are, but how do you get them and use them?

To get a list of Threads, execute a request to the [Threads List \(](#)

[https://developer.nike.com/docs/projects/](https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-threads-list-get)

[Product%20Feed%20Service%20API%20V2?tab=api#threads-threads-list-get](https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-threads-list-get))

endpoint, including at minimum the required filter query parameters for **channelId**, **language**, and **marketplace**.

Sample [Threads List \(](#) [https://developer.nike.com/docs/projects/](https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-threads-list-get)

[Product%20Feed%20Service%20API%20V2?tab=api#threads-threads-list-get](https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-threads-list-get)) request

URI:

```
https://api.nike.com/product_feed/threads/  
v2?filter=channelId(d9a5bc42-4b9c-4976-858a-  
f159cf99c647)&filter=language(en)&filter=marketplace(US)
```

TIPS:

- For a list of supported locales, see the [Language/Locale Mapping JSON \(https://bitbucket.nike.com/projects/MOON/repos/language-tunnel-json/browse/localization.json \)](https://bitbucket.nike.com/projects/MOON/repos/language-tunnel-json/browse/localization.json) and the [Language/Locale Mapping README \(https://bitbucket.nike.com/projects/MOON/repos/language-tunnel-json/browse/README.md \)](https://bitbucket.nike.com/projects/MOON/repos/language-tunnel-json/browse/README.md).
- For a sample Threads List response, see [here \(https://bitbucket.nike.com/projects/PFA/repos/productfeedv2/browse/API/response/thread/multiple.json \)](https://bitbucket.nike.com/projects/PFA/repos/productfeedv2/browse/API/response/thread/multiple.json).

How to Get Only the Threads You Need

If there are more threads in the API response than you want, add more specific identifiers to the request as follows.

1. Filters

Use any of the [supported filter query parameters \(https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api \)](https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api) to get more specific results in the response. For example, to only get content for a specific Nike style-color code, append a query parameter like

```
filter=publishedContent.properties.products.styleColor(942198-700)
```

to the request URI.

2. Sorting

Sort the results using any of the [supported sort query parameters \(https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api \)](https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api). For example, to sort by the current price in ascending order, append query parameter

```
sort=productInfo.merchPrice.currentPriceAsc
```

to the request URI.

3. Fields

Request only the fields that you want in the response by using the **fields** query parameter. For example, to return fields `threadId`, `styleColor`, and `MSRP`, append query parameter

```
fields=id,channelId,productInfo.merchProduct.styleColor,productInfo.merchPrice.msrp
```

to the request URI.

TIP: The [Product Feeds API Reference \(https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api \)](https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api) is the source of truth for all supported query parameters.

Can I Use Product Feeds to Search for Products?

You can use the Product Feeds API for basic product search by including the **searchTerms** query parameter. The API attempts to match the string sent in `searchTerms` to a fixed set of fields in the product data (see [Product Feeds API Reference \(https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api \)](https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api) for the list of fields).

However, for a more accurate search, or if you are merchandising a product wall, it's strongly recommended that you use the [Rollup Threads API \(https://developer.niketech.com/docs/projects/Product%20Feed%20Rollup%20Threads%20Service%20API%20V2?tab=api \)](https://developer.niketech.com/docs/projects/Product%20Feed%20Rollup%20Threads%20Service%20API%20V2?tab=api). Rollup Threads can be used in conjunction with Smart Search rules to influence the search results based on your specific use case.

See [Adding Rollup Threads to Your Experience \(https://developer.niketech.com/nde-docs/doc/commerce/product/use-rollup-threads.html#using-rollup-threads \)](https://developer.niketech.com/nde-docs/doc/commerce/product/use-rollup-threads.html#using-rollup-threads) and [Understanding Search Results \(https://developer.niketech.com/nde-docs/doc/commerce/search/use-search.html \)](https://developer.niketech.com/nde-docs/doc/commerce/search/use-search.html) for more.

Terminology Differences Between CMS and Product Feeds

The [Product Feeds API \(https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api \)](https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api) includes product content from Nike CMS in responses. Nike CMS sometimes uses different names for the same field than Product Feeds. For example, the CMS **collectionGroup** that you will see in responses is the same as the **channelId** query parameter you might send to Product Feeds.

Here is a terminology guide between Nike CMS and Product Feeds:

CMS Term	Product Feeds Term
Collection Group	Channel
Collection	Feed
Content/Thread	Thread
Node	Card

What is the Customized PreBuild Section of the Response?

If you are getting data in the **objects.productInfo.customizedPreBuild** section of the response, then one of the threads that you've requested contains a customizable prebuild product.

A prebuild is a design for a customizable (e.g., NIKEiD) product invented by merchandisers/designers to demonstrate how customers can personalize the product. These “inspiration” designs are merchandised within specific experiences and can be found on product walls, product display pages and in marketing materials.

You will be able to identify the presence of prebuilds when **objects.publishedContent.properties.threadType** field contains the value **nikeid_soldier**.

Get a Product Thread by ID

✓ Get a Specific Product Thread by its ID

Get a single product thread by its unique identifier by executing a request to the [Thread by ID \(https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-thread-by-id-get-1 \)](https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-thread-by-id-get-1) endpoint.

Sample [Thread by ID \(https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-thread-by-id-get-1 \)](https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api#threads-thread-by-id-get-1) request URI:

```
https://api.nike.com/product_feed/threads/v2/
bcbeae50-28a5-404d-9941-fbbdff0c7860
```

Upgrading to the Latest Version

Ready to upgrade to the latest version of the Product Feeds API?

First, some considerations:

- By design, not all v1.x endpoints have a direct v2 equivalent. For example, there are no v2 endpoints which return a list of product channels.
- All endpoints of Product Feeds exclusively feature the GET method, which has no request body, so the focus of each section will be on the differences in the response body only.
- For the 4 endpoints that have both a v1 and a v1.5 (see [Product Feeds v1 API Reference \(https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API?tab=api \)](https://developer.nike.com/docs/projects/Product%20Feed%20Service%20API?tab=api) for details), the response schemas are the same between v1 and v1.5 so the upgrade process to v2 is the same for both.

TIP: Upgrading from CAPI (Commerce API)? See the [CAPI Migration Guide \(https://developer.nike.com/ndc/docs/doc/commerce/product/capi-migration.html \)](https://developer.nike.com/ndc/docs/doc/commerce/product/capi-migration.html) for detailed instructions.

V1.x to V2 Endpoint Mapping

The following table lists the v1 endpoints along with the equivalent v2 endpoint for each:

V1 Endpoint Name	Equivalent V2 Endpoint Name	
—	—	s
All Product Channels	None	
Product Channel by Name	None	
Product Feed by Feed ID	None	
All Product Threads	Product Threads List	
Product Thread by ID	Product Thread by ID	
Product Thread by Thread ID	None	
Product Thread by Style-Color	Product Threads List	
Product Thread by SEO Slug	Product Threads List	
All Admin Threads	None	
Product Card by ID	None	

All Product Threads & Product Thread by ID v1 to v2 Field Mapping

The response structure of the v1 All Product Threads and Product Thread by ID endpoints is the same, with a few minor exceptions, so for the purposes of upgrading to v2 they can be discussed together.

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

The following table describes how the response body fields map from the v1 to the v2 endpoints.

V1 Field Name	Description	V2 Field Name
country	Country in which the thread exists	marketplace
locale	Locale of the thread content	language
channel	Channel in which the thread exists	channelId
totalRecords	Total number of threads that match the criteria	N/A
threads	Array containing one or more threads that match the criteria	objects
id	Unique identifier for a particular thread	id
threadId	Unique ID coming from the relative path of the object in	N/A

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
	AEM/ Authoring tool	
interestId	Unique ID coming from the Social interests	N/A
name	Name of the thread describing the campaign	publishedContent.properties. title
createdDate	Time when the object was created in AEM/ Authoring tool	N/A
lastUpdatedDate	Last time this object was updated	lastFetchTime
publishedDate	The first time any card in this thread should be visible	publishedContent. publishStartDate
product	Object containing product info	productInfo
product.id	Unique ID coming from Merchandised	productInfo.merchProduct. id

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
	Products API	
product. interestId	Unique ID coming from the Social interests	N/A
product. style	Style identifier for the style of the product	productInfo.merchProduct. styleCode
product. colorCode	Three-digit color code identifier	productInfo.merchProduct. colorCode
product. globalPid	Global identifier of the product	productInfo.merchProduct. pid
product. fullTitle	Full title of the product	productInfo.productContent. fullTitle
product. title	Title of the product	productInfo.productContent. title
product. subtitle	Subtitle of the product	productInfo.productContent. subtitle
product. description	Description of the product	productInfo.productContent. description
product. imageUrl	URL for product images	productInfo.imageURLs. productImageUrl
product. genders	Array of relevant genders for the product	productInfo.merchProduct. genders

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
product. price	Object containing product price info	productInfo. merchPrice
product.price. onSale	Indicates if the product is on clearance or not	productInfo.merchPrice. discounted
product.price. msrp	Maximum stated retail price of the product	productInfo.merchPrice. msrp
product.price. fullRetailPrice	Full retail price of the product	productInfo.merchPrice. fullPrice
product.price. currentRetailPrice	Current retail price of the product. For discounted products it will be different from fullRetailPrice	productInfo.merchPrice. currentPrice
product.price. formattedFullRetailPrice	Formatted full retail price	N/A
product.price. formattedCurrentRetailPrice	Formatted current retail price	N/A
product. estimatedLaunchDate	Deprecated, do not use	N/A

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
product. publishedDate	Date when a product was published in launch admin tool	
product. quantityLimit	Quantity limit of the product	productInfo.merchProduct. quantityLimit
product. status	Status of the product	productInfo.merchProduct. status
product. selectionEngine	Selection engine of the product	N/A
product. colorDescription	Description of the color of the product	N/A
product. productType	Type of product	productInfo.merchProduct. productType
product. salesChannel	Sales channel of product	productInfo.merchProduct. channels
product. accessCode	Boolean indicator for whether access code is required or not	productInfo.merchProduct. exclusiveAccess
product. startSellDate	Date when a product is estimated to launch	productInfo.launchView. startEntryDate OR product.Info.merchProduct. commerceStartDate

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
product. timeToStartSelectionSeconds	Number of seconds until the product drawing is started	N/A
product. timeToStartSellSeconds	Number of seconds until the product drawing ends and the product is available to sell	N/A
product. endDrawDate	Date that the drawing ends	productInfo.launchView. endEntryDate
product. waitlineEnabled	Boolean for whether wait line for the product was enabled or not	N/A
product. available	Boolean for whether any size of the product is available or not	productInfo.availability. available
product. sportTags	Array of sport tags	productInfo.merchProduct. sportTags
product. skus	Array of SKU info	productInfo. skus

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
product.skus.id	UUID for the SKU	productInfo.skus.id
product.skus.localizedSize	Localized size for this SKU	productInfo.skus.countrySpecifications.localizedSize
product.skus.nikeSize	Nike size for this SKU	productInfo.skus.nikeSize
product.skus.available	Boolean for whether SKU is available for purchase or not	productInfo.availableSkus.available
restricted	Boolean for whether an access code is tied the thread or not	N/A
feed	Feeds this thread belongs to	publishedContent.properties.publish.collections
title	Title of the thread	publishedContent.title
subtitle	Subtitle of the thread	publishedContent.subtitle
imageUrl	URL where the image exists	publishedContent.properties.coverCard.properties.landscap
altText	Alt text for the image	publishedContent.properties.coverCard.properties.altText
tabletImageUrl	URL where	N/A

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
	the image for the tablet exists	
tabletAltText	Alt text for the tablet image	N/A
desktopImageUrl	URL where the image for desktop exists	N/A
desktopAltText	Alt text for desktop image	N/A
tags	Array of tags that can be applied to content to relate them	N/A
cards	Array of card info	publishedContent. nodes
cards. country	Country of the card	N/A
cards. locale	Locale of the card	N/A
cards. channel	Channel of the card	N/A
cards. id	Unique identifier for a particular card	publishedContent.nodes. id

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
cards.cardId	Unique ID coming from the relative path of the object in AEM/ Authoring tool	N/A
cards.sortOrder	Order in which the card should appear in the thread	N/A
cards.interestId	Unique ID coming from the social interests	N/A
cards.type	Type of card (photo, photo-carousel, video or text)	publishedContent.nodes.subType
cards.title	Title of the card	publishedContent.nodes.properties.title
cards.subtitle	Subtitle of the card	publishedContent.nodes.properties.subtitle
cards.description	Description of the card	publishedContent.nodes.properties.body
cards.images	Array of image info related to the	publishedContent.nodes.properties

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
	card	
cards.images.type	Type of image (card, thread or alternate)	N/A
cards.images.imageUrl	URL where the image exists	publishedContent.nodes.properties.portraitURL
cards.images.alt	Alt text for the image	publishedContent.nodes.properties.altText
cards.images.sortOrder	Sort order in which images should be displayed	N/A
cards.images.desktopImageUrl	URL where the image for desktop exists	N/A
cards.images.desktopAltText	Alt text for desktop image	N/A
cards.images.tabletImageUrl	URL where the image for the tablet exists	N/A
cards.images.tabletAltText	Alt text for the tablet image	N/A

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
cards.videos	Array of video info for the card	publishedContent.nodes.properties
cards.videos.type	Type of video object (nikeserver, brightcove or youtube)	publishedContent.nodes.properties.providerId
cards.videos.stillImageUrl	URL of still image to be shown as placeholder for the video	publishedContent.nodes.properties.startImageURL
cards.videos.videoUrl	Video URL that can be retrieved to display on the card	publishedContent.nodes.properties.videoid
cards.videos.alt	Text string that verbally describes the video for accessibility	publishedContent.nodes.properties.altText
cards.videos.sortOrder	Order in which the multiple videos on the card need to be presented	N/A

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
cards.videos.desktopImageUrl	URL of still image to be shown as placeholder for the video on a desktop	N/A
cards.videos.desktopAltText	Text string that verbally describes the video on a desktop	N/A
cards.videos.tabletImageUrl	URL of still image to be shown as placeholder for the video on a tablet	N/A
cards.videos.tabletAltText	Text string that verbally describes the video on a tablet	N/A
cards.createdDate	Time when the object was created in AEM/ Authoring tool	N/A
cards.lastUpdatedDate	Last time this object was updated	N/A
cards.colorHint	Object	N/A

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
	containing color hint info	
cards.colorHint.text	RGB hex color code ranging from 000000 for black to FFFFFF for white	N/A
cards.colorHint.active	RGB hex color code ranging from 000000 for black to FFFFFF for white	N/A
cards.colorHint.inactive	RGB hex color code ranging from 000000 for black to FFFFFF for white	N/A
cards.colorHint.pressed	RGB hex color code ranging from 000000 for black to FFFFFF for white	N/A
cards.cta	Object containing	publishedContent.nodes.properties.title.actions.actionType

ADDING PRODUCT FEEDS TO YOUR EXPERIENCE

V1 Field Name	Description	V2 Field Name
	call-to-action info	
cards.cta.text	Custom call to action text that can be presented on a content card, when there is no product object associated with it	N/A
cards.cta.buyingTools	Boolean indicating the need to present buying tools on the card	N/A
cards.iOSOnly	Flag to indicate if the card is only for IOS	N/A
relations	Array of related threads data	N/A
relations.name	Name (RELATED)	N/A
relations.threads	Identifier (threadId) of related	N/A

V1 Field Name	Description	V2 Field Name
	threads	
locations		N/A
active	Boolean for whether the thread is active or not	active
seoSlug	The SEO slug of the thread	publishedContent.seo. slug
seoTitle	Title tag for SEO	publishedContent.seo. title
seoDescription	Meta description for SEO	publishedContent.seo. description
relationId		publishedContent. relationId
socialPattern		N/A

TIP: For the v2 URI format and available parameters, see the [Product Thread by ID](#) and [Product Threads List](#) sections of this document.

URL Patterns By Version

The URL pattern used by the Product Feeds API's varies depending on the version, as described here:

v1

`https://api.nike.com/commerce/productfeed/products` (Note: no version)

number indicated in path)

v1.5

`https://api.nike.com/commerce/productfeed/products/v1.5`

v2

None

TIP: Always check the specific API you are integrating with to confirm the correct URL format. Also, see the URL Patterns section of the [Using NDe APIs \(https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#url-patterns \)](https://developer.niketech.com/nde-docs/doc/getting-started/using-nike-apis.html#url-patterns) guide for info on Nike standards.

API Quick Reference

Product Feeds v2 Endpoints


HTTP Verb	Endpoint Name	Endpoint Description	URI Format
GET	Product Threads List	Get all threads for a channel, marketplace, language combination (https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api)	<code>/product_feed/threads/v2{?filter,1</code>
GET	Product Thread by ID	Get a specific thread by its identifier (https://developer.niketech.com/docs/projects/Product%20Feed%20Service%20API%20V2?tab=api)	<code>/product_feed/threads/v2/{id}{?channel,marketplace,lang</code>

Best Practices

Listed below are some best practices for working with Product Feeds.

Example Implementation Diagram

Here is an example of a sequence of API calls to get content from Product Feeds v2:

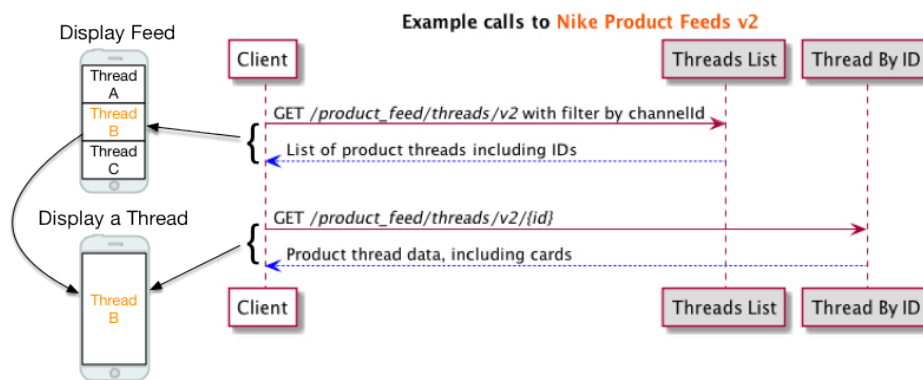

Test Environment

Product Feeds v2 has a test environment available at host

<https://experience.test.commerce.nikecloud.com>.

Apart from the host, you can use the same URL, for example:

[https://experience.test.commerce.nikecloud.com/product_feed/threads/v2?filter=marketplace\(US\)&filter=language\(en\)&filter=channelId\(d9a5bc42-4b9c-4976-858a-f159cf99c647\)](https://experience.test.commerce.nikecloud.com/product_feed/threads/v2?filter=marketplace(US)&filter=language(en)&filter=channelId(d9a5bc42-4b9c-4976-858a-f159cf99c647)).

Some considerations about using the test environment:

- The functionality of the API is the same in test vs. production, with the exception of new features that are not yet deployed to production.
- Test has a different set of product data than production, but the test data set is similar. For example, many of the constants are the same in test, i.e. the marketplace, language, and channelId, as they are in production.
- Inventory availability data is scarce in the test environment. At the product level, i.e. the

values in **productInfo.availability.available**, might show as 'false' in test most of the time. Availability data at the SKU/size level, i.e. in **productInfo.availableSkus**, is not present in test.

- All performance testing activities should be done in test and not in production.

Troubleshooting

Listed below are ways to troubleshoot unexpected responses using this API.

Use Troubleshooting Tools

- Use the general troubleshooting tips in the [Using NDe APIs \(https://developer.nike.com/nde-docs/doc/getting-started/using-nike-apis.html#troubleshooting \)](https://developer.nike.com/nde-docs/doc/getting-started/using-nike-apis.html#troubleshooting) guide.
- Use a Splunk query (requires access) such as [this \(https://nike.splunkcloud.com/en-US/app/nike_search/search/search?q=search%20index%3Dweb%20environment%3Dprod%20application%3Dproductfeedv2%20source%3D%2Fvar%2Flog%2Fnike%2Fproductfeedv2%2Faccess.log&display.page.search.mode=smart&dispatch.sample_ratio=1&earliest=-1h%40h&latest=now&sid=1518466951.667397_002B2083-7782-48F4-ADBB-A22C4546544D \)](https://nike.splunkcloud.com/en-US/app/nike_search/search/search?q=search%20index%3Dweb%20environment%3Dprod%20application%3Dproductfeedv2%20source%3D%2Fvar%2Flog%2Fnike%2Fproductfeedv2%2Faccess.log&display.page.search.mode=smart&dispatch.sample_ratio=1&earliest=-1h%40h&latest=now&sid=1518466951.667397_002B2083-7782-48F4-ADBB-A22C4546544D) to check for issues with your request.
- Use the [Product Feeds v2 Overview \(https://insights.newrelic.com/apps/accounts/714737/product-feed-service/dashboards/483419 \)](https://insights.newrelic.com/apps/accounts/714737/product-feed-service/dashboards/483419) dashboard in Insights (requires access) to see if the service is up and healthy.
- Contact the Product Feeds Team on the [#nde-product-feeds \(https://nikedigital.slack.com/messages/CAPF62A66 \)](https://nikedigital.slack.com/messages/CAPF62A66) Slack channel for assistance.

Common Questions

Who do I contact with questions about what I'm seeing in the **productInfo** or **publishedContent** sections of the response?

- The data in **productInfo** and **publishedContent** is not owned by the Product Feeds

team. Refer to [Thread Response Ownership Breakdown \(https://confluence.nike.com/display/DEN/Thread+Response+Ownership+Breakdown \)](https://confluence.nike.com/display/DEN/Thread+Response+Ownership+Breakdown) to find the Slack channel of the team responsible for that data.

How do I know what product attributes are available for me to use to request Threads?

- Unless you are doing a keyword search using the **searchTerms** query parameter, you need to know in advance which product attributes to include in your requests. The source of product attributes (e.g. slugs, 'best for', and other attributes) is Nike's Prodigy system.

Why isn't my feed showing up?

- The feed may have failed validation and was marked inactive. Only active threads with a valid publish date will be returned by this API. Contact the Product Feeds Team on the [#nde-product-feeds \(https://nikedigital.slack.com/messages/CAPF62A66 \)](https://nikedigital.slack.com/messages/CAPF62A66) Slack channel to check if the feed failed validation and why.
- The feed might not yet be published. It can take up to 15 minutes to publish a change from AEM and have it be reflected in the Feeds API.

Why am I getting an empty 200 response from Threads List?

- There might not be any threads that meet the criteria that you specified, particularly when using optional filters. For example, if you send a request with `filter=productInfo.merchProduct.styleCode(999999)` and there are no threads for style code 999999, you will get an empty 200 response.
- The **publishStartDate** for the requested threads might be in the future, or conversely the **publishEndDate** might be in the past. In other words, if today's date is not within the publish start/end range for the thread, the thread will not be returned in the response.
- The **softLaunchDate** on the product is in the future. The `softLaunchDate`, when present, overrides the `publishStartDate`, and thus can affect whether the thread is returned or not.

Why am I getting a 404 error from Thread by ID when I know that the thread ID is valid?

- Today's date might be outside the publish start/end range for the thread.
- The **catalogId** on the product might be blank. To troubleshoot, send a request to the

Merchandised Products API with the affected product ID (e.g. <https://api.nike.com/merch/products/v2/c98f12d7-7dee-5775-b4a6-c83d0d2dcb9a>) to see if a catalog ID is present or not. If not, that is the reason that the thread is not being returned.

TIP: Be careful not to confuse **legacyCatalogId**, which like **catalogId** is also present in the threads response under **productInfo.merchProduct**, but does not affect thread visibility.

Terms of Service

It is highly recommended that you send a caller ID header in every request to this API to help troubleshoot unexpected responses. See the Registration section of the [Using NDe APIs \(https://developer.nike.com/nde-docs/doc/getting-started/using-nike-apis.html#registration \)](https://developer.nike.com/nde-docs/doc/getting-started/using-nike-apis.html#registration) guide on how to create and register your caller ID.

Authentication

There are no authentication requirements for Product Feeds except when using the **preview** query parameter to preview a Feed or Thread, which is not common. See the [Using Product Feeds v2](#) section for more details.

Contacting the Team

Need to contact the Product Feeds team?

Slack	#nde-product-feeds (https://nikedigital.slack.com/messages/CAPF62A66)
Confluence Space	Product and Feeds API (https://confluence.nike.com/display/DEN/Product+And+Feeds+API)
Team Contacts	Andy Sun

Glossary

See the [Glossary \(https://developer.niketech.com/nde-docs/doc/commerce/reference/glossary.html \)](https://developer.niketech.com/nde-docs/doc/commerce/reference/glossary.html).

Document Change Log

Summary	Date	Description
Initial draft	01/23/2018	Initial Draft

Related Links

[NDe Docs Home](#)

[Get Started \(https://developer.niketech.com/nde-docs/doc/getting-started/get-started.html \)](https://developer.niketech.com/nde-docs/doc/getting-started/get-started.html)