V. Run Ltd.
David Tritch St. 14, Tel Aviv
69860

API documentation for Run ERP system

OVERVIEW

All API requests are **GET** requests to URL with a string of arguments. All production requests are made to a server address of a shipping company. To get access to a sandbox for developing and testing applications, please contact the shipping company.

AUTHORIZATION

Please consult with the shipping company whether authorization is relevant.

Authorization is done by transferring a token in request header in the following way:

```
GET /resource HTTP/1.1
Host: server.example.com
Authorization: Bearer <token>
```

You can use Postman for testing purposes and transfer the token as follows:

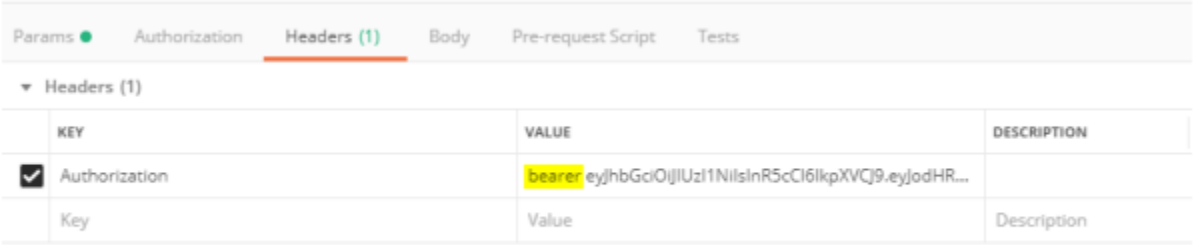

In order to get the token for your customer account, please contact the shipping company.

Provided token is valid for a year and can be renewed by the shipping company.

During the authorization process the Run system will validate that the token matches the customer account and respond with “401: Unauthorized error” if it does not match.

CREATE A SHIPMENT IN RUN SYSTEM

This API is based on a GET request to URL with a string of arguments. It works as a web service and we refer to it as WS Simple.

Request:

https://<HOST>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_create_anonymous&ARGUMENTS=-N<P1>,-A<P2>,-N<P3>,-N<P4>,-A<P5>,-A<P6>,-N<P7>,-N<P8>,-N<P9>,-N<P10>,-A<P11>,-A<P12>,-A<P13>,-A<P14>,-A<P15>,-A<P16>,-A<P17>,-A<P18>,-A<P19>,-A<P20>,-A<P21>,-A<P22>,-A<P23>,-A<P24>,-A<P25>,-A<P26>,-A<P27>,-A<P28>,-N<P29>,-N<P30>,-N<P31>,-A<P32>,-A<P33>,-N<P34>,-N<P35>,-A<P36>,-A<P37>,-A<P38>,-N<P39>,-N<P40>,-N<P41>,-N<P42>

Notes:

1. Tag symbols <> need to be removed.
2. There is a comma after each argument.
3. There is a -A or a -N before each argument except HOST. These are mandatory symbols which indicate field type (numeric or string) to the server, and should not be removed.
4. If the field is empty, it still has to be sent in the request.
5. There cannot be commas and '&' characters in the text of a parameter itself. Please perform validation of parameter fields text before sending.

Request parameters (mandatory parameters are highlighted in red):

Parameter	Data type	Explanation
Host	String 100	Shipping company server address Get it from the shipping company
P1	Numeric 8	Customer number (get it from the shipping company)
P2	String 6	מסירה – for **deliveries** איסוף - for **returns** Please use the word in Hebrew exactly as spelled above.

P3	Numeric 5	Shipment type - get the code from the shipping company
P4	Numeric 5	Shipment stage Consult with the shipping company which code to send (if any)
P5	String 10	Your company name
P6	String 10	Please leave blank
P7	Numeric 5	Shipped cargo type - get the code from the shipping company
P8	Numeric 5	Returned cargo type (relevant for **returns** only) - get the code from the shipping company
P9	Numeric 3	Number of returned packages (relevant for **returns** only)
P10	Numeric 3	Please leave blank
P11	String 20	Consignee's name
P12	String 10	City/settlement code - optional If you are sending city codes, please use the gov.il database
P13	String 30	City/settlement name
P14	String 10	Street code

		If you are sending street codes, please use the gov.il database
P15	String 30	Street name This field can contain street name together with building number, in this case P16 can be left blank.
P16	String 5	Building No.
P17	String 1	Entrance No.
P18	String 2	Floor No.
P19	String 4	Apartment No.
P20	String 20	Primary phone number (cellular)
P21	String 20	Additional phone number
P22	String 200	Your reference number for the shipment You can also send several reference numbers separated by ":" Please consult with the shipping company which parameter is preferable to use in your case - P22 or P26.
P23	Numeric 6	Number of packages to be delivered This field is mandatory if there is more than one package in the shipment.

P24	String 70	Address remarks
P25	String 80	Additional shipment remarks (if any)
P26	String 50	Second reference number for the shipment Please consult with the shipping company which parameter is preferable to use in your case - P22 or P26.
P27	String DD/MM/YYYY	Date If you want the shipment to be picked up on a specific date which is more than a day away from the date of the request, you can specify a date in this field.
P28	String HH:MM	Time If you want the shipment to be picked up at a specific hour which is more than a day away from the date of the request, you can specify time in this field.
P29	Numeric 12	Please leave blank
P30	Numeric 3	If the courier needs to collect payment from the consignee, please specify the payment type code in this field - get it from the shipping company
P31	Numeric 8.2	The sum to be collected from the consignee
P32	String DD/MM/YYYY	The date of payment collection from the consignee

P33	String 500	Notes for payment collection
P34	Numeric	Source pickup point – relevant for **returns** only
P35	Numeric	Destination pickup point Relevant only for shipments to pickup points Please fill in if your customer has chosen a pickup point on your website. If you fill in this field, please leave P37 blank.
P36	String	Response type - TXT (default) or **XML (recommended)**
P37	String 1	Run system can choose a pickup point for a shipment automatically, based on a consignee's address (the closest working point will be assigned). N = Do not assign (default) Y = Assign any type (store or locker) L = Assign a locker S = Assign a store
P38	String	Please leave blank
P39	Numeric	Please leave blank
P40	String 100	Consignee's email

P41	String DD/MM/YYYY	Parcel preparation date This field is used in case your parcels are assembled at the shipping company warehouse.
P42	String HH:MM	Parcel preparation time This field is used in case your parcels are assembled at the shipping company warehouse.

Request sample :

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_create_anonymous&ARGUMENTS=-N<customer number>,-Aמסירה,-N<shipment type>,-N,-ASome Company,-A,-N<cargo type>,-N,-N,-N,-AConsignee Name,-A,-ATel Aviv,-A,-AArlozorov,-A25,-A,-A,-A,-A0500000000,-A,-A,-A,-A,-A,-A,-A,-A,-N,-N,-N,-A,-A,-N,-N,-AXML,-A,-A,-N,-Aemail@email.com,-A,-A

There is a feature which allows you to check the request prior to sending it: add **_details** to the program name in the URL as follows:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_create_anonymous**_details**&ARGUMENTS=-N<customer number>,-Aמסירה,-N<shipment type>,-N,-ASome Company,-A,-N<cargo type>,-N,-N,-N,-AConsignee Name,-A,-ATel Aviv,-A,-AArlozorov,-A25,-A,-A,-A,-A0500000000,-A,-A,-A,-A,-A,-A,-A,-A,-N,-N,-N,-A,-A,-N,-N,-AXML,-A,-A,-N,-Aemail@email.com,-A,-A

This will open a PDF file with the table similar to the one above and your parameters in their respective fields.

Responses:

TXT response - a simple string with ANSI encoding, which contains shipment number in Run system, distribution line number, distribution area number and error description, all separated by commas.

TXT response sample :

If the request was sent correctly, the shipment will receive a delivery number with no error description.

24929807,118,3

If the request was incorrect, the shipment will receive "0" and an error description.

0,1500|לקוח לא רשאי להזמין

XML response with UTF-8 encoding, which contains all the data relevant for the shipping company.

XML response sample :


```xml
<?xml version="1.0" encoding="utf-8" ?>
<root>
  <result>ok</result>
  <task>ws simple ship create answer</task>
  <magic_enter_prog_yn><![CDATA[y]]></magic_enter_prog_yn>
  <magic_return_data_yn><![CDATA[y]]></magic_return_data_yn>
  <mydata>
    <shgiya_yn><![CDATA[n]]></shgiya_yn>
    <message><![CDATA[]]></message>
    <answer>
        <ship_create_num><![CDATA[24929804]]></ship_create_num>
        <customer_number><![CDATA[3966]]></customer_number>
        <ship_num_rand><![CDATA[16424929804024]]></ship_num_rand>
        <distribution_line><![CDATA[118]]></distribution_line>
        <distribution_line_desc><![CDATA[ארלוזרוב מרכז]]></distribution_line_desc>
        <line_branch><![CDATA[3]]></line_branch>
        <line_branch_desc><![CDATA[תל אביב]]></line_branch_desc>
        <section><![CDATA[]]></section>
        <section_desc><![CDATA[]]></section_desc>
        <ship_create_error><![CDATA[]]></ship_create_error>
        <ship_create_error_code><![CDATA[]]></ship_create_error_code>
        <distribution_point><![CDATA[]]></distribution_point>
        <name_point><![CDATA[]]></name_point>
        <address_point><![CDATA[]]></address_point>
        <sorting_area_code><![CDATA[]]></sorting_area_code>
    </answer>
  </mydata>
</root>
```

ERRORS

Key	Value (Hebrew)	Explanation	Argument to check
0	לא נמצא קוד שגיאה	Unknown error	Consult the shipping company
100	ישוב שגוי	Invalid city name	P13
200	רחוב שגוי	Invalid street name	P15
300	נקודת חלוקה יעד אינה תקינה	Invalid pickup point number (delivery)	P35
400	נקודת חלוקה מקור לא תקינה	Invalid pickup point number (return)	P34
500	אסמכתא: כבר נקלטה במשלוח	Shipment ID [...] already exists in shipment [...]	P22
600	אסמכתא 2: כבר נקלטה במשלוח	Shipment ID [...] already exists in shipment [...]	P26
700	שדה איסוף/מסירה שגוי	Invalid value in P2	P2
800	חסר שם	Consignee name not specified	P11
900	לא נמצאה נקודת חלוקה יעד	Pickup point not found for the specified address	Consult the shipping company
1000	לא נמצאה נקודת חלוקה-טעות בישוב חוזר מגוגל	Pickup point not found - city name after Google validation does not correspond to the specified value	Consult the shipping company
1200	כמות אריזות הלוך גדולה מהמותר	Specified number of packages in the delivery is not allowed	P23
1300	כמות אריזות חזור גדולה מהמותר	Specified number of packages in the return is not allowed	P9
1500	לקוח לא רשאי להזמין	Customer account in the shipping company is inactive	P1
1600	אזור הובלה-מחיר-משך	No price for specified delivery address in the shipping company system	Consult the shipping company
1700	מחיר-משך	No price for specified shipment/cargo type in the shipping company system	P3, P7 Consult the shipping company
1800	קישורי כתובת	Wrong address	Consult the shipping company

PRINT A LABEL FOR THE CREATED SHIPMENT

This API is based on a GET request to URL with a string of arguments. Use it to print a label in the shipping company format. A label sized 10x10 cm will be created as a PDF document.

Request sample:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_print_ws&ARGUMENTS=-N<shipment ID>,-A,-A,-A,-A,-A,-A,-N,-A<your reference number>

Request parameters:

Parameter	Data type	Explanation
Host	String 100	Shipping company server address Get it from the shipping company.
Shipment ID	Numeric	Shipment number which returned as a response from the previous API (WS Simple).
Your reference number	String 50	Use the reference number you are sending in P26 in the WS Simple. Relevant only if you have identification letters at the shipping company - please check this option with the shipping company.

Response sample:

PDF file (stream)

GET TRACKING INFORMATION

There are two ways to get tracking information: by PUSH and by PULL.

PUSH (preferred) - you will need to prepare a web service which will receive an XML in the shipping company format (see below). An XML will be sent each time the tracking status is changed.

PULL - send the following GET request:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_status_xml&ARGUMENTS=-N<P1>,-A<P2>

Request parameters:

Parameter	**Data type**	**Explanation**
Host	String 100	Shipping company server address Get it from the shipping company.
P1	Numeric	Shipment number which returned as a response from WS Simple If you are using this number, please leave P2 blank.
P2	String	Your identification letters at the shipping company + your reference number Please check this option with the shipping company. If you are using this number, please leave P1 blank.

Request samples:

Tracking by shipping company number:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_status_xml&ARGUMENTS=-N12345678

Tracking by your reference number - let's say your identification letters at the shipping company are AB, it means all your reference numbers start with AB:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_status_xml&ARGUMENTS=-N,-A**AB987654321**

XML sample:


```
<?xml version="1.0" encoding="utf-8"?>
<root>
<result>ok</result>
<task>ship_status_xml</task>
<magic_enter_prog_yn>y</magic_enter_prog_yn>
<magic_return_data_yn>y</magic_return_data_yn>
<mydata>
<ship_no>12345678</ship_no>
<master_customer_id>1234</master_customer_id>
<customer_id>1234</customer_id>
<external_customer_no></external_customer_no>
<ref2_with_prefix>AB987654321</ref2_with_prefix>
<shgiya_yn>n</shgiya_yn>
<message></message>
<receiver1>ליאור</receiver1>
<receiver2></receiver2>
<ref1></ref1>
<ref2>987654321</ref2>
<random_id>14912345678966</random_id>
<pudo_origin_code>0</pudo_origin_code>
<pudo_origin_desc><![CDATA[]]></pudo_origin_desc>
<pudo_destination_code>0</pudo_destination_code>
<pudo_destination_desc><![CDATA[]]></pudo_destination_desc>
<source code="1">ממשק פשוט</source>
<ship_delivered_yn>y</ship_delivered_yn>
<driver_id>4409</driver_id>
<driver_name>דורון דלל*-פ"ת</driver_name>
<ref_multy>
<ref>AB987654321</ref>
</ref_multy>

<status>
<status_code>4</status_code>
<status_desc>Data has been received by the shipping company</status_desc>
<status_date>08/09/2016</status_date>
<status_time>10:22</status_time>
<status_customer_code></status_customer_code>
</status>
<status>
<status_code>5</status_code>
<status_desc>Internet</status_desc>
<status_date>08/09/2016</status_date>
<status_time>10:21</status_time>
<status_customer_code></status_customer_code>
</status>
<status>
```

<status_code>5</status_code>
<status_desc> Internet </status_desc>
<status_date>15/09/2016</status_date>
<status_time>20:42</status_time>
<status_customer_code></status_customer_code>
</status>
<status>
<status_code>7</status_code>
<status_desc>On the way to shipping company warehouse</status_desc>
<status_date>15/09/2016</status_date>
<status_time>20:45</status_time>
<status_customer_code></status_customer_code>
</status>

<electronic_message>
<draft_code>590</draft_code>
<draft_desc></ddraft_desc>
<failed>no</failed>
<media_type>sms</media_type>
<message_date>15/09/2016</message_date>
<message_time>20:42</message_time>
<message_body> The package ordered from Groupon, ref. No. 2 AB987654321 is on its way to you </message_body>
</electronic_message>
<electronic_message>
<draft_code>590</draft_code>
<draft_desc></ddraft_desc>
<failed>no</failed>
<media_type>email</media_type>
<message_date>15/09/2016</message_date>
<message_time>20:42</message_time>
<message_body> The package ordered from Groupon, ref. No. 2 AB987654321 is on its way to you </message_body>
</electronic_message>
<electronic_message>
<draft_code>560</draft_code>
<draft_desc></ddraft_desc>
<failed>no</failed>
<media_type>sms</media_type>
<message_date>15/09/2016</message_date>
<message_time>20:45</message_time>

<message_body>Package number 12345678 for Amir Orech has been delivered on 15/09/2016 at 20:45 </message_body>
</electronic_message>
</mydata>
</root>

CANCEL SHIPMENT

You can cancel a created shipment up to the moment the shipping company driver arrives to pick it up. Please consult the shipping company prior to using this API, so that they set up a permission for your customer account in the ERP system.

Send the following GET request:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=bitul_mishloah&ARGUMENTS=-A<P1>,-A,-A,-A,-N<P2>

Request parameters:

Parameter	Data type	Explanation
Host	String 100	Shipping company server address Get it from the shipping company.

P1	Numeric	Random number which returned in a response from WS Simple
		`<?xml version="1.0" encoding="utf-8" ?>`
		`<root>`
		`  <result>ok</result>`
		`  <task>ws simple ship create answer</task>`
		`  <magic_enter_prog_yn><![CDATA[y]]></magic_enter_prog_yn>`
		`  <magic_return_data_yn><![CDATA[y]]></magic_return_data_yn>`
		`  <mydata>`
		`  <shgiya_yn><![CDATA[n]]></shgiya_yn>`
		`  <message><![CDATA[]]></message>`
		`  <answer>`
		`  <ship_create_num><![CDATA[24929804]]></ship_create_num>`
		`  <customer_number><![CDATA[3966]]></customer_number>`
		`  <ship_num_rand><![CDATA[16424929804024]]></ship_num_rand>`
		`  <distribution_line><![CDATA[118]]></distribution_line>`
		`  <distribution_line_desc><![CDATA[ארלוזרוב מרכז]]></distribution_line_desc>`
		`  <line_branch><![CDATA[3]]></line_branch>`
		`  <line_branch_desc><![CDATA[תל אביב]]></line_branch_desc>`
		`  <section><![CDATA[]]></section>`
		`  <section_desc><![CDATA[]]></section_desc>`
		`  <ship_create_error><![CDATA[]]></ship_create_error>`
		`  <ship_create_error_code><![CDATA[]]></ship_create_error_code>`
		`  <distribution_point><![CDATA[]]></distribution_point>`
		`  <name_point><![CDATA[]]></name_point>`
		`  <address_point><![CDATA[]]></address_point>`
		`  <sorting_area_code><![CDATA[]]></sorting_area_code>`
		`  </answer>`
		`  </mydata>`
		`</root>`

P2	Numeric	Your customer number at the shipping company Get it from the shipping company.

Response sample:

Shipment cancelled successfully:


```
▼<root>
   <Status>OK</Status>
   <Status_desc/>
   <Mishloah>24928348</Mishloah>
   <Random>66224928348247</Random>
 </root>
```


Error - shipment could not be cancelled:

```
▼<root>
   <Status>ERROR</Status>
   <Status_desc>משלוח נמצא בשלב שלא מאפשר ביטול</Status_desc>
   <Mishloah>24398647</Mishloah>
   <Random>19124398647941</Random>
 </root>
```

GET THE LIST OF PICKUP POINTS

Get the list of shipping company's pickup points in a given location as an XML file.

Send the following GET request:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ws_spotslist&ARGUMENTS=-A<P1>,-A,-N<P2>

Parameter	Data type	Explanation
Host	String 100	Shipping company server address Get it from the shipping company.
P1	String	City name To get ALL shipping company's pickup points, send "all" in P1.
P2	Numeric	City code An alternative to P1. If you are sending city codes, please use the gov.il database. If you are sending a value in this field, please leave P1 blank.

Request samples:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ws_spotslist&ARGUMENTS=-Aall

This will give you a list of all the pickup points of your shipping company.

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ws_spotslist&ARGUMENTS=-Aתל אביב

This will give you a list of all the pickup points assigned to Tel Aviv. Please note that this API currently supports city names in Hebrew only.

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ws_spotslist&ARGUMENTS=-A,-A,-N3000

This will give you a list of all the pickup points assigned to Jerusalem.

Response sample:


```xml
<?xml version="1.0" encoding="utf-8"?>
<root>
	<magic_enter_prog_yn>y</magic_enter_prog_yn>
	<shgiya_yn>n</shgiya_yn>
	<message></message>
	<spots>
	<spot_detail>
	   <name>Random convenience store</name>
	   <city>Tel Aviv</city>
	   <street>Dizengoff</street>
	   <house>8</house>
	   <latitude>32.114383</latitude>
	   <longitude>34.834102</longitude>
	   <type>Store</type>
	   <remarks>Sun-Thu 08:30-19:00, Fri 08:30-13:00</remarks>
	   <n_code>500</n_code>
	</spot_detail>
	<spot_detail>
	   <name>Yet another random convenience store</name>
	   <city> Holon</city>
	   <street>Sokolov</street>
	   <house>29</house>
	   <latitude>32.114383</latitude>
	   <longitude>34.834102</longitude>
	   <type>Store</type>
	   <remarks>Sun-Thu 09:00-22:00, Fri closed</remarks>
	   <n_code>510</n_code>
	</spot_detail>
	</spots>
</root>
```


If you need the pickup point code to use in WS Simple, it is in the n_code tag.

FLOW

1. Create shipment

When you are making a parcel, the first step is to send the flow to generate a shipment number and inform our ERP system that the parcel is existing:

https://<HOST>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_create_anonymous&ARGUMENTS=-N<P1>,-A<P2>,-N<P3>,-N<P4>,-A<P5>,-A<P6>,-N<P7>,-N<P8>,-N<P9>,-N<P10>,-A<P11>,-A<P12>,-A<P13>,-A<P14>,-A<P15>,-A<P16>,-A<P17>,-A<P18>,-A<P19>,-A<P20>,-A<P21>,-A<P22>,-A<P23>,-A<P24>,-A<P25>,-A<P26>,-A<P27>,-A<P28>,-N<P29>,-N<P30>,-N<P31>,-A<P32>,-A<P33>,-N<P34>,-N<P35>,-A<P36>,-A<P37>,-A<P38>,-N<P39>,-N<P40>,-N<P41>,-N<P42>

When you launch this request, take the shipment number in WS Simple response:
<ship_create_num><![CDATA[22222222]]></ship_create_num>
<ship_num_rand><![CDATA[75622222222761]]></ship_num_rand>

2. Cancel shipment

Use <ship_num_rand> to cancel a shipment - see full description in the corresponding section.

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=bitul_mishloah&ARGUMENTS=-A<ship_num_rand>,-A,-A,-A,-N<customer number>

2. Print label

Use <ship_create_num> to generate a label in the shipping company format:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_print_ws&ARGUMENTS=-N<ship_create_num>

3. Get tracking information

Finally, send <ship_create_num> in a PULL request to get the updated tracking information:

https://<host>/RunCom.Server/Request.aspx?APPNAME=run&PRGNAME=ship_status_xml&ARGUMENTS=-N<ship_create_num>,-A