Cucumber Report

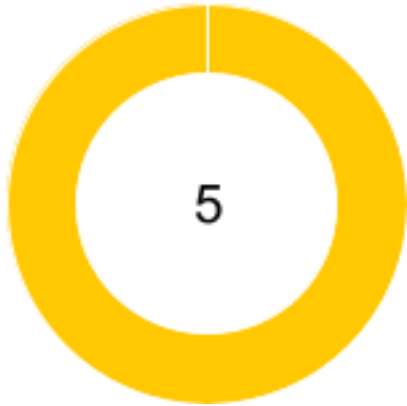| Start : Oct 26, 1:03:04.466 pm	End : Oct 26, 1:03:04.599 pm	Duration : 0.133 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 5
1	1	5

#	Feature Name	T	P	F	S	Duration
1	Authentification	1	0	1	0	0.133 s
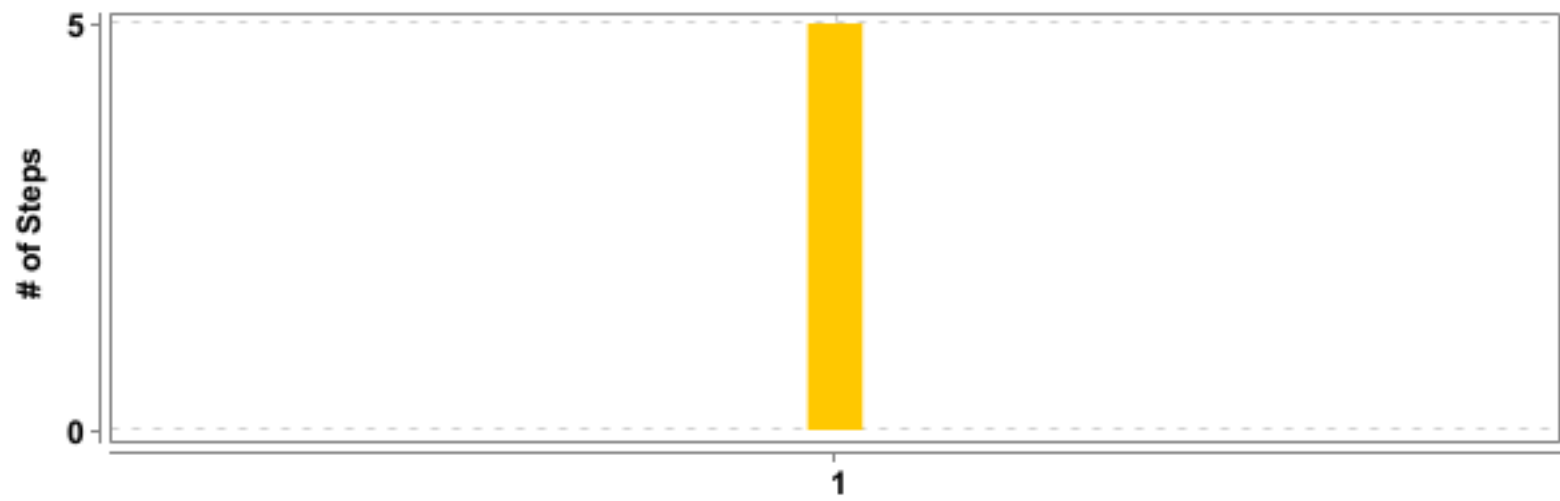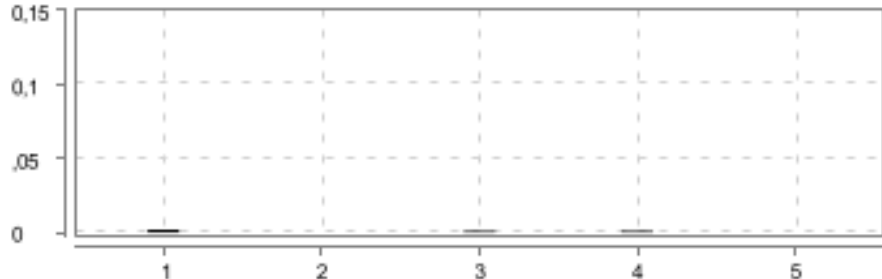
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Authentification	authentification avec des identifiants valides	5	0	0	5	0.126 s

(F)- Authentification

FAILED	DURATION - 0.133 s		Scenarios			Steps	
/ 1:03:04.466 pm // 1:03:04.599 pm /			Total - 1	1		Total - 5	5
			Pass - 0			Pass - 0	
			Fail - 1			Fail - 0	
			Skip - 0			Skip - 5	

(S)- authentification avec des identifiants valides

FAILED	DURATION - 0.126 s		Steps	
/ 1:03:04.473 pm // 1:03:04.599 pm /			Total - 5	5
Authentification			Pass - 0	
@connexion @connexionValide			Fail - 0	
			Skip - 5	

#	Step / Hook Details	Status	Duration
	BEFORE - utils.Setup.setup()	FAILED	0.071 s

	java.lang.IllegalStateException: The path to the driver executable The path to the driver executable must be set by the webdriver.edge.driver system property; for more information, see https://docs.microsoft.com/en-us/microsoft-edge/webdriver-chromium/. The latest version can be downloaded from https://developer.microsoft.com/en-us/microsoft-edge/tools/webdriver/
	    at org.openqa.selenium.internal.Require$StateChecker.nonNull(Require.java:280)
	    at org.openqa.selenium.remote.service.DriverService.findExecutable(DriverService.java:135)
	    at org.openqa.selenium.edge.EdgeDriverService.access$000(EdgeDriverService.java:40)
	    at org.openqa.selenium.edge.EdgeDriverService$Builder.findDefaultExecutable(EdgeDriverService.java:171)
	    at org.openqa.selenium.remote.service.DriverService$Builder.build(DriverService.java:437)
	    at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:41)
	    at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:38)
	    at utils.EdgeDriverManager.createDriver(EdgeDriverManager.java:22)
	    at utils.DriverManager.getDriver(DriverManager.java:25)
	    at utils.Setup.setup(Setup.java:21)		

1	Given je me connecte sur l'application	SKIPPED	0.002 s
2	When je saisis le username "Admin"	SKIPPED	0.000 s
3	And je saisis le password "admin123"	SKIPPED	0.001 s
4	And je clique sur le bouton login	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
5	Then je me redirige vers la page d'acceuil et "Dashboard" s'affiche	SKIPPED	0.000 s
	AFTER - utils.Setup.embedScreenshot(io.cucumber.java.Scenario)	FAILED	0.008 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because "utils.Setup.driver" is null at utils.Setup.embedScreenshot(Setup.java:36)		