

Interval Verification Documentation for TrapeziumFence

July 2026

Abstract

This document describes the architecture, verification logic, functions, and recorded experiments for the **TrapeziumFence** package. The package verifies upper bounds for the normalized shortest equal-area fence in convex quadrilaterals and also records necessary-condition exclusions for optimality. The search subdivides a four-dimensional rectangle of coordinates for the two free vertices C, D . Each leaf rectangle is either discarded as certainly inadmissible, certified as having a shortest fence value below a threshold θ , certified nonoptimal by the opposite-pair equality condition, or retained as an unresolved survivor. The certificate verifier re-checks both the metadata, local leaf claims, and global dyadic tiling of the original domain.

Contents

1	Mathematical Normalization	1
2	Package Architecture	2
3	Rectangle Validation Logic	2
3.1	Cells	2
3.2	Splitting Rule	3
3.3	Leaf Classification	3
3.4	Self-Describing Certificate Metadata	4
3.5	Certificate Semantics	4
4	Auxiliary Certificates	4
4.1	Opposite-Pair Equality	4
4.2	Flat and Small-Area Estimate	4
4.3	Angle Consequence	5
5	Functional Bounds	5
5.1	Vertex Bounds	5
5.2	Opposite-Pair Bounds	6
5.3	Natural and Centered Enclosures	6
6	Function Reference	6
6.1	geom.c/geom.h	6
6.2	series.c/series.h	7
6.3	functionals.c/functionals.h	8
6.4	admissible.c/admissible.h	8
6.5	search.c/search.h	8
6.6	cert.c/cert.h	9
6.7	fence_validate.c	10
6.8	Python Tools and Tests	10

7	Command-Line Interface	11
8	Experiments	11
8.1	Build and Machine	11
8.2	Reference Trapezoid	12
8.3	Threshold $\theta = 1.0496$	12
8.4	Survivor Analysis	13
8.5	Interpretation	13
8.6	Audit Status	13
9	Limitations and Soundness Notes	14

1 Mathematical Normalization

The package studies convex quadrilaterals $ABCD$ with $A = (0, 0)$, $B = (1, 0)$, $C = (c_1, c_2)$, and $D = (d_1, d_2)$. The side AB is assumed to be a longest side and is normalized to length 1. This loses no generality for the target functional, because fence lengths are divided by $\sqrt{\text{Area}(ABCD)}$. A quadrilateral with a longer side can be rescaled and appears in another copy of the normalized search.

The raw search box is

$$c_1 \in [0, 2], \quad c_2 \in [0, 1], \quad d_1 \in [-1, 1], \quad d_2 \in [0, 1].$$

The admissibility predicate keeps only boxes that may contain counterclockwise convex quadrilaterals whose non-base side lengths are at most 1:

$$|BC| \leq 1, \quad |CD| \leq 1, \quad |DA| \leq 1.$$

For a quadrilateral $Q = ABCD$, the code computes six scale-invariant upper bounds $F_i(Q)$ for the normalized shortest fence value:

$$f(Q) \leq \min_{0 \leq i < 6} F_i(Q).$$

The six items are four vertex-angle bounds and two opposite-edge-pair bounds. A box is certified below θ when interval arithmetic proves that the upper endpoint of an enclosure for $\min_i F_i$ is at most θ . Consequently, certified boxes are one-sided exclusions for the problem $f(Q) > \theta$: they prove that no admissible quadrilateral in the box has normalized shortest fence value above the threshold.

2 Package Architecture

The C implementation is arranged in layers:

geom.c, geom.h Arb arithmetic wrappers, four-variable forward-mode automatic differentiation jets, and basic point/vector operations.

series.c, series.h Rigorous enclosures for $g(\gamma) = \gamma / \sin \gamma$ and $g'(\gamma)$, used by the parallel-safe opposite-pair formula near $\gamma = 0$.

functionals.c, functionals.h Construction of the six upper-bound functionals, natural and centered interval enclosures, the minimum envelope used by certification, and the optional `functionals\_opposite\_pairs\_disjoint` nonoptimality certificate.

`admissible.c`, `admissible.h` Conservative interval tests that discard boxes containing no admissible normalized quadrilateral, plus the flat/small-area certificate `box\_small\_area\_certifies\_1`.

`search.c`, `search.h` Dyadic subdivision engine. It classifies boxes as discarded, certified low, flat-area low, nonoptimal, or surviving; splits unresolved boxes; collects statistics; and can seed a refinement run from previous survivors.

`cert.c`, `cert.h` JSONL certificate writer, stateless certificate verifier, and certificate assembler. The verifier first checks the self-describing metadata line, then recomputes local claims and checks that all leaves tile the original domain by the same dyadic splitting rule. Missing dyadic children fail immediately. The assembler replaces survivor leaves through a refinement chain and checks metadata compatibility across the chain.

`fence_validate.c` Command-line front end for searching, refining, verifying, and evaluating a point.

`analyze_cert.py` Safe postprocessing of certificate files. It does not replace certificate verification.

`tests/test_trap.c` Unit tests for the reference trapezoid, pair-bound formula agreement, series evaluation, inadmissibility, one interior certification, the pair-equality certificate, and the flat-area certificate.

`tests/test_cert_cli.sh` CLI regression test for certificate verification, including fast failure on a missing certificate leaf.

3 Rectangle Validation Logic

3.1 Cells

A search cell is a four-dimensional rectangle

$$X = [c_1^-, c_1^+] \times [c_2^-, c_2^+] \times [d_1^-, d_1^+] \times [d_2^-, d_2^+].$$

Equivalently, it is a product of two planar rectangles:

$$X_C = [c_1^-, c_1^+] \times [c_2^-, c_2^+], \quad X_D = [d_1^-, d_1^+] \times [d_2^-, d_2^+].$$

The initial cell has

$$X_C = [0, 2] \times [0, 1], \quad X_D = [-1, 1] \times [0, 1].$$

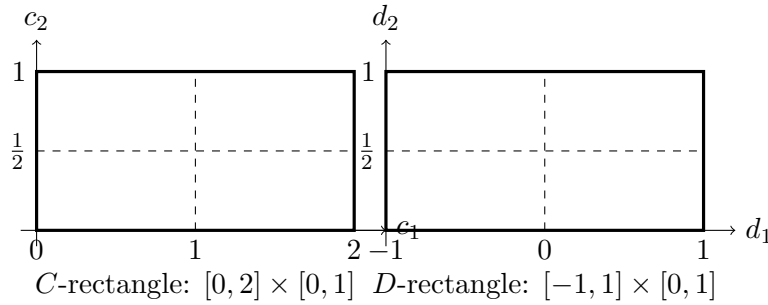


Figure 1: Equal-axis initial planar grids for C and D . Combining one rectangle from the C -grid with one rectangle from the D -grid gives a four-dimensional cell.

3.2 Splitting Rule

The root spans are

$$(2, 1, 2, 1)$$

for the coordinates (c_1, c_2, d_1, d_2) . The search compares scaled widths

$$\frac{c_1^+ - c_1^-}{2}, \quad c_2^+ - c_2^-, \quad \frac{d_1^+ - d_1^-}{2}, \quad d_2^+ - d_2^-.$$

The coordinate with largest scaled width is bisected. If the coordinate is c_1 or c_2 , only the C -rectangle changes; if it is d_1 or d_2 , only the D -rectangle changes. This rule is deterministic and is used by both the search and the certificate verifier.

3.3 Leaf Classification

For a box X , the search applies the following logic:

1. If `box\_certainly\_inadmissible` proves that the entire box violates convexity, side-length, or optional half-symmetry constraints, the leaf is written with status `discarded`.
2. If `--flat-area-cert` is enabled and `box\_small\_area\_certifies\_low` proves the flat/small-area estimate below, the leaf is written with status `flat\_area`. This is a genuine low-fence certificate.
3. If `--pair-eq-cert` is enabled and `functionals\_opposite\_pairs\_disjoint` proves that the two opposite-pair fence intervals are disjoint, the leaf is written with status `nonoptimal`. This excludes an optimizer by a necessary optimality condition, but is not by itself a low-fence claim.
4. Otherwise, `functionals\_min` computes an interval enclosure $[f_{\text{lo}}, f_{\text{hi}}]$ for the minimum of the six upper-bound items. If the enclosure is finite and $f_{\text{hi}} \leq \theta$, the leaf is written with status `certified`.
5. If the box is not certified and its largest scaled width is at most `wfloor`, it is written with status `survivor`. A survivor is not evidence of optimality; it is merely an unresolved part of the outer neighborhood.
6. Otherwise the box is split into two children and the process continues.

The search can be restarted from survivors by passing `--refine FILE`. Refinement outputs are partial certificates. Use `--assemble` to replace survivor leaves stage by stage and produce a complete certificate for the original root box.

3.4 Self-Describing Certificate Metadata

Every JSONL certificate begins with a metadata line of schema version 2. It records the threshold θ , enclosure form, half-domain flag, auxiliary-certificate flags, precision provenance, root box, and splitter spans. Leaf lines follow this first line.

The verifier reads θ , `form`, and `half` from the file. Supplying `--theta`, `--form`, or `--half` during `--verify` is only a cross-check: if a command-line value disagrees with the certificate metadata, verification fails with `FAIL[meta]`. This prevents a certificate for one threshold from being silently audited as a different, usually weaker, statement.

The assembler requires metadata in every input file and checks that the global claim parameters are compatible before it replaces survivor leaves. Old JSONL files without metadata must be regenerated with the current program before they can be audited or assembled.

3.5 Certificate Semantics

A complete verified certificate proves:

every admissible quadrilateral outside the survivor union is either
certified below θ or certified nonoptimal.

Statuses `certified` and `flat\_area` are low-fence certificates: they prove $f(Q) \leq \theta$ throughout the box. Status `nonoptimal` means that no optimizer lies in the box, because a necessary optimality condition fails. It does not assert a pointwise low-fence bound.

Therefore a certificate with `--pair-eq-cert` enabled should be read as an exclusion certificate for possible above-threshold optimizers, not simply as a partition into low boxes and survivors. It does not prove that survivor boxes contain values above θ , nor does it produce a lower bound for the true optimum. It gives an outer neighborhood for currently unresolved candidate configurations.

4 Auxiliary Certificates

4.1 Opposite-Pair Equality

The two opposite-pair items correspond to the fence constructions associated to the pairs (AB, CD) and (BC, DA) . A theoretical necessary condition for optimality is that these two fences agree at an optimizer. The optional certificate `--pair-eq-cert` evaluates interval enclosures for the two opposite-pair items. If the finite intervals are disjoint, then no point in the box can satisfy the equality condition, and the box is written with status `nonoptimal`.

This certificate is independent of the threshold θ . It removes regions that cannot contain a maximizing quadrilateral even when the current upper-bound envelope is too wide to certify $f(Q) \leq \theta$.

4.2 Flat and Small-Area Estimate

Let

$$A = \text{Area}(ABCD), \quad h = \max\{c_2, d_2\}.$$

For the fence associated to the pair of opposite sides (AB, CD) , a direct construction gives

$$L_{AB,CD} \leq h.$$

Indeed, the relevant separating curve can be chosen with length no larger than the largest height of the two top vertices over the base line AB .

For an admissible counterclockwise convex quadrilateral in the normalized domain,

$$A = \text{Area}(ABC) + \text{Area}(ACD) > \frac{c_2}{2}, \quad A = \text{Area}(ABD) + \text{Area}(BCD) > \frac{d_2}{2}.$$

Hence $h \leq 2A$, and therefore

$$\frac{L_{AB,CD}}{\sqrt{A}} \leq \frac{h}{\sqrt{A}} \leq 2\sqrt{A}.$$

Consequently, if interval arithmetic proves

$$A_{\text{ub}} \leq \frac{\theta^2}{4},$$

then the whole box has normalized shortest fence value at most θ . This is implemented by `box\_small\_area\_certifies\_low` and recorded with status `flat\_area`.

For the threshold used below,

$$\theta = 1.0496, \quad \theta^2 = 1.10166016, \quad \frac{\theta^2}{4} = 0.27541504.$$

4.3 Angle Consequence

The vertex fence at an angle α has normalized upper bound $\sqrt{\alpha}$. Thus, if the smallest angle of $ABCD$ is less than θ^2 , the quadrilateral is already below threshold. Any possible above-threshold optimizer must therefore have all four angles at least θ^2 , so its largest angle is at most

$$2\pi - 3\theta^2.$$

For $\theta = 1.0496$, this is

$$2.978204827 \text{ radians} = 170.638567^\circ,$$

or equivalently the gap from a straight angle is at least

$$3\theta^2 - \pi = 0.163387826 \text{ radians.}$$

This angle observation explains why very flat quadrilaterals should not be optimal. The implemented small-area certificate above is the direct quantitative exclusion used in the current computation.

5 Functional Bounds

5.1 Vertex Bounds

For a vertex V with neighboring vertices P, Q , the vertex item is

$$F_V = \sqrt{\angle PVQ}.$$

The angle is computed as

$$\text{atan2}(|(P - V) \times (Q - V)|, (P - V) \cdot (Q - V)).$$

If a coarse interval contains a degenerate vertex case where `atan2` becomes indeterminate, the value interval is clamped conservatively to $[0, \pi]$, and derivative information is treated as indeterminate. In centered mode this forces a conservative fallback to the natural enclosure.

5.2 Opposite-Pair Bounds

There are two opposite-pair items: (AB, CD) and (BC, DA) . Let the two supporting line directions make acute angle $\gamma \in [0, \pi/2]$, and let $A_Q = \text{Area}(ABCD)$. The implementation uses two algebraically identical formulas.

When $\inf \gamma > \text{GAMMA_SPLIT}$, the apex form is used. Let O be the intersection point of the two supporting lines, and let T_0, T_1 be the areas of the two triangles formed by the non-pair edges and O . Then

$$F_{\text{pair}}^2 = \frac{\gamma(T_0 + T_1)}{A_Q}.$$

Near parallelism, the symmetric formula is used:

$$F_{\text{pair}}^2 = \frac{\gamma}{\sin \gamma} \frac{p_a + p_b}{2A_Q},$$

where each p is a product of distances from the endpoints of one non-pair edge to the two opposite supporting lines. This form avoids the unstable intersection point O when γ is small.

5.3 Natural and Centered Enclosures

The natural enclosure evaluates each expression directly over interval boxes. The centered enclosure uses a mean-value form

$$F_i(m) + \sum_{k=0}^3 \partial_k F_i(X) [-r_k, r_k],$$

where m is the coordinate midpoint and r_k is half the coordinate width. The derivatives $\partial_k F_i(X)$ are obtained by forward-mode automatic differentiation over Arb balls. In centered mode the code combines the centered and natural enclosures conservatively: if both are finite and overlap, their intersection is used; if they are finite but disjoint, their hull is used; if one is non-finite, the finite one is used.

6 Function Reference

This section lists the implemented functions by module. Static functions are included because they encode important proof logic.

6.1 `geom.c/geom.h`

Function	Purpose
<code>jet_init</code>	Initializes the value ball and all four derivative balls of a jet.
<code>jet_clear</code>	Clears all Arb storage owned by a jet.
<code>jet_set</code>	Copies a jet value and its derivative enclosures.
<code>jet_set_var</code>	Seeds one moduli coordinate as an automatic-differentiation variable with derivative 1 in coordinate k .
<code>jet_set_const</code>	Sets a constant Arb value and zero derivatives.
<code>jet_set_si</code>	Sets a signed integer constant and zero derivatives.
<code>jet_add</code>	Adds two jets componentwise.
<code>jet_sub</code>	Subtracts two jets componentwise.
<code>jet_neg</code>	Negates value and derivatives.
<code>jet_mul</code>	Multiplies jets using the product rule; temporaries allow aliasing.
<code>jet_div</code>	Divides jets using the quotient rule; non-finite balls are preserved when the denominator straddles zero.
<code>jet_sqr</code>	Squares a jet and applies $d(a^2) = 2a da$.
<code>jet_sqrt</code>	Applies square root with derivative $da/(2\sqrt{a})$. Degenerate input may produce non-finite derivative enclosures, which higher layers handle conservatively.
<code>jet_abs</code>	Computes $ a $. If the value straddles zero, the value becomes $[0, \sup a]$ and derivatives receive sign uncertainty.
<code>jet_atan2</code>	Computes $\text{atan2}(y, x)$ and its derivative $(x dy - y dx)/(x^2 + y^2)$.
<code>jet_mul_si</code>	Multiplies a jet by a signed integer.
<code>jet_mul_arb</code>	Multiplies a jet by a scalar Arb constant.
<code>jpt_init</code>	Initializes a two-coordinate jet point.
<code>jpt_clear</code>	Clears a jet point.
<code>jpt_sub</code>	Subtracts two jet points.

Function	Purpose
<code>jet_cross</code>	Computes the two-dimensional cross product of two jet vectors.
<code>jet_dot</code>	Computes the dot product of two jet vectors.
<code>trap_cross</code>	Scalar Arb cross product for raw vector components.
<code>trap_dot</code>	Scalar Arb dot product for raw vector components.

6.2 `series.c/series.h`

Function	Purpose
<code>series_build</code>	Static initializer that computes Taylor coefficients for $\gamma/\sin\gamma$ as rational numbers and stores them as high-precision Arb balls.
<code>ensure_coeffs</code>	Static guard that lazily initializes the coefficient table; protected by an OpenMP critical section when OpenMP is enabled.
<code>series_cleanup</code>	Clears cached coefficient balls. Called by the CLI and tests before exit.
<code>ghi_ball</code>	Static helper that turns the upper endpoint of a γ interval into a thin Arb ball.
<code>clamp_nonneg</code>	Static helper that intersects γ with $[0, \pi/2]$, valid because the pair angle is acute by construction.
<code>gamma_over_sin_series</code>	Taylor-series enclosure for $g(\gamma) = \gamma/\sin\gamma$, with a rigorous positive tail bound.
<code>gamma_over_sin_value</code>	Monotone endpoint enclosure for $g(\gamma)$, avoiding the removable $0/0$ singularity.
<code>gamma_over_sin_deriv</code>	Encloses $g'(\gamma)$ by direct formula away from zero and by series near zero.
<code>jet_gamma_over_sin</code>	Applies g to a jet using the value enclosure and derivative enclosure.

6.3 `functionals.c/functionals.h`

Function	Purpose
<code>vbound</code>	Static helper for the vertex bound $\sqrt{\angle PVQ}$.
<code>pdist</code>	Static helper for the distance from a point to a line, used in the parallel-safe pair formula.
<code>tri_area</code>	Static helper for triangle area $\frac{1}{2} (Q - P) \times (O - P) $.
<code>pair_bound</code>	Static helper implementing the opposite-pair bound. It selects the apex formula or the parallel-safe formula unless a test forces one.
<code>compute_items</code>	Static builder for the six item jets from the four coordinate jets. It also constructs the quadrilateral area $A_Q = (c_2 + c_1d_2 - d_1c_2)/2$.
<code>functionals_eval</code>	Public routine that encloses all six items on a coordinate box, in natural or centered form.

Function	Purpose
<code>functionals_pair_forced</code>	Test hook that evaluates one pair item at a point while forcing the apex or parallel-safe formula.
<code>functionals_min</code>	Encloses the minimum envelope over the six items. Non-finite item enclosures are ignored; if all six are non-finite, the result is $+\infty$, so the search cannot certify the box.
<code>functionals_opposite_pairs_disjoint</code>	Checks if the two opposite-pair items and returns true only when both finite intervals are disjoint, certifying failure of the pair-equality necessary condition for optimality.

6.4 `admissible.c/admissible.h`

Function	Purpose
<code>set_box</code>	Static helper converting double endpoints into an Arb interval.
<code>sqrlen</code>	Static helper computing squared vector length in Arb arithmetic.
<code>box_certainly_inadmissible</code>	Returns true only when a whole box is proved inadmissible. It checks CCW convexity through cross products, side lengths through squared distances, and optionally the half-domain condition $c_1 + d_1 \geq 1$.
<code>box_small_area_certifies_lower</code>	Returns true only when the interval upper bound for area satisfies $A_{\text{ub}} \leq \theta^2/4$, so the estimate $L_{AB,CD}/\sqrt{A} \leq 2\sqrt{A}$ proves the box below threshold.

6.5 `search.c/search.h`

Function	Purpose
<code>search_root_box</code>	Writes the full coordinate domain $[0, 2] \times [0, 1] \times [-1, 1] \times [0, 1]$.
<code>st_init</code>	Static stack initializer for pending boxes.
<code>st_free</code>	Static stack destructor.
<code>st_push</code>	Static stack push with geometric reallocation.
<code>st_pop</code>	Static stack pop; returns false when empty.
<code>widest_coord</code>	Static helper selecting the coordinate with largest root-span-scaled width.
<code>classify</code>	Static core classifier. It applies inadmissibility, optional flat-area certification, optional pair-equality nonoptimality, functional certification, optional adaptive precision, survivor flooring, and child generation.
<code>stats_add_leaf</code>	Static statistics accumulator for a final leaf.
<code>run_serial</code>	Static depth-first serial driver over a seeded stack.
<code>run_parallel</code>	Static OpenMP driver using a shared stack and critical sections for stack/statistics updates.
<code>run_stack</code>	Static dispatcher that initializes statistics and selects serial or parallel execution.
<code>search_run</code>	Starts a search from the root box.

Function	Purpose
<code>search_run_seeded</code>	Starts a search from explicit seed boxes, used by <code>--refine</code> .

6.6 `cert.c/cert.h`

Function	Purpose
<code>status_name</code>	Static conversion from leaf status enum to JSON status string.
<code>cert_write_meta</code>	Writes the schema-2 metadata line containing threshold, form, half-domain flag, auxiliary flags, precision prove-nance, root box, and splitter spans.
<code>cert_write_leaf</code>	Leaf callback that writes one JSON line containing box, status, active item, enclosure, and precision.
<code>parse_meta_line</code>	Static parser for the metadata JSON line.
<code>parse_line</code>	Static parser for certificate leaf JSON lines.
<code>parse_status</code>	Static parser for status strings; accepts <code>low</code> as an alias for <code>certified</code> , and recognizes <code>flat_area</code> and <code>nonoptimal</code> .
<code>cmp_double</code>	Static total ordering helper for doubles used in sorting boxes.
<code>cmp_box_arrays</code>	Static lexicographic comparison of box endpoints.
<code>leaf_cmp</code>	Static comparator for sorting certificate leaves.
<code>widest_coord_cert</code>	Static copy of the deterministic splitting rule used by the verifier.
<code>meta_compatible</code>	Static check that two certificate files assert the same global claim parameters before assembly.
<code>verify_leaf_claim</code>	Static local audit of one leaf: discarded boxes must still be certainly inadmissible; certified and flat-area boxes must recompute below θ ; nonoptimal boxes must recompute disjoint opposite-pair intervals; survivors require no value claim.
<code>verify_cover_node_slice</code>	Static recursive tiling audit over the leaves contained in the current node. Missing children fail immediately; the verifier no longer descends empty subtrees.
<code>cover_node_slice_structure</code>	Static structural tiling check used by assembly, without rechecking local analytic claims.
<code>cert_load_survivors</code>	Loads survivor boxes from a certificate file for a refinement run.
<code>cert_verify</code>	Public verifier combining parsing, duplicate detection, global coverage checking, and local claim recomputation.
<code>cert_assemble</code>	Public assembler that replaces survivor leaves through a refinement chain and writes one full-domain JSONL certificate.

6.7 `fence\_validate.c`

Function	Purpose
<code>usage</code>	Static helper printing command-line options.

Function	Purpose
<code>main</code>	Parses options, dispatches point evaluation, verification, certificate assembly, full search, or survivor refinement; writes certificates and prints statistics.

6.8 Python Tools and Tests

Function or file	Purpose
<code>analyze_cert.py</code>	Summarizes certificates safely. It reports survivor volume and separates certainly-admissible survivor cores from boundary-straddling survivors.
<code>tests/test_trap.c: ok</code>	Records a unit-test pass/fail result.
<code>tests/test_trap.c: ub, lb</code>	Convert Arb upper and lower endpoints to doubles for tests.
<code>tests/test_trap.c: approx</code>	Checks that an Arb enclosure lies within a tolerance of a reference value.
<code>tests/test_trap.c: test_Tstar</code>	Checks the reference trapezoid values and active pair item.
<code>tests/test_trap.c: test_pair_forms</code>	Checks agreement of the two opposite-pair formulas.
<code>tests/test_trap.c: test_series</code>	Checks $\gamma/\sin \gamma$ series enclosures against direct Arb evaluation.
<code>tests/test_trap.c: test_inadmissible</code>	Checks conservative inadmissibility on known examples.
<code>tests/test_trap.c: test_interior_certify</code>	Checks that an interior sub-threshold box certifies.
<code>tests/test_trap.c: test_pair_equality_certificate</code>	Checks that a box with disjoint opposite-pair intervals is certified nonoptimal, while a small box around T^* is not rejected by this certificate.
<code>tests/test_trap.c: test_flat_area_certificate</code>	Checks that small-area boxes are certified low and that a small box around T^* is not eliminated by the flat-area estimate.
<code>tests/test_cert_cli.sh</code>	Builds a tiny certificate, verifies it from metadata alone, checks that a wrong command-line theta fails with <code>FAIL[meta]</code> , deletes one leaf, and checks that verification fails quickly with a coverage error.

7 Command-Line Interface

The executable is `fence\_validate`. The principal options are:

- `--theta T` Threshold for certification.
- `--wfloor W` Scaled-width floor at which unresolved boxes become survivors.
- `--prec P` Starting Arb precision in bits.
- `--maxprec M` Cap for adaptive precision.
- `--form natural|centered` Interval enclosure mode.

--half Use the optional reflection half-domain $c_1 + d_1 \geq 1$.

--serial Force single-threaded execution.

--adaptive Retry marginal unresolved boxes at higher precision.

--pair-eq-cert Certify boxes as **nonoptimal** when the two opposite-pair fence intervals are disjoint.

--flat-area-cert Certify boxes as **flat_area** when the small-area estimate proves normalized fence value below θ .

--max-leaves *N* Debugging cap. Output from capped runs should not be treated as a complete certificate.

--out *FILE* Write a JSONL certificate stream.

--stats Print summary statistics.

--verify *FILE* Re-check metadata, local claims, and full dyadic coverage. The file supplies *theta*, *form*, and *half*; command-line values for those fields are optional consistency checks.

--assemble *FILE...* **--out** *OUT* Assemble a base certificate and refinement files into one full-domain certificate.

--eval *c1 c2 d1 d2* Print the six items and minimum at a point.

--refine *FILE* Seed the search from survivor boxes in a previous certificate.

8 Experiments

8.1 Build and Machine

The current threshold experiment used serial execution with centered enclosures, precision 70, and both auxiliary certificates:

```
make OMP=0
```

Machine characteristics for the timings:

Host	beni-ThinkPad-P53
OS/kernel	Ubuntu 24.04, Linux 6.11.0-29-generic
CPU	Intel Core i7-9750H at 2.60 GHz, 6 cores / 12 threads
Memory	31 GiB RAM, 29 GiB swap
Compiler	Ubuntu GCC 13.3.0
Mode	make OMP=0, --serial

8.2 Reference Trapezoid

The reference trapezoid used in diagnostics is approximately

$$C^* = (0.6417451566, 0.7071006812), \quad D^* = (0.3582548434, 0.7071006812).$$

Point evaluation gives

$$f(T^*) \approx 1.04968581549,$$

with an opposite-pair item active.

8.3 Threshold $\theta = 1.0496$

The following sequence refines only the survivors of the previous run. Each run uses `--theta 1.0496`, `--prec 70`, `--form centered`, `--serial`, `--flat-area-cert`, and `--pair-eq-cert`.

Run	wfloor	Time (s)	Leaves	Discarded	Certified	Flat	Nonopt.	Survivors	Survivor volume
Base	0.025	79.139	215758	11555	116319	213	17884	69787	1.66385×10^{-2}
Refine 1	0.0125	117.585	360798	2967	282735	0	50065	25031	3.72991×10^{-4}
Refine 2	0.00625	35.091	119594	28	51386	0	55878	12302	1.14571×10^{-5}
Refine 3	0.003125	19.360	66134	0	17312	0	39816	9006	5.24218×10^{-7}

The commands were:

```
./fence_validate --theta 1.0496 --wfloor 0.025 --prec 70 \
--form centered --serial --flat-area-cert --pair-eq-cert \
--out flat_pair_cert_w0025.jsonl --stats

./fence_validate --theta 1.0496 --wfloor 0.0125 --prec 70 \
--form centered --serial --flat-area-cert --pair-eq-cert \
--refine flat_pair_cert_w0025.jsonl \
--out flat_pair_refine_w00125.jsonl --stats

./fence_validate --theta 1.0496 --wfloor 0.00625 --prec 70 \
--form centered --serial --flat-area-cert --pair-eq-cert \
--refine flat_pair_refine_w00125.jsonl \
--out flat_pair_refine_w000625.jsonl --stats

./fence_validate --theta 1.0496 --wfloor 0.003125 --prec 70 \
--form centered --serial --flat-area-cert --pair-eq-cert \
--refine flat_pair_refine_w000625.jsonl \
--out flat_pair_refine_w0003125.jsonl --stats
```

8.4 Survivor Analysis

The postprocessor applied to the last refinement file reports that all remaining survivors are certainly admissible, with zero boundary-straddling survivor volume. The survivor union is contained in the product

$$R_C \times R_D,$$

where

$$R_C = [0.6171875, 0.703125] \times [0.662109375, 0.748046875],$$

$$R_D = [0.296875, 0.3828125] \times [0.662109375, 0.748046875].$$

The survivor volume bound is


$$5.24218 \times 10^{-7},$$

and the farthest point of a survivor box from T^* , in the coordinate box metric used by the analysis script, is 0.07065.

8.5 Interpretation

For $\theta = 1.0496$, the current refinement sequence leaves only boxes inside $R_C \times R_D$. Outside this product rectangle, every admissible normalized quadrilateral is either certified to have shortest fence value at most 1.0496 or certified nonoptimal by the opposite-pair equality condition. Thus there is no possible above-threshold optimizer outside $R_C \times R_D$.

This is stronger than the earlier run without auxiliary certificates, but it must be read with the correct status semantics: **nonoptimal** is not a low-fence estimate. It is a separate exclusion using a necessary condition at optimality.

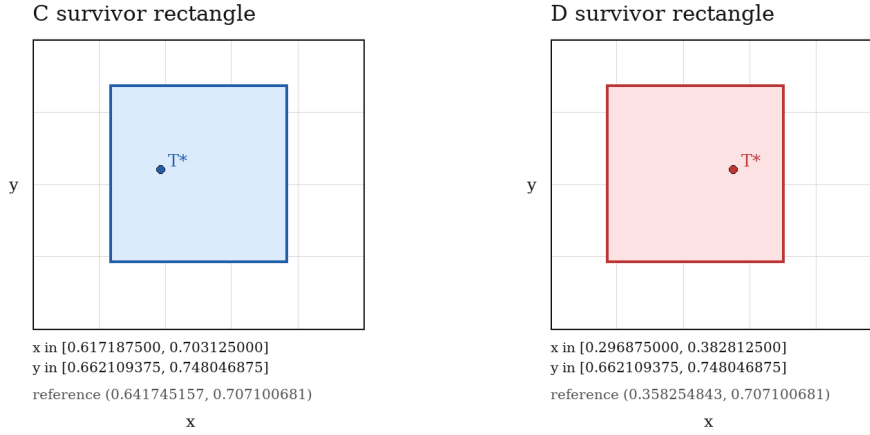

Current certificate: theta = 1.0496, wfloor = 0.003125, survivors = 9006, volume <= 5.24218e-7
All remaining survivors are certainly admissible; boundary-straddling survivor volume is 0.

Figure 2: Equal-axis PNG export of the current survivor rectangles for C and D , together with the reference trapezoid point.

8.6 Audit Status

The listed files are incremental refinement files: each refinement replaces the survivor leaves of the preceding run. Assemble the chain before whole-domain verification:

```
./fence_validate --assemble \  
flat_pair_cert_w0025.jsonl \  
flat_pair_refine_w00125.jsonl \  
flat_pair_refine_w000625.jsonl \  
flat_pair_refine_w0003125.jsonl \  
--out flat_pair_full_w0003125.jsonl
```

The recorded assembly produced

655,164

leaves. The assembled full-domain certificate was then audited by

```
./fence_validate --verify flat_pair_full_w0003125.jsonl \  
--prec 70 --serial
```

with output

655,164 leaves, 14,550 discarded, 467,752 certified,
213 flat-area, 163,643 nonoptimal, 9,006 survivors.

The dyadic partition coverage of the full root box passed, the worst rechecked certified upper bound was

$$1.04959998999232 \leq 1.0496,$$

and the audit reported zero failures.

Verifying a refinement-only file as a full certificate is now a fast structural failure: the verifier reports the first missing dyadic child instead of descending an empty subtree.

The verification command may additionally include `--theta 1.0496` and `--form centered`; in the current code these are checked against the metadata rather than used to define the certificate claim.

9 Limitations and Soundness Notes

- Certification is based on upper bounds for the shortest fence. A certified box proves “below threshold”, while a survivor only means that the current upper-bound enclosures were not tight enough to certify.
- Status `nonoptimal` is not an upper-bound statement. It certifies failure of the opposite-pair equality necessary condition for an optimizer. Conclusions that use `nonoptimal` boxes should be stated as exclusion of possible optimizers, not as pointwise low-fence bounds.
- Status `flat\_area` is an upper-bound statement. It uses $L_{AB,CD}/\sqrt{A} \leq 2\sqrt{A}$ and $A_{\text{ub}} \leq \theta^2/4$ to prove the box below threshold.
- Coarse boxes near degeneracies can have very wide interval enclosures. This is intentional: non-finite or loose enclosures force splitting or survival, never false certification.
- The JSONL enclosure printed in a certificate is diagnostic. The verifier ignores the recorded enclosure and recomputes claims from the box, the metadata threshold, metadata form, metadata half-domain flag, and the requested verification precision.
- A run stopped by `--max-leaves` is useful for debugging but is not a complete certificate and should fail the full coverage check.
- Parallel execution uses a shared stack, so output order may vary. The verifier sorts leaves and checks dyadic coverage, so certificate correctness does not depend on output order.