



WAAS CH 70349 W18A	APP CRS 185°	Rwy Ldg TDZE Apt Elev 66 66
--	------------------------	---

RNAV (GPS) RWY 18

ST PAUL ISLAND (SNP) (PASN)

RNP APCH - GPS.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Inop table does not apply to LPV all Cats and LNAV Cat A and B. When local altimeter setting not received, procedure NA. Circling NA west of Rwy 18-36.	MALSF	MISSED APPROACH: Climb to 2300 direct NILLE and hold, continue climb-in-hold to 2300.

ASOS 135.75	ANCHORAGE CENTER 119.1 339.8	CTAF 122.3 0
-----------------------	--	------------------------

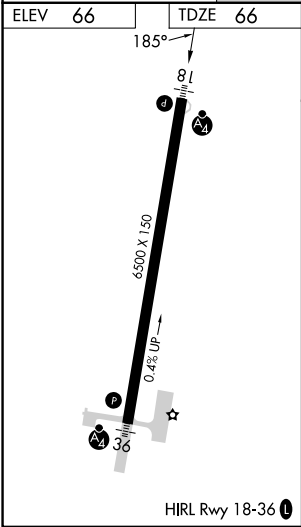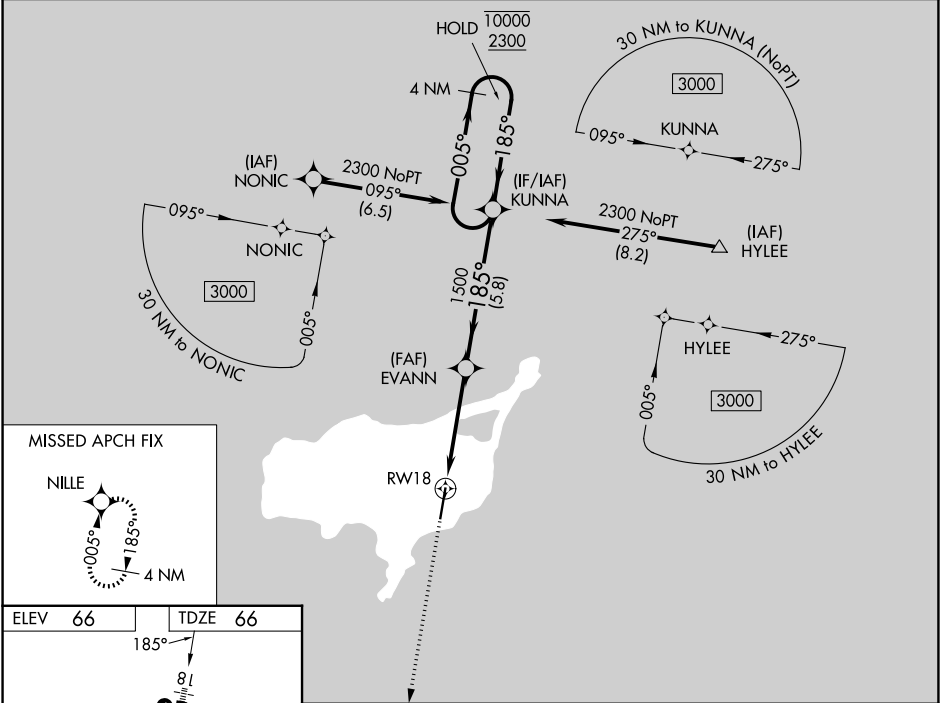

2300	NILLE			
		EVANN	KUNNA	4 NM Holding Pattern
	1.8 NM to RWY 18	1500	1500	
	1.8 NM	2.6 NM	5.8 NM	
CATEGORY	A	B	C	D
LPV DA	266-1		200 (200-1)	
LNAV/VNAV DA	621-1 $\frac{3}{8}$		555 (600-1 $\frac{3}{8}$)	
LNAV MDA	680-1	614 (700-1)	680-1 $\frac{1}{2}$	614 (700-1 $\frac{1}{2}$)
CIRCLING	780-1	714 (800-1)	780-2 714 (800-2)	780-2 $\frac{1}{4}$ 714 (800-2 $\frac{1}{4}$)