
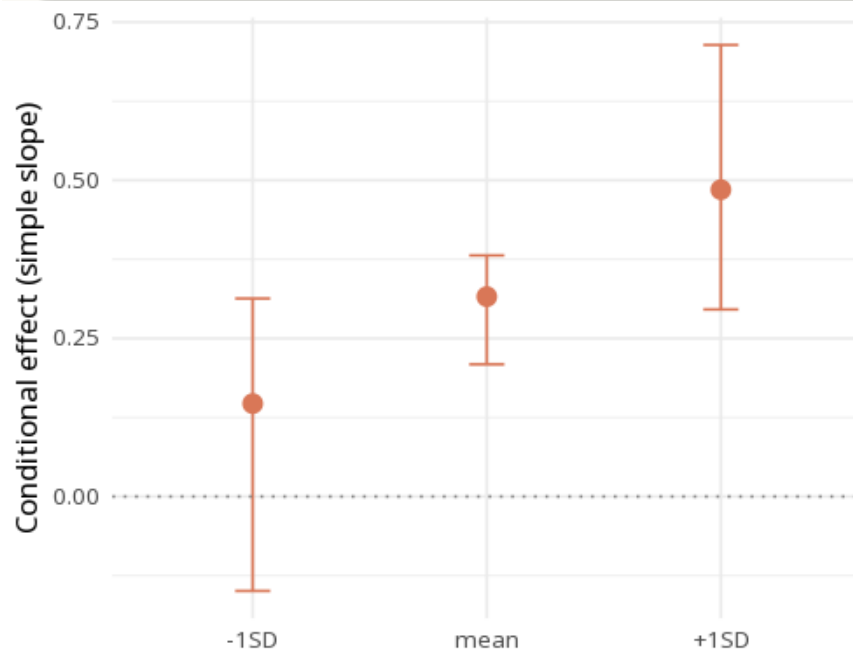


1 PLS-SEM

Construct / item	α	ρA	CR (ρC)	AVE	Mean	SD	Loading / weight	t	p
<i>esg</i>	<i>.86</i>	<i>.86</i>	<i>.90</i>	<i>.70</i>					
esg1					−0.07	1.02	.87	61.60	<.001
esg2					−0.06	1.00	.82	36.98	<.001
esg3					−0.02	0.98	.84	43.80	<.001
esg4					−0.01	1.00	.81	30.50	<.001
<i>norm</i>	<i>.88</i>	<i>.88</i>	<i>.92</i>	<i>.74</i>					
norm1					−0.02	1.04	.87	47.58	<.001
norm2					0.02	1.02	.85	40.99	<.001
norm3					−0.02	1.01	.86	46.69	<.001
norm4					−0.01	1.02	.86	51.02	<.001
<i>service_quality</i>	<i>.86</i>	<i>.88</i>	<i>.91</i>	<i>.71</i>					
service_quality1					−0.03	0.99	.85	21.97	<.001
service_quality2					−0.01	0.96	.85	23.61	<.001
service_quality3					−0.02	0.97	.86	22.61	<.001
service_quality4					0.00	1.00	.81	12.12	<.001
<i>attitude</i>	<i>.88</i>	<i>−2.07</i>	<i>.45</i>	<i>.23</i>					
attitude1					0.05	0.98	.74	2.37	.018
attitude2					0.04	1.04	.41	1.66	.096
attitude3					0.08	1.01	−.03	−0.08	.934
attitude4					0.07	0.98	.47	1.88	.060
<i>intent</i>	<i>.85</i>	<i>.85</i>	<i>.91</i>	<i>.77</i>					
intent1					−0.08	0.96	.89	77.86	<.001
intent2					−0.05	0.99	.85	55.84	<.001
intent3					−0.11	1.01	.89	74.89	<.001
	esg	norm	service_quality	attitude	intent				
esg									
norm	.11								
service_quality	.06	.14							
attitude	.05	.04	.16						
intent	.36	.29	.20	.05					
H	Path		β	p	Percentile 95% CI		BC 95% CI		Result
					Lower	Upper	Lower	Upper	
H1	esg → intent		.33	<.001	.27	.42	.23	.40	Supported
H2	norm → intent		.32	<.001	.21	.38	.25	.43	Supported
H3	service_quality → intent		.19	<.001	.13	.28	.11	.26	Supported
H4	attitude → intent		.07	.419	−.15	.14	−.02	.19	Not supported
H5	norm*attitude → intent		.17	.101	−.00	.40	−.16	.30	Not supported
Construct	R ²	R ² adj	Q ²						
intent	.25	.24	0.03						

Moderator level	β	SE	p	boot 95% CI
-1SD	.15	0.12	.990	[-.15, .31]
mean	.32	0.04	<.001	[.21, .38]
+1SD	.49	0.10	<.001	[.30, .71]

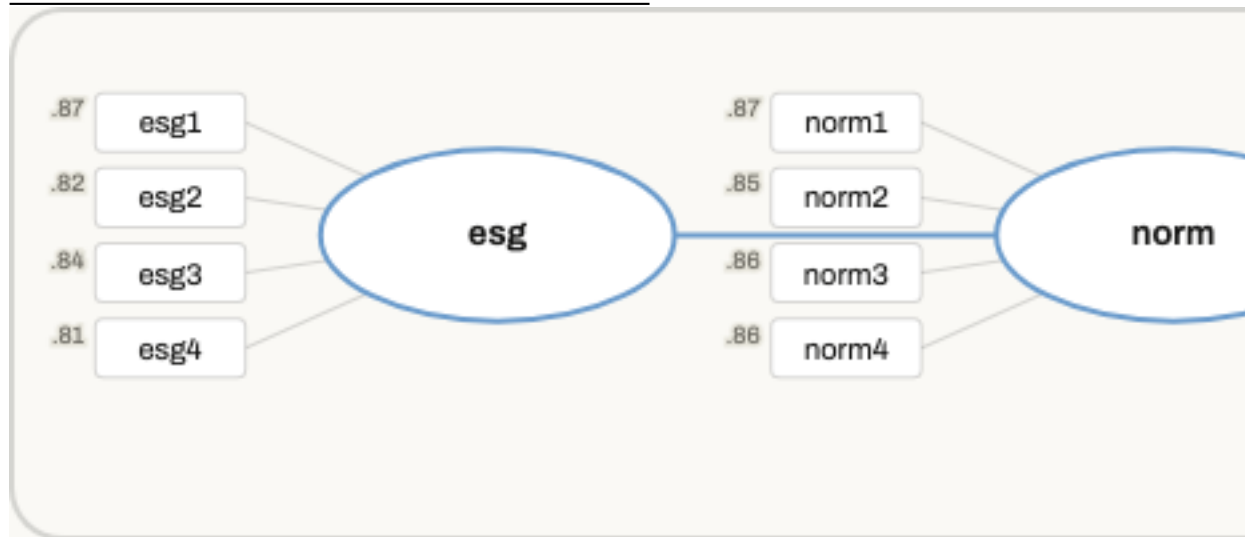

Like CB-SEM but variance-based and prediction-oriented (good for smaller samples / formative constructs). PLS-SEM does not use CB-SEM global fit indices (CFI/TLI/RMSEA) — judge it instead by reliability & validity (CR,

AVE, HTMT), then R^2 , Q^2 (predictive relevance) and f^2 , with SRMR the only commonly reported approximate fit index. Read the bootstrapped path coefficients (β , p); f^2 is each path's effect size (~ 0.02 small, 0.15 medium, 0.35 large).

In the PLS-SEM, the path from *esg* to *intent* gave $\beta=.33$, $p < .001$ (bootstrap); $R^2Y=.25$.

Statistical basis: PLS-SEM estimation (*sempr*) (Ray S, Danks N, Calero Valdéz A (2021). *sempr: Domain-Specific Language for Building PLS Structural Equation Models*. R package.); Discriminant validity via HTMT $< .85/.90$ (Henseler, J., Ringle, C. M., Sarstedt, M. (2015). "A new criterion for assessing discriminant validity in variance-based structural equation modeling." *Journal of the Academy of Marketing Science*, 43(1), 115-135.); f^2 effect-size benchmarks (.02/.15/.35) (Cohen, J. (1988). *Statistical Power Analysis for the Behavioral Sciences* (2nd ed.). Routledge.); PLS-SEM reporting standard (no global fit indices; judge by reliability/validity then $R^2/Q^2/f^2$) (Hair, J. F., Risher, J. J., Sarstedt, M., Ringle, C. M. (2019). "When to use and how to report the results of PLS-SEM." *European Business Review*, 31(1), 2-24.); Two-stage latent moderation via an interaction construct (Henseler, J., Chin, W. W. (2010). "A comparison of approaches for the analysis of interaction effects between latent variables using partial least squares path modeling." *Structural Equation Modeling*, 17(1), 82-109.); Simple slopes at $-1SD/mean/+1SD$ (Aiken, L. S., West, S. G. (1991). *Multiple Regression: Testing and Interpreting Interactions*. Sage.).