

1 PLS-SEM

Construct → Item	Loading / weight		t	p
		.87	31.19	< .001
		.60	9.42	< .001
		.76	18.78	< .001
		.90	63.67	< .001
		.89	63.38	< .001
		.91	69.44	< .001
		.56	5.28	< .001
		.76	13.83	< .001
		.91	33.06	< .001


Construct	α	ρA	CR (ρC)	AVE
visual	.63	.72	.79	.56
textual	.88	.89	.93	.81
speed	.69	.89	.80	.57

	visual	textual	speed
visual			
textual	.42		
speed	.47	.29	

Path	β	t	p	95% CI	f ²
visual → textual	.35	6.31	< .001	[.24, .46]	
textual → speed	.12	1.97	.049	[.00, .24]	
visual → speed	.35	6.72	< .001	[.25, .45]	

Construct	R ²	R ² adj	Q ²
textual	.12	.12	-0.02
speed	.17	.16	-0.00

Path	Estimate	SE	boot 95% CI	p
visual → textual → speed	.04	0.02	[.00, .10]	.088

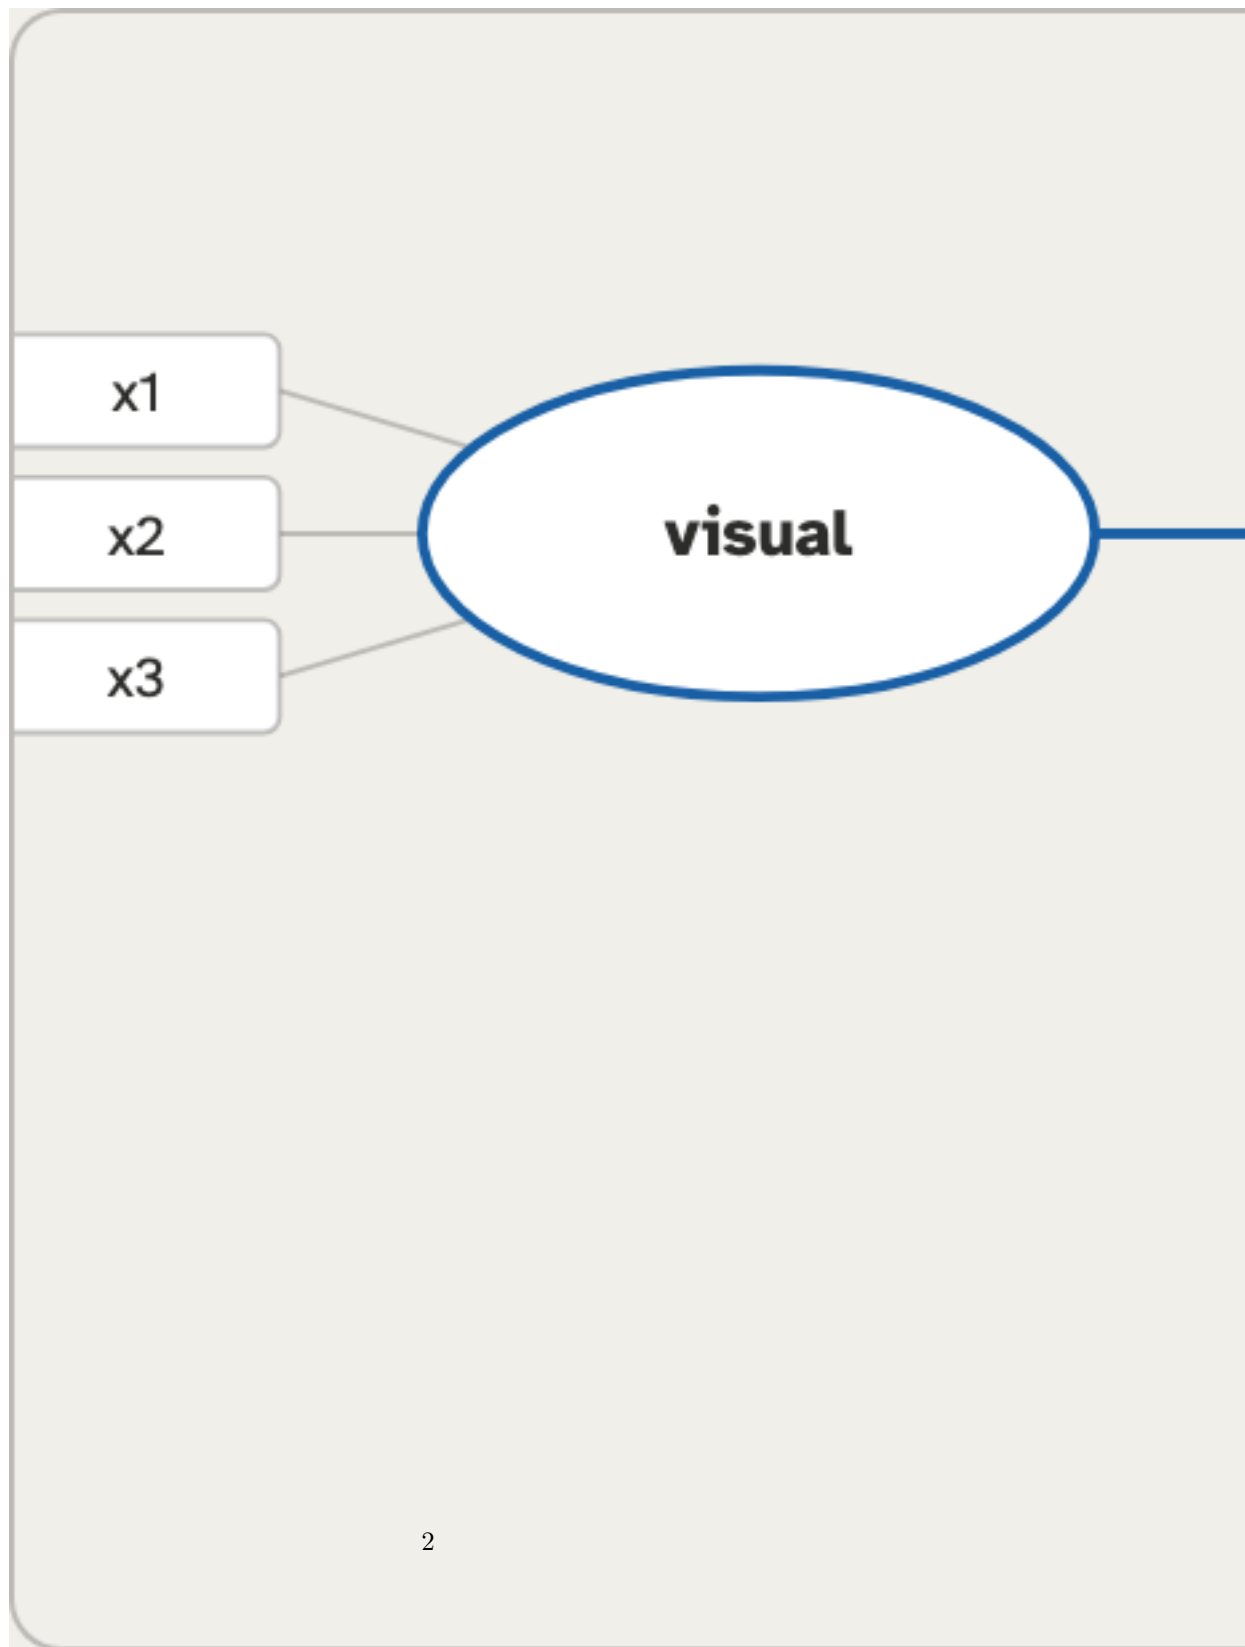

Like CB-SEM but variance-based and prediction-oriented (good for smaller samples / formative constructs). PLS-SEM does not use CB-SEM global fit indices (CFI/TLI/RMSEA) — judge it instead by reliability & validity (CR, AVE, HTMT), then R^2 , Q^2 (predictive relevance) and f^2 , with SRMR the only commonly reported approximate fit index. Read the bootstrapped path coefficients (β , p); f^2 is each path's effect size (~ 0.02 small, 0.15 medium, 0.35 large).

In the PLS-SEM, the path from X to Y gave $\beta=$ ____, $p=$ ____ (bootstrap); $R^2Y=$ ____.