

Agentic Retrieval Systems: A Reproducible Framework for Comparing Conventional RAG, Iterative, and Multi-Agent Retrieval

Ben Karlsberg
Georgia Institute of Technology
bkarlsberg3@gatech.edu

Abstract

Retrieval-augmented generation (RAG) systems increasingly add iterative and multi-agent control loops, but comparisons across these architectures are often confounded by differences in corpora, budgets, logging, and metrics. This paper presents **Agentic Retrieval Systems (ARS)**, an open-source harness that runs conventional retrieve-once RAG, a budgeted single-agent iterative retriever, and a role-separated multi-agent pipeline against a shared corpus, model interface, metric suite, and budget controller, and records per-question traces. The three architectures are compared with `gpt-4o-mini` on a 153-question slice of the HotpotQA distractor development set, using BM25 over 5,675 sentence-level passages, under unconstrained and equal-retrieval budgets, which give the same results. With the default five passages for RAG, the multi-agent pipeline is more accurate under an audited LLM judge (0.765 vs. 0.601; paired difference +0.163, 95% CI +0.098 to +0.235) at $8.2\times$ the tokens, while the single-agent loop gives no measurable gain. The multi-agent pipeline, however, reads about 13 unique passages per question. A control that changes only RAG’s `top_k` to 15 raises RAG to 0.752 and leaves a multi-agent advantage of +0.013 (−0.033 to +0.059), with RAG using 30% of the multi-agent tokens and about 1 s instead of 43 s per question. In this setting the multi-agent gain is therefore explained almost entirely by the larger evidence budget rather than by planning and critique. The study is limited to one model, a small derived slice, and a local BM25 corpus. Code, configurations, run artifacts, and analysis scripts are available at <https://github.com/benkarlsberg/Agentic-Retrieval-Systems>.

1 Introduction

Knowledge-intensive question answering increasingly relies on retrieval-augmented generation [Lewis et al., 2020, Karpukhin et al., 2020, Gao et al., 2023]. Beyond retrieve-once pipelines, recent systems interleave retrieval with reasoning [Trivedi et al., 2023, Jiang et al., 2023, Yao et al., 2023], critique their evidence [Asai et al., 2024], route queries by complexity [Jeong et al., 2024], or split planning, retrieval, critique, and synthesis across specialized agents [Nguyen et al., 2025, Singh et al., 2025]. These designs target multi-hop questions, where a single retrieval round can miss part of the evidence, but they add model calls, tokens, and latency. Because each system is usually evaluated with its own corpus, budgets, and metrics, an observed quality gap may reflect implementation choices, or simply a larger amount of retrieved text, rather than the control architecture.

ARS holds the corpus, retriever, model, budget controller, and metrics fixed across three architectures and reports process cost next to answer quality. Its research questions are whether bounded iterative retrieval (RQ1) or role-separated multi-agent retrieval (RQ2) improves on retrieve-once RAG enough to justify the overhead, how the architectures handle unanswerable questions (RQ3), and how rankings depend on the retriever (RQ4). This paper addresses RQ1 and RQ2, gives preliminary evidence on RQ3 (8 items), and leaves RQ4 open. The contributions

are the harness itself; a live comparison on a 153-question HotpotQA-derived slice under two budget modes, with paired bootstrap intervals, per-stratum results, and an LLM judge checked against a manual audit; a passage-budget control showing that RAG given as many passages as the multi-agent pipeline reads matches its accuracy at a fraction of the cost; and an open release of code, run artifacts, and the script that regenerates every table and figure.

2 Related Work

Retrieval and iterative retrieval. Retrieve-and-read pipelines [Chen et al., 2017], dense retrieval [Karpukhin et al., 2020], and RAG [Lewis et al., 2020] are standard baselines; BM25 remains strong [Robertson and Zaragoza, 2009], and reciprocal rank fusion is a common hybrid [Cormack et al., 2009]. IRCOT interleaves retrieval with chain-of-thought reasoning [Trivedi et al., 2023], FLARE retrieves when generation confidence is low [Jiang et al., 2023], Self-RAG learns when to retrieve and how to critique evidence [Asai et al., 2024], Adaptive-RAG routes by estimated complexity [Jeong et al., 2024], and tool-using agents couple reasoning with search actions [Yao et al., 2023, Schick et al., 2023, Press et al., 2023]. ARS proposes no new policy; it provides a controlled setting for comparing such policies. Long contexts are not free: language models use information in the middle of long inputs less reliably [Liu et al., 2024], which is one reason a larger `top_k` might hurt rather than help.

Agentic RAG comparisons and harnesses. A recent survey organizes agentic RAG by agent cardinality, control structure, and autonomy, and names evaluation and efficiency as open problems [Singh et al., 2025]. MA-RAG assigns planning, step definition, evidence extraction, and answering to separate agents and reports gains on multi-hop benchmarks including HotpotQA [Nguyen et al., 2025]. Ferrazzi et al. [2026] find neither enhanced RAG pipelines nor a single-tool agentic system universally better on four datasets, with the agentic system using about $3.3\times$ more input tokens and $1.5\times$ more time, and McCleary and Ghawaly [2026] measure how search depth, retrieval strategy, and completion budget affect the accuracy and cost of agentic search across six LLMs. FlashRAG reimplements 16 RAG methods over 38 datasets [Jin et al., 2025], and RAG Playground compares retrieval variants combined with ReAct agents [Papadimitriou et al., 2024]. ARS complements these works by fixing the corpus, retriever, model, and budget controller across three control architectures, logging tokens and latency for every call, matching passage budgets, reporting paired bootstrap intervals, and releasing the traces. HotpotQA [Yang et al., 2018], Natural Questions [Kwiatkowski et al., 2019], and 2WikiMultiHopQA [Ho et al., 2020] are the usual multi-hop and open-domain benchmarks.

3 Framework

The three runners share the corpus, retriever, model client, budget controller, and metric suite. **Conventional RAG** issues one retrieval call with the original question, returning `top_k` passages, and one generation call that answers or abstains. The **bounded single-agent** runner makes a controller call at each step that chooses to *retrieve*, *reformulate*, *stop* (and synthesize), or *abstain*; retrieved passages are deduplicated, and hard caps on steps, model calls, retrieval calls, documents, and tokens bound the loop. In the **multi-agent** pipeline a planner call decomposes the question, two retriever roles (“fact” and “evidence”) alternate over up to three retrieval rounds that exclude passages already retrieved, a critic call after each round judges whether the evidence suffices, and a synthesizer call produces the answer or an abstention.

Available retrievers are BM25, dense retrieval over hashing-based fixture embeddings, reciprocal-rank-fusion hybrids, and a lexical reranker; the live study uses BM25 only. Budgets cap steps, model calls, documents, tokens, retrieval calls, and `top_k`. The **unconstrained** mode applies the configured caps, the **equal_retrieval** mode limits every architecture to 3 retrieval

calls and 15 documents (RAG to one retrieval and one model call), and an `equal_token` mode (not run here) imposes a shared token cap. Every question emits JSONL events with queries, retrieved passage IDs and scores, routing actions, API token counts, latency, and termination reason; a deterministic heuristic model supports offline tests (Appendix A).

4 Experimental Setup

Data and corpus. The evaluation slice contains 153 questions drawn with seed 42 from the HotpotQA distractor development set (7,405 questions): 100 bridge questions (the *multi-hop* stratum), 30 comparison questions (*multi-passage*), 15 bridge or comparison questions with short contexts (4–19 sentences against a median of 40; the *short-context* stratum, which is not a verified single-hop set), and 8 synthetic questions about fictional entities with no support in the corpus (*unanswerable*). Gold answers are the HotpotQA strings (mean 2.5 words) without aliases. The corpus pools the distractor-setting paragraphs of the 145 HotpotQA questions and splits them into 5,675 sentence-level passages (`title::si`), so each question competes with passages from the other 144 questions as well as its own distractors. Retrieval is BM25 ($k_1=1.5$, $b=0.75$) over title and sentence text with `top_k=5` per call. The gold evidence of a question is the set of all sentences of its supporting paragraphs.

Model and budgets. All calls use `gpt-4o-mini` at temperature 0 with at most 512 output tokens. The main runs requested the API alias between 04:24 and 10:31 UTC on 2026-09-15 and did not record the returned model identifier, so their exact snapshot cannot be recovered; the control runs (23:15–23:21 UTC, 2026-09-30) and all judge calls recorded `gpt-4o-mini-2024-07-18`. The **unconstrained** budget is 8 steps, 12 model calls, 5 retrieval calls, 20 documents, and 8,000 tokens per question. Each mode was run once per architecture, and no call failed. The multi-agent critic’s verdict never matched the controller’s early-stop pattern, so every question received three retrieval rounds and five model calls: the pipeline behaved as a fixed three-round schedule. Because RAG reads five passages in both modes, the equal-retrieval mode changes the effective budget only for the single-agent loop and is treated as a replication of the unconstrained run.

Passage-budget control. Because three deduplicated rounds of five passages give the multi-agent pipeline far more text than RAG, RAG was re-run with `top_k=15` (the pipeline’s maximum) and `top_k=13` (close to its mean) on the same 153 questions, with the same corpus, retriever, prompt, model, and decoding settings; only `top_k` differs. RAG consults neither retrieval-call nor document caps, so its two modes are procedurally identical (the two top-5 runs retrieve identical passages for all 153 questions), and one run per `top_k` serves both modes. The top-5 results are the original runs.

Metrics. Answers are normalized in the HotpotQA style. *Lenient EM* (L-EM) is 1 if the normalized prediction equals the gold answer or either contains the other; *contains-gold* (CG) requires the prediction to contain the gold (reverse containment only for strings of at most five tokens). Because `gpt-4o-mini` answers in full sentences (30–35 words against 2.5-word gold answers), strict EM is 0.000 for every system and token F1 is dominated by length; L-EM and CG (which differ on one question in the main runs) are therefore the primary string metrics, and *soft F1* (token F1 raised to 0.5 when CG = 1) is secondary. String metrics are 0 on the unanswerable questions, so the maximum L-EM is $145/153 = 0.948$. *Evidence recall* is the fraction of gold-evidence sentences retrieved at any point, and *all support* is the fraction of answerable questions with at least one retrieved sentence from every supporting paragraph; both are recomputed from the traces (the harness field `recall@k` agrees for RAG at every `top_k` and for the multi-agent pipeline, but reports a spurious 1.0 instead of 0.383 for the single-agent

runner, whose retrieved IDs it does not find). Cost comprises model and retrieval calls, unique passages, total tokens, wall-clock latency, and an estimated USD cost at list prices (USD 0.15 input and 0.60 output per million tokens) with each question’s tokens split equally between input and output; this is a rough estimate, not billing data.

LLM judge and audit. Because containment can credit an answer that mentions the gold without committing to it and misses paraphrases, every saved answer is also graded by an LLM judge (`gpt-4o-mini`, temperature 0, JSON output, prompt version `judge-v2`); no system is re-run. The judge sees only the question, the gold answer, and the answer, never the architecture, and requests are issued in a seeded shuffled order. For answerable questions an answer is correct only if it commits to the gold entity or value (aliases, formatting differences, and paraphrases accepted) and incorrect if it hedges, names another entity, mentions the gold only in passing, or abstains. Unanswerable questions use a separate rubric under which an answer is correct if and only if it abstains. An earlier prompt combining both rubrics credited abstentions on answerable questions and was replaced before the audit. All 1,224 judgments returned a valid verdict (918 for the main runs, using 313,858 prompt and 17,181 completion tokens, about USD 0.06; 306 for the control runs, about USD 0.02). To check the judge, I audited 60 judgments drawn with a fixed seed from answerable questions in the unconstrained run, spread evenly over the architectures: 30 on which the judge and L-EM disagree and 30 on which they agree. An AI assistant produced initial correctness labels, which I then reviewed item by item against the gold answers and model outputs. The judge agreed with the audit on 54 of 60 items (Cohen’s $\kappa = 0.78$) and L-EM on 36 of 60 ($\kappa = 0.23$); reweighting the strata to their frequency in the run gives an estimated judge–audit agreement of 96.8% on answerable questions. In four of the six disagreements the judge accepted an answer that does not match the gold, twice by overruling an apparently wrong gold label with outside knowledge and twice by accepting a loosely related answer to a gold string that is a sentence fragment; in the other two it rejected “over 300,000” for the gold “300,000”. The control verdicts were not formally audited; a spot check is reported in Section 5.2.

Statistics and reproduction. Confidence intervals are percentile bootstrap 95% intervals [Efron and Tibshirani, 1993] with 10,000 resamples over questions (seed 42); differences between systems use a paired bootstrap over the same questions, with discordant counts (questions correct for only one of the two systems). The four runs are defined by the `live_hotpot150_*.yaml` files in `configs/experiments/`; the slice, corpus, and build metadata (seed and SHA-256 of the source file) are in `fixtures/`.

```
pip install -e "[dev,openai]"
python scripts/run_experiment.py --config <config.yaml>
python scripts/judge_answers.py [--runs <run dirs>] # cached verdicts
python analysis/compute_tables.py --ars-root <path-to-ARS>
```

The last script recomputes every number, table, and figure from the saved results, traces, cached verdicts, and audit file without API calls.

5 Results

5.1 Architecture comparison at five passages

Tables 1 and 2 report answer quality. With five passages for RAG, the multi-agent pipeline is ahead in the unconstrained run on L-EM (0.621 vs. 0.510; paired +0.111, CI +0.059 to +0.163, 18 vs. 1 discordant), on soft F1 (+0.054, +0.029 to +0.080), and by a wider margin under the judge (+0.163). The single-agent loop is indistinguishable from RAG (L-EM −0.013,

Table 1: Answer quality (153 questions; gpt-4o-mini, BM25). Means with bootstrap 95% CIs. Strict EM is 0.000 for all rows.

Architecture	L-EM	CG	Soft F1	Token F1
<i>Unconstrained</i>				
RAG	0.510 [0.431, 0.588]	0.510 [0.431, 0.588]	0.279 [0.242, 0.316]	0.097
Single-agent	0.497 [0.418, 0.575]	0.497 [0.418, 0.575]	0.270 [0.233, 0.307]	0.096
Multi-agent	0.621 [0.542, 0.693]	0.621 [0.542, 0.699]	0.333 [0.297, 0.368]	0.107
<i>Equal-retrieval</i>				
RAG	0.503 [0.425, 0.582]	0.503 [0.425, 0.582]	0.276 [0.239, 0.314]	0.097
Single-agent	0.516 [0.438, 0.595]	0.510 [0.431, 0.588]	0.277 [0.239, 0.315]	0.098
Multi-agent	0.621 [0.542, 0.693]	0.621 [0.542, 0.693]	0.333 [0.297, 0.368]	0.105
<i>Passage-budget control (RAG only; same run for both modes)</i>				
RAG, top-15	0.641 [0.562, 0.719]	0.641 [0.562, 0.712]	0.338 [0.303, 0.373]	0.106
RAG, top-13	0.647 [0.569, 0.725]	0.647 [0.569, 0.725]	0.343 [0.308, 0.378]	0.105

Table 2: LLM-judge accuracy next to L-EM (153 questions; a correct abstention on an unanswerable question counts as correct). Δ : paired difference in judge accuracy against RAG top-5 of the same mode (control rows: the unconstrained run), with bootstrap 95% CI and discordant counts (correct only for the row system / only for RAG). Flips: L-EM = 1 judged incorrect / L-EM = 0 judged correct (answerable + unanswerable).

Architecture	L-EM	Judge	Δ Judge vs. RAG	Flips
<i>Unconstrained</i>				
RAG	0.510	0.601 [0.523, 0.680]	—	8 / 14 + 8
Single-agent	0.497	0.575 [0.497, 0.654]	-0.026 [-0.092, +0.039] (11/15)	12 / 16 + 8
Multi-agent	0.621	0.765 [0.693, 0.830]	+0.163 [+0.098, +0.235] (28/3)	4 / 18 + 8
<i>Equal-retrieval</i>				
RAG	0.503	0.601 [0.523, 0.673]	—	8 / 15 + 8
Single-agent	0.516	0.582 [0.503, 0.660]	-0.020 [-0.085, +0.046] (11/14)	12 / 14 + 8
Multi-agent	0.621	0.765 [0.699, 0.830]	+0.163 [+0.105, +0.229] (27/2)	3 / 17 + 8
<i>Passage-budget control (RAG only; same run for both modes)</i>				
RAG, top-15	0.641	0.752 [0.680, 0.817]	+0.150 [+0.092, +0.216] (25/2)	5 / 14 + 8
RAG, top-13	0.647	0.752 [0.680, 0.817]	+0.150 [+0.092, +0.216] (25/2)	7 / 15 + 8

-0.065 to +0.039, 7 vs. 9; judge -0.026). The equal-retrieval run replicates both comparisons (L-EM: multi-agent minus RAG +0.118, +0.072 to +0.170, 18 vs. 0; single-agent minus RAG +0.013, -0.039 to +0.065, 10 vs. 8). Per-question L-EM agrees across the two runs on 99.3% (RAG), 96.7% (single-agent), and 97.4% (multi-agent) of questions and judge verdicts on 98.7%, 95.4%, and 97.4%; for RAG, whose retrieval is identical, this reflects API non-determinism at temperature 0.

The judge scores every system above L-EM: it withdraws credit from answers that hedge or mention the gold only in passing (8, 12, and 4 questions for RAG, single-agent, and multi-agent) and adds credit for name variants and paraphrases (e.g., “Stephen Ireland” for “Stephen James Ireland”; 14, 16, and 18 questions) and for the 8 correct abstentions. On the 145 answerable questions judge accuracy is 0.579, 0.552, and 0.752.

By stratum (Table 3, Figure 1), the multi-agent advantage over top-5 RAG is concentrated on multi-hop (judge +0.170) and multi-passage (+0.233) questions, where both intervals exclude zero; on the 15 short-context items the systems differ by one question. The single-agent loop is below RAG on multi-passage and short-context questions under the judge, but neither interval excludes zero.

Table 3: Results by stratum, unconstrained mode, for L-EM (top) and the LLM judge (bottom). Δ columns: paired differences against RAG top-5 with bootstrap 95% CIs and discordant counts. L-EM is 0 on the unanswerable stratum by definition.

Stratum (n)	RAG	Single	Multi	Δ Multi – RAG	Δ Single – RAG
<i>L-EM</i>					
Multi-hop (100)	0.460	0.470	0.580	+0.120 [+0.050, +0.190] (13/1)	+0.010 [−0.050, +0.070] (6/5)
Multi-passage (30)	0.733	0.700	0.867	+0.133 [+0.033, +0.267] (4/0)	−0.033 [−0.167, +0.067] (1/2)
Short-context (15)	0.667	0.533	0.733	+0.067 [+0.000, +0.200] (1/0)	−0.133 [−0.333, +0.000] (0/2)
<i>LLM judge</i>					
Multi-hop (100)	0.510	0.550	0.680	+0.170 [+0.090, +0.250] (18/1)	+0.040 [−0.030, +0.110] (9/5)
Multi-passage (30)	0.700	0.533	0.933	+0.233 [+0.033, +0.433] (9/2)	−0.167 [−0.367, +0.000] (2/7)
Short-context (15)	0.800	0.600	0.867	+0.067 [+0.000, +0.200] (1/0)	−0.200 [−0.400, +0.000] (0/3)
Unanswerable (8)	1.000	1.000	1.000	+0.000 [+0.000, +0.000] (0/0)	+0.000 [+0.000, +0.000] (0/0)

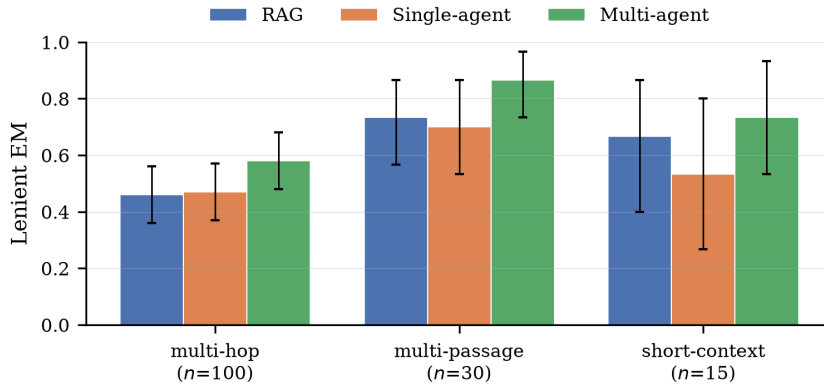


Figure 1: L-EM by stratum, unconstrained mode, with bootstrap 95% CIs (RAG top-5).

5.2 Passage-budget control

The multi-agent pipeline read 13.1 unique passages per question in both modes (unconstrained: median 14, range 10–15, with 15 passages on 47 of 153 questions; equal-retrieval: mean 13.1, median 13), against 5.0 for RAG. Table 4 gives the control. Raising RAG’s `top.k` from 5 to 15 increases judge accuracy from 0.601 to 0.752 (+0.150, CI +0.092 to +0.216; 25 vs. 2 discordant) and L-EM from 0.510 to 0.641 (+0.131, +0.078 to +0.190; 20 vs. 0). The remaining multi-agent advantage is +0.013 under the judge (−0.033 to +0.059; 8 vs. 6) and −0.020 under L-EM (−0.059 to +0.020; 3 vs. 6); soft F1 gives −0.006 (−0.025 to +0.013). Against the equal-retrieval multi-agent run the judge difference is the same (+0.013, −0.033 to +0.059). Top-13 RAG gives the same judge accuracy (0.752; multi-agent minus RAG +0.013, −0.026 to +0.052, 6 vs. 4). Top-15 RAG recovers a share of 0.92 of the multi-agent judge gain (paired bootstrap 95% CI 0.67–1.26); for scale, the two identical top-5 RAG runs differ on 2 questions (1 each way).

By stratum, top-15 RAG gains most on multi-hop questions (0.510 to 0.700, 19 vs. 0) and slightly exceeds the multi-agent pipeline there (0.680). The only stratum with a residual multi-agent advantage is multi-passage (0.933 vs. 0.833; +0.100, −0.033 to +0.233; 4 vs. 1), where $n=30$ leaves the interval wide. Top-15 RAG reaches evidence recall 0.618 and all-support coverage 0.786, close to the multi-agent pipeline (0.641 and 0.766; Table 6), and abstains on 5 of 145 answerable questions (top-5 RAG: 24).

The longer context (775 instead of 296 prompt tokens on average) did not measurably hurt RAG. Only 2 questions correct at top-5 were judged incorrect at top-15 (none under L-EM): one answer claims two singers released equally many albums, and in the other the same answer (“Terry Kath was born first”) to a question with an apparently wrong gold label was accepted for top-5 RAG and the multi-agent pipeline but rejected for top-15, an inconsistency of the judge.

Table 4: Passage-budget control, unconstrained mode: judge accuracy (and L-EM, last row) for RAG with 5 and 15 passages and the multi-agent pipeline. Δ columns: paired differences with bootstrap 95% CIs and discordant counts (first system only / second system only).

Stratum (n)	RAG-5	RAG-15	Multi	Δ RAG-15 – RAG-5	Δ Multi – RAG-15
All (153)	0.601	0.752	0.765	+0.150 [+0.092, +0.216] (25/2)	+0.013 [−0.033, +0.059] (8/6)
Multi-hop (100)	0.510	0.700	0.680	+0.190 [+0.120, +0.270] (19/0)	−0.020 [−0.080, +0.030] (3/5)
Multi-passage (30)	0.700	0.833	0.933	+0.133 [−0.033, +0.300] (6/2)	+0.100 [−0.033, +0.233] (4/1)
Short-context (15)	0.800	0.800	0.867	+0.000 [+0.000, +0.000] (0/0)	+0.067 [+0.000, +0.200] (1/0)
Unanswerable (8)	1.000	1.000	1.000	+0.000 [+0.000, +0.000] (0/0)	+0.000 [+0.000, +0.000] (0/0)
All, L-EM (153)	0.510	0.641	0.621	+0.131 [+0.078, +0.190] (20/0)	−0.020 [−0.059, +0.020] (3/6)

Table 5: Process cost per question (means over 153 questions). Latency: wall-clock seconds, mean / median. Cost: estimated USD for all 153 questions.

Architecture	Model calls	Retr. calls	Unique passages	Tokens	Latency (s)	Est. cost (USD)
<i>Unconstrained</i>						
RAG	1.00	1.00	5.0	336	0.81 / 0.77	0.019
Single-agent	2.99	1.16	5.2	892	22.70 / 19.79	0.051
Multi-agent	5.00	3.00	13.1	2744	43.16 / 41.72	0.157
<i>Equal-retrieval</i>						
RAG	1.00	1.00	5.0	337	8.57 / 9.52	0.019
Single-agent	2.93	1.12	5.3	859	25.42 / 28.23	0.049
Multi-agent	5.00	3.00	13.1	2732	43.18 / 41.76	0.157
<i>Passage-budget control (RAG only; same run for both modes)</i>						
RAG, top-15	1.00	1.00	15.0	826	1.09 / 1.00	0.047
RAG, top-13	1.00	1.00	13.0	731	1.11 / 1.01	0.042

Among answerable questions with every supporting paragraph retrieved, judge accuracy is 0.843 at top-5 ($n=70$), 0.842 at top-15 ($n=114$), and 0.874 for the multi-agent pipeline ($n=111$): the gain comes from covering more questions’ evidence, not from better use of evidence already retrieved. A spot check of ten top-15 verdicts (both regressions, six judge–L-EM disagreements, four agreements) found them consistent with the rubric apart from that case.

5.3 Cost, evidence coverage, and abstention

Table 5 reports process cost. Relative to top-5 RAG, the single-agent loop uses $2.7\times$ the tokens and the multi-agent pipeline $8.2\times$ (2,744 vs. 336) with five model calls; top-15 RAG uses 826 tokens (30% of the multi-agent pipeline) and one call. Median latency in the unconstrained run is 0.77s for RAG, 19.8s for the single-agent loop, and 41.7s for the multi-agent pipeline; top-15 RAG takes 1.00s. Latency varies between runs (RAG’s mean was 0.81s and 8.57s in the two identical top-5 runs), so it should be compared within a run. In the quality–token plane (Figure 2) top-15 RAG dominates the multi-agent pipeline on L-EM and soft F1, and the single-agent loop is dominated in the unconstrained run (its nominal place on the equal-retrieval frontier rests on a +0.013 L-EM difference well inside its interval).

Table 6 reports retrieval and abstention diagnostics. With five passages, RAG retrieves 36.6% of gold-evidence sentences and covers every supporting paragraph for 48.3% of answerable questions, against 64.1% and 76.6% for the multi-agent pipeline. The single-agent loop retrieves little more than RAG (one retrieval call on 101 of 153 questions, none on 24) and abstains on 31 answerable questions (RAG 24, multi-agent 8), 16 of them before retrieving anything. On the unanswerable items the harness flags abstentions on all 8 for top-5 RAG and the single-agent loop, 7 for top-15 RAG, and 6 for the multi-agent pipeline; the remaining answers also decline

Table 6: Diagnostics, unconstrained mode. Evidence recall and all support over answerable questions (Section 4). Abstentions: counts flagged by the harness. Words: mean length of non-abstained answers.

Architecture	Evidence	All	Abstentions		Answer
	recall	support	answerable	unanswerable	words
RAG	0.366	0.483	24/145	8/8	30.0
Single-agent	0.383	0.503	31/145	8/8	33.1
Multi-agent	0.641	0.766	8/145	6/8	33.7
RAG, top-15	0.618	0.786	5/145	7/8	33.5
RAG, top-13	0.591	0.766	5/145	7/8	35.0

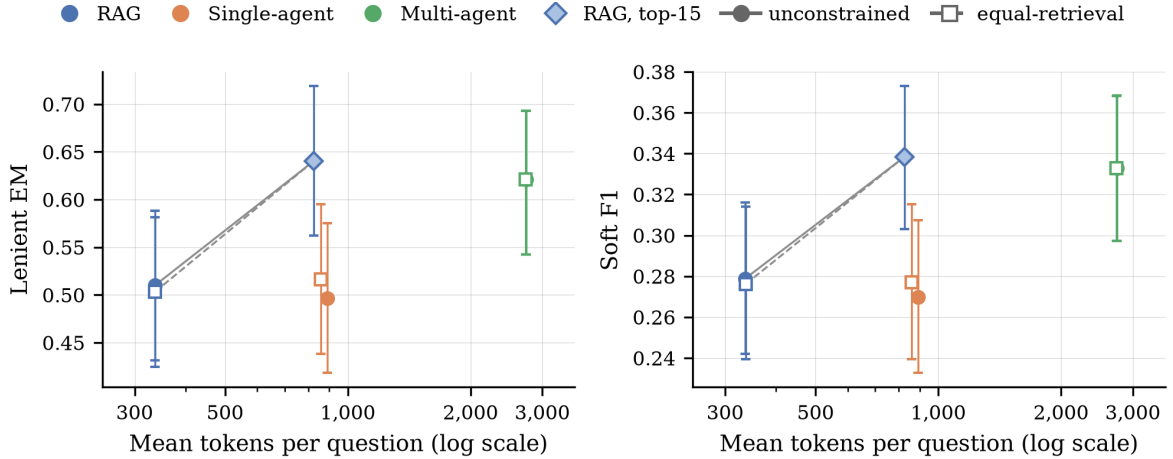


Figure 2: Quality versus mean tokens per question (log scale) with bootstrap 95% CIs. Filled circles: unconstrained; open squares: equal-retrieval; diamonds: RAG top-15 (one run, included in both frontiers). Lines connect Pareto-optimal systems (solid: unconstrained; dashed: equal-retrieval). The two multi-agent points almost coincide.

(“the context provided does not mention ...”) without the **ABSTAIN** token, and the judge counts all 8 as correct for every system.

6 Discussion and Limitations

The multi-agent gain is an evidence-budget effect. With RAG at five passages, the multi-agent pipeline looked clearly better on multi-hop and multi-passage questions, and it retrieved far more of the gold evidence. The control isolates that difference: a comparable passage budget in a single retrieval call recovers about nine-tenths of the judge gain and matches the pipeline on multi-hop questions at 30% of the tokens and about one-fortieth of the latency. Planning, role-separated retrieval, and critique therefore add little here beyond the passages they bring in; a residual advantage on comparison questions (4 vs. 1 discordant) is possible but not established. The setup favours a large **top_k**: the pooled corpus consists of each question’s own paragraphs plus distractors, so BM25 on the original question already ranks much of the evidence within the top 15, and sentence-level passages keep the context short. Despite known long-context degradation [Liu et al., 2024], tripling the context did not reduce accuracy on questions whose evidence was already retrieved. With full-Wikipedia retrieval, paragraph-length passages, or evidence that the original question does not surface, query decomposition may matter more; such claims need passage-budget-matched baselines.

Why the single-agent loop does not help. The loop rarely iterates, so its evidence coverage stays close to RAG’s, its extra calls go mostly to control decisions, and it abstains more often.

This concerns this controller prompt and model, not iterative retrieval in general [Trivedi et al., 2023, Jiang et al., 2023].

Metrics. The gap between L-EM (≈ 0.5 – 0.65) and token F1 (≈ 0.1) reflects answer verbosity: the model usually embeds a correct short answer in a sentence. Containment over-credits hedged answers and misses paraphrases; the judge corrects most errors of both kinds in the audit and changes no conclusion. Constrained short-answer output would make strict EM and token F1 informative.

Limitations. All results use one model (`gpt-4o-mini`, temperature 0), and rankings may differ for others. The slice is a stratified 153-question sample plus 8 synthetic unanswerable questions; the short-context stratum is not verified single-hop, and the numbers are not comparable to HotpotQA leaderboard results. With 30, 15, and 8 questions in the smaller strata, per-stratum conclusions beyond multi-hop are tentative. Retrieval runs over a pooled sentence-level corpus rather than full Wikipedia, and only BM25 is evaluated (RQ4 is open). The string metrics are lenient, and the judge is the same model as the systems under test, may share their biases, sometimes overrules apparently wrong gold labels with outside knowledge (and does so inconsistently, as in the control), and was audited on 60 items whose labels were drafted by an AI assistant and reviewed by a single author; the control verdicts were only spot-checked. The equal-retrieval mode does not equalize passages read, the multi-agent critic never stopped early (so planning and critique cannot be ablated separately from the three-round schedule), the equal-token mode was not run, and the control varies RAG’s `top_k` but not the multi-agent pipeline’s. Each configuration was run once, and the control ran two weeks after the main runs, whose model snapshot is unknown; identical retrieval, the small run-to-run difference, and the shared judge snapshot limit how much this can matter. USD figures are estimates, and citation precision and recall are not reported because the harness did not parse the model’s citation format.

7 Conclusion

ARS compares conventional RAG, bounded iterative retrieval, and multi-agent retrieval under a shared corpus, budget controller, trace format, and metric suite. On a 153-question HotpotQA-derived slice with `gpt-4o-mini` and BM25, a three-round multi-agent pipeline outperformed five-passage RAG, but RAG given 15 passages in one call matched it at about a third of the tokens and a small fraction of the latency, and the single-agent loop added cost without a quality gain. Future work includes passage-budget matching as a default baseline and an equal-token run; a critic whose output the controller parses, so that early stopping and critique can be ablated; constrained short-answer output and citation parsing; additional models, the full HotpotQA development set, and 2WikiMultiHopQA; and dense and hybrid retrieval for RQ4.

Code Availability

Code, configurations, run artifacts, and the analysis script are released under the MIT license at <https://github.com/benkarlsberg/Agentic-Retrieval-Systems>.

Acknowledgments

I conceived and designed this study. Separately from the `gpt-4o-mini` system evaluated here, AI assistants were used to help implement the experiment code, run the evaluations, and draft

the manuscript under my direction. I reviewed all code, results, and references and take full responsibility for the content.

A Pipeline Validation

The harness was first checked on the mini fixtures (24 passages, 13 questions of five types; BM25, top-5). With the heuristic `DeterministicModel`, all three architectures obtained L-EM 0.846 and abstention correctness 1.000, as expected for a shared extractive heuristic, while cost grew with architectural complexity (1.00, 3.00, and 4.31 model calls; 294, 654, and 1,625 mean tokens for RAG, single-agent, and multi-agent). A live `gpt-4o-mini` smoke run on the same questions gave L-EM 0.692 for all three, with 1.00, 4.23, and 5.00 model calls and 300, 1,460, and 2,331 mean tokens; an offline equal-retrieval run also completed. With 13 questions these runs only verify that the pipeline works end to end.

References

- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. Self-RAG: Learning to retrieve, generate, and critique through self-reflection. In *The Twelfth International Conference on Learning Representations*, 2024.
- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. Reading Wikipedia to answer open-domain questions. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1870–1879. Association for Computational Linguistics, 2017.
- Gordon V. Cormack, Charles L. A. Clarke, and Stefan Buettcher. Reciprocal rank fusion outperforms Condorcet and individual rank learning methods. In *Proceedings of the 32nd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 758–759, 2009.
- Bradley Efron and Robert J. Tibshirani. *An Introduction to the Bootstrap*, volume 57 of *Monographs on Statistics and Applied Probability*. Chapman & Hall, New York, 1993.
- Pietro Ferrazzi, Milica Cvjetićanin, Alessio Piraccini, and Davide Giannuzzi. Is agentic RAG worth it? an experimental comparison of RAG approaches. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 6: Industry Track)*, pages 56–75. Association for Computational Linguistics, 2026. arXiv:2601.07711.
- Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2023.
- Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop QA dataset for comprehensive evaluation of reasoning steps. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6609–6625, 2020.
- Soyeong Jeong, Jinheon Baek, Sukmin Cho, Sung Ju Hwang, and Jong C. Park. Adaptive-RAG: Learning to adapt retrieval-augmented large language models through question complexity. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 7036–7050. Association for Computational Linguistics, 2024.
- Zhengbao Jiang, Frank F. Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. Active retrieval augmented generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7969–7992. Association for Computational Linguistics, 2023.
- Jiajie Jin, Yutao Zhu, Zhicheng Dou, Guanting Dong, Xinyu Yang, Chenghao Zhang, Tong Zhao, Zhao Yang, and Ji-Rong Wen. FlashRAG: A modular toolkit for efficient retrieval-augmented generation research. In *Companion Proceedings of the ACM Web Conference 2025*, pages 737–740. ACM, 2025.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781. Association for Computational Linguistics, 2020.

- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. Natural Questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:452–466, 2019.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, volume 33, pages 9459–9474, 2020.
- Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. Lost in the middle: How language models use long contexts. *Transactions of the Association for Computational Linguistics*, 12:157–173, 2024. doi: 10.1162/tacl.a.00638.
- Kyle A. McCleary and James M. Ghawaly. Quantifying the accuracy and cost impact of design decisions in budget-constrained agentic LLM search. In *Proceedings of the Fifteenth Language Resources and Evaluation Conference (LREC 2026)*, pages 10291–10300. European Language Resources Association, 2026. arXiv:2603.08877.
- Thang Nguyen, Peter Chin, and Yu-Wing Tai. MA-RAG: Multi-agent retrieval-augmented generation via collaborative chain-of-thought reasoning. *arXiv preprint arXiv:2505.20096*, 2025.
- Ioannis Papadimitriou, Ilias Gialampoukidis, Stefanos Vrochidis, and Ioannis Kompatsiaris. RAG playground: A framework for systematic evaluation of retrieval strategies and prompt engineering in RAG systems. *arXiv preprint arXiv:2412.12322*, 2024.
- Ofir Press, Muru Zhang, Sewon Min, Ludwig Schmidt, Noah A. Smith, and Mike Lewis. Measuring and narrowing the compositionality gap in language models. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 5687–5711. Association for Computational Linguistics, 2023.
- Stephen Robertson and Hugo Zaragoza. The probabilistic relevance framework: BM25 and beyond. *Foundations and Trends in Information Retrieval*, 3(4):333–389, 2009.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- Aditi Singh, Abul Ehtesham, Saket Kumar, Tala Talaei Khoei, and Athanasios V. Vasilakos. Agentic retrieval-augmented generation: A survey on agentic RAG. *arXiv preprint arXiv:2501.09136*, 2025.
- Harsh Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. Interleaving retrieval with chain-of-thought reasoning for knowledge-intensive multi-step questions. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 10014–10037. Association for Computational Linguistics, 2023.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380. Association for Computational Linguistics, 2018.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *The Eleventh International Conference on Learning Representations*, 2023.