

Agentic Retrieval Systems: A Reproducible Framework for Comparing Conventional RAG, Iterative, and Multi-Agent Retrieval

Ben Karlsberg
Georgia Institute of Technology
bkarlsberg3@gatech.edu

Abstract

Retrieval-augmented generation (RAG) systems increasingly incorporate iterative and multi-agent control loops, yet fair comparisons across architectures remain difficult: implementations differ in corpora, budgets, traces, and metrics. We present **Agentic Retrieval Systems (ARS)**, an open-source evaluation framework that places conventional retrieve-once RAG, a budgeted single-agent iterative retriever, and a role-separated multi-agent pipeline under a shared corpus, model interface, metric suite, and hard budget regime. ARS records structured JSONL traces (queries, retrieved documents, routing decisions, stop reasons, and token accounting) and supports budget-matched modes (`equal_retrieval`, `equal_token`, unconstrained). We validate the harness offline with a deterministic heuristic model and checked-in mini fixtures ($n=13$ examples, 24 passages). On this synthetic setup, answer quality is matched across architectures ($EM \approx 0.85$, $F1 \approx 0.81$, abstention correctness = 1.0), while process cost increases monotonically: RAG $\ll$ single-agent $\ll$ multi-agent in model calls and tokens. These results are *not* frontier LLM benchmarks; they demonstrate harness correctness and quantify coordination overhead under controlled conditions. ARS is released at <https://github.com/benkarlsberg/Agentic-Retrieval-Systems> to support reproducible comparisons as live models and larger public datasets are introduced via adapters.

1 Introduction

Open-domain question answering and related knowledge-intensive tasks increasingly rely on retrieval-augmented generation [Lewis et al., 2020, Karpukhin et al., 2020, Gao et al., 2023]. Beyond the classical retrieve-once pattern, recent systems interleave retrieval with reasoning [Trivedi et al., 2023, Jiang et al., 2023, Yao et al., 2023], reflect on evidence quality [Asai et al., 2024], and route queries by complexity [Jeong et al., 2024]. In parallel, multi-agent designs decompose planning, retrieval, critique, and synthesis across specialized roles. These agentic designs promise better coverage on multi-hop and multi-passage questions, but they also introduce coordination overhead: extra model calls, duplicate retrievals, longer traces, and higher latency.

A practical obstacle for research and engineering is *fair comparison*. Published systems rarely share identical corpora, budget caps, logging schemas, and metric definitions, so observed quality gaps may confound architecture with implementation choices. We argue that progress on agentic retrieval requires a harness that holds those factors fixed and makes process cost as first-class as answer quality.

Research questions. We organize the framework around four questions:

RQ1 Under matched retrieval or token budgets, does bounded iterative retrieval improve answer quality over retrieve-once RAG on multi-hop / multi-passage items?

- RQ2** Does role-separated multi-agent retrieval improve evidence coverage and citation fidelity enough to justify coordination overhead?
- RQ3** How do architectures differ on unanswerable and ambiguous questions (abstention vs. false answers)?
- RQ4** How sensitive are architecture rankings to sparse (BM25), dense, and hybrid retrieval under a fixed corpus?

Contributions.

1. A reproducible systems framework comparing three architectures (conventional RAG, bounded single-agent, multi-agent) with shared retrieval, budgets, metrics, and JSONL tracing.
2. Explicit budget-matched comparison modes and first-class termination reasons, enabling efficiency-aware evaluation.
3. An offline-fixture validation study ($n=13$) with `DeterministicModel`, confirming pipeline correctness and quantifying process overhead when quality is matched.
4. An open-source release with adapters for larger public datasets (user-supplied local files) and optional live model backends.

Scope. This paper is primarily a *systems and evaluation framework* paper with a small synthetic validation study. Checked-in numbers use a heuristic model and mini fixtures; they must not be read as HotpotQA/Natural Questions leaderboard results or claims of state-of-the-art answer quality for agentic systems.

2 Related Work

Retrieve-and-read and dense retrieval. Classical open-domain QA pipelines retrieve passages and then read them for answers [Chen et al., 2017]. Dense Passage Retrieval [Karpukhin et al., 2020] and RAG [Lewis et al., 2020] popularized end-to-end neural retrieval with generation. Sparse baselines such as BM25 remain strong and widely used [Robertson and Zaragoza, 2009]. Hybrid fusion (e.g., reciprocal rank fusion) often combines sparse and dense signals [Cormack et al., 2009].

Iterative and adaptive retrieval. IRCOT interleaves retrieval with chain-of-thought reasoning for multi-step questions [Trivedi et al., 2023]. FLARE triggers retrieval when generation confidence is low [Jiang et al., 2023]. Self-RAG trains models to decide when to retrieve and how to critique evidence [Asai et al., 2024]. Adaptive-RAG routes queries by estimated complexity [Jeong et al., 2024]. ReAct and related tool-using agents couple reasoning with actions such as search [Yao et al., 2023, Schick et al., 2023, Press et al., 2023]. ARS does not claim a new retrieval policy; it provides a controlled substrate on which such policies can be compared under matched budgets.

Multi-hop benchmarks. HotpotQA [Yang et al., 2018], Natural Questions [Kwiatkowski et al., 2019], and 2WikiMultiHopQA [Ho et al., 2020] remain standard evaluation resources. ARS ships adapters that load *user-provided* local copies; it does not redistribute those datasets, and this paper reports no leaderboard numbers on them.

Evaluation methodology. Surveys of RAG emphasize the need for systematic metrics spanning answer quality, retrieval, faithfulness, and cost [Gao et al., 2023]. ARS contributes a concrete harness: typed schemas, paired bootstrap confidence intervals [Efron and Tibshirani, 1993], and auditable traces.

3 Framework Design

3.1 Architectures

ARS implements three runners that share the same corpus, retriever factory, model client interface, budget controller, and metric suite.

A — Conventional RAG. A single retrieval call returns `top_k` passages; one generation call produces the answer. This is the retrieve-once baseline corresponding to classical RAG.

B — Bounded single-agent. A decision loop may *retrieve*, *reformulate* the query, or *stop*. Hard caps on steps, model calls, retrieval calls, documents, and tokens prevent unbounded loops. Stop reasons (e.g., answer ready, budget exhausted) are logged as first-class events.

C — Multi-agent. A planner decomposes the information need; role-specialized retrievers issue queries; a critic assesses evidence sufficiency; a synthesizer produces the final answer. Coordination messages are recorded in traces so overhead is measurable rather than implicit.

3.2 Shared retrieval stack

Retrievers include BM25 (with a pure-Python fallback), dense retrieval over fixture embeddings (hashing-based for offline use, not a trained dual encoder), hybrid RRF fusion, and an optional lexical reranker. Architecture rankings under RQ4 are therefore attributable to retrieval *modality* rather than divergent corpora.

3.3 Budgets and comparison modes

Default budgets specify limits on steps, model calls, documents, tokens, retrieval calls, and `top_k`. Comparison modes include:

- `equal_retrieval`: matched retrieval-call / document budgets (RAG remains a single retrieve);
- `equal_token`: matched token budgets;
- `unconstrained`: per-architecture defaults, still hard-capped.

These modes operationalize fair comparison for RQ1–RQ2.

3.4 Tracing

Every example emits JSONL events covering reformulated queries, retrieved document IDs and scores, routing actions, model/token accounting, latency, estimated cost, and termination reason. An HTML trace viewer supports qualitative audit. Prompt text may be hashed in traces to reduce accidental leakage of sensitive content in live runs.

3.5 Metrics

ARS reports:

- **Answer:** exact match (EM), token F1, lexical similarity;
- **Retrieval:** recall@ k , mean reciprocal rank (MRR);
- **Citations:** precision/recall against gold document IDs when available;
- **Abstention:** correctness on unanswerable items;
- **Efficiency:** latency, model calls, retrieval calls, tokens, unique vs. duplicate passages, config-based cost estimates.

Paired bootstrap confidence intervals on per-example metric deltas support architecture comparisons on shared IDs.

3.6 Model interface

A provider-neutral client supports (i) a `DeterministicModel` for offline CI and fixture validation, and (ii) optional OpenAI-compatible live backends via environment configuration. Live keys are never committed; live results must be labeled separately from fixture baselines.

4 Experimental Setup

4.1 Offline fixtures

The checked-in evaluation uses:

- Corpus: `fixtures/corpus/mini_wiki.jsonl` (24 passages);
- Dataset: `fixtures/datasets/mini_eval.jsonl` ($n=13$ questions spanning single-hop, multi-hop/multi-passage, and unanswerable items);
- Model: `DeterministicModel` (`deterministic-v1`), a keyword/heuristic answerer over retrieved context;
- Retrieval: BM25, `top_k=5`;
- Seed: 42;
- Mode: `unconstrained` (primary table); equal-retrieval mode also exercised.

Label: all reported numbers are *offline-fixture / synthetic validation of the harness*, not frontier LLM evaluations.

4.2 DeterministicModel policy

The mock model extracts answers from retrieved passages with fixed heuristics and question gating. Consequently, when retrieval surface form is similar, architectures tend to *match* on EM/F1; differences appear in control flow and cost. This is intentional for validating wiring, budgets, and traces without API keys.

4.3 Configs and reproduction

Primary config: `configs/experiments/offline_fixture_compare.yaml`. Budget-matched configs include `equal_retrieval.yaml` and `equal_token.yaml`. Ten ablation YAML files document planned studies (critic/planner ablations, hybrid/dense retrieval, `top_k`, strict budgets, reformulation off, reranker). Reproduction:

Table 1: Offline-fixture validation ($n=13$, DeterministicModel, BM25, unconstrained, seed 42). Quality is matched; process cost increases with agentic complexity. EM/F1 rounded to three decimals; tokens are means.

Architecture	EM	F1	Abst. corr.	Avg. model	Avg. retr.	Avg. tokens
RAG	0.846	0.810	1.000	1.00	1.00	~295
Single-agent	0.846	0.810	1.000	3.00	1.00	~654
Multi-agent	0.846	0.810	1.000	4.31	2.31	~1626

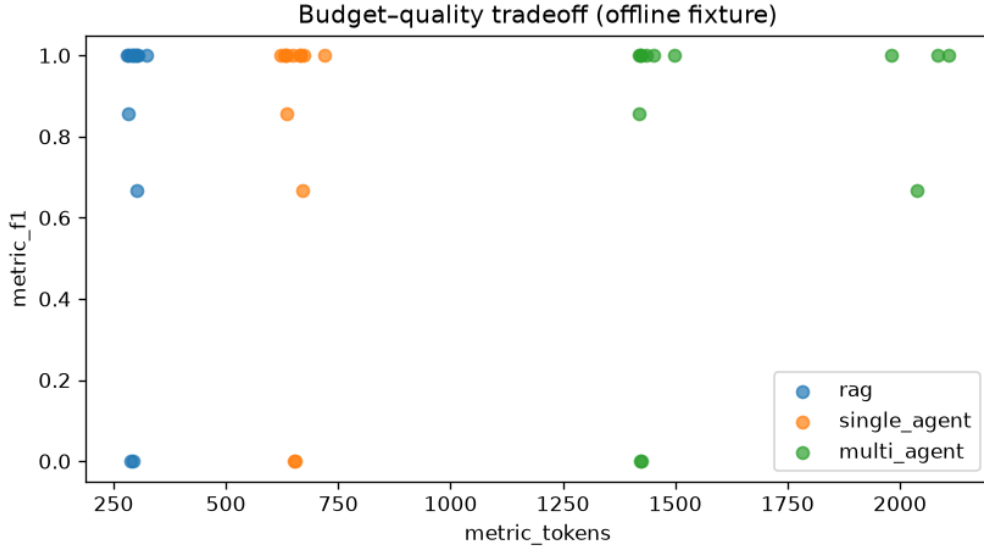


Figure 1: Budget-quality tradeoff on the offline fixture (per-example F1 vs. tokens). Architectures share similar F1 mass near 1.0 with a common failure at F1=0; multi-agent occupies a higher token regime. This plot illustrates process overhead under matched heuristic quality—not a live LLM ranking.

```

pip install -e ".[dev]"
python scripts/run_experiment.py \
  --config configs/experiments/offline_fixture_compare.yaml
python scripts/generate_report.py --run-dir results/runs/latest

```

Artifacts include per-architecture summaries, comparison tables, plots, and full traces under `results/`.

5 Results

Table 1 reports the primary offline-fixture comparison (unconstrained BM25, seed 42, $n=13$). Figure 1 visualizes per-example F1 against token cost; Figures 2a–2b summarize mean EM and F1.

Quality. EM (0.846), F1 (0.810), and abstention correctness (1.0) are identical across architectures on this fixture after question-gated mock answering. Bootstrap 95% intervals are wide (as expected for $n=13$). Eleven of thirteen answerable-or-partial items score as successful under the EM/F1 thresholds used in reporting; both unanswerable items yield correct abstention for all three runners.

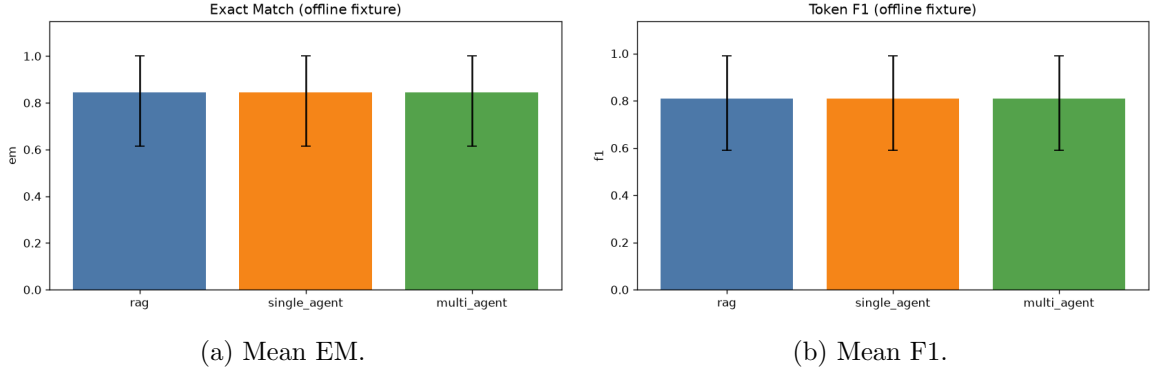


Figure 2: Offline-fixture answer metrics by architecture. Bars are essentially identical; the evaluation signal for this run is efficiency, not quality separation.

Efficiency (primary signal). Average model calls rise from 1.00 (RAG) to 3.00 (single-agent) to 4.31 (multi-agent). Average tokens rise from ~ 295 to ~ 654 to ~ 1626 . Multi-agent also issues more retrieval calls (2.31 vs. 1.00) and logs coordination messages. Thus the harness recovers the designed cost ordering $\text{RAG} \ll \text{single-agent} \ll \text{multi-agent}$ when answer quality is held approximately fixed by the deterministic policy.

Equal-retrieval mode. An equal-retrieval budget run completed successfully without API keys, exercising matched retrieval caps while preserving shared metrics and traces. This confirms that budget modes are operational for future live-model comparisons under RQ1.

What we do not claim. We do not claim that agentic architectures outperform RAG on frontier LLMs, nor do we report HotpotQA/NQ scores. Fixture equality of EM/F1 is expected under a shared heuristic answerer; it is evidence that evaluation plumbing is consistent, not that agentic complexity is useless in general.

6 Discussion

What fixture runs show. Offline runs validate that (i) all three architectures execute end-to-end, (ii) hard budgets and stop reasons are enforceable, (iii) traces are complete enough for audit, (iv) metrics and paired bootstrap utilities are wired, and (v) process overhead is measurable and ordered as designed.

What they do not show. They do not establish absolute quality of production LLMs, production latency distributions, or architecture rankings on full multi-hop benchmarks. Statistical power is limited by $n=13$.

When agentic complexity may help. Under live models, iterative reformulation and multi-agent role separation are hypothesized to help when: evidence is split across passages (multi-hop); one-shot BM25 misses a second hop; citation fidelity and evidence recall matter more than token cost; or unanswerable questions require explicit abstention policies beyond naive generation. ARS is designed so those hypotheses can be tested under `equal_retrieval` / `equal_token` with paired bootstrap deltas—once a live backend and larger stratified samples are configured.

Systems insights. Making budgets and stop reasons first-class prevents silent unbounded agent loops. Shared retrieval and schemas reduce confounds. Treating coordination messages

and duplicate passages as metrics reframes “multi-agent benefit” as an explicit cost–benefit question (RQ2).

7 Limitations

- **Synthetic validation only.** Checked-in results use `DeterministicModel` and mini fixtures; they are not frontier benchmarks.
- **Small n .** Wide confidence intervals; rankings are not statistically decisive.
- **Dense retrieval.** Fixture dense embeddings use hashing, not trained dual encoders such as DPR [Karpukhin et al., 2020].
- **Ablation toggles.** Ten ablation configs are present; some behavioral switches (e.g., hard skip-critic) remain extension points.
- **Cost estimates.** USD figures in configs are timestamped estimates, not live billing.
- **Dataset redistribution.** HotpotQA/NQ/2Wiki adapters require user-provided local files; no leaderboard results are reported here.

8 Conclusion and Future Work

We introduced Agentic Retrieval Systems (ARS), a reproducible framework for comparing conventional RAG, bounded iterative retrieval, and multi-agent retrieval under shared corpora, budgets, traces, and metrics. An offline-fixture study confirms harness correctness and shows matched heuristic quality with clearly increasing coordination and token cost as architectures become more agentic. We release the code openly to support controlled follow-on experiments.

Future work. (1) Live OpenAI-compatible models on stratified samples of 100–200 multi-hop-style items under equal-retrieval and equal-token modes; (2) full behavioral enforcement of ablation switches; (3) learned rerankers and trained dense encoders; (4) error taxonomies mined from traces (query drift, duplicate retrieval, premature stop); (5) larger public datasets via existing adapters with clear separation of live results from fixture baselines.

Acknowledgments

The author thanks the open-source community for tools used in retrieval and evaluation infrastructure. Code is available at <https://github.com/benkarlsberg/Agentic-Retrieval-Systems> under the MIT license.

References

- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. Self-RAG: Learning to retrieve, generate, and critique through self-reflection. In *The Twelfth International Conference on Learning Representations*, 2024.
- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. Reading Wikipedia to answer open-domain questions. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1870–1879. Association for Computational Linguistics, 2017.

- Gordon V. Cormack, Charles L. A. Clarke, and Stefan Buettcher. Reciprocal rank fusion outperforms condorcet and individual rank learning methods. In *Proceedings of the 32nd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 758–759, 2009.
- Bradley Efron and Robert J. Tibshirani. An introduction to the bootstrap. *Monographs on Statistics and Applied Probability*, 57, 1993.
- Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2023.
- Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop QA dataset for comprehensive evaluation of reasoning steps. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6609–6625, 2020.
- Soyeong Jeong, Jinheon Baek, Sukmin Cho, Sung Ju Hwang, and Jong C. Park. Adaptive-RAG: Learning to adapt retrieval-augmented large language models through question complexity. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 7036–7050. Association for Computational Linguistics, 2024.
- Zhengbao Jiang, Frank F. Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. Active retrieval augmented generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7969–7992. Association for Computational Linguistics, 2023.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781. Association for Computational Linguistics, 2020.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. Natural questions: A benchmark for question answering research. In *Transactions of the Association for Computational Linguistics*, volume 7, pages 452–466, 2019.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, volume 33, pages 9459–9474, 2020.
- Ofir Press, Muru Zhang, Sewon Min, Ludwig Schmidt, Noah A. Smith, and Mike Lewis. Measuring and narrowing the compositionality gap in language models. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 5687–5711. Association for Computational Linguistics, 2023.
- Stephen Robertson and Hugo Zaragoza. The probabilistic relevance framework: BM25 and beyond. *Foundations and Trends in Information Retrieval*, 3(4):333–389, 2009.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. In *Advances in Neural Information Processing Systems*, volume 36, 2023.

Harsh Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. Interleaving Retrieval with chain-of-thought reasoning for knowledge-intensive multi-step questions. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 10014–10037. Association for Computational Linguistics, 2023.

Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380. Association for Computational Linguistics, 2018.

Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *The Eleventh International Conference on Learning Representations*, 2023.