

Agentic Retrieval Systems: A Reproducible Framework for Comparing Conventional RAG, Iterative, and Multi-Agent Retrieval

Ben Karlsberg
Georgia Institute of Technology
bkarlsberg3@gatech.edu

Abstract

Retrieval-augmented generation (RAG) systems increasingly add iterative and multi-agent control loops, but comparisons across these architectures are often confounded by differences in corpora, budgets, logging, and metrics. We present **Agentic Retrieval Systems (ARS)**, an open-source harness that runs conventional retrieve-once RAG, a budgeted single-agent iterative retriever, and a role-separated multi-agent pipeline against a shared corpus, model interface, metric suite, and budget controller, and records structured per-question traces. We evaluate the three architectures with `gpt-4o-mini` on a 153-question slice derived from the HotpotQA distractor development set (100 bridge, 30 comparison, 15 short-context, and 8 synthetic unanswerable questions) using BM25 over a pooled corpus of 5,675 sentence-level passages, under an unconstrained and an equal-retrieval budget mode. In the unconstrained run, the multi-agent pipeline reaches a lenient exact match of 0.621 (95% bootstrap CI 0.542–0.693), compared with 0.510 for RAG and 0.497 for the single-agent loop; the paired multi-agent minus RAG difference is +0.111 (95% CI +0.059 to +0.163). The gain is concentrated on bridge (multi-hop) and comparison (multi-passages) questions and comes at $8.2\times$ the tokens of RAG (2,744 vs. 336 per question) and five model calls instead of one. In the same run, the single-agent loop uses $2.7\times$ the tokens of RAG with no measurable quality gain. The equal-retrieval run reproduces these results. The study is limited to one model, a small derived slice, and a local BM25 corpus; it is not a HotpotQA leaderboard evaluation. Code, configurations, and analysis scripts are available at <https://github.com/benkarlsberg/Agentic-Retrieval-Systems>.

1 Introduction

Open-domain question answering and related knowledge-intensive tasks increasingly rely on retrieval-augmented generation [Lewis et al., 2020, Karpukhin et al., 2020, Gao et al., 2023]. Beyond the classical retrieve-once pattern, recent systems interleave retrieval with reasoning [Trivedi et al., 2023, Jiang et al., 2023, Yao et al., 2023], reflect on evidence quality [Asai et al., 2024], and route queries by complexity [Jeong et al., 2024]. In parallel, multi-agent designs split planning, retrieval, critique, and synthesis across specialized roles [Nguyen et al., 2025, Singh et al., 2025]. These designs are motivated by multi-hop and multi-passages questions, where a single retrieval round may miss part of the required evidence, but they add model calls, retrieval calls, tokens, and latency.

Comparing such architectures fairly is difficult. Systems are usually introduced and evaluated separately, each with its own corpus, budget caps, logging, and metric definitions, so an observed quality gap may reflect implementation choices rather than architecture. Unified toolkits and recent comparative studies address parts of this problem (Section 2). A useful comparison of control architectures still needs a harness that holds the corpus, model, and budgets fixed and reports process cost alongside answer quality.

Research questions. The framework is organized around four questions:

- RQ1** Under matched retrieval or token budgets, does bounded iterative retrieval improve answer quality over retrieve-once RAG on multi-hop / multi-passage items?
- RQ2** Does role-separated multi-agent retrieval improve evidence coverage and answer quality enough to justify its coordination overhead?
- RQ3** How do architectures differ on unanswerable questions (abstention vs. false answers)?
- RQ4** How sensitive are architecture rankings to sparse (BM25), dense, and hybrid retrieval under a fixed corpus?

This paper reports evidence on RQ1 and RQ2, preliminary evidence on RQ3 (8 unanswerable items), and no evidence on RQ4, since all live runs use BM25.

Contributions.

1. A reproducible harness that runs conventional RAG, a bounded single-agent loop, and a multi-agent pipeline with shared retrieval, budgets, metrics, and JSONL tracing, including budget-matched comparison modes and logged termination reasons.
2. A live comparison of the three architectures with `gpt-4o-mini` on a 153-question HotpotQA-derived slice under two budget modes, reporting answer quality with bootstrap confidence intervals, paired differences, per-category results, and per-question cost (tokens, model and retrieval calls, latency, estimated USD).
3. A quality-cost analysis showing that, in this setting, the multi-agent pipeline improves lenient exact match by about 11 points over RAG (16 points under an LLM judge checked against an audit), mainly on bridge and comparison questions, at roughly eight times the token cost, while the single-agent loop gives no measurable gain over RAG at $2.5\text{--}2.7\times$ its token cost.
4. An open-source release of the code, run configurations, and the analysis script that regenerates every table and figure in this paper from the run artifacts.

2 Related Work

Retrieve-and-read and dense retrieval. Classical open-domain QA pipelines retrieve passages and then read them for answers [Chen et al., 2017]. Dense Passage Retrieval [Karpukhin et al., 2020] and RAG [Lewis et al., 2020] popularized neural retrieval combined with generation. Sparse baselines such as BM25 remain strong and widely used [Robertson and Zaragoza, 2009]. Hybrid fusion (e.g., reciprocal rank fusion) often combines sparse and dense signals [Cormack et al., 2009].

Iterative and adaptive retrieval. IRCOT interleaves retrieval with chain-of-thought reasoning for multi-step questions [Trivedi et al., 2023]. FLARE triggers retrieval when generation confidence is low [Jiang et al., 2023]. Self-RAG trains models to decide when to retrieve and how to critique evidence [Asai et al., 2024]. Adaptive-RAG routes queries by estimated complexity [Jeong et al., 2024]. ReAct and related tool-using agents couple reasoning with actions such as search [Yao et al., 2023, Schick et al., 2023, Press et al., 2023]. ARS does not propose a new retrieval policy; it provides a controlled setting in which such policies can be compared under shared budgets.

Multi-hop benchmarks. HotpotQA [Yang et al., 2018], Natural Questions [Kwiatkowski et al., 2019], and 2WikiMultiHopQA [Ho et al., 2020] are standard evaluation resources. Our live study uses a small stratified slice of the HotpotQA distractor development set with a local retrieval corpus (Section 4). Its numbers are not comparable to the official HotpotQA leaderboard, which uses the full development and test sets and a different answer-scoring protocol.

Agentic RAG comparisons, budgets, and harnesses. A recent survey organizes agentic RAG systems by agent cardinality, control structure, and autonomy, and lists evaluation and efficiency among the open challenges [Singh et al., 2025]. Role-separated multi-agent pipelines such as MA-RAG, which assigns planning, step definition, evidence extraction, and answering to separate agents, report gains on multi-hop QA benchmarks including HotpotQA [Nguyen et al., 2025]. Closest to our study, Ferrazzi et al. [2026] compare “Enhanced” RAG pipelines (routing, query rewriting, re-ranking) with a single-tool agentic RAG system on four datasets; neither is universally better, and the agentic system uses on average about $3.3\times$ more input tokens and $1.5\times$ more time. McCleary and Ghawaly [2026] measure how search depth, retrieval strategy, and completion budget affect the accuracy and cost of an agentic search system under explicit tool-call and token budgets, across six LLMs and three QA benchmarks. On the tooling side, FlashRAG reimplements 16 RAG methods and collects 38 benchmark datasets in one modular toolkit [Jin et al., 2025], and RAG Playground compares naive vector, re-ranked, and hybrid retrieval combined with ReAct agents under different prompting strategies [Papadimitriou et al., 2024]. ARS is complementary to these works. It holds the corpus, retriever, model, and budget controller fixed across three control architectures (retrieve-once, bounded single-agent, and role-separated multi-agent); logs tokens and latency for every model call and an estimated cost per question; adds an equal-retrieval budget mode; reports paired bootstrap confidence intervals over the same questions; and releases the per-question traces.

Evaluation methodology. Surveys of RAG describe evaluation in terms of retrieval and generation quality, with context relevance, answer faithfulness, and answer relevance as the main quality scores [Gao et al., 2023]. Recent comparative studies of agentic RAG also report token usage and latency [Ferrazzi et al., 2026, McCleary and Ghawaly, 2026]. ARS provides typed schemas, per-question traces, and bootstrap confidence intervals [Efron and Tibshirani, 1993] for quality and process-cost measurements.

3 Framework Design

3.1 Architectures

ARS implements three runners that share the same corpus, retriever, model client, budget controller, and metric suite.

A — Conventional RAG. One retrieval call with the original question returns `top_k` passages; one generation call produces the answer or an abstention.

B — Bounded single-agent. At each step a controller call chooses to *retrieve*, *reformulate* the query, *stop* (and synthesize), or *abstain*. Retrieved passages are deduplicated against earlier steps. Hard caps on steps, model calls, retrieval calls, documents, and tokens bound the loop, and the stop reason is logged.

C — Multi-agent. A planner call decomposes the question; two retriever roles (“fact” and “evidence”) alternate over up to three retrieval rounds, each excluding passages already retrieved;

a critic call after each round judges whether the evidence is sufficient; and a synthesizer call produces the final answer or an abstention. Coordination messages are recorded in the trace.

3.2 Shared retrieval stack

Retrievers include Okapi BM25 (with a pure-Python fallback), dense retrieval over hashing-based fixture embeddings (not a trained encoder), hybrid RRF fusion, and an optional lexical reranker. The live study in this paper uses BM25 only.

3.3 Budgets and comparison modes

Budgets limit steps, model calls, documents, tokens, retrieval calls, and `top_k`. Comparison modes rewrite the per-architecture budget:

- `unconstrained`: the configured budget, still hard-capped;
- `equal_retrieval`: at most 3 retrieval calls and 15 documents for every architecture, with RAG restricted to one retrieval call and one model call;
- `equal_token`: a shared token cap (not run in this study).

3.4 Tracing

Every question emits JSONL events covering issued queries, retrieved passage IDs and scores, routing actions, token accounting, latency, estimated cost, and termination reason. An HTML viewer supports qualitative inspection of individual traces.

3.5 Model interface

A provider-neutral client supports a deterministic heuristic model (`DeterministicModel`) for offline tests, and OpenAI-compatible live backends configured through environment variables. Token counts in live runs are taken from the API usage fields.

4 Experimental Setup

4.1 Dataset slice

We derive a 153-question evaluation slice from the HotpotQA distractor development set (`hotpot_dev_distractor_v1.json`, 7,405 questions, all labelled *hard*) with seeded sampling (seed 42). Table 1 lists the strata. Multi-hop items are HotpotQA *bridge* questions and multi-passage items are *comparison* questions. HotpotQA does not annotate hop count; the 15 items in the single-hop stratum are bridge (9) and comparison (6) questions with short contexts (4–19 sentences, against a median of 40 in the development set; 9 of them have fewer than the usual ten paragraphs), so this stratum is better read as “short-context” than as guaranteed single-hop. The 8 unanswerable questions are synthetic questions about fictional entities (e.g., “What is the capital of the Republic of Middle Earthia?”) with no support in the corpus. Gold answers are the HotpotQA answer strings (mean length 2.5 words); no answer aliases are used.

4.2 Corpus and retrieval

The retrieval corpus is the union of the distractor-setting context paragraphs of the 145 HotpotQA questions (the two supporting paragraphs plus distractors; ten paragraphs for 135 questions and two to five for the other ten), split into sentences. Each sentence is one passage with ID `title::si`, giving 5,675 passages. Retrieval is Okapi BM25 ($k_1=1.5$, $b=0.75$) over title and sentence text, with `top_k=5` passages per call. Because distractor paragraphs from all questions

Table 1: Composition of the 153-question evaluation slice.

Stratum	Source	n
Multi-hop	HotpotQA bridge	100
Multi-passage	HotpotQA comparison	30
Single-hop (short context)	HotpotQA bridge (9) / comparison (6)	15
Unanswerable	synthetic	8
Total		153

are pooled, each question competes against passages from the other 144 questions as well as its own distractors. For retrieval diagnostics, the gold evidence of a question is the set of all sentences of its supporting paragraphs.

4.3 Model and budgets

All model calls use `gpt-4o-mini` through the OpenAI API with temperature 0 and at most 512 output tokens per call. The runs requested the `gpt-4o-mini` API alias between 04:24 and 10:31 UTC on 2026-09-15. The model identifier returned in the API responses, which would name the dated snapshot behind the alias, was not recorded, so the exact snapshot cannot be recovered from the run artifacts; the harness now logs this identifier for future runs. In the `unconstrained` mode the budget is 8 steps, 12 model calls, 5 retrieval calls, 20 documents, and 8,000 tokens per question. In the `equal_retrieval` mode the single-agent and multi-agent runners are limited to 3 retrieval calls and 15 documents, and RAG to one retrieval and one model call. Each mode was run once over all 153 questions for each architecture (459 questions per mode); no call failed.

Two properties of the runs affect how the modes should be read. First, the multi-agent critic’s verdict never matched the controller’s early-stop pattern, so every question received exactly three retrieval rounds followed by synthesis (5 model calls and 3 retrieval calls for all 153 questions in both modes); the multi-agent condition therefore behaved as a fixed three-round pipeline. Second, RAG uses a single top-5 retrieval in both modes. The equal-retrieval mode thus caps retrieval calls but does not equalize the number of passages each architecture actually reads, and it changes the effective budget only for the single-agent loop. We therefore treat the equal-retrieval run primarily as a replication of the unconstrained run.

4.4 Metrics

Answers are normalized in the HotpotQA style (lower-casing and removing punctuation, articles, and extra whitespace).

- **Lenient EM (L-EM)**: 1 if the normalized prediction equals the normalized gold answer or either string contains the other (the harness field `em`).
- **Contains-gold (CG)**: 1 if the normalized prediction contains the normalized gold answer (reverse containment is accepted only for short strings of at most five tokens).
- **Strict EM**: normalized string equality (harness field `soft_em`).
- **Token F1**: SQuAD-style token-overlap F1 against the gold answer.
- **Soft F1**: token F1, raised to 0.5 when $CG = 1$.
- **Abstention**: whether the system abstains on unanswerable questions and answers the answerable ones.

- **Evidence recall:** the fraction of gold-evidence sentences retrieved at any point for the question, and the fraction of questions for which at least one sentence of every supporting paragraph was retrieved. We recompute both from the traces for all architectures.¹
- **Cost:** model calls, retrieval calls, unique passages read, total tokens (prompt plus completion), wall-clock latency, and an estimated USD cost.

Answer metrics are 0 on the 8 unanswerable questions, and all means are over the full 153 questions, so the maximum attainable L-EM is $145/153 = 0.948$ (the LLM judge described below instead credits a correct abstention on these questions). Because `gpt-4o-mini` answers in full sentences (30–34 words on average for non-abstained answers, against 2.5-word gold answers), strict EM is 0.000 for every architecture in both runs and token F1 is heavily penalized by answer length. We therefore use L-EM and CG as the primary quality metrics, report soft F1 as a secondary graded measure, and report token F1 only for completeness. L-EM and CG coincide on every question except one (single-agent, equal-retrieval).

The estimated cost uses list prices of USD 0.15 (input) and USD 0.60 (output) per million tokens, and the harness splits each question’s total tokens equally between input and output; it is a rough estimate, not billing data. Latency is end-to-end wall-clock time including API round trips.

LLM-judge correctness. Because containment can credit an answer that mentions the gold string without committing to it, we also grade every saved answer with an LLM judge; no system was re-run. The judge is `gpt-4o-mini` at temperature 0 with JSON output (the API returned `gpt-4o-mini-2024-07-18` for every call). It sees only the question, the gold answer, and the system answer, not the architecture, and the requests for both runs and all three architectures are issued in one shuffled order. For answerable questions the rubric marks an answer correct only if it commits to the gold entity or value (aliases, formatting differences, and reasonable paraphrases are accepted), and incorrect if it hedges between candidates, names a different entity, mentions the gold string only incidentally while asserting something else, or abstains. For the 8 unanswerable questions the judge receives a separate rubric under which an answer is correct if and only if it abstains or says that the information is not available. An earlier prompt that stated both rubrics together credited abstentions on answerable questions; it was replaced before the audit, and only verdicts from the final prompt are reported. All 918 judgments (459 per run) returned a valid verdict, using 313,858 prompt and 17,181 completion tokens (about USD 0.06 at list prices). To check the judge, we audited 60 judgments. An AI assistant produced initial correctness labels, which the author then reviewed item by item against the gold answers and model outputs. The 60 were drawn with a fixed seed from answerable questions in the unconstrained run, spread evenly over the architectures: 30 on which the judge and L-EM disagree and 30 on which they agree. The judge agreed with the audit on 54 of the 60 (Cohen’s $\kappa = 0.78$), against 36 of 60 for L-EM ($\kappa = 0.23$); reweighting the two strata to their frequency in the run gives an estimated judge–audit agreement of 96.8% on answerable questions. In four of the six disagreements the judge accepted an answer that does not match the gold, twice by overruling an apparently wrong gold label with outside knowledge and twice by accepting a loosely related answer to a gold string that is a sentence fragment; in the other two it rejected “over 300,000” for the gold “300,000”. The judge script and prompts, the cached verdicts, and the audit file are included in the repository.

Statistics. We report percentile bootstrap 95% confidence intervals [Efron and Tibshirani, 1993] with 10,000 resamples over questions. Architecture differences are estimated with a paired

¹The harness’s own `recall@k` field matches our recomputation for RAG and multi-agent, but for the single-agent runner it falls back to the gold IDs because that runner logs retrieved IDs in a different trace event, and it reports a spurious 1.0.

Table 2: Answer quality on the 153-question slice (gpt-4o-mini, BM25, top-5). Means with percentile bootstrap 95% CIs (10,000 resamples). L-EM and CG are the primary metrics (Section 4.4); strict EM is 0.000 for all rows.

Architecture	L-EM	CG	Soft F1	Token F1
<i>Unconstrained</i>				
RAG	0.510 [0.431, 0.588]	0.510 [0.431, 0.588]	0.279 [0.242, 0.316]	0.097
Single-agent	0.497 [0.418, 0.575]	0.497 [0.418, 0.575]	0.270 [0.233, 0.307]	0.096
Multi-agent	0.621 [0.542, 0.693]	0.621 [0.542, 0.699]	0.333 [0.297, 0.368]	0.107
<i>Equal-retrieval</i>				
RAG	0.503 [0.425, 0.582]	0.503 [0.425, 0.582]	0.276 [0.239, 0.314]	0.097
Single-agent	0.516 [0.438, 0.595]	0.510 [0.431, 0.588]	0.277 [0.239, 0.315]	0.098
Multi-agent	0.621 [0.542, 0.693]	0.621 [0.542, 0.693]	0.333 [0.297, 0.368]	0.105

bootstrap over the same questions; we also report discordant counts, i.e., the number of questions answered correctly by one architecture but not the other.

4.5 Reproduction

The live runs are defined by `configs/experiments/live_hotpot150_unconstrained.yaml` and `configs/experiments/live_hotpot150_equal_retrieval.yaml`. The slice and its corpus are distributed as `fixtures/datasets/hotpot_dev_slice_150.jsonl` and `fixtures/corpus/hotpot_dev_slice_150.jsonl`; the build metadata (seed and SHA-256 of the source file) is recorded in `fixtures/raw/hotpot_dev_slice_150_build_meta.json`.

```
pip install -e ".[dev,openai]"
python scripts/run_experiment.py \
    --config configs/experiments/live_hotpot150_unconstrained.yaml
python scripts/judge_answers.py # LLM judge; verdicts are cached
python analysis/compute_tables.py --ars-root <path-to-ARS>
```

The last script recomputes every number, table, and figure in Section 5 from the per-question results, traces, cached judge verdicts, and audit file, without API calls.

5 Results

5.1 Overall quality

Table 2 reports answer quality for both modes. In the unconstrained run, the multi-agent pipeline reaches L-EM 0.621, against 0.510 for RAG and 0.497 for the single-agent loop. The paired multi-agent minus RAG difference is +0.111 (95% CI +0.059 to +0.163); the multi-agent pipeline answers 18 questions correctly that RAG misses, and RAG answers 1 question correctly that the multi-agent pipeline misses. The single-agent minus RAG difference is −0.013 (−0.065 to +0.039; 7 vs. 9 discordant questions), i.e., no detectable difference. Soft F1 gives the same ordering (multi-agent minus RAG +0.054, CI +0.029 to +0.080; single-agent minus RAG −0.009, CI −0.034 to +0.016).

The equal-retrieval run gives nearly identical results: multi-agent minus RAG is +0.118 (+0.072 to +0.170; 18 vs. 0 discordant) and single-agent minus RAG is +0.013 (−0.039 to +0.065; 10 vs. 8). Per-question L-EM agrees between the two runs on 99.3% (RAG), 96.7% (single-agent), and 97.4% (multi-agent) of questions. Since the RAG pipeline and its retrieval are identical in both modes, the disagreements for RAG reflect residual non-determinism of the API at temperature 0.

Table 3: Process cost per question (means over 153 questions). Latency is wall-clock seconds (mean / median). Cost is the estimated USD total for all 153 questions (Section 4.4).

Architecture	Model calls	Retr. calls	Unique passages	Tokens	Latency (s)	Est. cost (USD)
<i>Unconstrained</i>						
RAG	1.00	1.00	5.0	336	0.81 / 0.77	0.019
Single-agent	2.99	1.16	5.2	892	22.70 / 19.79	0.051
Multi-agent	5.00	3.00	13.1	2744	43.16 / 41.72	0.157
<i>Equal-retrieval</i>						
RAG	1.00	1.00	5.0	337	8.57 / 9.52	0.019
Single-agent	2.93	1.12	5.3	859	25.42 / 28.23	0.049
Multi-agent	5.00	3.00	13.1	2732	43.18 / 41.76	0.157

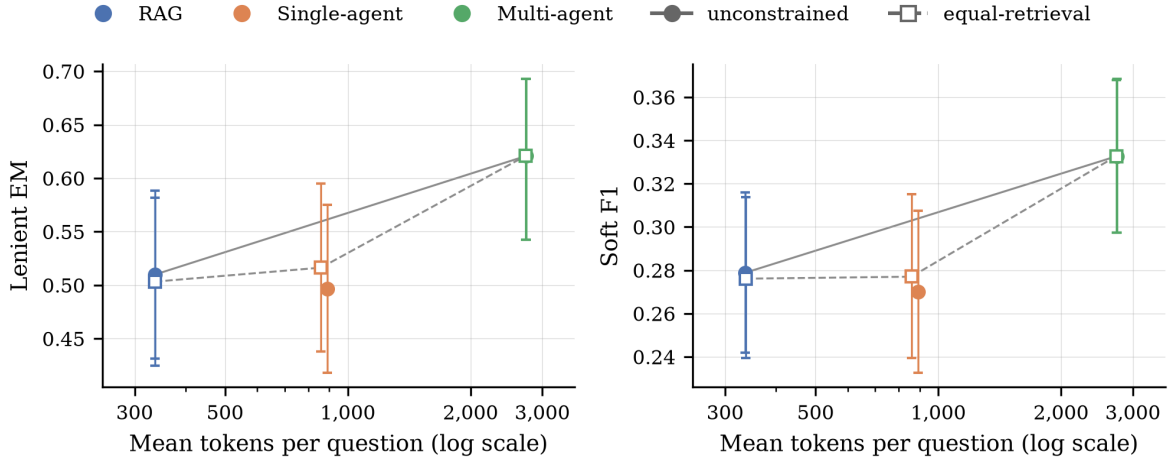


Figure 1: Answer quality versus mean tokens per question (log scale) for both budget modes. Filled circles: unconstrained; open squares: equal-retrieval. Error bars are bootstrap 95% CIs; lines connect the Pareto-optimal architectures in each mode (solid: unconstrained, dashed: equal-retrieval). The multi-agent points for the two modes almost coincide.

5.2 Cost

Table 3 reports process cost. RAG uses one model call and 336 tokens per question. The single-agent loop uses 2.99 model calls and 892 tokens ($2.7\times$ RAG), and the multi-agent pipeline uses 5 model calls and 2,744 tokens ($8.2\times$ RAG), and it reads 13.1 unique passages per question against 5.0 for RAG. Estimated cost for the 153 questions is USD 0.019 (RAG), 0.051 (single-agent), and 0.157 (multi-agent). Within the unconstrained run, median latency is 0.77s for RAG, 19.8s for the single-agent loop, and 41.7s for the multi-agent pipeline. Latency is less stable than the other cost measures: RAG’s mean latency was 0.81s in the unconstrained run and 8.57s in the equal-retrieval run with an identical pipeline, so latencies should be compared only within a run.

Figure 1 places each architecture in the quality–token plane. In both modes RAG and the multi-agent pipeline lie on the Pareto frontier. In the unconstrained run the single-agent loop is dominated by RAG (lower L-EM at higher cost); in the equal-retrieval run it lies nominally on the frontier, but its advantage over RAG (+0.013) is well within the confidence interval.

5.3 Results by question category

Table 4 and Figure 2 break down L-EM by stratum for the unconstrained run. The multi-agent advantage over RAG is +0.12 on multi-hop questions (0.580 vs. 0.460; 13 vs. 1 discordant) and

Table 4: L-EM by stratum, unconstrained mode (Single: single-agent; Multi: multi-agent; per-architecture bootstrap 95% CIs are shown in Figure 2). Δ columns give paired differences against RAG with bootstrap 95% CIs; the parenthesized pair counts questions correct only for the first architecture / only for RAG.

Stratum (n)	RAG	Single	Multi	Δ Multi – RAG		Δ Single – RAG	
Multi-hop (100)	0.460	0.470	0.580	+0.120	[+0.050, +0.190] (13/1)	+0.010	[−0.050, +0.070] (6/5)
Multi-pass (30)	0.733	0.700	0.867	+0.133	[+0.033, +0.267] (4/0)	−0.033	[−0.167, +0.067] (1/2)
Single-hop (15)	0.667	0.533	0.733	+0.067	[+0.000, +0.200] (1/0)	−0.133	[−0.333, +0.000] (0/2)

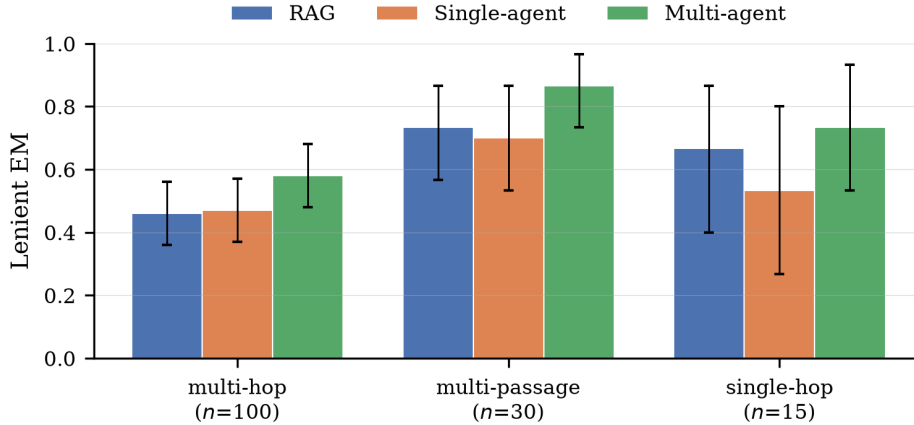


Figure 2: L-EM by stratum and architecture, unconstrained mode. Error bars are bootstrap 95% CIs. The unanswerable stratum ($n=8$) is omitted because answer metrics are 0 there by definition.

+0.13 on multi-pass questions (0.867 vs. 0.733; 4 vs. 0 discordant). Both paired intervals exclude zero, although the multi-pass interval is wide (+0.033 to +0.267) because $n=30$. On the 15 short-context items the difference is one question. The single-agent loop is within one or two questions of RAG on every stratum. All three architectures score 0 on the unanswerable stratum by construction; their abstention behaviour is reported in Table 7. The equal-retrieval run shows the same pattern (multi-hop: RAG 0.450, single-agent 0.490, multi-agent 0.580; multi-pass: 0.733, 0.700, 0.900).

5.4 LLM-judge correctness

Table 5 compares L-EM with judge accuracy. The judge scores all three architectures higher than L-EM (unconstrained: 0.601 for RAG, 0.575 for the single-agent loop, and 0.765 for the multi-agent pipeline). The flip counts show why. The judge withdraws credit that L-EM gave to answers that hedge, name the gold and then abstain, or mention the gold only in passing (8, 12, and 4 questions for RAG, the single-agent loop, and the multi-agent pipeline). It adds credit for name variants and paraphrases that containment misses (e.g., “Stephen Ireland” for the gold “Stephen James Ireland”, or gold strings that are sentence fragments; 14, 16, and 18 answerable questions), and for abstention on the 8 unanswerable questions. Restricted to the 145 answerable questions, judge accuracy is 0.579 (RAG), 0.552 (single-agent), and 0.752 (multi-agent).

The architecture comparison holds, and the multi-agent gain is larger under the judge: the paired multi-agent minus RAG difference is +0.163 (95% CI +0.098 to +0.235; 28 vs. 3 discordant questions), compared with +0.111 for L-EM. The single-agent minus RAG difference is −0.026 (−0.092 to +0.039; 11 vs. 15), again no detectable difference. The equal-retrieval run replicates

Table 5: LLM-judge accuracy next to L-EM (153 questions; the judge counts an abstention on an unanswerable question as correct). Judge: mean with bootstrap 95% CI. Δ vs. RAG: paired difference in judge accuracy with bootstrap 95% CI; the parenthesized pair counts questions judged correct only for that architecture / only for RAG. Flips: questions with L-EM = 1 judged incorrect / questions with L-EM = 0 judged correct (answerable + unanswerable).

Architecture	L-EM	Judge	Δ Judge vs. RAG	Flips
<i>Unconstrained</i>				
RAG	0.510	0.601 [0.523, 0.680]	—	8 / 14 + 8
Single-agent	0.497	0.575 [0.497, 0.654]	-0.026 [-0.092, +0.039] (11/15)	12 / 16 + 8
Multi-agent	0.621	0.765 [0.693, 0.830]	+0.163 [+0.098, +0.235] (28/3)	4 / 18 + 8
<i>Equal-retrieval</i>				
RAG	0.503	0.601 [0.523, 0.673]	—	8 / 15 + 8
Single-agent	0.516	0.582 [0.503, 0.660]	-0.020 [-0.085, +0.046] (11/14)	12 / 14 + 8
Multi-agent	0.621	0.765 [0.699, 0.830]	+0.163 [+0.105, +0.229] (27/2)	3 / 17 + 8

Table 6: LLM-judge accuracy by stratum, unconstrained mode. Δ columns as in Table 4, computed on judge verdicts.

Stratum (n)	RAG	Single	Multi	Δ Multi – RAG	Δ Single – RAG
Multi-hop (100)	0.510	0.550	0.680	+0.170 [+0.090, +0.250] (18/1)	+0.040 [-0.030, +0.110] (9/5)
Multi-passage (30)	0.700	0.533	0.933	+0.233 [+0.033, +0.433] (9/2)	-0.167 [-0.367, +0.000] (2/7)
Single-hop (15)	0.800	0.600	0.867	+0.067 [+0.000, +0.200] (1/0)	-0.200 [-0.400, +0.000] (0/3)
Unanswerable (8)	1.000	1.000	1.000	+0.000 [+0.000, +0.000] (0/0)	+0.000 [+0.000, +0.000] (0/0)

this (multi-agent minus RAG +0.163, +0.105 to +0.229, 27 vs. 2; single-agent minus RAG -0.020, -0.085 to +0.046, 11 vs. 14), and per-question judge verdicts agree between the two runs on 98.7% (RAG), 95.4% (single-agent), and 97.4% (multi-agent) of questions. By stratum (Table 6), the multi-agent gain over RAG is +0.170 on multi-hop and +0.233 on multi-passage questions, with both intervals excluding zero. The single-agent loop scores below RAG on multi-passage (-0.167) and short-context (-0.200) questions, but neither interval excludes zero.

5.5 Evidence coverage and abstention

Table 7 reports retrieval and abstention diagnostics for the unconstrained run. The multi-agent pipeline retrieves 64.1% of gold-evidence sentences and covers every supporting paragraph for 76.6% of answerable questions, against 36.6% and 48.3% for RAG. The single-agent loop retrieves little more than RAG (38.3% and 50.3%); it issued a single retrieval call on 101 of 153 questions and none on 24. On 16 answerable questions the single-agent controller abstained without retrieving anything. It abstains on 31 of 145 answerable questions, RAG on 24, and the multi-agent pipeline on 8. On the unanswerable items, the harness flags abstentions on all 8 for RAG and the single-agent loop and on 6 for the multi-agent pipeline; the other two multi-agent answers also decline (“the context provided does not mention ...”), but without the **ABSTAIN** token the harness looks for, and the judge counts all 8 as correct abstentions.

6 Discussion

Where the multi-agent pipeline helps. The multi-agent gain is clearest on the bridge and comparison strata, where answering requires combining evidence from two paragraphs and where the strata are large enough for the paired intervals to exclude zero. It coincides with higher evidence coverage (Table 7): with three deduplicated retrieval rounds the pipeline reads about 13 sentences instead of 5, and far more often retrieves material from both supporting paragraphs.

Table 7: Diagnostics, unconstrained mode. Evidence recall: mean fraction of gold-evidence sentences retrieved (answerable questions). All support: fraction of answerable questions with at least one retrieved sentence from every supporting paragraph. Abstentions are counts flagged by the harness. Answer length is the mean number of words in non-abstained answers.

Architecture	Evidence	All	Abstentions		Answer
	recall	support	answerable	unanswerable	words
RAG	0.366	0.483	24/145	8/8	30.0
Single-agent	0.383	0.503	31/145	8/8	33.1
Multi-agent	0.641	0.766	8/145	6/8	33.7

It also abstains less often on answerable questions (8 vs. 24 for RAG). These observations are consistent with the view that the gain comes mainly from reading more, and more diverse, evidence rather than from role separation itself. Because the critic never stopped early in these runs, the study cannot separate the contribution of planning and critique from that of a fixed three-round retrieval schedule; an ablation that gives RAG a comparable passage budget (e.g., `top_k=15`) would be needed. Its lower abstention rate did not cost it on the unanswerable questions: although the harness flag records only 6 of 8 abstentions, the two remaining answers also decline to answer.

Why the single-agent loop does not help. In this configuration the single-agent loop rarely iterates: 101 of 153 questions received exactly one retrieval call and 24 received none. Its evidence coverage is therefore close to RAG’s, and its additional model calls are spent mostly on control decisions rather than on retrieval. It also abstains more often on answerable questions than RAG, including 16 questions on which it abstained before retrieving anything. The loop consequently adds tokens and latency without improving answer quality. This finding concerns this controller prompt and this model; it does not show that iterative retrieval is ineffective in general [Trivedi et al., 2023, Jiang et al., 2023].

Quality–cost trade-off. Viewed as a Pareto problem, RAG and the multi-agent pipeline are both efficient choices here, and which one to use depends on the value of about 11 additional correct answers per 100 questions (16 under the LLM judge) relative to roughly $8\times$ the tokens, $5\times$ the model calls, and tens of seconds of added latency per question. At the list prices used here the absolute cost difference is small (about USD 0.14 per 153 questions), so latency and API rate limits may matter more than token cost in practice. The single-agent loop, as configured, is not on the unconstrained frontier.

Answer format and metrics. The gap between L-EM ($\approx 0.5\text{--}0.6$) and token F1 (≈ 0.1) is caused by answer verbosity, not by retrieval: the model typically embeds the correct short answer in a full sentence. Containment-based metrics credit these answers, but they can also credit a long answer that mentions the gold string without committing to it, and they miss correct answers phrased differently from the gold. The LLM judge (Section 5.4) corrects most errors of both kinds in the audited sample and leaves the conclusions unchanged. Constraining the output format or extracting a short answer span would allow standard strict EM and token F1 to be used.

7 Limitations

- **One model.** All live results use `gpt-4o-mini` at temperature 0; rankings may differ for other models.

- **Derived slice, not the full benchmark.** The 153 questions are a stratified sample of the HotpotQA distractor development set plus 8 synthetic unanswerable questions, and the short-context stratum is not a verified single-hop set. The numbers are not comparable to HotpotQA leaderboard results.
- **Primary metrics are lenient.** Raw token F1 is depressed by verbose answers, and strict EM is 0 for every architecture because normalized string equality almost never holds for sentence-length answers. L-EM and CG are containment based and can over-credit long answers; we therefore also report LLM-judge accuracy.
- **LLM judge.** The judge is the same model (`gpt-4o-mini`) as the systems under test, so it may share their biases or prefer their phrasing. It sometimes relies on outside knowledge to overrule an apparently wrong gold label, and some HotpotQA gold strings in the slice are sentence fragments, which makes any reference-based grading noisy. The audit covers 60 stratified judgments; its labels were drafted by an AI assistant and reviewed by a single author.
- **Small strata.** With 30, 15, and 8 questions in the smaller strata, confidence intervals are wide, and per-category conclusions beyond the multi-hop stratum are tentative.
- **Local BM25 corpus.** Retrieval runs over a pooled corpus of sentence-level passages built from the distractor paragraphs, not over full Wikipedia, and only BM25 is evaluated (RQ4 is not addressed).
- **Budget matching.** The equal-retrieval mode caps retrieval calls but does not equalize passages read, and the multi-agent critic never triggered an early stop; the equal-token mode was not run.
- **Single runs.** Each configuration was run once; the agreement between the two modes suggests low but non-zero run-to-run variation.
- **Cost and citations.** USD figures are estimates from list prices and an assumed equal input/output token split. The harness did not parse the citation format produced by the model, so citation precision and recall are not reported.

8 Conclusion and Future Work

We presented ARS, a harness for comparing conventional RAG, bounded iterative retrieval, and multi-agent retrieval under a shared corpus, budget controller, trace format, and metric suite. On a 153-question HotpotQA-derived slice with `gpt-4o-mini` and BM25, a three-round multi-agent pipeline improved lenient exact match over RAG by about 11 points, mainly on bridge and comparison questions, at about eight times the token cost and a large latency increase, while the single-agent loop added cost without a quality gain. Both findings replicated under an equal-retrieval budget, and both held when the saved answers were regraded by an LLM judge checked against an audit, which put the multi-agent gain at about 16 points.

Future work. (1) Passage-budget-matched baselines (RAG with larger `top_k`) and the equal-token mode; (2) a critic output format that the controller parses, so that early stopping and critique can be ablated; (3) constrained short-answer output so that strict EM and token F1 are informative, and citation parsing; (4) additional models, the full HotpotQA development set, and 2WikiMultiHopQA; (5) dense and hybrid retrieval for RQ4.

Code Availability

Code, configurations, and the analysis script are released under the MIT license at <https://github.com/benkarlsberg/Agentic-Retrieval-Systems>.

Acknowledgments

The author conceived and designed this study. Separately from the gpt-4o-mini system evaluated here, AI assistants were used to help implement the experiment code, run the evaluations, and draft the manuscript under the author’s direction. The author reviewed all code, results, and references and takes full responsibility for the content.

A Pipeline Validation

Before the live study, the harness was checked in two small runs on the checked-in mini fixtures (24 passages, $n=13$ questions covering single-hop, multi-hop, multi-passage, ambiguous, and unanswerable items; BM25, top-5, unconstrained). With the heuristic `DeterministicModel`, all three architectures obtained the same L-EM (0.846) and abstention correctness (1.000), as expected for a shared extractive heuristic, while cost increased with architectural complexity (1.00, 3.00, and 4.31 model calls; 294, 654, and 1,625 mean tokens for RAG, single-agent, and multi-agent). A live `gpt-4o-mini` smoke run on the same 13 questions gave L-EM 0.692 for all three architectures, with 1.00, 4.23, and 5.00 model calls and 300, 1,460, and 2,331 mean tokens. An offline equal-retrieval run also completed. These runs verified that the runners, budgets, traces, and metrics operate end to end; with $n=13$ they carry no information about relative answer quality.

References

- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. Self-RAG: Learning to retrieve, generate, and critique through self-reflection. In *The Twelfth International Conference on Learning Representations*, 2024.
- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. Reading Wikipedia to answer open-domain questions. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1870–1879. Association for Computational Linguistics, 2017.
- Gordon V. Cormack, Charles L. A. Clarke, and Stefan Buettcher. Reciprocal rank fusion outperforms Condorcet and individual rank learning methods. In *Proceedings of the 32nd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 758–759, 2009.
- Bradley Efron and Robert J. Tibshirani. *An Introduction to the Bootstrap*, volume 57 of *Monographs on Statistics and Applied Probability*. Chapman & Hall, New York, 1993.
- Pietro Ferrazzi, Milica Cvjetićanin, Alessio Piraccini, and Davide Giannuzzi. Is agentic RAG worth it? an experimental comparison of RAG approaches. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 6: Industry Track)*, pages 56–75. Association for Computational Linguistics, 2026. arXiv:2601.07711.
- Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2023.

- Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop QA dataset for comprehensive evaluation of reasoning steps. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6609–6625, 2020.
- Soyeong Jeong, Jinheon Baek, Sukmin Cho, Sung Ju Hwang, and Jong C. Park. Adaptive-RAG: Learning to adapt retrieval-augmented large language models through question complexity. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 7036–7050. Association for Computational Linguistics, 2024.
- Zhengbao Jiang, Frank F. Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. Active retrieval augmented generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7969–7992. Association for Computational Linguistics, 2023.
- Jiajie Jin, Yutao Zhu, Zhicheng Dou, Guanting Dong, Xinyu Yang, Chenghao Zhang, Tong Zhao, Zhao Yang, and Ji-Rong Wen. FlashRAG: A modular toolkit for efficient retrieval-augmented generation research. In *Companion Proceedings of the ACM Web Conference 2025*, pages 737–740. ACM, 2025.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781. Association for Computational Linguistics, 2020.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. Natural Questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:452–466, 2019.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, volume 33, pages 9459–9474, 2020.
- Kyle A. McCleary and James M. Ghawaly. Quantifying the accuracy and cost impact of design decisions in budget-constrained agentic LLM search. In *Proceedings of the Fifteenth Language Resources and Evaluation Conference (LREC 2026)*, pages 10291–10300. European Language Resources Association, 2026. arXiv:2603.08877.
- Thang Nguyen, Peter Chin, and Yu-Wing Tai. MA-RAG: Multi-agent retrieval-augmented generation via collaborative chain-of-thought reasoning. *arXiv preprint arXiv:2505.20096*, 2025.
- Ioannis Papadimitriou, Ilias Gialampoukidis, Stefanos Vrochidis, and Ioannis Kompatsiaris. RAG playground: A framework for systematic evaluation of retrieval strategies and prompt engineering in RAG systems. *arXiv preprint arXiv:2412.12322*, 2024.
- Ofir Press, Muru Zhang, Sewon Min, Ludwig Schmidt, Noah A. Smith, and Mike Lewis. Measuring and narrowing the compositionality gap in language models. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 5687–5711. Association for Computational Linguistics, 2023.
- Stephen Robertson and Hugo Zaragoza. The probabilistic relevance framework: BM25 and beyond. *Foundations and Trends in Information Retrieval*, 3(4):333–389, 2009.

- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- Aditi Singh, Abul Ehtesham, Saket Kumar, Tala Talaei Khoei, and Athanasios V. Vasilakos. Agentic retrieval-augmented generation: A survey on agentic RAG. *arXiv preprint arXiv:2501.09136*, 2025.
- Harsh Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. Interleaving retrieval with chain-of-thought reasoning for knowledge-intensive multi-step questions. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 10014–10037. Association for Computational Linguistics, 2023.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380. Association for Computational Linguistics, 2018.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *The Eleventh International Conference on Learning Representations*, 2023.