













**Generated Document by Me**



# Table of contents:

-  Create a Page
-  Create a Document
-  Create a Blog Post
-  Markdown Features
-  Deploy your site
-  Congratulations Aaron Aardvark!
-  We done caught Willy
-  About Page
-  management
- Create a Page
  - Create your first React Page
  - Create your first Markdown Page
- Create a Document
  - Create your first Doc
  - Configure the Sidebar
- Create a Blog Post
  - Create your first Post
- Markdown Features
  - Front Matter
  - Links
  - Images
  - Code Blocks
  - Admonitions
  - MDX and React Components
- Deploy your site
  - Build your site
  - Deploy your site
- Congratulations Aaron Aardvark!
  - What's next?
- Congratulations Again, but this time it's tiresome
  - What's next?
- About Page
- Local Config
  - Local Config Page
- Entry Templates
  - Entry Templates Page

- Search Templates
  - Search Templates Page
- Web Config
  - Web Config Page
- Manager
  - Managers
  -  Manage Docs Versions
  -  Translate your site
- Manage Docs Versions
  - Create a docs version
  - Add a Version Dropdown
  - Update an existing version
- Translate your site
  - Configure i18n
  - Translate a doc
  - Start your localized site
  - Add a Locale Dropdown
  - Build your localized site

## **Create a Page**

Add Markdown or React files to `src/pages` to create a standalone page:

## **Create a Document**

Documents are groups of pages connected through:

## **Create a Blog Post**

Docusaurus creates a page for each blog post, but also a blog index page, a tag system, an RSS feed...

## **Markdown Features**

Docusaurus supports Markdown and a few additional features.

## **Deploy your site**

Docusaurus is a static-site-generator (also called Jamstack).

## **Congratulations Aaron Aardvark!**

You have just learned the basics of Docusaurus and made some changes to the initial template.

## **We done caught Willy**

You have just learned the basics of Docusaurus and made some changes to the initial template.

## **About Page**

A page about pages

## **management**

2 items

# Create a Page

Add **Markdown or React** files to `src/pages` to create a **standalone page**:

- `src/pages/index.js` → `localhost:3000/`
- `src/pages/foo.md` → `localhost:3000/foo`
- `src/pages/foo/bar.js` → `localhost:3000/foo/bar`

## Create your first React Page

Create a file at `src/pages/my-react-page.js`:

`src/pages/my-react-page.js`

```
import React from 'react';
import Layout from '@theme/Layout';

export default function MyReactPage() {
  return (
    <Layout>
      <h1>My React page</h1>
      <p>This is a React page</p>
    </Layout>
  );
}
```

A new page is now available at <http://localhost:3000/my-react-page>.

## Create your first Markdown Page

Create a file at `src/pages/my-markdown-page.md`:

`src/pages/my-markdown-page.md`

# My Markdown page

This is a Markdown page

A new page is now available at <http://localhost:3000/my-markdown-page>.

# Create a Document

Documents are **groups of pages** connected through:

- a **sidebar**
- **previous/next navigation**
- **versioning**

## Create your first Doc

Create a Markdown file at `docs/hello.md`:

```
docs/hello.md
```

```
# Hello
```

```
This is my first Docusaurus document!
```

A new document is now available at <http://localhost:3000/docs/hello>.

## Configure the Sidebar

Docusaurus automatically **creates a sidebar** from the `docs` folder.

Add metadata to customize the sidebar label and position:

```
docs/hello.md
```

```
---  
sidebar_label: 'Hi!'  
sidebar_position: 3  
---
```

```
# Hello
```



This is my **first Docusaurus document**!

It is also possible to create your sidebar explicitly in `sidebars.js`:

sidebars.js

```
export default {  
  tutorialSidebar: [  
    'intro',  
    'hello',  
    {  
      type: 'category',  
      label: 'Tutorial',  
      items: ['tutorial-basics/create-a-document'],  
    },  
  ],  
};
```

# Create a Blog Post

Docusaurus creates a **page for each blog post**, but also a **blog index page**, a **tag system**, an **RSS** feed...

## Create your first Post

Create a file at `blog/2021-02-28-greetings.md`:

`blog/2021-02-28-greetings.md`

```
---
slug: greetings
title: Greetings!
authors:
  - name: Joel Marcey
    title: Co-creator of Docusaurus 1
    url: https://github.com/JoelMarcey
    image_url: https://github.com/JoelMarcey.png
  - name: Sébastien Lorber
    title: Docusaurus maintainer
    url: https://sebastienlorber.com
    image_url: https://github.com/slorber.png
tags: [greetings]
---
```

Congratulations, you have made your first post!

Feel free to play around and edit this post as much as you like.

A new blog post is now available at <http://localhost:3000/blog/greetings>.

# Markdown Features

Docusaurus supports **Markdown** and a few **additional features**.

## Front Matter

Markdown documents have metadata at the top called **Front Matter**:

my-doc.md

```
---
id: my-doc-id
title: My document title
description: My document description
slug: /my-custom-url
---
```

## Markdown heading

Markdown text with [links](./hello.md)

## Links

Regular Markdown links are supported, using url paths or relative file paths.

Let's see how to [Create a page](/create-a-page).

Let's see how to [Create a page](./create-a-page.md).

**Result:** Let's see how to [Create a page](#).

## Images

Regular Markdown images are supported.

You can use absolute paths to reference images in the static directory (`static/img/docusaurus.png`):

```
![Docusaurus logo](/img/docusaurus.png)
```



You can reference images relative to the current file as well. This is particularly useful to colocate images close to the Markdown files using them:

```
![Docusaurus logo](./img/docusaurus.png)
```

## Code Blocks

Markdown code blocks are supported with Syntax highlighting.

```
```jsx title="src/components/HelloDocusaurus.js"
function HelloDocusaurus() {
  return <h1>Hello, Docusaurus!</h1>;
}
```
```

src/components/HelloDocusaurus.js

```
function HelloDocusaurus() {
  return <h1>Hello, Docusaurus!</h1>;
}
```

# Admonitions

Docusaurus has a special syntax to create admonitions and callouts:

```
:::tip[My tip]

Use this awesome feature option

:::

:::danger[Take care]

This action is dangerous

:::
```

## MY TIP

Use this awesome feature option

## TAKE CARE

This action is dangerous

# MDX and React Components

MDX can make your documentation more **interactive** and allows using any **React components inside Markdown**:

```
export const Highlight = ({children, color}) => (
  <span
    style={{
      backgroundColor: color,
      borderRadius: '20px',
      color: '#fff',
      padding: '10px',
      cursor: 'pointer',
    }}
    onClick={() => {
```

```
    alert(`You clicked the color ${color} with label ${children}`)  
  }}>  
  {children}  
</span>  
);
```

This is <Highlight color="#25c2a0">Docusaurus green</Highlight> !

This is <Highlight color="#1877F2">Facebook blue</Highlight> !

This is Docusaurus green !

This is Facebook blue !

Version: 9

# Deploy your site

Docusaurus is a **static-site-generator** (also called **Jamstack**).

It builds your site as simple **static HTML, JavaScript and CSS files**.

## Build your site

Build your site **for production**:

```
npm run build
```

The static files are generated in the `build` folder.

## Deploy your site

Test your production build locally:

```
npm run serve
```

The `build` folder is now served at <http://localhost:3000/>.

You can now deploy the `build` folder **almost anywhere** easily, **for free** or very small cost (read the **Deployment Guide**).

# Congratulations Aaron Aardvark!

You have just learned the **basics of Docusaurus** and made some changes to the **initial template**.

Docusaurus has **much more to offer!**

Have **5 more minutes**? Take a look at [versioning](#) and [i18n](#).

Anything **unclear** or **buggy** in this tutorial? [Please report it!](#)

## What's next?

- Read the [official documentation](#)
- Modify your site configuration with `docusaurus.config.js`
- Add navbar and footer items with `themeConfig`
- Add a custom [Design and Layout](#)
- Add a [search bar](#)
- Find inspirations in the [Docusaurus showcase](#)
- Get involved in the [Docusaurus Community](#)



# Congratulations Again, but this time it's tiresome

You have just learned the **basics of Docusaurus** and made some changes to the **initial template**.

Docusaurus has **much more to offer!**

Have **5 more minutes**? Take a look at [versioning](#) and [i18n](#).

Anything **unclear** or **buggy** in this tutorial? [Please report it!](#)

## What's next?

- Read the [official documentation](#)
- Modify your site configuration with `docusaurus.config.js`
- Add navbar and footer items with `themeConfig`
- Add a custom [Design and Layout](#)
- Add a [search bar](#)
- Find inspirations in the [Docusaurus showcase](#)
- Get involved in the [Docusaurus Community](#)

Version: 9

# About Page

read more about this in your local library

Version: 9

# Local Config

## Local Config Page

Local files looking to be configured in your area, click now

Version: 9

# Entry Templates

## Entry Templates Page

Enter some templates

Version: 9

# Search Templates

## Search Templates Page

Search for templates

Version: 9

# Web Config

## Web Config Page

Shoot some web

# Manager

## Managers

Is this about a software construct that manages something, or the concept of human management?

## **Manage Docs Versions**

Docusaurus can manage multiple versions of your docs.

## **Translate your site**

Let's translate docs/intro.md to French.



# Manage Docs Versions

Docusaurus can manage multiple versions of your docs.

## Create a docs version

Release a version 1.0 of your project:

```
npm run docusaurus docs:version 1.0
```

The `docs` folder is copied into `versioned_docs/version-1.0` and `versions.json` is created.

Your docs now have 2 versions:

- `1.0` at `http://localhost:3000/docs/` for the version 1.0 docs
- `current` at `http://localhost:3000/docs/next/` for the **upcoming, unreleased docs**

## Add a Version Dropdown

To navigate seamlessly across versions, add a version dropdown.


Modify the `docusaurus.config.js` file:

`docusaurus.config.js`

```
export default {
  themeConfig: {
    navbar: {
      items: [
        {
          type: 'docsVersionDropdown',
        },
      ],
    },
  },
}
```

```
},  
};
```

The docs version dropdown appears in your navbar:

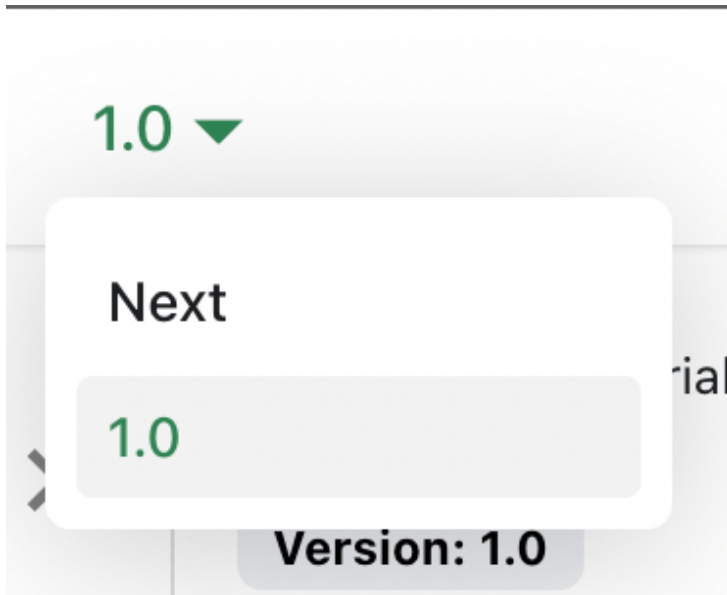

## Update an existing version

It is possible to edit versioned docs in their respective folder:

- `versioned_docs/version-1.0/hello.md` updates `http://localhost:3000/docs/hello`
- `docs/hello.md` updates `http://localhost:3000/docs/next/hello`

# Translate your site

Let's translate `docs/intro.md` to French.

## Configure i18n

Modify `docusaurus.config.js` to add support for the `fr` locale:

`docusaurus.config.js`

```
export default {  
  i18n: {  
    defaultLocale: 'en',  
    locales: ['en', 'fr'],  
  },  
};
```

## Translate a doc

Copy the `docs/intro.md` file to the `i18n/fr` folder:

```
mkdir -p i18n/fr/docusaurus-plugin-content-docs/current/  
  
cp docs/intro.md i18n/fr/docusaurus-plugin-content-docs/current/intro.md
```

Translate `i18n/fr/docusaurus-plugin-content-docs/current/intro.md` in French.

## Start your localized site

Start your site on the French locale:

```
npm run start -- --locale fr
```

Your localized site is accessible at <http://localhost:3000/fr/> and the `Getting Started` page is translated.

### CAUTION

In development, you can only use one locale at a time.

## Add a Locale Dropdown

To navigate seamlessly across languages, add a locale dropdown.

Modify the `docusaurus.config.js` file:

`docusaurus.config.js`

```
export default {
  themeConfig: {
    navbar: {
      items: [
        {
          type: 'localeDropdown',
        },
      ],
    },
  },
};
```

The locale dropdown now appears in your navbar:



## Build your localized site

Build your site for a specific locale:

```
npm run build -- --locale fr
```

Or build your site to include all the locales at once:

```
npm run build
```