

Bootstrap CSS framework 30m

So far, all the CSS has been manually created, in that we have either included some CSS within the HTML or created external .css style sheet files. In Topic 2, we introduced CSS frameworks such as Tailwind CSS and Bootstrap CSS.

CSS frameworks are very useful when it comes to dealing with the utility side of HTML web development (buttons, fonts and other UI widgets and elements). You generally select a framework based on the desired characteristics (as mentioned in Topic 2), features and integration with other frameworks.

The easiest way to get started with a CSS framework is to use the CDN approach. This means you only need the URL that points to the style sheet to start using it. This alleviates the need to install other development tools such as Node.js. Look at Example 6.22 below to see what you need to put in the header of the HTML in order to use the Bootstrap style sheet.



[Skip to main content](#)

HTML

Result

EDIT ON

LIVE ...

```
<!doctype html>
<html lang="en">
  <head>
    <title>Bootstrap demo</title>
    <link
href="https://cdn.jsdelivr.net/npm/b
ootstrap@5.3.6/dist/css/bootstrap.mi
n.css" rel="stylesheet"
integrity="sha384-
4Q6Gf2aSP4eDXB8Miphtr37CMZZQ5oXLH2ya
XMJ2w8e2ZtHTl7GptT4jmdRuHDT"
crossorigin="anonymous">
  </head>
  ...
</html>
```

Resources1x0.5x0.25xRerun

Example 6.22 Bootstrap



[Skip to main content](#)

Using Bootstrap is just a matter of locating the chosen style from Bootstrap Docs and applying it to the HTML.

Look at the HTML in Example 6.23, which will create an alert type style:



[Skip to main content](#)

HTML

Result

EDIT ON

LIVE

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport"
content="width=device-width,
initial-scale=1">
    <title>Bootstrap demo</title>
    <link
href="https://cdn.jsdelivr.net/npm/b
ootstrap@5.3.6/dist/css/bootstrap.mi
n.css" rel="stylesheet"
integrity="sha384-
4Q6Gf2aSP4eDXB8Miphtr37CMZZQ5oXLH2ya
XMJ2w8e2ZtHTL7GptT4jmdRuHDT"
crossorigin="anonymous">
  </head>
  <body>
    <h1>Hello, world!</h1>
    <div class="alert alert-primary"
role="alert">A simple primary alert-
check it out!
    </div>
  </body>
</html>
```

Resources1x0.5x0.25xRerun

Example 6.23 Bootstrap 2



In Example 6.23, we did not specify a width for the alert, but it will fit whatever container you specify. The main thing here is that we did not have to write the CSS for the style, but rather we used a prebuilt style as defined by Bootstrap.

Bootstrap docs provides many examples, including a dedicated page for various use case
[Skip to main content](#)




☒ Bootstrap

Non-Assessed

Create the layout below by using Bootstrap.

- The h1 is centred
- There is a grid with 3 columns and an alert in the centre column.

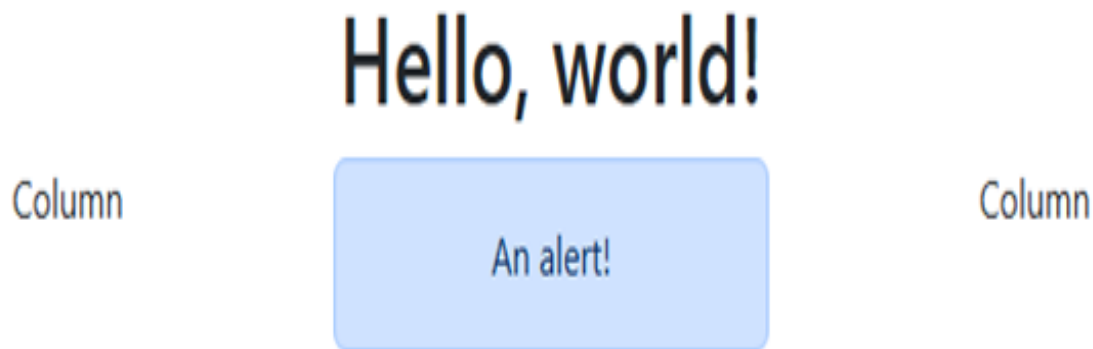

Screenshot © codepen.io

☐ I have successfully completed this task!

Submit



[Skip to main content](#)

Let's now look at Tailwind CSS.



Thoughts on this page?

