




[BIT703 Web Technologies](#) / [Contents](#) / Topic 11: Server-side web application admin panel development / Creating an admin panel

Design and create the admin panel 10m

Once the database has been configured, the next step is to design the admin panel. Recall the following example that illustrated what the dashboard looks like in the admin panel once a user has entered their administration username and password.

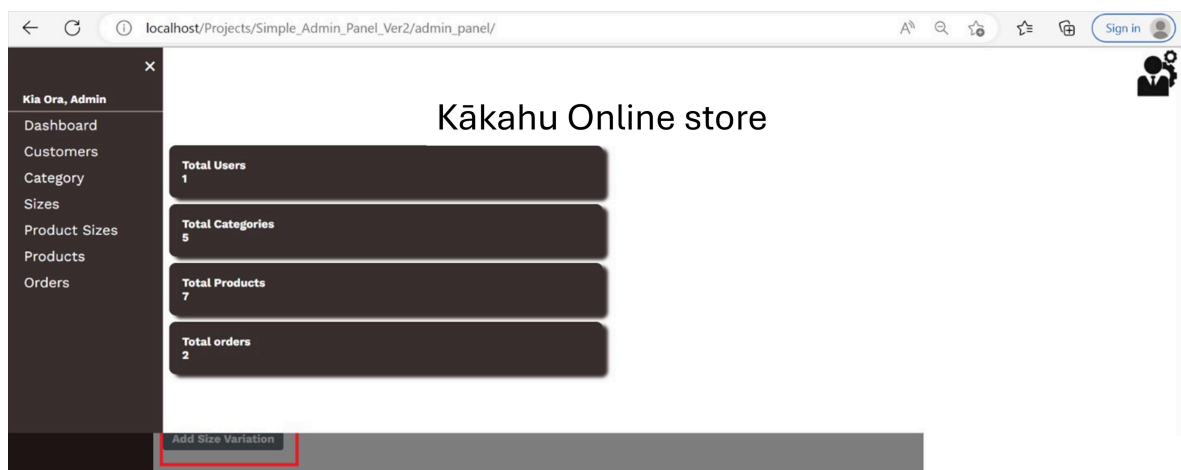

Skip to main content

Dashboard of the admin panel for the Kākahu online store

© © The Open Polytechnic of New Zealand



The PHP code below can be used to design the admin panel.

```
<!DOCTYPE html>

<html>

<head>

<title>Admin</title>

<head>

<meta name= "viewport " content= "width=device-width, initial-
scale=1 ">

<link rel= "stylesheet " href= "../assets/css/style.css "></link>

</head>

</head>

<body>

<?php

/*****

To include adminHeader.php, sidebar.php

and dbconnect to connect to the database
```

Skip to main content

```
include "../adminHeader.php ";  
  
include "../sidebar.php ";  
  
include_once "../config/dbconnect.php ";  
  
?>
```

Create the admin panel dashboard

Once you've designed and created the layout for the admin panel, create the admin panel dashboard by using the PHP code below. The PHP code below will fetch the records from all the tables in the database and then provide an overview of these records to the administrator.

Info page

Similar to the existing index.php code, this updated code will display the counts for the current users in the system, product categories, products and the total orders in the system. It has been refactored to meeting the requirements of the Kākahu online store. You will notice the test for the admin. This means you need to ensure you already have an admin account and that this account has the 'isAdmin' field set to 1.

Database code

As mentioned earlier, the code for the Kākahu online store application is based on existing code that is procedural. You can replace the various MySQL code with OOP code that wraps the MySQL code, much like we did in Topic 10 – refer to the classesCrud.php file for the example.

The current database code, like the following, is the OOP version of the MySQL code.

```
$result=$conn-> query($sql);
```

This means the following is the procedural code that could have been implemented as OOP like the Crud::getData() found in the classesCrud.php.

[Skip to main content](#)

```
if ($result-> num_rows > 0){  
  
while ($row=$result-> fetch_assoc()) {  
  
$count=$count+1;  
  
}  
  
}
```

The code is added to the index.php.



Thoughts on this page?

