

Executive Summary
RootBeer Repository Activity
Omari Rich


This analysis examined source-file activity in the scottkyab/rootbeer GitHub repository. I defined source files as Java, Kotlin, C++, and C/C++ header files using the extensions .java, .kt, .cpp, and .h. Using this definition, the analysis identified 36 source files and tracked when those files were modified and by which contributors.

Significant Findings

1. The most frequently modified source file was `rootbeerlib/src/main/java/com/scottyab/rootbeer/RootBeer.java`, with 53 recorded touches.
2. Repository activity was concentrated in a relatively small number of core source files. Files such as `RootBeer.java` were modified repeatedly, while many other files received much less activity.
3. The repository shows development activity from multiple contributors across a long period of time. The scatter plot shows that changes occurred at different stages of the project rather than being concentrated in one short development period.

Scatter Plot

The scatter plot shows weeks since the beginning of the repository on the horizontal axis and source files on the vertical axis. Each point represents an author modifying a particular source file during that time period. Different authors are represented separately in the legend.

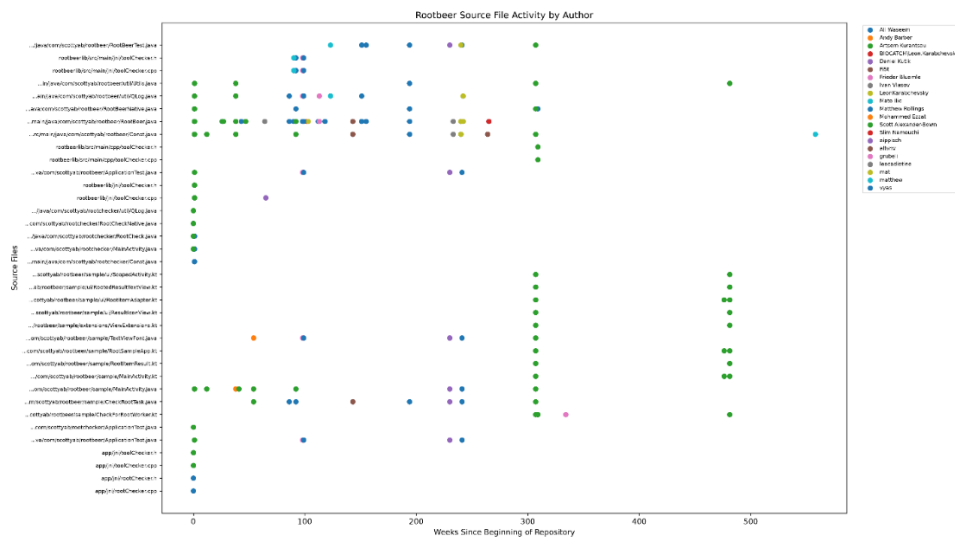

Conclusion

Overall, the data shows that RootBeer development is concentrated in a relatively small number of core source files, especially `RootBeer.java`, which had 53 recorded touches. Although 36 source files were identified, activity was not evenly distributed across them, and changes were made by multiple contributors over a long period of the repository's history.

Limitation

One limitation of this analysis is that contributor information comes from Git commit metadata. Because of this, the same contributor may appear under different names or identities. Source files were also identified by file extension, so configuration, build, renamed, or deleted files may not be fully represented.