



Other details - padding


• **Away to deal with the edges of image**

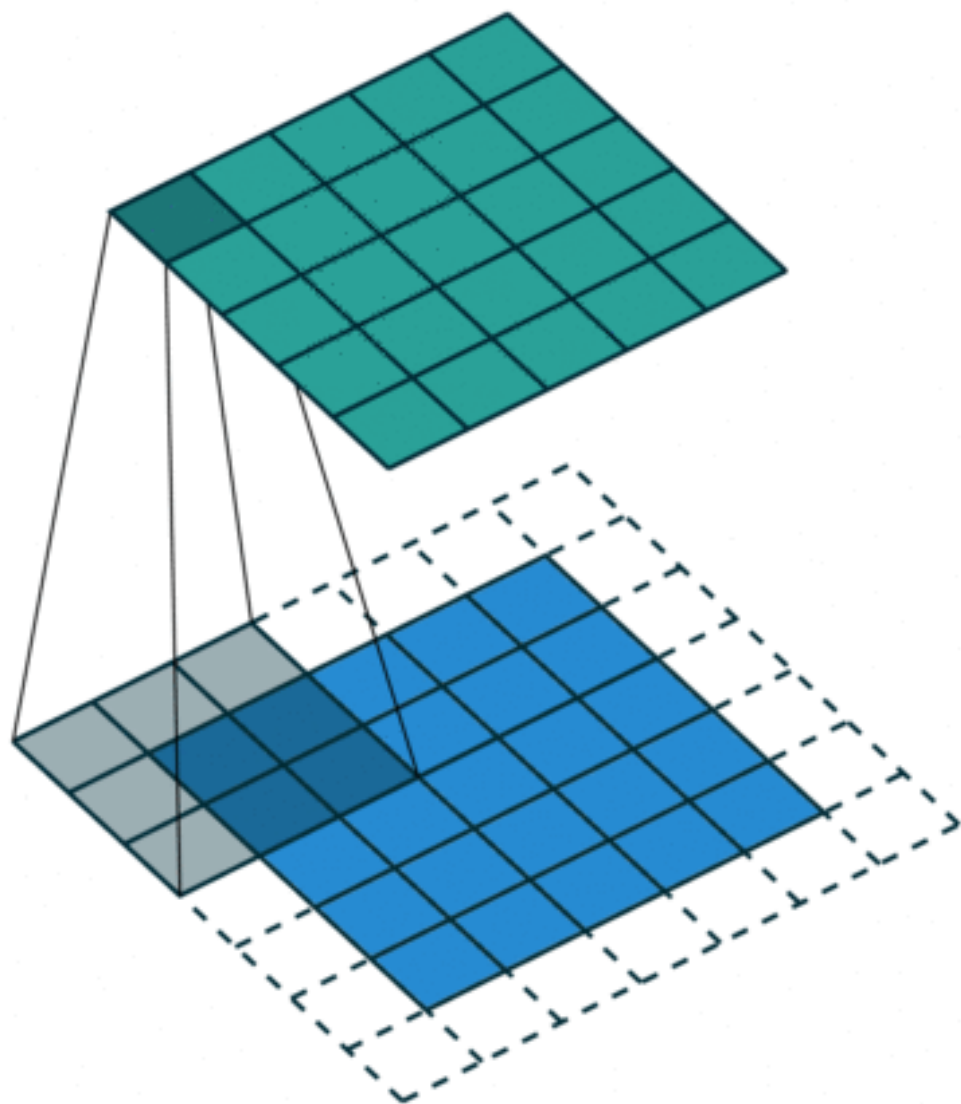


“Same” padding – output
matches input size

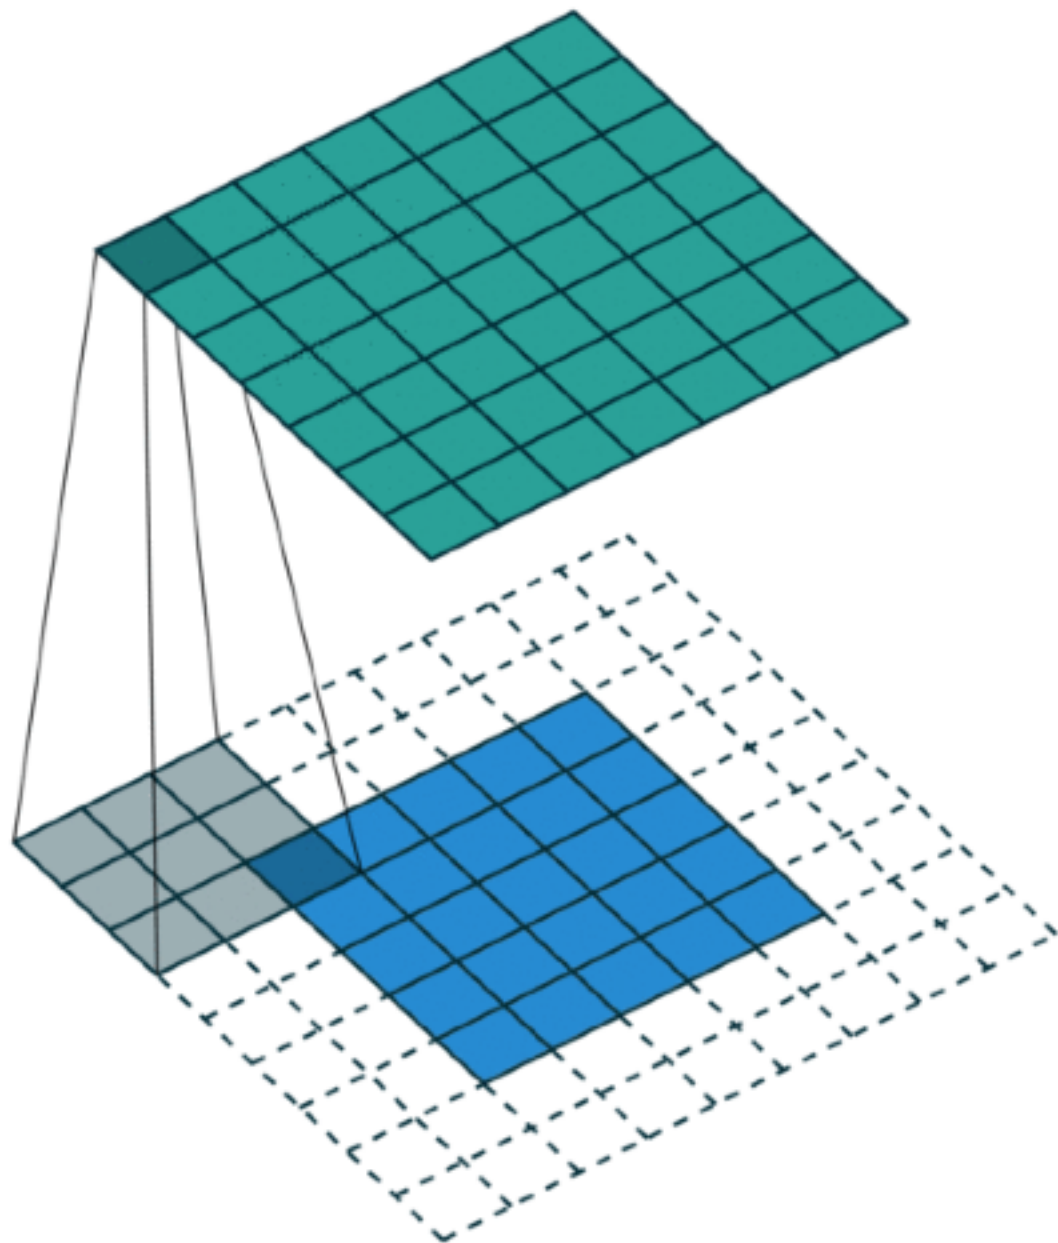



“full” padding – output is
larger than input (rare)

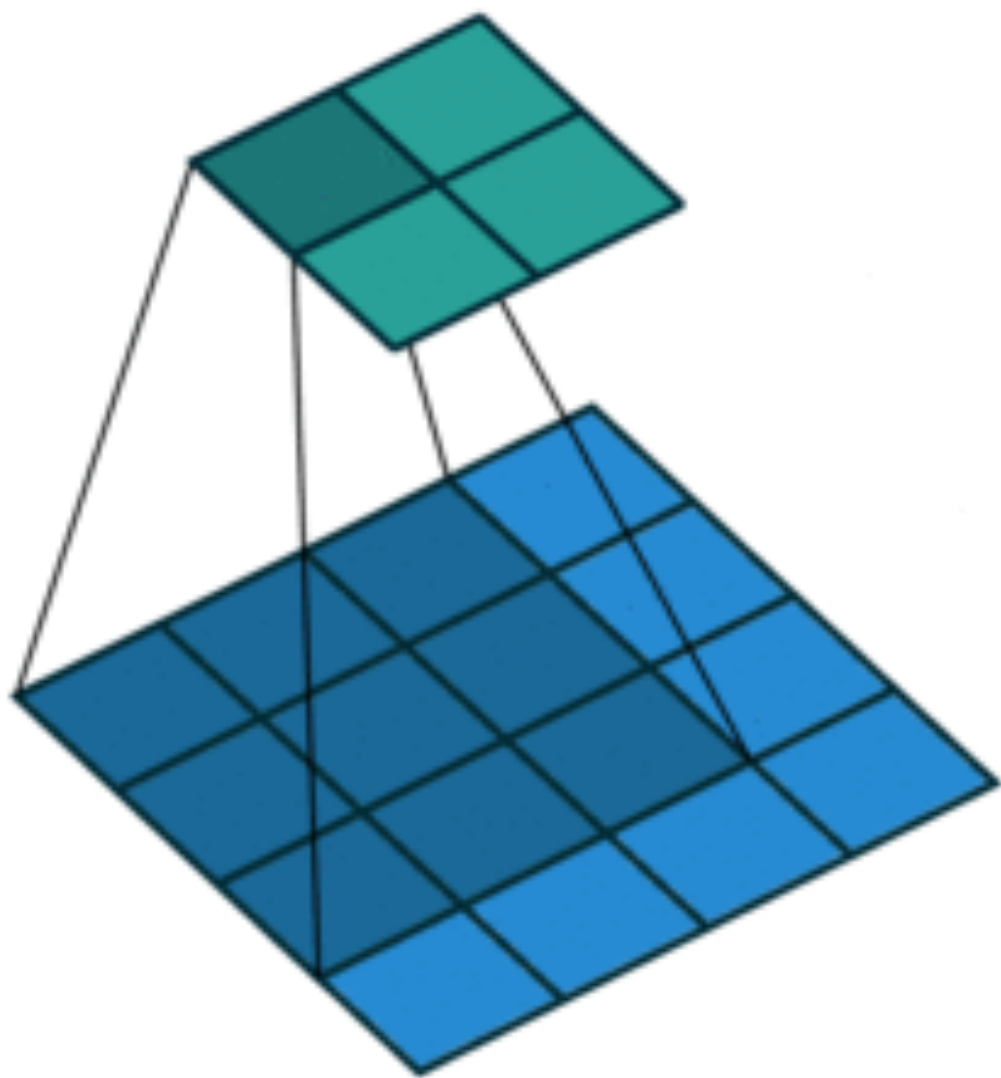

**“Valid” padding – no
padding, output shrinks**

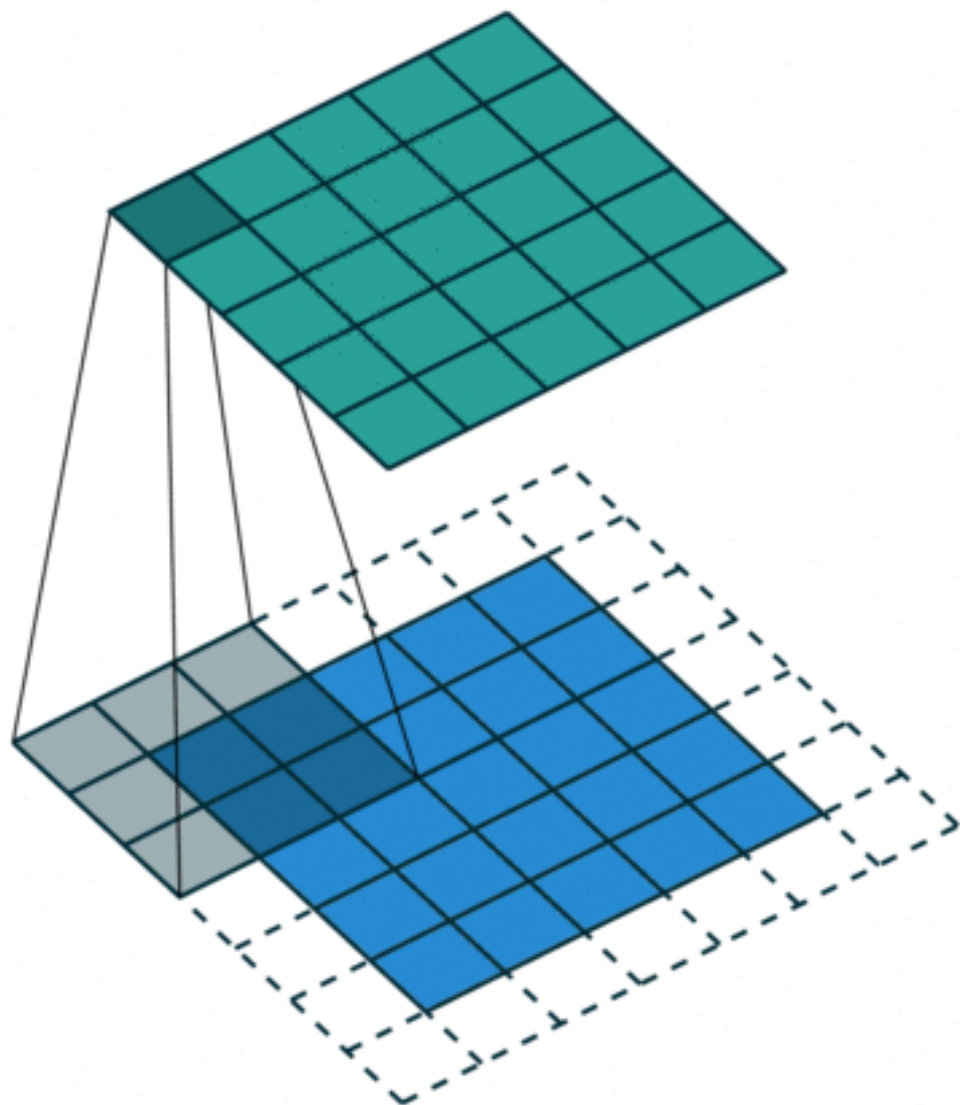


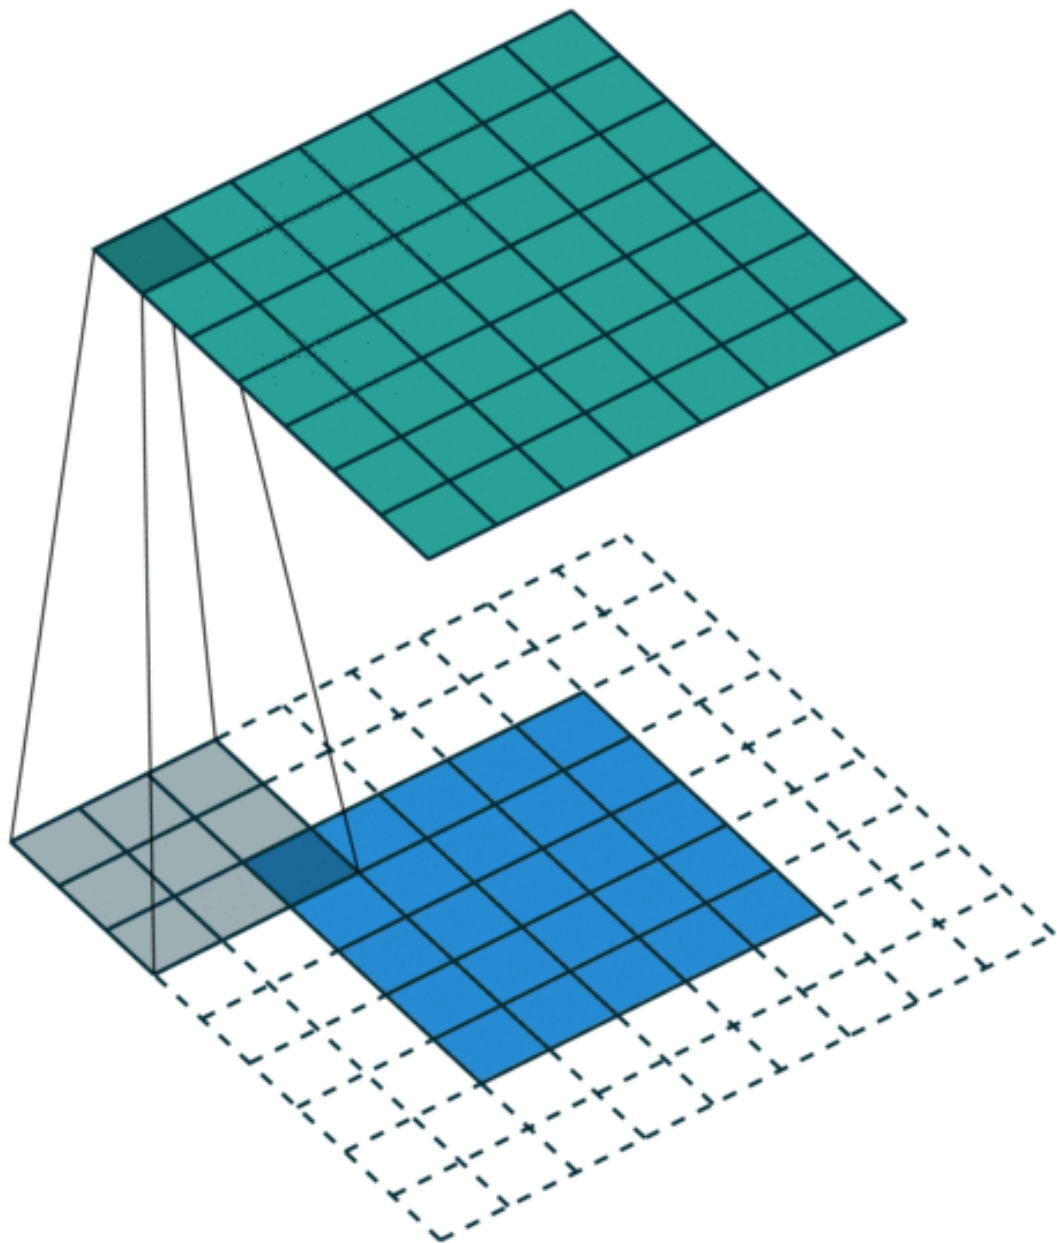

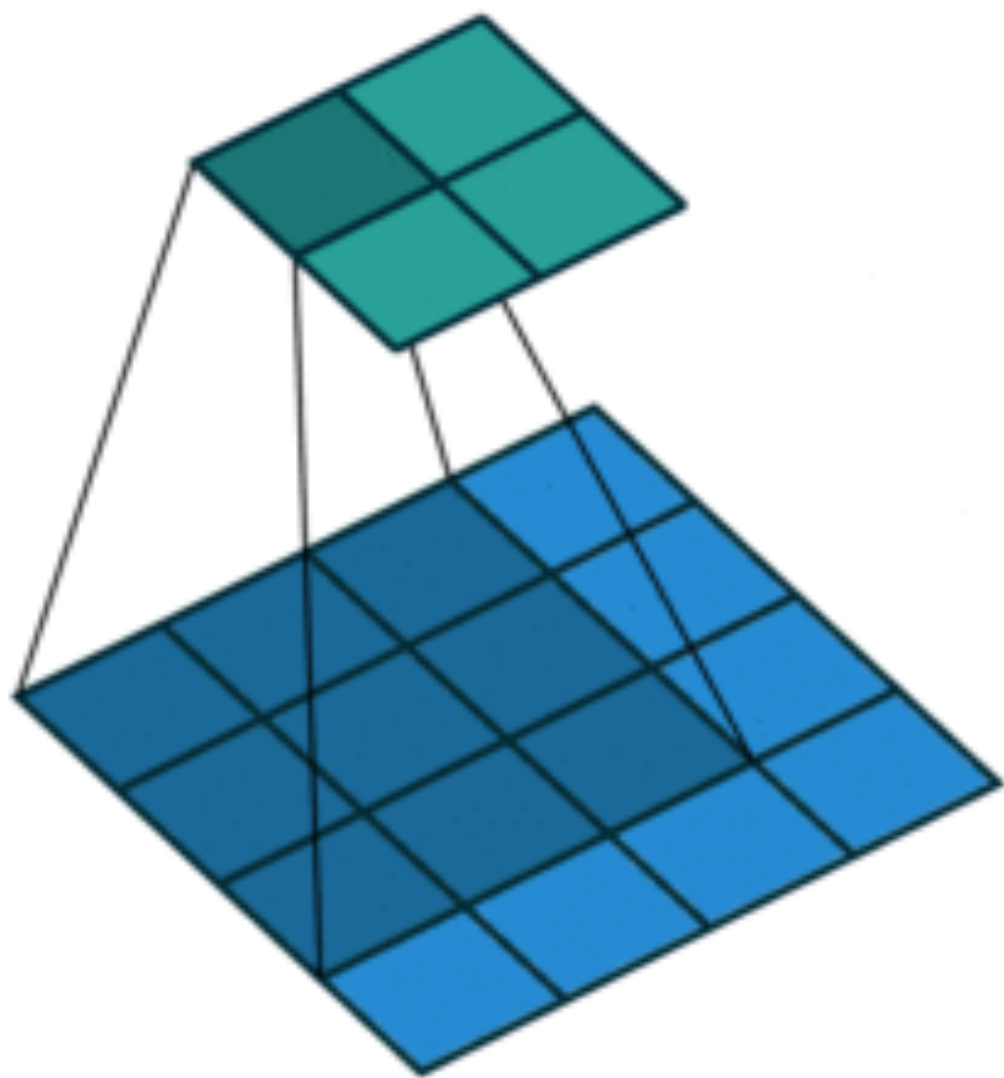


Other details - padding


- A way to deal with the edges of image

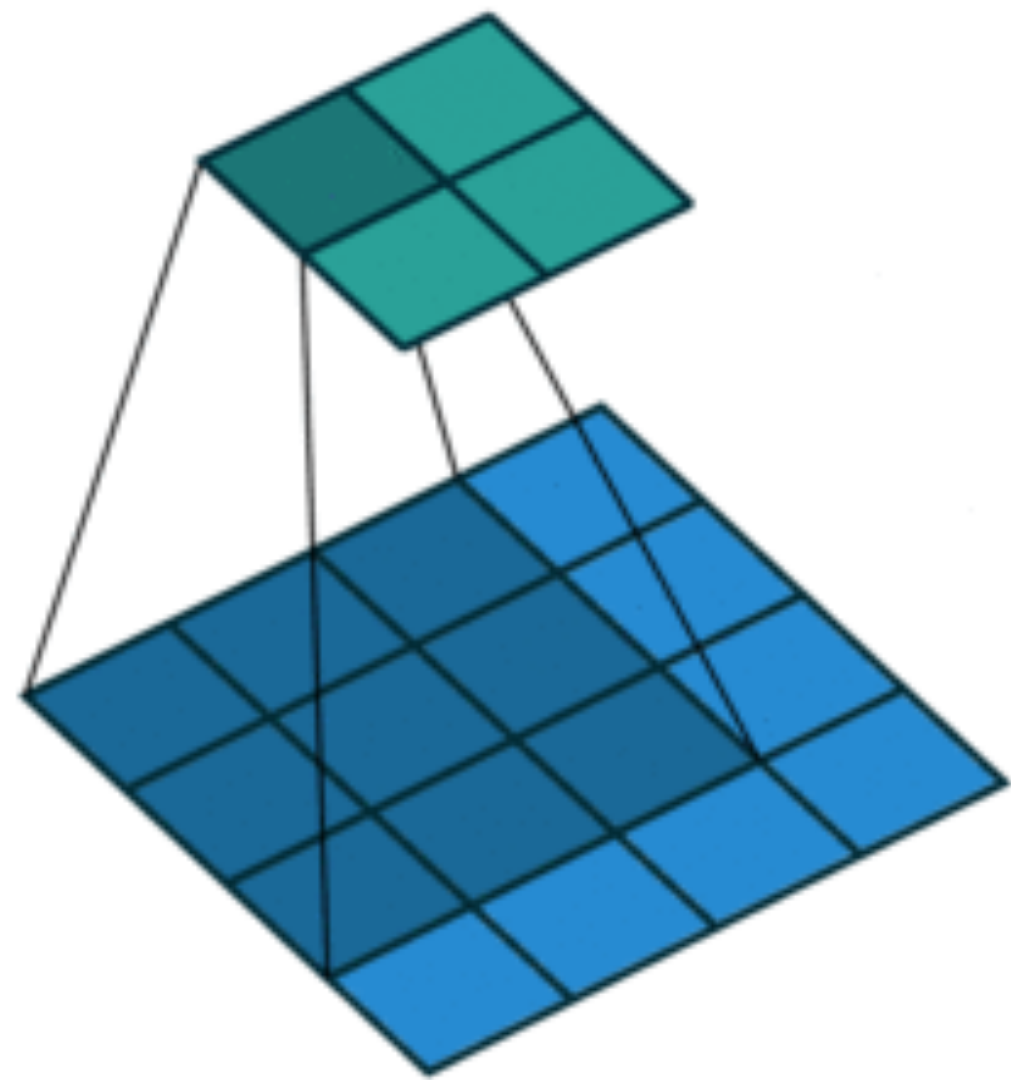

“Valid” padding - no padding, output shrinks

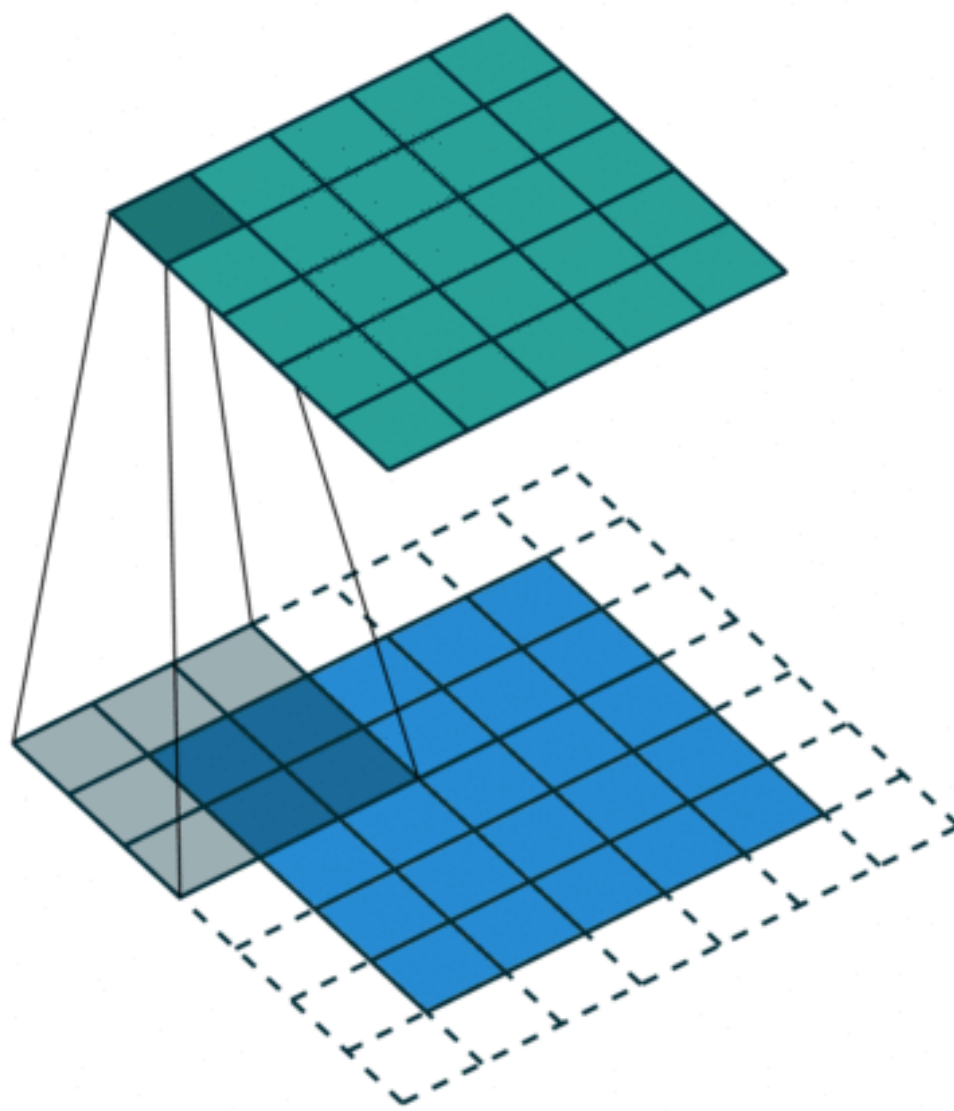

“Same” padding - output matches input size

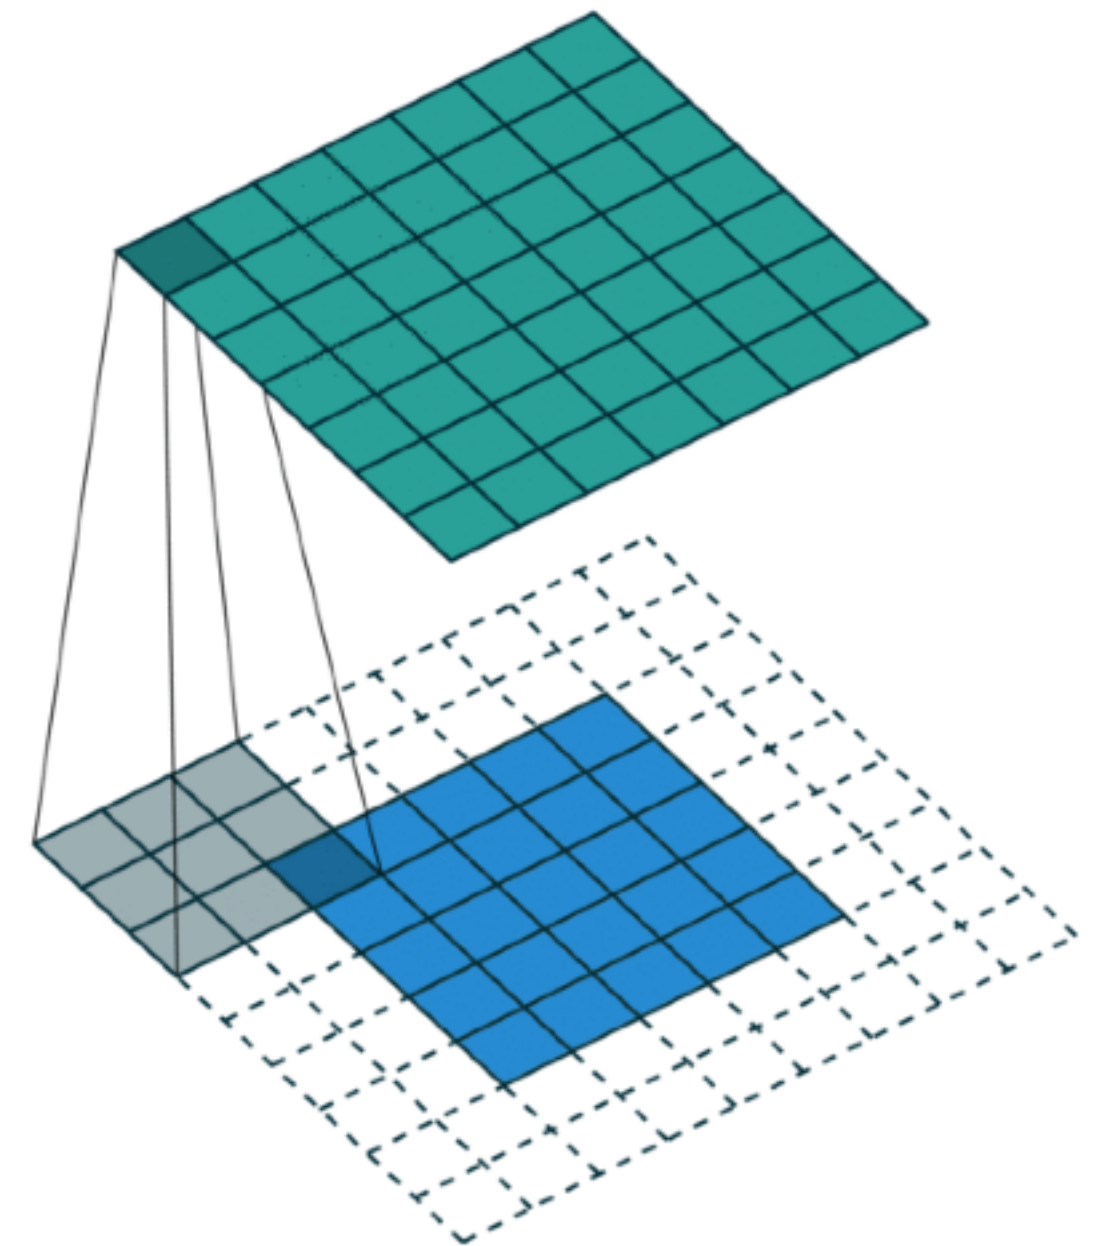

“full” padding - output is larger than input (rare)

Discussion

- if you were thinking about this in a time series context, how might you think about padding across different directions? (forward or backward in time)