

Experimen PlayTennis

October 29, 2017

1 Eksperimen data playtennis

1.1 Dataset Playtennis (csv) Eksternal

Oleh : Bervianto Leo P - 13514047 dan Muhammad Reifiza - 13514103

1.2 Fungsi *Plot Confusion Matrix*

Fungsi ini digunakan nanti, untuk memplot *confusion matrix* dalam bentuk grafik.

Diambil dari http://scikit-learn.org/stable/auto_examples/model_selection/plot_confusion_matrix.html

```
In [1]: %matplotlib inline
import matplotlib.pyplot as plt
import itertools
import numpy as np
def plot_confusion_matrix(cm, classes,
                           normalize=False,
                           title='Confusion matrix',
                           cmap=plt.cm.Blues):
    """
    This function prints and plots the confusion matrix.
    Normalization can be applied by setting `normalize=True`.
    """
    if normalize:
        cm = cm.astype('float') / cm.sum(axis=1)[:, np.newaxis]
        print("Normalized confusion matrix")
    else:
        print('Confusion matrix, without normalization')

    print(cm)

    plt.imshow(cm, interpolation='nearest', cmap=cmap)
    plt.title(title)
    plt.colorbar()
    tick_marks = np.arange(len(classes))
    plt.xticks(tick_marks, classes, rotation=45)
    plt.yticks(tick_marks, classes)
```

```

fmt = '.2f' if normalize else 'd'
thresh = cm.max() / 2.
for i, j in itertools.product(range(cm.shape[0]), range(cm.shape[1])):
    plt.text(j, i, format(cm[i, j], fmt),
             horizontalalignment="center",
             color="white" if cm[i, j] > thresh else "black")

plt.tight_layout()
plt.ylabel('True label')
plt.xlabel('Predicted label')

```

1.3 Mempersiapkan data dari csv

Data playtennis.csv harus ada di dalam folder yang sama dengan *script* ini dijalankan.

```

In [2]: from sklearn import datasets
        from sklearn.model_selection import cross_val_score
        import pandas

        playtennis_raw = pandas.read_csv("playtennis.csv")
        playtennis = pandas.DataFrame(playtennis_raw)

```

1.4 Preproses data playtennis

Karena nilai data playtennis semuanya dalam bentuk string, kalau langsung dimasukkan akan menyebabkan sklearn tree dan seaborn terbingung-bingung. Oleh karena itu, data playtennis mesti dipreproses dulu dengan meng-*encode* nya nilai datanya menjadi float.

```

In [3]: from sklearn import preprocessing
        encoder = preprocessing.LabelEncoder()
        playtennis_transformed = playtennis.apply(encoder.fit_transform)
        playtennis_train = playtennis_transformed.drop("playtennis", axis=1)
        playtennis_classes = playtennis_transformed.iloc[:, -1]

```


1.5 Visualisasi data playtennis

Data playtennis divisualisasikan dengan menggunakan *library* seaborn

```

In [4]: import seaborn
        seaborn.set(color_codes=True)
        g = seaborn.PairGrid(playtennis_transformed, hue="playtennis")
        g.map_diag(plt.hist)
        g.map_offdiag(plt.scatter)
        g.add_legend();

```

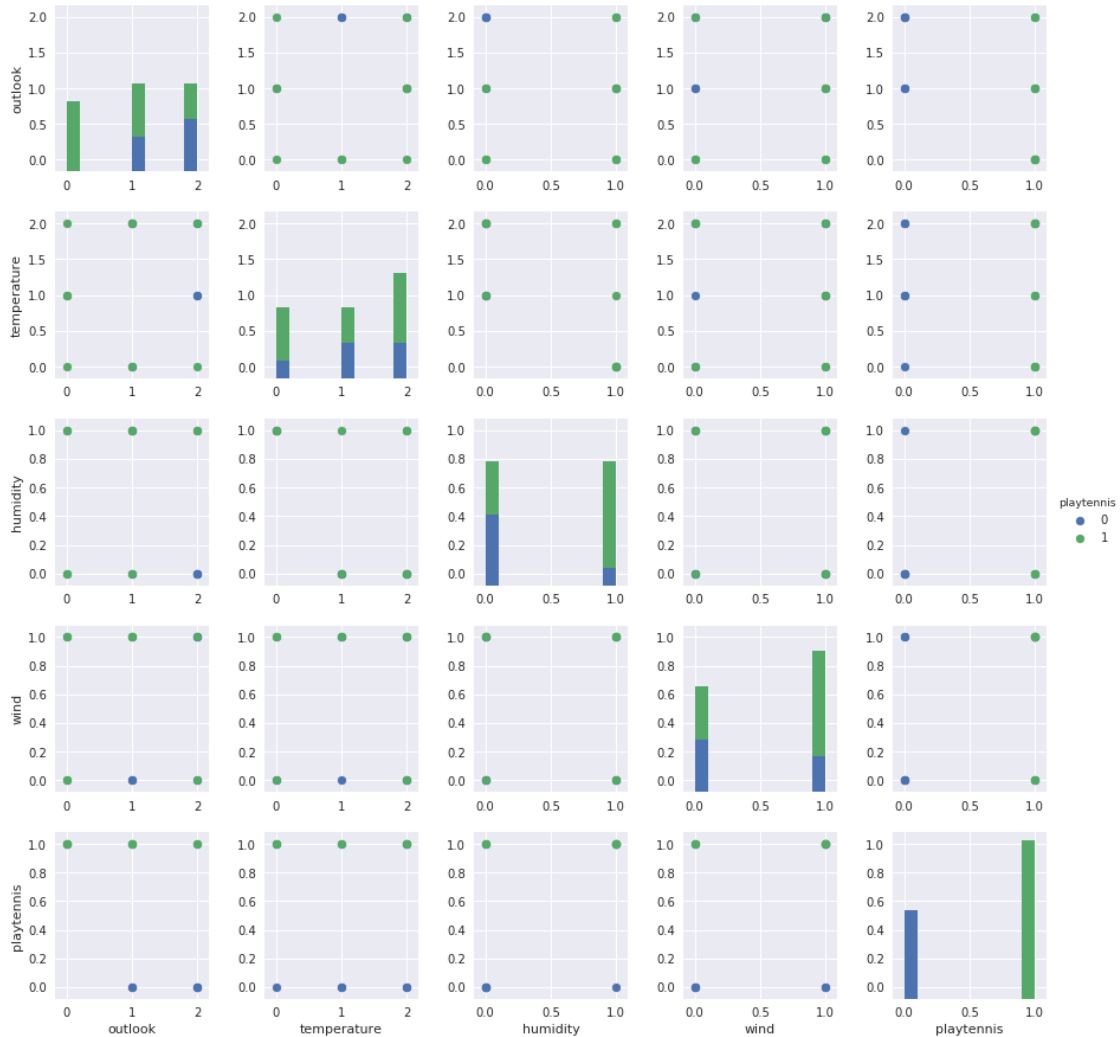

1.6 Membuat Classifier Decision Tree dan ANN.


Skema *Full Training*.

```
In [5]: from sklearn import tree
        dtl = tree.DecisionTreeClassifier()
        dtl.fit(playtennis_train, playtennis_classes)

        import graphviz
        dot_data = tree.export_graphviz(dtl, out_file=None,
                                         feature_names=playtennis_train.columns.values,
                                         class_names=encoder.classes_,
                                         filled=True, rounded=True,
                                         special_characters=True)

        graph = graphviz.Source(dot_data)
        graph
```

Out [5] :

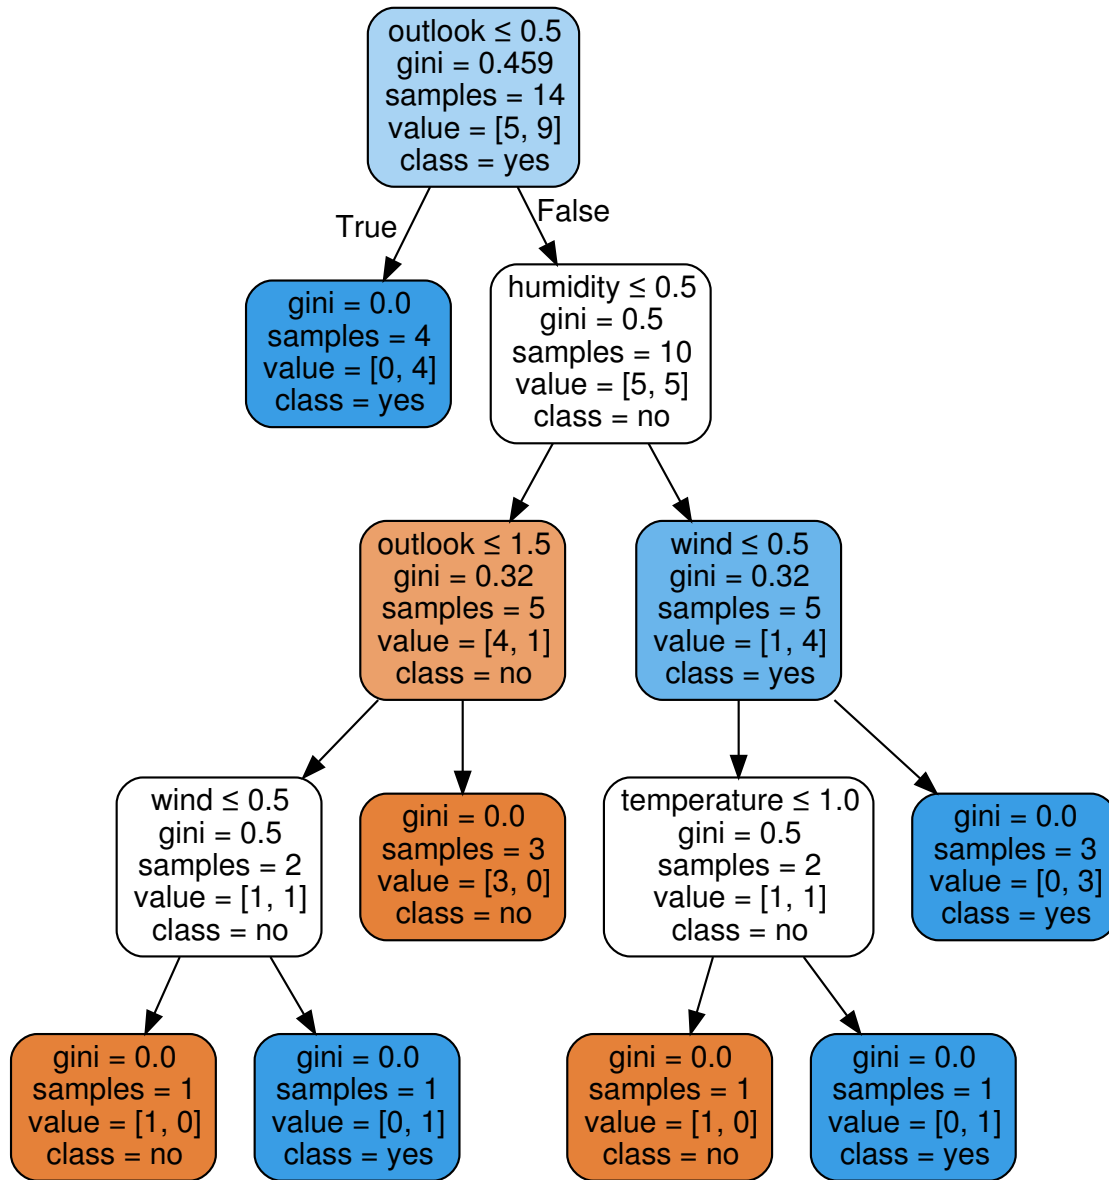

```
In [6]: from sklearn.neural_network import MLPClassifier
ann = MLPClassifier(solver='lbfgs', alpha=1e-5, hidden_layer_sizes=(5, 2), random_state=
ann.fit(playtennis_train, playtennis_classes)
```

```
Out [6]: MLPClassifier(activation='relu', alpha=1e-05, batch_size='auto', beta_1=0.9,
beta_2=0.999, early_stopping=False, epsilon=1e-08,
hidden_layer_sizes=(5, 2), learning_rate='constant',
learning_rate_init=0.001, max_iter=200, momentum=0.9,
nesterovs_momentum=True, power_t=0.5, random_state=1, shuffle=True,
```

```
solver='lbfgs', tol=0.0001, validation_fraction=0.1, verbose=False,
warm_start=False)
```

```
In [7]: ann.coefs_
```

```
Out[7]: [array([[ -0.13550079,  0.00099321, -0.81629954, -0.3227855 , -0.49469775],
               [ -0.53482092, -0.70828209, -0.2521951 , -0.31046607,  0.01149222],
               [ -0.0065751 ,  0.60225994, -0.48262138,  0.33721485, -0.77176312],
               [  0.40924777,  0.01155045,  0.09583888, -0.72912846, -0.55351094]]),
         array([[ 0.73066037, -0.8446235 ],
               [-0.85349395, -0.81169676],
               [ 0.70017505, -0.74370779],
               [-0.14607845,  0.66642695],
               [ 0.0614094 ,  0.19940107]]),
         array([[ 0.94645242],
               [-1.19663215]])]
```

```
In [8]: ann.intercepts_
```

```
Out[8]: [array([ 0.74737327,  0.86967696, -0.30467704,  0.03381831,  0.55843369]),
         array([-0.34159867, -0.22762354]),
         array([ 0.58779669])]
```

1.7 Membuat Skema Pembelajaran *Split-train*

Split train dengan test 10% dan train 90%

```
In [9]: from sklearn.model_selection import train_test_split
        X_train, X_test, y_train, y_test = train_test_split(playtennis_train, playtennis_classes,
```

```
In [10]: from sklearn.metrics import accuracy_score
         split = tree.DecisionTreeClassifier()
         split = split.fit(X_train, y_train)
         y_predict = split.predict(X_test)
         accuracy = accuracy_score(y_test, y_predict)
         print('Akurasi: {} %'.format(accuracy * 100))
```

Akurasi: 50.0 %

```
In [11]: from sklearn.metrics import classification_report
         print(classification_report(y_test, y_predict, target_names=encoder.classes_))
```


	precision	recall	f1-score	support
no	0.00	0.00	0.00	0
yes	1.00	0.50	0.67	2
avg / total	1.00	0.50	0.67	2

```
/usr/local/lib/python3.5/dist-packages/sklearn/metrics/classification.py:1137: UndefinedMetricWarning:
'recall', 'true', average, warn_for)
```

```
In [12]: from sklearn.metrics import confusion_matrix
cnf_matrix = confusion_matrix(y_test, y_predict)
plt.figure()
plot_confusion_matrix(cnf_matrix, classes=encoder.classes_,
                      title='Confusion matrix DT')
```

Confusion matrix, without normalization

```
[[0 0]
 [1 1]]
```

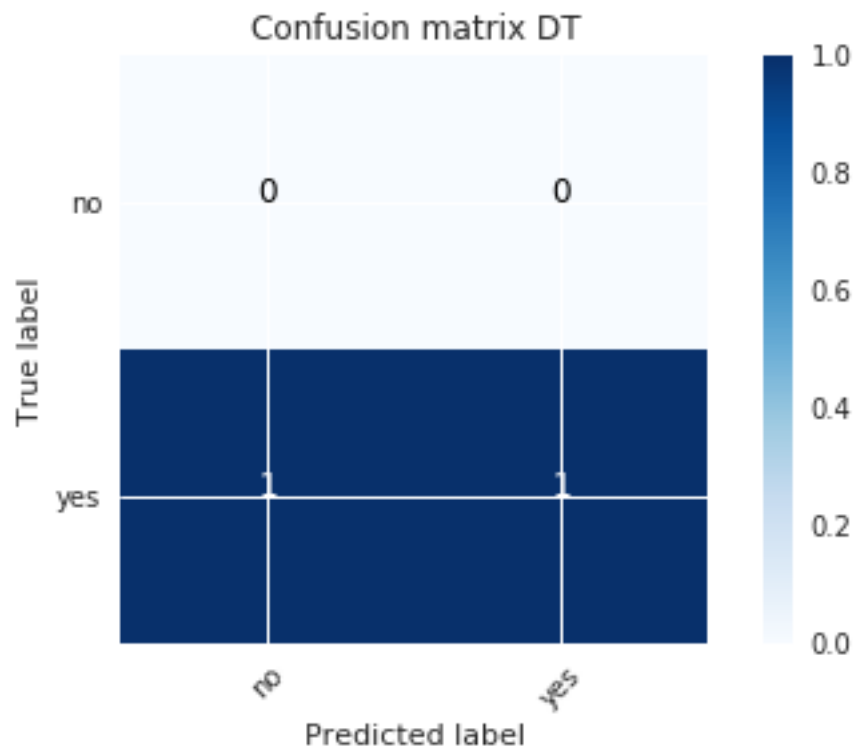

```
In [13]: ann_split = MLPClassifier(solver='lbfgs', alpha=1e-5, hidden_layer_sizes=(5, 2), random
ann_split.fit(X_train, y_train)
y_ann_predict = ann_split.predict(X_test)
accuracy_ann = accuracy_score(y_test, y_ann_predict)
print('Akurasi: {} %'.format(accuracy_ann * 100))
```

Akurasi: 50.0 %

```
In [14]: print(classification_report(y_test, y_ann_predict, target_names=encoder.classes_))
```

	precision	recall	f1-score	support
no	0.00	0.00	0.00	0
yes	1.00	0.50	0.67	2
avg / total	1.00	0.50	0.67	2

```
/usr/local/lib/python3.5/dist-packages/sklearn/metrics/classification.py:1137: UndefinedMetricWarning: 'recall', 'true', average, warn_for)
```

```
In [15]: from sklearn.model_selection import cross_val_score
scores = cross_val_score(dtl, playtennis_train, playtennis_classes, cv=3)
print("Accuracy: %0.2f (+/- %0.2f)" % (scores.mean(), scores.std() * 2))
```

Accuracy: 0.78 (+/- 0.05)

```
In [16]: scores = cross_val_score(ann, playtennis_train, playtennis_classes, cv=3)
print("Accuracy: %0.2f (+/- %0.2f)" % (scores.mean(), scores.std() * 2))
```

Accuracy: 0.72 (+/- 0.17)

1.8 Save dan Load Model

```
In [17]: from sklearn.externals import joblib
joblib.dump(dtl, 'playtennis_dtl.pkl')
joblib.dump(ann, 'playtennis_ann.pkl')
```

```
Out[17]: ['playtennis_ann.pkl']
```

```
In [18]: loaded_tree_model = joblib.load('playtennis_dtl.pkl')
loaded_ann_model = joblib.load('playtennis_ann.pkl')
```

1.9 Klasifikasi *Unseen Instance*

Mengklasifikasikan instans baru dengan dtl skema full train dan ann skema full train.

```
In [19]: new_instance_data = {"outlook": [1], "temperature": [1], "humidity": [1], "wind": [1]}
new_instance = pandas.DataFrame(data=new_instance_data, columns = playtennis_train.columns)

print(new_instance.dtypes)
```

```
outlook      int64
temperature  int64
humidity     int64
wind         int64
dtype: object
```

```
In [20]: loaded_tree_model.predict(new_instance)
```

```
Out[20]: array([1])
```

```
In [21]: loaded_ann_model.predict(new_instance)
```

```
Out[21]: array([1])
```