Documentation WebServer

Contenu

Configuration du Netplan 1
Commandes CLI 2
Configurations des Ports Apache 2
Configuration du VirtualHost (Page Principale) 3
Configuration du VirtualHost (Page Contrôleur) 4
Utilisateurs SQL 4
Connection externe (openssh) 5
Time Zone 5
Migration de la Page Principale 6
Fonctionnalités Optionnels 7

Configuration du Netplan

```
# This is the network config written by 'subiquity'
network:
  ethernets:
    enp0s3:
      dhcp4: false
      addresses:
        - 10.1.25.1/16
      routes:
        - to: default
          via: 10.1.0.1
      nameservers:
        addresses:
          - 10.1.0.5
          - 10.1.0.10
    enp0s8:
      dhcp4: false
      addresses:
        - 10.1.25.2/16
  version: 2
```

Commandes CLI

Installation dans l'ordre

```
Sudo apt install apach2
Sudo apt install mysql-server
Sudo apt install php
Sudo apt install php-mysql
Sudo apt install phpmyadmin
```

Activation des pages

```
Sudo a2dissite 00-default.conf
Sudo a2ensite ecoweighing.conf
Sudo a2ensite controller.conf
```

Configurations des Ports Apache

```
# If you just change the port or add more ports here, you will likely also
# have to change the VirtualHost statement in
# /etc/apache2/sites-enabled/000-default.conf

Listen 80
Listen 8080

<IfModule ssl_module>
        Listen 443
        Listen 8081
</IfModule>

<IfModule mod_gnutls.c>
        Listen 443
</IfModule>
```

Configuration du VirtualHost (Page Principale)

```
<VirtualHost 10.1.25.1:80>
        Redirect permanent / https://10.1.25.1/
</VirtualHost>
<VirtualHost 10.1.25.1:443>
        # The ServerName directive sets the request scheme, hostname and
port that
        # the server uses to identify itself. This is used when creating
        # redirection URLs. In the context of virtual hosts, the ServerName
        # specifies what hostname must appear in the request's Host: header
to
        # match this virtual host. For the default virtual host (this file)
this
        # value is not decisive as it is used as a last resort host
regardless.
        # However, you must set it for any further virtual host explicitly.
        #ServerName www.example.com

        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/github/PIF-Website/EcoWeighing
        DirectoryIndex index.php

        # Available loglevels: trace8, ..., trace1, debug, info, notice,
warn,
        # error, crit, alert, emerg.
        # It is also possible to configure the loglevel for particular
        # modules, e.g.
        #LogLevel info ssl:warn

        ErrorLog ${APACHE_LOG_DIR}/ecoweighing/error.log
        CustomLog ${APACHE_LOG_DIR}/ecoweighing/access.log combined

        SSLEngine on

        SSLCertificateFile      /etc/ssl/certs/ecoweighing-selfsigned.crt
        SSLCertificateKeyFile /etc/ssl/private/ecoweighing-selfsigned.key

        # For most configuration files from conf-available/, which are
        # enabled or disabled at a global level, it is possible to
        # include a line for only one particular virtual host. For example
the
        # following line enables the CGI configuration for this host only
        # after it has been globally disabled with "a2disconf".
        #Include conf-available/serve-cgi-bin.conf
</VirtualHost>
```

Configuration du VirtualHost (Page Contrôleur)

```
<VirtualHost 10.1.25.2:8080>

        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/controller
        DirectoryIndex index.php

        ErrorLog ${APACHE_LOG_DIR}/controller/error.log
        CustomLog ${APACHE_LOG_DIR}/controller/access.log combined

</VirtualHost>
<VirtualHost 10.1.25.2:8081>

        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/controller
        DirectoryIndex index.php

        ErrorLog ${APACHE_LOG_DIR}/controller/error.log
        CustomLog ${APACHE_LOG_DIR}/controller/access.log combined

        SSLEngine on

        SSLCertificateFile      /etc/ssl/certs/controller-selfsigned.crt
        SSLCertificateKeyFile /etc/ssl/private/controller-selfsigned.key


</VirtualHost>
```

Utilisateurs SQL

```
+------------------+-----------------------+-----------+
| user             | plugin                | host      |
+------------------+-----------------------+-----------+
| admin            | caching_sha2_password | localhost |
| debian-sys-maint | caching_sha2_password | localhost |
| ecoweighing      | caching_sha2_password | localhost |
| mysql.infoschema | caching_sha2_password | localhost |
| mysql.session    | caching_sha2_password | localhost |
| mysql.sys        | caching_sha2_password | localhost |
| phpmyadmin       | caching_sha2_password | localhost |
| root             | auth_socket           | localhost |
+------------------+-----------------------+-----------+
8 rows in set (0.00 sec)
```

Connection externe (openssh)

Via Mobaxterm

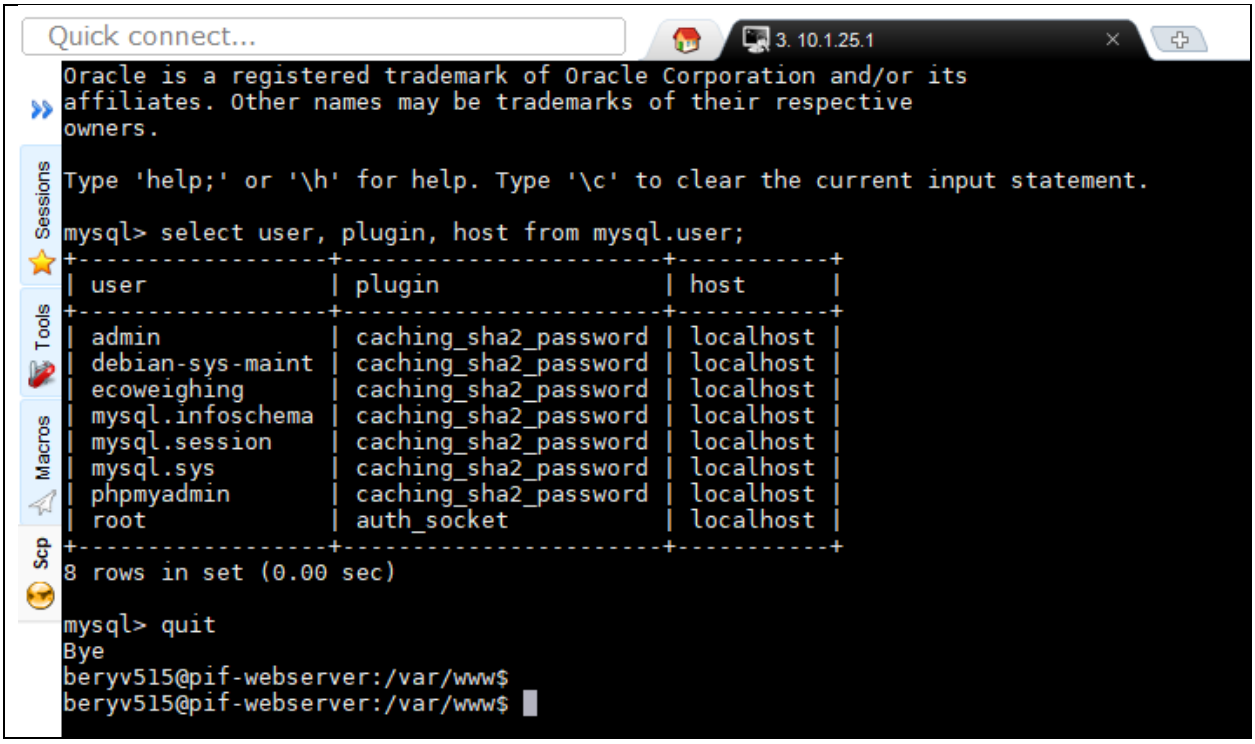

Time Zone

Commande : tzselect

```
The following information has been given:

        Luxembourg


Therefore TZ='Europe/Brussels' will be used.
Selected time is now:   Fri Mar  1 13:02:10 CET 2024.
Universal Time is now:  Fri Mar  1 12:02:10 UTC 2024.
```

Migration de la Page Principale

La base de données

```
mysql> show tables;
+--------------------------+
| Tables_in_db_ecoweighing |
+--------------------------+
| TBLBILL                  |
| TBLCENTERS               |
| TBLMEASURES              |
| TBLSCHEDULES             |
| TBLSTATIONS              |
| TBLSTATIONSTYPE          |
| TBLTRASHTYPE             |
| TBLUSERS                 |
+--------------------------+
8 rows in set (0.00 sec)
```

Le Page Principale (navigateur)

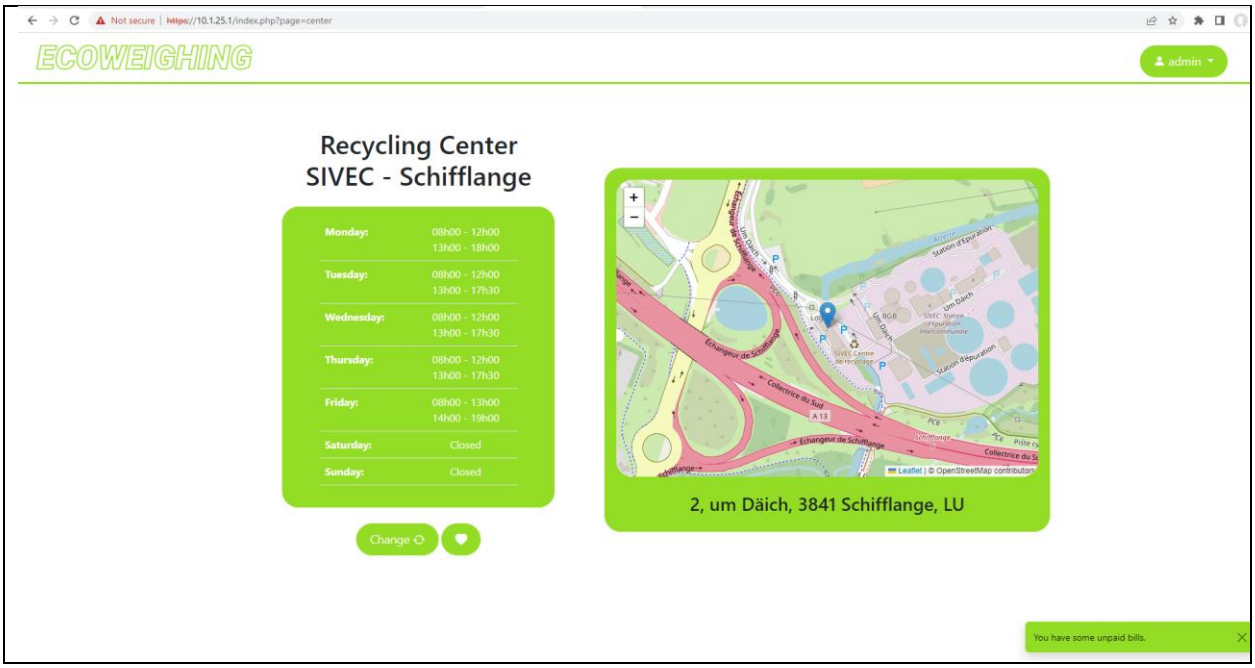

La Page Contrôleur et phpmyadmin



Fonctionnalités Optionnels

- Dernière Version de **Apache** (ppa:ondrej/apache2)
- Dernière Version de **php** (ppa:ondrej/php)
- Dernière Version de **phpmyadmin** (ppa:phpmyadmin/ppa)
- Utilisateur SQL pour le Site Principale (avec permission limité)
- HTTPS et redirection pour la Page principale (port : 443)
- HTTPS pour la Page Contrôleur (port : 8081)
- Ajout de Git et GitHub CLI pour la connexion à mon répertoire GitHub