



Data-driven Design and Analyses of Structures and Materials (3dasm)

Lecture 2

Miguel A. Bessa | M.A.Bessa@tudelft.nl | Associate Professor

OPTION 1. Run this notebook **locally** in your computer:

1. Confirm that you have the 3dasm conda environment (see Lecture 1).
2. Go to the 3dasm_course folder in your computer and pull the last updates of the **repository**:

```
git pull
```

3. Open command window and load jupyter notebook (it will open in your internet browser):

```
conda activate 3dasm  
jupyter notebook
```

4. Open notebook of this Lecture.

OPTION 2. Use Google's Colab (no installation required, but times out if idle):

1. go to <https://colab.research.google.com>
2. login
3. File > Open notebook
4. click on Github (no need to login or authorize anything)
5. paste the git link: https://github.com/bessagroup/3dasm_course
6. click search and then click on the notebook for this Lecture.

```
In [1]:  
    # Basic plotting tools needed in Python.  
  
import matplotlib.pyplot as plt # import plotting tools to create figures  
import numpy as np # import numpy to handle a lot of things!  
  
%config InlineBackend.figure_format = "retina" # render higher resolution images in the notebook  
plt.style.use("seaborn") # style for plotting that comes from seaborn  
plt.rcParams["figure.figsize"] = (8,4) # rescale figure size appropriately for slides
```

Outline for today

- Handling data and handling pandas!
- Application of knowledge gained in Lecture 1
- Understanding the governing model for the car stopping distance problem

Reading material: This notebook


The car stopping distance problem (again!)

Imagine we want to predict y for a given x but that **we had no idea** that this problem is governed by:

$$y = zx + 0.1x^2$$


- y is the **output**: the car stopping distance
- x is the **input**: the car velocity
- z is a hidden variable: an **rv** z representing the driver's reaction time (in seconds)

where $z \sim \mathcal{N}(\mu_z = 1.5, \sigma_z^2 = 0.5^2)$

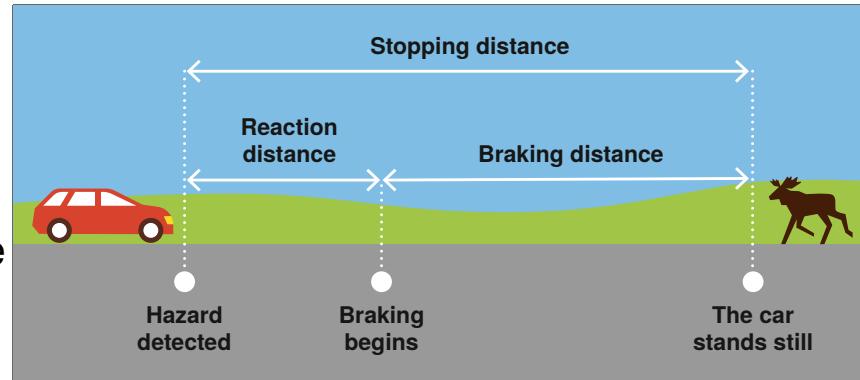

The car stopping distance problem

Instead, you are just provided with the data \mathcal{D} that contains N measurements of different people stopping the car.
How does the data \mathcal{D} look like?

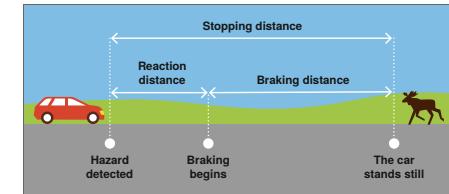

A table with N rows and 2 columns (input $x = \mathcal{D}_x$ and output $y = \mathcal{D}_y$).


x (m/s)	y (m)
15.5	21.4
5.3	11.8
78.0	701.6
...	...
10.8	22.1

Note that z is nowhere to be found! We could only measure the velocity of the car and the stopping distance, but we could not measure how quickly each driver reacts to seeing the deer!

Data generation

However, it's more instructive if we *create* the data from the governing equation.

This is more interesting than just being provided with the data!

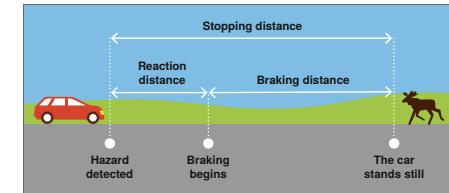

- Usually, in ML literature people don't create the data...
 - Data is collected from somewhere (Internet?) and we don't have a clue about the hidden variables involved in the data generation process (unknown causes that explain the data!).
- **But...** In engineering practice this can be different! Sometimes you *can create data* (e.g. from computer simulations, from conducting your own experiments, etc.)
 - Although, models/measurements are never perfect (errors) and can be stochastic (noise)!

Anyway, let's create the dataset for our problem...

In [2]:

```
from scipy.stats import norm # import the normal dist, as we learned before!
# Define our car stopping distance function
def y(x):
    z = norm.rvs(1.5, 0.5, size=1) # randomly draw 1 sample from the normal dist.
    y = z*x + 0.1*x**2 # compute the stopping distance
    return y

N = 33 # number of points to generate data
Data_x = np.linspace(3, 83, N) # generate a dataset with N points for velocities x between 3 and 83 m/s
print("Let's see the Data_x vector:\n", Data_x)

Data_y = np.zeros_like(Data_x) # create an empty vector for Data_y with same size as Data_x
i = 0 # initialize the counter
for x_i in Data_x:
    Data_y[i] = y(x_i)
    i += 1

print("\nLet's see the Data_y vector:\n", Data_y)
# IMPORTANT NOTE: Every time you run this cell you generate a new Data_y vector because of the z rv!!!
```

Let's see the Data_x vector:

```
[ 3.   5.5   8.  10.5  13.  15.5  18.  20.5  23.  25.5  28.  30.5  33.  35.5
 38.  40.5  43.  45.5  48.  50.5  53.  55.5  58.  60.5  63.  65.5  68.  70.5
 73.  75.5  78.  80.5  83. ]
```


Let's see the Data_y vector:

```
[ 6.6228835  10.3905087  17.96659493  23.42966362  30.89579891
 45.59685527  49.16011657  85.08081813  76.72897378  99.82697749
 109.74056361 123.8578289  153.95711001 179.5269188  187.94020114
 219.33589832 297.37101301 281.08247987 284.48886732 302.39922853
 380.32715662 416.50202633 387.79197732 473.16796893 442.29438313
 518.71985399 587.9409602  651.66160338 631.27248144 713.785457
 711.72178846 789.99906168 740.44892466]
```

Say hello to the pandas!

pandas is an open source library
that is very common to handle data
in ML

Let's create a pandas dataframe \mathcal{D}
that includes both the input \mathcal{D}_x and
output \mathcal{D}_y that we created.

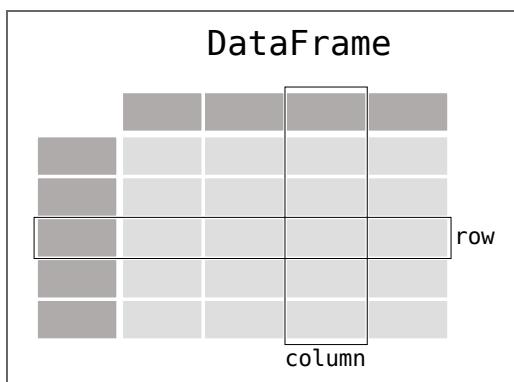

```
In [3]:  
    import pandas as pd # Pandas dataframe (very common in ML)  
#  
# Create a dictionary with the names of the input and output variables  
# and their respective values:  
input_dictionary = {  
    'x' : Data_x, # vector with input values of x  
    'y' : Data_y, # vector with output values of y  
}  
#  
# Then, we create a Pandas data frame:  
car_df = pd.DataFrame(input_dictionary)  
  
print(car_df)
```

	x	y
0	3.0	6.622883
1	5.5	10.390509
2	8.0	17.966595
3	10.5	23.429664
4	13.0	30.895799
5	15.5	45.596855
6	18.0	49.160117
7	20.5	85.080818
8	23.0	76.728974
9	25.5	99.826977
10	28.0	109.740564
11	30.5	123.857829
12	33.0	153.957110
13	35.5	179.526919
14	38.0	187.940201
15	40.5	219.335898
16	43.0	297.371013
17	45.5	281.082480

18	48.0	284.488867
19	50.5	302.399229
20	53.0	380.327157
21	55.5	416.502026
22	58.0	387.791977
23	60.5	473.167969
24	63.0	442.294383
25	65.5	518.719854
26	68.0	587.940960
27	70.5	651.661603
28	73.0	631.272481
29	75.5	713.785457
30	78.0	711.721788
31	80.5	789.999062
32	83.0	740.448925

Say hello to the pandas!

The **pandas** DataFrame we created is quite simple!

Today we won't go through many of the powerful data handling features of pandas.

We will try to introduce things as we need them.

- A basic need: save your data!



```
In [4]:
```

```
# Saving our "car_df" pandas dataframe to the "docs" folder in our computer is quite simple!
car_df.to_pickle("docs/car_dataframe.pkl") # done!
```

Go check in the "docs" folder if you have created the "car_dataframe.pkl" file!

Load data from someone else

As mentioned, many ML problems start in a different way:

- We are provided with a dataset in some format.
 - For example, someone else conducted the car stopping distance experiment and saved the measurements in a [csv](#) file called "**data_for_car_prob.csv**".
 - Then we receive the file and have to use it in our analysis!

We have that file in our "docs" folder. Go there and try to open it!

- Let's learn how to import this [csv](#) file data into a pandas dataframe.

```
In [5]:
```

```
    car_csv_data = pd.read_csv("docs/data_for_car_prob.csv") # read csv data provided by someone else
print(car_csv_data)
```

	Unnamed: 0	x	y
0	0	9.516939	29.749036
1	1	72.398757	642.132203
2	2	17.950326	36.648484
3	3	9.440853	18.604106
4	4	78.791008	769.656168
5	5	16.961121	57.971010
6	6	65.410368	559.093313
7	7	58.671099	463.686613
8	8	21.550603	92.242676
9	9	36.866913	197.688573
10	10	15.728748	56.885233
11	11	58.511494	388.753795
12	12	57.419190	399.807488
13	13	38.459157	213.181519
14	14	8.841742	20.387384
15	15	60.733051	516.341724
16	16	49.256663	307.931956
17	17	35.895121	181.123049
18	18	79.195652	750.178284
19	19	69.156669	553.153541
20	20	77.634896	746.031880
21	21	9.254011	20.810698
22	22	15.451468	39.872527
23	23	14.438247	42.118771

24	24	13.410999	44.775122
25	25	53.747057	375.013937
26	26	10.283719	19.438868
27	27	82.005477	742.336845
28	28	81.805562	706.620282
29	29	51.837742	345.212876
30	30	20.283785	65.303165
31	31	28.359647	155.185137
32	32	74.993715	676.628982
33	33	21.827564	81.150935
34	34	70.519111	700.520033
35	35	74.208532	622.453560
36	36	14.518958	40.927570
37	37	13.357644	39.770922
38	38	75.346253	707.973754
39	39	44.923956	251.300805
40	40	26.801159	124.098654
41	41	29.906265	118.100900
42	42	40.226356	215.082100
43	43	66.282662	537.845048
44	44	47.342777	308.558833
45	45	3.087674	5.947997
46	46	21.254611	101.295276
47	47	46.939484	345.778352
48	48	38.875692	219.095582
49	49	76.705452	742.720134

We see that one of the columns is redundant!

Let's delete that one

```
In [6]:
```

```
car_prob_df = car_csv_data[['x','y']] # pandas has a fast way to select the
# columns of interest (in this case 'x' and 'y')
print(car_prob_df)
```

	x	y
0	9.516939	29.749036
1	72.398757	642.132203
2	17.950326	36.648484
3	9.440853	18.604106
4	78.791008	769.656168
5	16.961121	57.971010
6	65.410368	559.093313
7	58.671099	463.686613
8	21.550603	92.242676
9	36.866913	197.688573
10	15.728748	56.885233
11	58.511494	388.753795
12	57.419190	399.807488
13	38.459157	213.181519
14	8.841742	20.387384
15	60.733051	516.341724
16	49.256663	307.931956
17	35.895121	181.123049
18	79.195652	750.178284
19	69.156669	553.153541
20	77.634896	746.031880
21	9.254011	20.810698
22	15.451468	39.872527

23	14.438247	42.118771
24	13.410999	44.775122
25	53.747057	375.013937
26	10.283719	19.438868
27	82.005477	742.336845
28	81.805562	706.620282
29	51.837742	345.212876
30	20.283785	65.303165
31	28.359647	155.185137
32	74.993715	676.628982
33	21.827564	81.150935
34	70.519111	700.520033
35	74.208532	622.453560
36	14.518958	40.927570
37	13.357644	39.770922
38	75.346253	707.973754
39	44.923956	251.300805
40	26.801159	124.098654
41	29.906265	118.100900
42	40.226356	215.082100
43	66.282662	537.845048
44	47.342777	308.558833
45	3.087674	5.947997
46	21.254611	101.295276
47	46.939484	345.778352
48	38.875692	219.095582
49	76.705452	742.720134

This looks better.

```
In [7]:
```

```
    Data_x = car_prob_df['x'].values # select the input VALUES from your dataframe into Data_x
Data_y = car_prob_df['y'].values # select the output VALUES from your dataframe into Data_y
print("Data_x is:\n",Data_x)
print("\nData_y is:\n",Data_y)
```

Data_x is:


```
[ 9.51693942 72.39875748 17.95032583  9.44085299 78.79100778 16.96112056
65.4103675 58.67109927 21.55060313 36.86691294 15.72874781 58.51149357
57.41918959 38.45915667  8.84174221 60.73305107 49.25666345 35.89512052
79.19565172 69.15666925 77.63489641  9.25401128 15.45146824 14.43824684
13.41099874 53.74705712 10.28371886 82.00547705 81.80556249 51.8377421
20.28378484 28.35964692 74.99371524 21.82756352 70.51911096 74.20853195
14.51895792 13.35764354 75.34625316 44.92395642 26.80115926 29.90626522
40.22635624 66.28266205 47.34277718  3.08767411 21.25461134 46.93948443
38.87569199 76.70545196]
```

Data_y is:

```
[ 29.74903647 642.13220315  36.64848446 18.60410602 769.65616843
57.97101034 559.09331318 463.68661322 92.24267632 197.68857288
56.88523327 388.75379474 399.80748803 213.18151905 20.38738432
516.34172363 307.93195589 181.12304936 750.17828361 553.15354059
746.03187971 20.81069833 39.87252654 42.11877078 44.77512244
375.01393668 19.43886782 742.33684483 706.62028237 345.21287569
65.30316533 155.18513747 676.62898211 81.15093549 700.52003305
622.45356019 40.92757044 39.77092163 707.97375405 251.30080489
124.09865438 118.10089977 215.08209978 537.84504756 308.55883254
5.94799685 101.29527607 345.77835213 219.09558165 742.72013356]
```


In [8]:

```
fig_car_data, ax_car_data = plt.subplots() # create a plot
ax_car_data.plot(Data_x, Data_y, 'b.')
ax_car_data.set_xlabel("x (m/s)", fontsize=20) # create x-axis label with font size 20
ax_car_data.set_ylabel("y (m)", fontsize=20) # create y-axis label with font size 20
ax_car_data.set_title("Car stopping distance problem", fontsize=20); # create title with font size 20
```

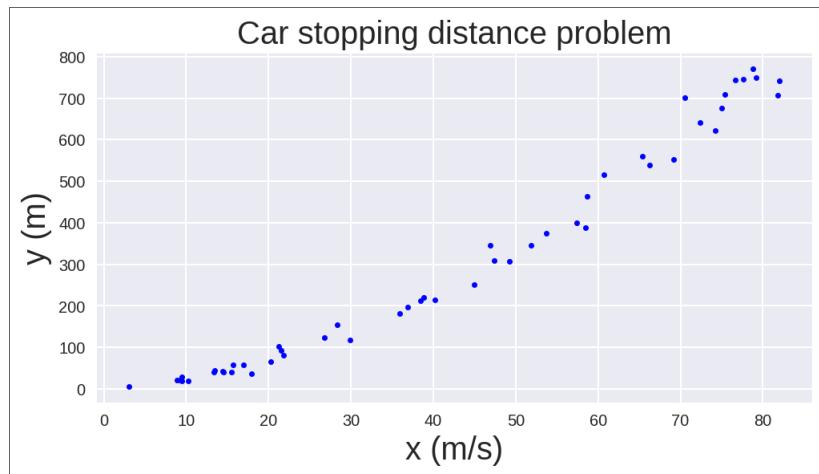

In-class Exercise 1

Plot the function $x \sin(x)$ in the domain $x \in [0, 10]$.

Here's a little reminder of the steps to do this:

1. Define the function $f(x) = x \sin(x)$.
2. Create a vector "x_data" of 50 points that are uniformly spaced between 0 and 10.
3. Calculate the values of $f(x) = x \sin(x)$ for each of the 50 points of vector "x_data" and save them in "y_data".
4. Plot the function from the 50 points that you defined, label the x-axis as "x" and the y axis as "y", and include a title "Exercise 1" in the plot.
5. Create a pandas dataframe called "my_df" with the data, and save it in a pickle file called "exercise1_data.pkl" that needs to be in the "docs" folder of this lecture.

```
In [9]:
```

```
# Exercise 1.  
# Write your code here:  
# until here.
```

In-class Exercise 2

Derive the expected value and variance for the governing model for the car stopping distance problem:


$$\mathbb{E}[y] = ?$$

$$\mathbb{V}[y] = ?$$

(In case you haven't seen enough of the problem statement 😊)
recall that:

$$y = zx + 0.1x^2$$


where $z \sim \mathcal{N}(\mu_z = 1.5, \sigma_z^2 = 0.5^2)$

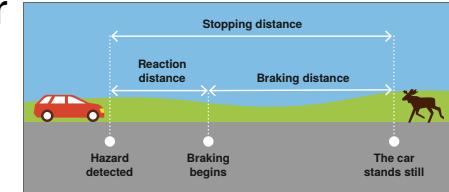

In [10]:

```
# Let's plot the model (we pretend for a moment that we know it!)
real_x = np.linspace(3, 83, 1000)
real_mu_y = 1.5*real_x + 0.1*(real_x**2) # Recall: E[z*x+0.1*x^2] = E[z]*E[x]+0.1*E[x^2]
real_sigma_y = np.sqrt( 0.5**2*real_x**2 ) # Recall: V[z*x+x^2] = V[z*x]+V[x^2]=...=sigma_z^2*mu_x^2
ax_car_data.plot(real_x, real_mu_y, 'k:', label="Governing model")
ax_car_data.fill_between(real_x, real_mu_y - 1.9600 * real_sigma_y,
                        real_mu_y + 1.9600 * real_sigma_y,
                        color='k', alpha=0.2,
                        label='95% confidence interval') # See book Sections 4.7.4 and 4.7.5 for a discussion on CI vs credible interval
ax_car_data.legend()
fig_car_data
```

Out[10]:

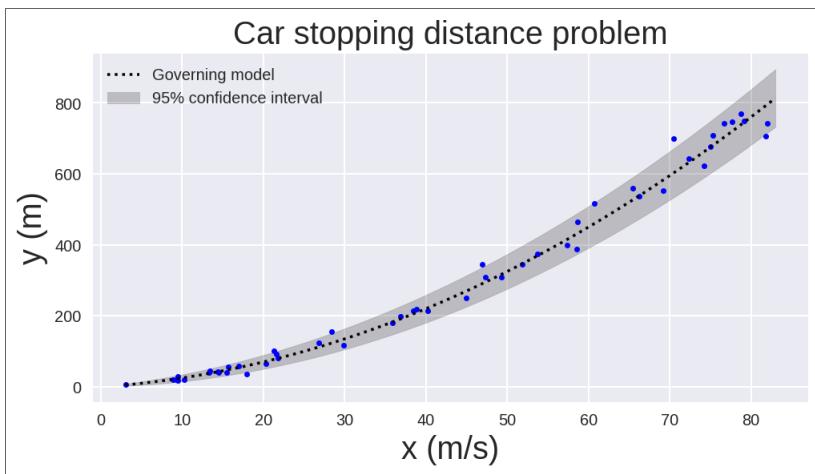

Question: If we didn't know the governing model, what should ML do using the data (blue dots)?

ML (supervised learning regression) goal

1. ML should find the mean response μ_y from the data $\mathcal{D} = \{\mathcal{D}_x, \mathcal{D}_y\}$ (data: blue dots).
1. Of course we will always make a prediction error (we just see the data, and we don't know the model or complete reality).
1. Ideally, ML should also tell us the confidence we have on the predictions we are making.
 - This is what probabilistic ML does!
1. **However**, even if we don't estimate our confidence (like most ML), having a probabilistic perspective over ML is advantageous because our unknowns can be modeled as **rv's**.
 - This helps us understand where the models come from and that the world is probabilistic.

In the next classes we will understand the simplest ML supervised learning regression models.


This will allow us to make simple predictions, so that later we make some serious predictions!

Here's a teaser for the next lectures about linear regression:

In [12]:

```
# Code to generate this figure is hidden during presentation (it's shown as notes).  
# (We will learn how to do this later...)  
fig_poly # show figure
```

Out[12] :

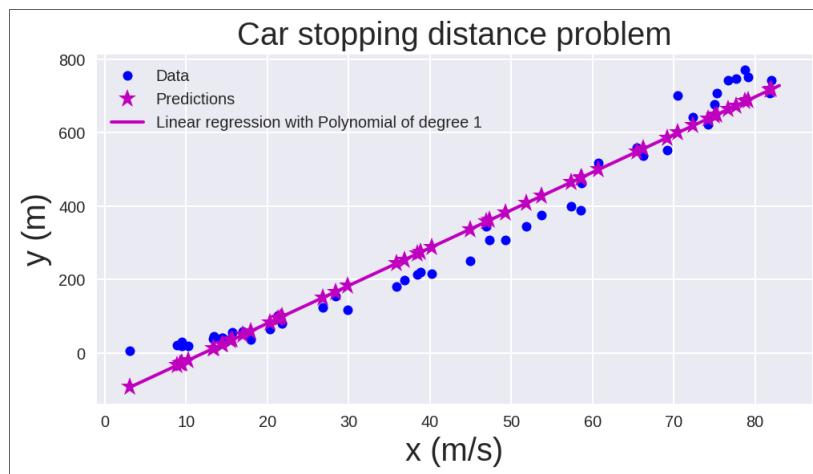

See you next class

Have fun!