

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

US PORTS

37a8c45a23e1 busybox

ed (0) 4 minutes ago

8849c62dd8d5 busybox

ed (0) 6 minutes ago

→ prod git:(master) docker system prune

WARNING! This will remove:

- all stopped containers
- all networks not used by at least one container
- all dangling images
- all build cache

Are you sure you want to continue? [y/N] y

Deleted Containers:

37a8c45a23e15af71684ad0c8e26e328661c5dc0855609bb66b861b0fb0d8e

8849c62dd8d512ab0485b174db5f4ca13f3fcc03fbe1de35324e77b494b6ed69

Total reclaimed space: 0B

→ prod git:(master) docker ps --all

CONTAINER ID IMAGE COMMAND CREATED STAT

US PORTS NAMES

→ prod git:(master) docker system prune █

NAMES

"echo hi there" 5 minutes ago

pedantic_jepsen

"echo hi there" 6 minutes ago

thirsty_northcutt

Exit

Exit

Up next
18. Retrieving Log Outputs

Cancel



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) |

}



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

```
→ prod git:(master) docker create busybox echo hi there
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525
→ prod git:(master) █
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

```
→ prod git:(master) docker create busybox echo hi there  
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525  
→ prod git:(master) █
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker create busybox echo hi there

18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525

→ prod git:(master)

{}



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker create busybox echo hi there


18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525

→ prod git:(master) docker start 18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525



```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)
→ prod git:(master) docker create busybox echo hi there
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525
→ prod git:(master) docker start 18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06ba
e31f1629d13525
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525
→ prod git:(master) █
```

```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)
→ prod git:(master) docker create busybox echo hi there
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525
→ prod git:(master) docker start 18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06ba
e31f1629d13525
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525
→ prod git:(master) █
```



```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)
→ prod git:(master) docker create busybox echo hi there
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525
→ prod git:(master) docker start 18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06ba
e31f1629d13525
18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525
→ prod git:(master) █
```

{}



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker create busybox echo hi there

18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525

→ prod git:(master) docker start 18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525

18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525

→ prod git:(master) docker start -a docker start 18b6450d5f30e4cb253e8827408b6aa2428e2f03f65dbb06bae31f1629d13525




Stephen

File Edit View Arrange Extras Help

Unsaved changes. Click here to save.

Stephen Grider

Get logs from a container

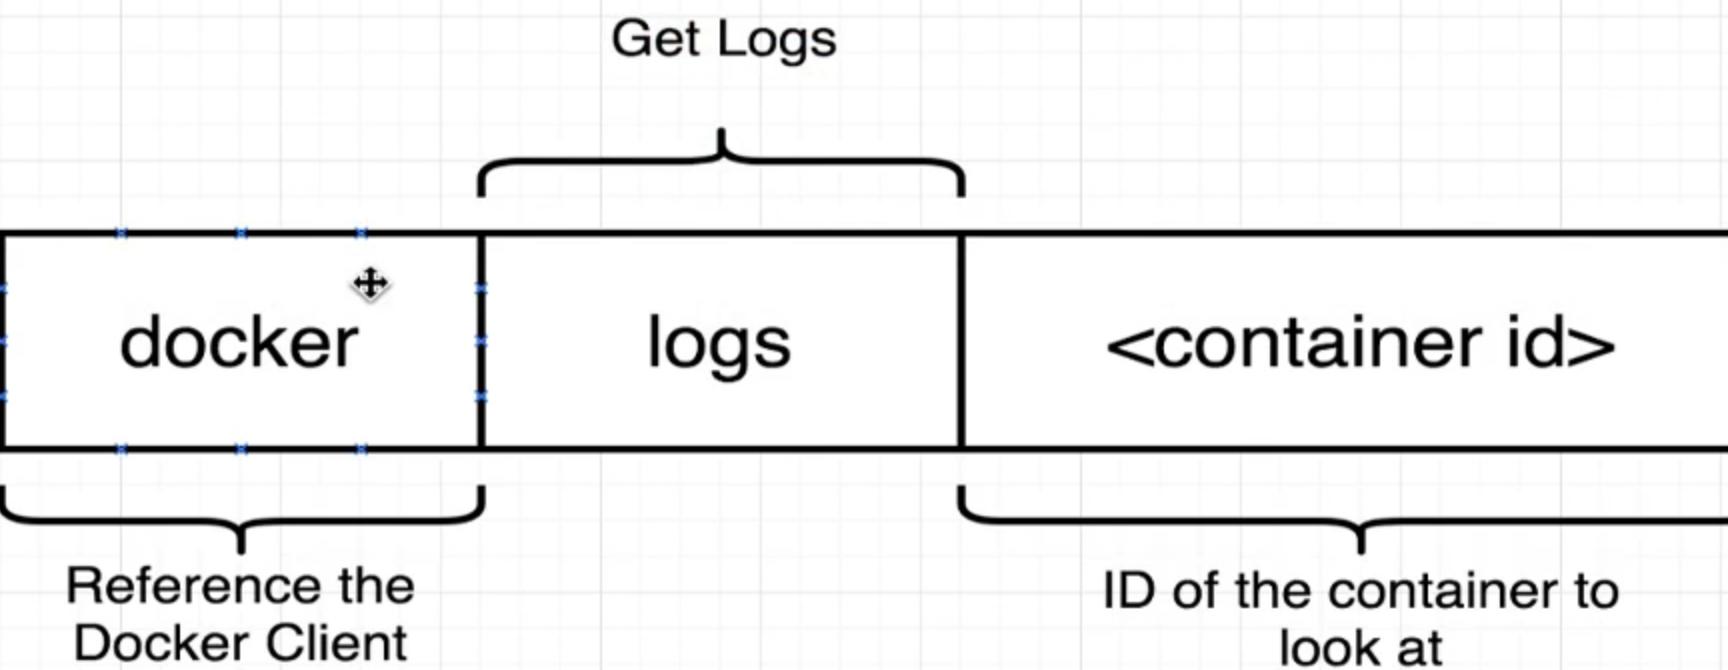




Stephen

File Edit View Arrange Extras Help

Unsaved changes. Click here to save.

Stephen Grider

Get logs from a container

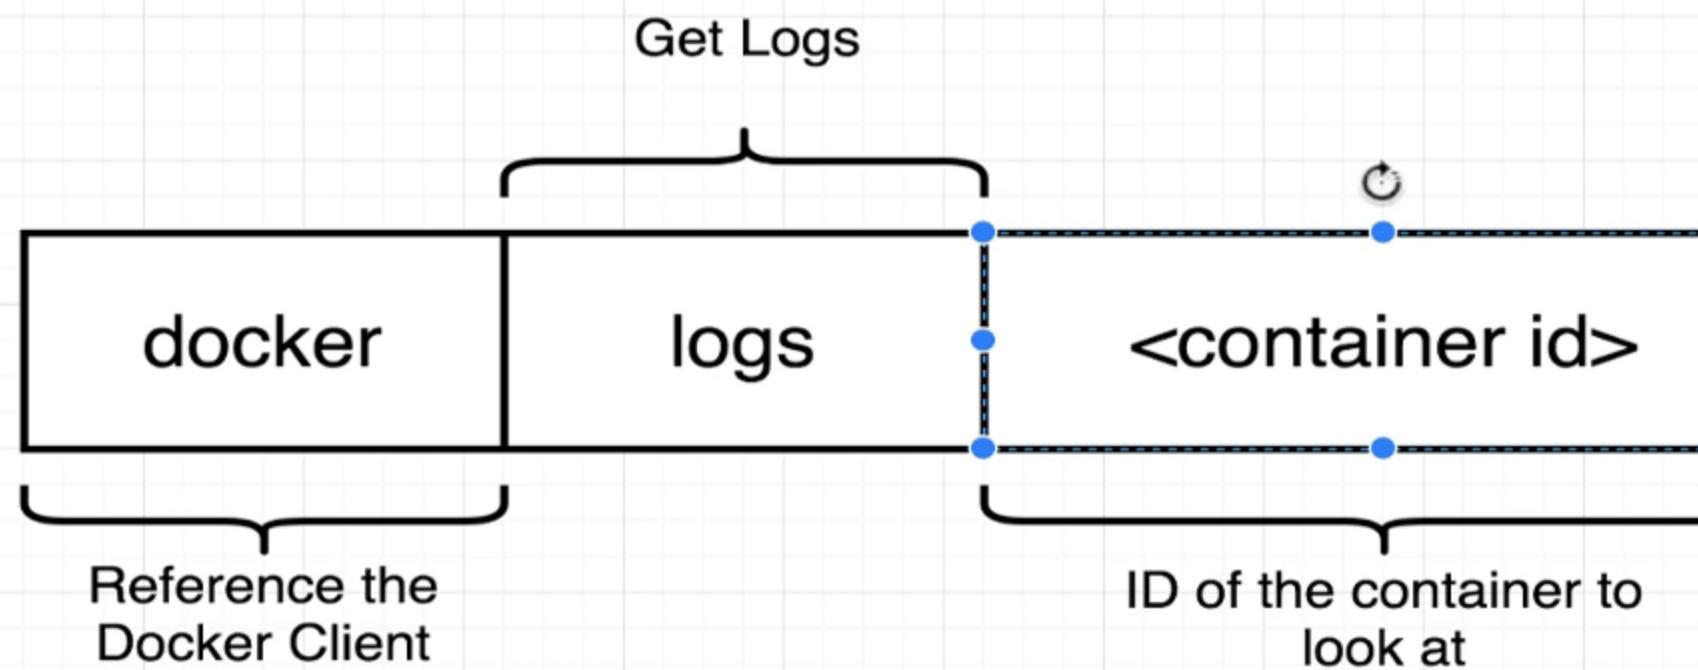

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (git)

```
→ prod git:(master) docker create busybox echo hi there
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) █
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

```
→ prod git:(master) docker create busybox echo hi there
a2d69ef73f4dfade7670e093ee8a406116690ccb907cc9007f99de2b56100be1
→ prod git:(master)
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker create busybox echo hi there

a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1

→ prod git:(master) docker start a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f
99de2b56100be1

```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (docker)
→ prod git:(master) docker create busybox echo hi there
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker start a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) █
```

```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker create busybox echo hi there
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker start a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f
99de2b56100be1
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker logs a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f9
9de2b56100be1
```

```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker create busybox echo hi there
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker start a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f9
99de2b56100be1
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker logs a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f9
99de2b56100be1
hi there
→ prod git:(master) █
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

```
→ prod git:(master) docker create busybox echo hi there
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker start a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f9
99de2b56100be1
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker logs a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f9
99de2b56100be1
hi there
→ prod git:(master) |
```



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

```
→ prod git:(master) docker create busybox echo hi there
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker start a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f9
99de2b56100be1
a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f99de2b56100be1
→ prod git:(master) docker logs a2d69ef73f4dfade7670e093ee8a406116690cbb907cc9007f9
99de2b56100be1
hi there
→ prod git:(master) █
```

Up next

19. Stopping Containers



Cancel