

HTML report





- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Rename
- Pipeline Syntax

Build History trend ▾

✓ #14	Nov 6, 2023, 3:02 PM
✗ #13	Nov 6, 2023, 2:56 PM
✗ #12	Nov 6, 2023, 2:51 PM
✗ #11	Nov 6, 2023, 2:35 PM
✗ #10	Nov 6, 2023, 2:28 PM
✗ #9	Nov 6, 2023, 2:18 PM
✓ #8	Nov 4, 2023, 3:08 PM
✓ #7	Nov 4, 2023, 2:51 PM
✓ #6	Nov 4, 2023, 2:46 PM
✓ #5	Nov 4, 2023, 2:04 PM
✓ #4	Nov 4, 2023, 2:00 PM

Pipeline learn-jenkins-app


Stage View

Average stage times:
(Average full run time: ~34s)

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
	888ms	9s	46s	87ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11 Nov 06 11:35 1 commit	1s	9s	2min 33s aborted	95ms
#10 Nov 06 11:28 No Changes	712ms	9s	9s failed	70ms

Add description

Disable Project

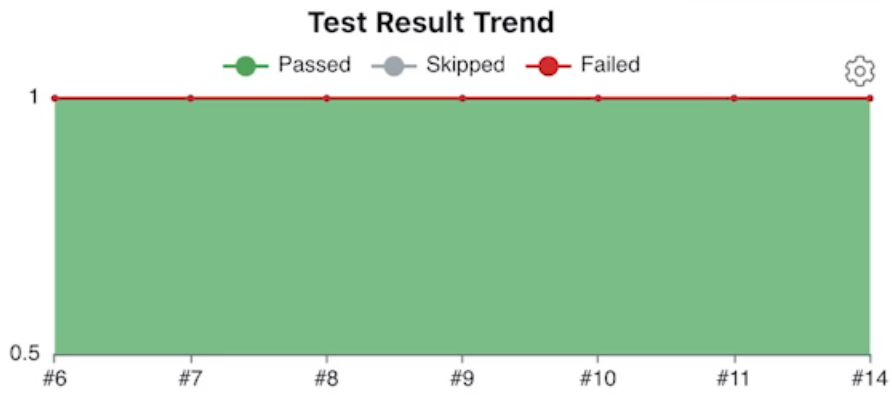

- Getting Started
 - Installation
 - Writing tests
 - Generating tests
 - Running and debugging tests
 - Trace viewer
 - CI GitHub Actions
- Getting started - VS Code
- Release notes
- Canary releases
- Playwright Test
 - Test configuration
 - Test use options
 - Annotations
 - Command line
 - Emulation
 - Fixtures
 - Global setup and teardown
 - Parallelism
 - Parameterize tests
 - Projects
 - Reporters
 - Retries
 - Sharding
 - Timeouts

HTML reporter

HTML reporter produces a self-contained folder that contains report for the test run that can be served as a web page.

```
npx playwright test --reporter=html
```

By default, HTML report is opened automatically if some of the tests failed. You can control this behavior via the `open` property in the Playwright config or the `PW_TEST_HTML_REPORT_OPEN` environmental variable. The possible values for that property are `always`, `never` and `on-failure` (default).

You can also configure `host` and `port` that are used to serve the HTML report.

playwright.config.ts

```
import { defineConfig } from '@playwright/test';

export default defineConfig({
  reporter: [['html', { open: 'never' }]],
});
```

By default, report is written into the `playwright-report` folder in the current working directory. One can override that location using the `PLAYWRIGHT_HTML_REPORT` environment variable or a reporter configuration.

In configuration file, pass options directly:

playwright.config.ts

```
import { defineConfig } from '@playwright/test';

export default defineConfig({
  reporter: [['html', { outputFolder: 'my-report' }]],
});
```

- Introduction
 - Multiple reporters
 - Reporters on CI
- Built-in reporters
 - List reporter
 - Line reporter
 - Dot reporter
 - HTML reporter
 - Blob reporter
 - JSON reporter
 - JUnit reporter
 - GitHub Actions annotations
- Custom reporters
 - Third party reporter showcase



Getting Started ▾

[Installation](#)[Writing tests](#)[Generating tests](#)[Running and debugging tests](#)[Trace viewer](#)[CI GitHub Actions](#)

Getting started - VS Code

[Release notes](#)[Canary releases](#)

Playwright Test ▾

[Test configuration](#)[Test use options](#)[Annotations](#)[Command line](#)[Emulation](#)[Fixtures](#)[Global setup and teardown](#)[Parallelism](#)[Parameterize tests](#)[Projects](#)[Reporters](#)[Retries](#)[Sharding](#)[Timeouts](#)

HTML reporter

HTML reporter produces a self-contained folder that contains report for the test run that can be served as a web page.

```
npx playwright test --reporter=html
```



By default, HTML report is opened automatically if some of the tests failed. You can control this behavior via the `open` property in the Playwright config or the `PW_TEST_HTML_REPORT_OPEN` environmental variable. The possible values for that property are `always`, `never` and `on-failure` (default).

You can also configure `host` and `port` that are used to serve the HTML report.

playwright.config.ts

```
import { defineConfig } from '@playwright/test';

export default defineConfig({
  reporter: [['html', { open: 'never' }]],
});
```

By default, report is written into the `playwright-report` folder in the current working directory. One can override that location using the `PLAYWRIGHT_HTML_REPORT` environment variable or a reporter configuration.

In configuration file, pass options directly:

playwright.config.ts

```
import { defineConfig } from '@playwright/test';

export default defineConfig({
  reporter: [['html', { outputFolder: 'my-report' }]],
});
```

[Introduction](#)[Multiple reporters](#)[Reporters on CI](#)[Built-in reporters](#)[List reporter](#)[Line reporter](#)[Dot reporter](#)[HTML reporter](#)[Blob reporter](#)[JSON reporter](#)[JUnit reporter](#)[GitHub Actions annotations](#)[Custom reporters](#)[Third party reporter showcase](#)

- Getting Started
 - Installation
 - Writing tests
 - Generating tests
 - Running and debugging tests
 - Trace viewer
 - CI GitHub Actions
- Getting started - VS Code
- Release notes
- Canary releases
- Playwright Test
 - Test configuration
 - Test use options
 - Annotations
 - Command line
 - Emulation
 - Fixtures
 - Global setup and teardown
 - Parallelism
 - Parameterize tests
 - Projects
 - Reporters
 - Retries
 - Sharding
 - Timeouts

HTML reporter

HTML reporter produces a self-contained folder that contains report for the test run that can be served as a web page.

```
npx playwright test --reporter=html
```

By default, HTML report is opened automatically if some of the tests failed. You can control this behavior via the `open` property in the Playwright config or the `PW_TEST_HTML_REPORT_OPEN` environmental variable. The possible values for that property are `always`, `never` and `on-failure` (default).

You can also configure `host` and `port` that are used to serve the HTML report.

playwright.config.ts

```
import { defineConfig } from '@playwright/test';

export default defineConfig({
  reporter: [['html', { open: 'never' }]],
});
```

By default, report is written into the `playwright-report` folder in the current working directory. One can override that location using the `PLAYWRIGHT_HTML_REPORT` environment variable or a reporter configuration.

In configuration file, pass options directly:

playwright.config.ts

```
import { defineConfig } from '@playwright/test';

export default defineConfig({
  reporter: [['html', { outputFolder: 'my-report' }]],
});
```

- Introduction
 - Multiple reporters
 - Reporters on CI
- Built-in reporters
 - List reporter
 - Line reporter
 - Dot reporter
 - HTML reporter
 - Blob reporter
 - JSON reporter
 - JUnit reporter
 - GitHub Actions annotations
- Custom reporters
 - Third party reporter showcase



Jenkinsfile

Jenkinsfile

 **README.md**

Jenkinsfile

PROBLEMS

COMMENTS

bash + [icon] [icon] [icon] [icon] [icon] [icon] [icon]

```
@vdespa-jenkins → /workspaces/learn-jenkins-app (main) $
```

> TIMELINE



- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Rename
- Pipeline Syntax

Build History trend ▾


✓ #15	Nov 6, 2023, 7:51 PM
✓ #14	Nov 6, 2023, 3:02 PM
✗ #13	Nov 6, 2023, 2:56 PM
✗ #12	Nov 6, 2023, 2:51 PM
✗ #11	Nov 6, 2023, 2:35 PM
✗ #10	Nov 6, 2023, 2:28 PM
✗ #9	Nov 6, 2023, 2:18 PM
✓ #8	Nov 4, 2023, 3:08 PM
✓ #7	Nov 4, 2023, 2:51 PM
✓ #6	Nov 4, 2023, 2:46 PM
✓ #5	Nov 4, 2023, 2:04 PM

Pipeline learn-jenkins-app

Stage View

Average stage times:
(Average full run time: ~35s)

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
	911ms	9s	43s	86ms
#15 Nov 06 16:51 1 commit	1s	9s	23s	81ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11 Nov 06 11:35 1 commit	1s	9s	2min 33s aborted	95ms
#10				

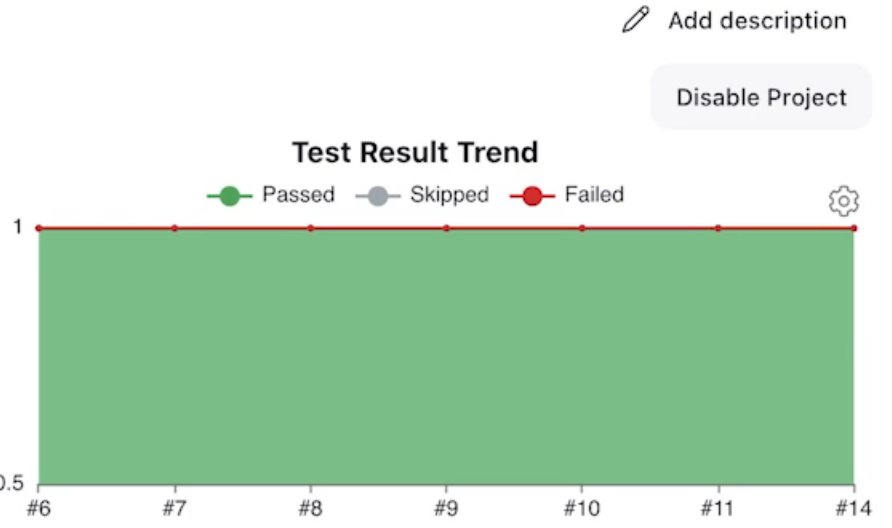



Status

</> Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Rename

Pipeline Syntax

Pipeline learn-jenkins-app

Add description


Disable Project

Stage View

Average stage times:
(Average full run time: ~35s)

	Declarative: Checkout SCM	Test	Success	Declarative: Post Actions
	911ms	9s		86ms
#15 Nov 06 16:51 1 commit	1s	9s	23s	81ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11 Nov 06 11:35 1 commit	1s	9s	2min 33s aborted	95ms
#10				

Test Result Trend

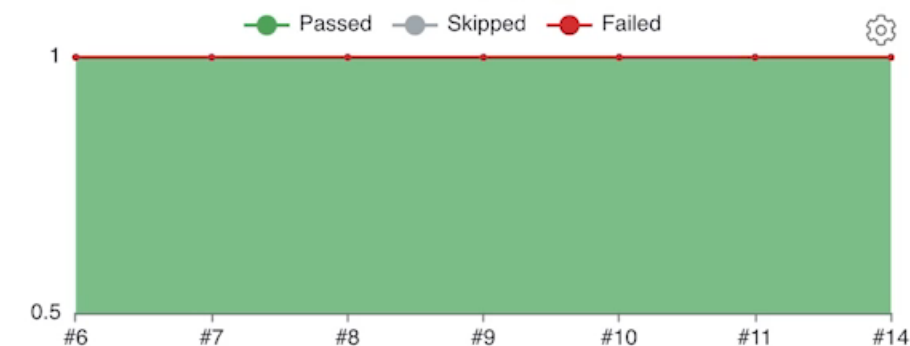

Stage Logs (E2E)

✕

- Get contextual object from internal APIs (self time 20ms)
- Checks if running on a Unix-like node (self time 17ms)
- Shell Script -- docker inspect -f . "\$JD_TO_RUN" (self time 269ms)
- Shell Script -- npm install serve node_modules/.bin/serve -s build & sleep 10 npx playwright test --reporter=html (self time 21s)

```
+ npm install serve

up to date, audited 1580 packages in 6s

261 packages are looking for funding
  run `npm fund` for details

8 vulnerabilities (2 moderate, 6 high)

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.
+ sleep 10
+ node_modules/.bin/serve -s build
  INFO  Accepting connections at http://localhost:3000
+ npx playwright test --reporter=html

Running 3 tests using 1 worker
```

✓ #15	Nov 6, 2023, 7:51 PM	Nov 06 12:02	1 commit	1s	8s	22s	89ms
✓ #14	Nov 6, 2023, 3:02 PM						
✗ #13	Nov 6, 2023, 2:56 PM	#13 Nov 06 11:44	No Changes	712ms	9s	25s	95ms
✗ #12	Nov 6, 2023, 2:51 PM						
✗ #11	Nov 6, 2023, 2:35 PM						
✗ #10	Nov 6, 2023, 2:28 PM	#12 Nov 06 11:40	2 commits	1s	10s	22s	86ms
✗ #9	Nov 6, 2023, 2:18 PM						
✓ #8	Nov 4, 2023, 3:08 PM						
✓ #7	Nov 4, 2023, 2:51 PM	#11 Nov 06 11:35	1 commit	1s	9s	2min 33s	95ms
✓ #6	Nov 4, 2023, 2:46 PM					aborted	
✓ #5	Nov 4, 2023, 2:04 PM	#10					

Stage Logs (E2E)

- Get contextual object from internal APIs (self time 20ms)
- Checks if running on a Unix-like node (self time 17ms)
- Shell Script -- docker inspect -f . "\$JD_TO_RUN" (self time 269ms)
- Shell Script -- npm install serve node_modules/.bin/serve -s build & sleep 10 npx playwright test --reporter=html (self time 21s)

261 packages are looking for funding
run `npm fund` for details

8 vulnerabilities (2 moderate, 6 high)

To address all issues (including breaking changes), run:
npm audit fix --force

Run `npm audit` for details.

```
+ sleep 10
+ node_modules/.bin/serve -s build
INFO  Accepting connections at http://localhost:3000
+ npx playwright test --reporter=html
```

Running 3 tests using 1 worker

```
HTTP 11/6/2023 7:51:55 PM 127.0.0.1 GET /
HTTP 11/6/2023 7:51:55 PM 127.0.0.1 Returned 200 in 21 ms
HTTP 11/6/2023 7:51:55 PM 127.0.0.1 GET /static/js/main.c64ec5d3.js
HTTP 11/6/2023 7:51:55 PM 127.0.0.1 GET /static/css/main.fd921077.css
```

✓ #15	Nov 6, 2023, 7:51 PM	Nov 0612:021 commit	1s	8s	22s	89ms
✓ #14	Nov 6, 2023, 3:02 PM					
✗ #13	Nov 6, 2023, 2:56 PM	#13Nov 0611:44No Changes	712ms	9s	25s	95ms
✗ #12	Nov 6, 2023, 2:51 PM					
✗ #11	Nov 6, 2023, 2:35 PM					
✗ #10	Nov 6, 2023, 2:28 PM	#12Nov 0611:402 commits	1s	10s	22s	86ms
✗ #9	Nov 6, 2023, 2:18 PM					
✓ #8	Nov 4, 2023, 3:08 PM					
✓ #7	Nov 4, 2023, 2:51 PM	#11Nov 0611:351 commit	1s	9s	2min 33s	95ms
✓ #6	Nov 4, 2023, 2:46 PM				aborted	
✓ #5	Nov 4, 2023, 2:04 PM	#10				



- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#15'
- Git Build Data
- Test Result
- Restart from Stage
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Build #15 (Nov 6, 2023, 7:51:22 PM)

Keep this build forever

Add description

Started 1 min 16 sec ago
Took **36 sec**

Changes

1. HTML reporter ([details](#) / [githubweb](#))

Started by user [valentin](#)

git
Revision: Odd2d1814a07c91e27590b5c5b26619087749de0
Repository: <https://github.com/vdespa-jenkins/learn-jenkins-app.git>

- refs/remotes/origin/main

Test Result (no failures)



Status

</> Changes

Console Output

Edit Build Information

Delete build '#15'

Git Build Data

Test Result

Restart from Stage

Replay

Pipeline Steps

Workspaces

Previous Build



Build #15 (Nov 6, 2023, 7:51:22 PM)

Keep this build forever

Add description

Started 1 min 16 sec ago

Took **36 sec**

Changes

1. HTML reporter ([details](#) / [githubweb](#))

Started by user [valentin](#)**Revision:** Odd2d1814a07c91e27590b5c5b26619087749de0**Repository:** <https://github.com/vdespa-jenkins/learn-jenkins-app.git>

- refs/remotes/origin/main

[Test Result](#) (no failures)



- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#15'
- Git Build Data
- Test Result
- Restart from Stage
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Workspaces for learn-jenkins-app #15

- /var/jenkins_home/workspace/learn-jenkins-app on built-in



- ↑ Up
- 🔍 Status
- 📄 Console Output
- 📁 Workspace**

Workspace

/

→

📁 .devcontainer			
📁 .git			
📁 build			
📁 e2e			
📁 jest-results			
📁 node_modules			
📁 playwright-report			
📁 public			
📁 src			
📁 test-results			
📁 test-results-e2e			
📁 tests-examples			
📄 .gitignore	Nov 3, 2023, 4:14:20 PM	365 B	👁
📄 Jenkinsfile	Nov 6, 2023, 7:51:25 PM	1.43 KB	👁
📄 package.json	Nov 6, 2023, 7:51:41 PM	1.29 KB	👁
📄 package-lock.json	Nov 6, 2023, 7:51:41 PM	705.17 KB	👁
📄 playwright.config.js	Nov 6, 2023, 2:56:11 PM	1.96 KB	👁
📄 README.md	Nov 3, 2023, 4:14:20 PM	3.26 KB	👁

📄 (all files in zip)

-  Up
-  Status
-  Console Output
-  **Workspace**

Workspace

/

→

	.devcontainer			
	.git			
	build			
	e2e			
	jest-results			
	node_modules			
	playwright-report			
	public			
	src			
	test-results			
	test-results-e2e			
	tests-examples			
	.gitignore	Nov 3, 2023, 4:14:20 PM	365 B	
	Jenkinsfile	Nov 6, 2023, 7:51:25 PM	1.43 KB	
	package.json	Nov 6, 2023, 7:51:41 PM	1.29 KB	
	package-lock.json	Nov 6, 2023, 7:51:41 PM	705.17 KB	
	playwright.config.js	Nov 6, 2023, 2:56:11 PM	1.96 KB	
	README.md	Nov 3, 2023, 4:14:20 PM	3.26 KB	

 (all files in zip)

- ↑ Up
- 🔍 Status
- 📄 Console Output
- 📁 Workspace

Workspace

/ playwright-report /

 [index.html](#)

Nov 6, 2023, 7:51:56 PM

419.46 KB



 (all files in zip)



- ↑ Up
- 🔍 Status
- 📄 Console Output
- 📁 Workspace


Workspace


/ playwright-report / →

📄 [index.html](#) Nov 6, 2023, 7:51:56 PM 419.46 KB 👁



📄 (all files in zip)

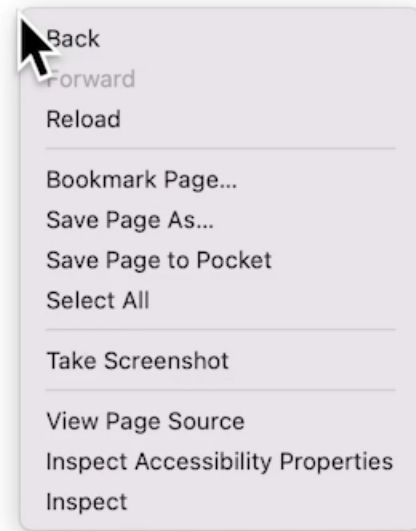

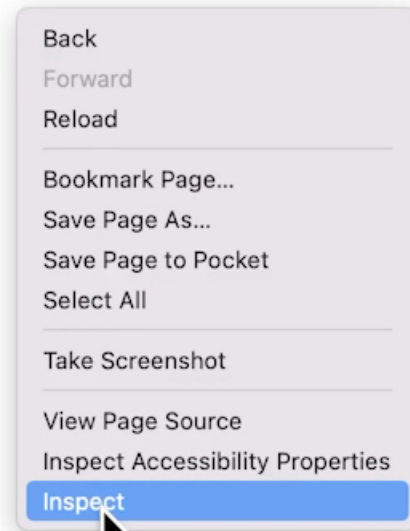

Inspector

Console

Debugger

Network

Style Editor

Performance

Memory

Storage

Accessibility

Application

Search HTML

<!DOCTYPE html>

<html>

><head></head>

><body>

>><div id="root"></div>

>>><script></script>

>></body>

></html>

element :: { }

Filter Styles

:hov .cls +

Layout

Computed

Changes

Compatibility

1

Layout

Computed

Changes

Compatibility


Flexbox

Grid

Box Model

Select a Flex container or item to continue.

CSS Grid is not in use on this page

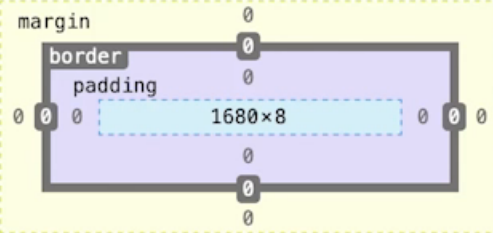

1680x8

static

Box Model Properties

box-sizing

display

content-box

block

Odemy

Inspector Console Debugger Network Style Editor Performance Memory Storage Accessibility Application

Filter Output

ErrorsWarningsLogsInfoDebug

CSSXHRRequests

1

>>

Content-Security-Policy: The page's settings blocked the loading of a resource at inline ("style-src").

[index.html:53:1](#)

Inspector Console Debugger Network Style Editor Performance Memory Storage Accessibility Application

Filter Output

Errors Warnings Logs Info Debug

CSS XHR Requests

Content-Security-Policy: The page's settings blocked the loading of a resource at inline ("style-src").

[index.html:53:1](#)



Inspector Console Debugger Network Style Editor Performance Memory Storage Accessibility Application

Filter Output

Errors Warnings Logs Info Debug

CSS XHR Requests

1

Content-Security-Policy: The page's settings blocked the loading of a resource at inline ("style-src"). [index.html:53:1](#)

>>



- + New Item
-  People
-  Build History
-  Manage Jenkins
-  My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 Idle

2 Idle

All +

Add description

S	W	Name ↓	Last Success	Last Failure	Last Duration
		Hello - freestyle	17 days #1	N/A	0.12 sec 
		Hello - pipeline	17 days #5	N/A	42 sec 
		Laptop assembly	17 days #31	17 days #29	1.2 sec 
		learn-jenkins-app	4 min 29 sec #15	4 hr 59 min #13	36 sec 

Icon: S M L

Icon legend

 Atom feed for all

 Atom feed for failures

 Atom feed for just latest builds

- + New Item
-  People
-  Build History
-  **Manage Jenkins**
-  My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 Idle

2 Idle

Manage Jenkins

Q Search settings

/

Building on the built-in node can be a security issue. You should set up distributed builds. See [the documentation](#).

Set up agentSet up cloudDismiss

Warnings have been published for the following currently installed components:

Go to plugin managerConfigure which of these warnings are shown

GitHub plugin 1.37.3:
Stored XSS vulnerability
A fix for this issue is available. Go to the [plugin manager](#) to update the plugin.

System Configuration



System
Configure global settings and paths.



Tools
Configure tools, their locations and automatic installers.



Plugins
Add, remove, disable or enable plugins that can extend the functionality of Jenkins.



Nodes
Add, remove, control and monitor the various nodes that Jenkins runs jobs on.



Clouds
Add, remove, and configure cloud instances to provision agents on-demand.

Security



Security
Secure Jenkins; define who is allowed to access/use the system.



Credentials
Configure credentials



Credential Providers
Configure the credential providers and types



Users
Create/delete/modify users that can log in to



Users

Create/delete/modify users that can log in to this Jenkins.

Status Information



System Information

Displays various environmental information to assist trouble-shooting.



System Log

System log captures output from `java.util.logging` output related to Jenkins.



Load Statistics

Check your resource utilization and see if you need more computers for your builds.



About Jenkins

See the version and license information.

Troubleshooting



Manage Old Data

Scrub configuration files to remove remnants from old plugins and earlier versions.

Tools and Actions



Reload Configuration from Disk

Discard all the loaded data in memory and reload everything from file system. Useful when you modified config files directly on disk.



Jenkins CLI

Access/manage Jenkins from your shell, or from your script.



Script Console

Executes arbitrary script for administration/troubleshooting/diagnostics.



Prepare for Shutdown

Stops executing new builds, so that the system can be eventually shut down safely.



Users

Create/delete/modify users that can log in to this Jenkins.

Status Information



System Information

Displays various environmental information to assist trouble-shooting.



System Log

System log captures output from `java.util.logging` output related to Jenkins.



Load Statistics

Check your resource utilization and see if you need more computers for your builds.



About Jenkins

See the version and license information.

Troubleshooting



Manage Old Data

Scrub configuration files to remove remnants from old plugins and earlier versions.

Tools and Actions



Reload Configuration from Disk

Discard all the loaded data in memory and reload everything from file system. Useful when you modified config files directly on disk.



Jenkins CLI

Access/manage Jenkins from your shell, or from your script.



Script Console

Executes arbitrary script for administration/trouble-shooting/diagnostics.



Prepare for Shutdown

Stops executing new builds, so that the system can be eventually shut down safely.

Script Console

Type in an arbitrary [Groovy script](#) and execute it on the server. Useful for trouble-shooting and diagnostics. Use the 'println' command to see the output (if you use System.out, it will go to the server's stdout, which is harder to see.) Example:

```
println(Jenkins.instance.pluginManager.plugins)
```

All the classes from all the plugins are visible. jenkins.*, jenkins.model.*, hudson.*, and hudson.model.* are pre-imported.

1 |



Run

Script Console

Type in an arbitrary [Groovy script](#) and execute it on the server. Useful for trouble-shooting and diagnostics. Use the 'println' command to see the output (if you use System.out, it will go to the server's stdout, which is harder to see.) Example:

```
println(Jenkins.instance.pluginManager.plugins)
```

All the classes from all the plugins are visible. jenkins.*, jenkins.model.*, hudson.*, and hudson.model.* are pre-imported.

```
1 System.setProperty("hudson.model.DirectoryBrowserSupport.CSP", "sandbox allow-scripts;")
```

```
2
```



Run

- + New Item
-  People
-  Build History
-  Manage Jenkins
-  My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 Idle

2 Idle

Script Console

Type in an arbitrary [Groovy script](#) and execute it on the server. Useful for trouble-shooting and diagnostics. Use the 'println' command to see the output (if you use System.out, it will go to the server's stdout, which is harder to see.) Example:

```
println(Jenkins.instance.pluginManager.plugins)
```

All the classes from all the plugins are visible. jenkins.*, jenkins.model.*, hudson.*, and hudson.model.* are pre-imported.

```
1 System.setProperty("hudson.model.DirectoryBrowserSupport.CSP", "sandbox allow-scripts;")
```

Result 

Run 



- New Item
- People
- Build History
- Manage Jenkins
- My Views

Build Queue

No builds in the queue.

Build Executor Status

- 1 Idle
- 2 Idle

Script Console

Type in an arbitrary [Groovy script](#) and execute it on the server. Useful for trouble-shooting and diagnostics. Use the 'println' command to see the output (if you use System.out, it will go to the server's stdout, which is harder to see.) Example:

```
println(Jenkins.instance.pluginManager.plugins)
```

All the classes from all the plugins are visible. jenkins.*, jenkins.model.*, hudson.*, and hudson.model.* are pre-imported.

```
1 System.setProperty("hudson.model.DirectoryBrowserSupport.CSP", "sandbox allow-scripts;")
```

Run

Result



- + New Item
-  People
-  Build History
-  Manage Jenkins
-  My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 Idle

2 Idle

All +

S	W	Name ↓	Last Success	Last Failure	Last Duration	
		Hello - freestyle	17 days #1	N/A	0.12 sec	
		Hello - pipeline	17 days #5	N/A	42 sec	
		Laptop assembly	17 days #31	17 days #29	1.2 sec	
		learn-jenkins-app ▾	5 min 45 sec #15	5 hr 0 min #13	36 sec	

Icon: S M L

Icon legend  Atom feed for all  Atom feed for failures  Atom feed for just latest builds

 Add description



- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Rename
- Pipeline Syntax

Build History trend

Filter builds...

#15

Nov 6, 2023, 7:51 PM

#14

Nov 6, 2023, 3:02 PM

#13

Nov 6, 2023, 2:56 PM

#12

Nov 6, 2023, 2:51 PM

#11

Nov 6, 2023, 2:35 PM

#10

Nov 6, 2023, 2:28 PM

#9

Nov 6, 2023, 2:18 PM

#8

Nov 4, 2023, 3:08 PM

#7

Nov 4, 2023, 2:51 PM

#6

Nov 4, 2023, 2:46 PM

#5


Nov 4, 2023, 2:04 PM

Pipeline learn-jenkins-app

Stage View

Average stage times:
(Average full run time: ~35s)

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
	911ms	9s	43s	86ms
#15	1s	9s	23s	81ms
#14	1s	8s	22s	89ms
#13	712ms	9s	25s	95ms
#12	1s	10s	22s	86ms
#11	1s	9s	2min 33s	95ms
#10				

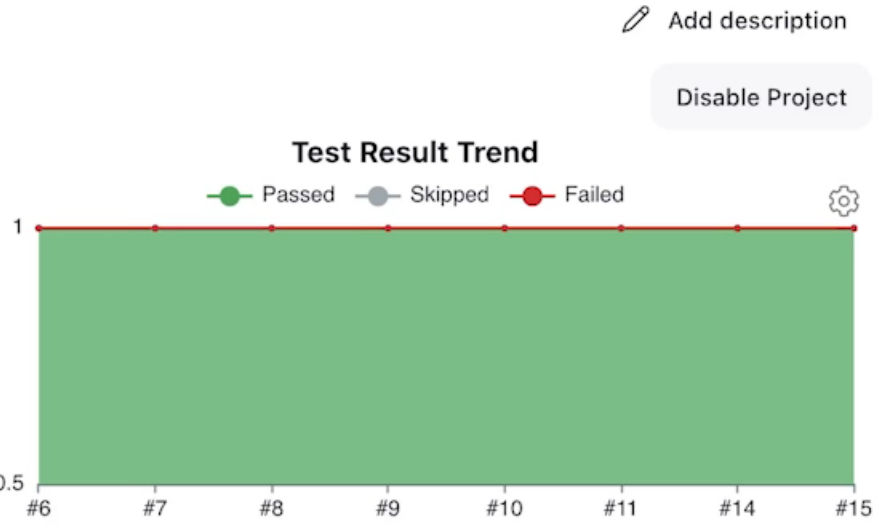



- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#15'
- Git Build Data
- Test Result
- Restart from Stage
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Build #15 (Nov 6, 2023, 7:51:22 PM)

Keep this build forever

Add description Started 5 min 49 sec ago
Took 36 sec

Changes

1. HTML reporter ([details](#) / [githubweb](#))

Started by user [valentin](#)

Revision: Odd2d1814a07c91e27590b5c5b26619087749de0
Repository: <https://github.com/vdespa-jenkins/learn-jenkins-app.git>

- refs/remotes/origin/main

Test Result (no failures)



- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#15'
- Git Build Data
- Test Result
- Restart from Stage
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Workspaces for learn-jenkins-app #15

- /var/jenkins_home/workspace/learn-jenkins-app on built-in



- ↑ Up
- 🔍 Status
- 📄 Console Output
- 📁 Workspace**

Workspace

/

→

📁 .devcontainer			
📁 .git			
📁 build			
📁 e2e			
📁 jest-results			
📁 node_modules			
📁 playwright-report			
📁 public			
📁 src			
📁 test-results			
📁 test-results-e2e			
📁 tests-examples			
📄 .gitignore	Nov 3, 2023, 4:14:20 PM	365 B	👁
📄 Jenkinsfile	Nov 6, 2023, 7:51:25 PM	1.43 KB	👁
📄 package.json	Nov 6, 2023, 7:51:41 PM	1.29 KB	👁
📄 package-lock.json	Nov 6, 2023, 7:51:41 PM	705.17 KB	👁
📄 playwright.config.js	Nov 6, 2023, 2:56:11 PM	1.96 KB	👁
📄 README.md	Nov 3, 2023, 4:14:20 PM	3.26 KB	👁

📄 (all files in zip)

- ↑ Up
- 🔍 Status
- 📄 Console Output
- 📁 Workspace

Workspace

/ playwright-report /

 [index.html](#)

Nov 6, 2023, 7:51:56 PM

419.46 KB



 (all files in zip)

▼ app.spec.js	
✓ has title app.spec.js:4	373ms
✓ has Jenkins in the body app.spec.js:11	203ms
✓ has expected app version app.spec.js:18	200ms





- ↑ Up
- 🔍 Status
- 📄 Console Output
- 📁 Workspace

Workspace

/ playwright-report / →

📄 [index.html](#) Nov 6, 2023, 7:51:56 PM 419.46 KB 👁

📄 (all files in zip)

+ New Item

 People

 Build History

 Manage Jenkins

 My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 Idle

2 Idle

All +

S	W	Name ↓	Last Success	Last Failure	Last Duration
		Hello - freestyle	17 days #1	N/A	0.12 sec 
		Hello - pipeline	17 days #5	N/A	42 sec 
		Laptop assembly	17 days #31	17 days #29	1.2 sec 
		learn-jenkins-app	6 min 18 sec #15	5 hr 1 min #13	36 sec 

Icon: S M L

Icon legend

 Atom feed for all

 Atom feed for failures

 Atom feed for just latest builds

Add description

- People
- Build History
- Manage Jenkins**
- My Views

Build Queue

No builds in the queue.

Build Executor Status

1 Idle

2 Idle

Building on the built-in node can be a security issue. You should set up distributed builds. See [the documentation](#).

Set up agentSet up cloudDismiss

The default Content-Security-Policy is currently overridden using the `hudson.model.DirectoryBrowserSupport.CSP` system property, which is a potential security issue when browsing untrusted files. As an alternative, you can set up a **resource root URL** that Jenkins will use to serve some static files without adding Content-Security-Policy headers.

Configure resource root URLDismiss

Warnings have been published for the following currently installed components:

Go to plugin managerConfigure which of these warnings are shown

GitHub plugin 1.37.3:

Stored XSS vulnerability

A fix for this issue is available. Go to the [plugin manager](#) to update the plugin.

System Configuration

System

Configure global settings and paths.

Tools

Configure tools, their locations and automatic installers.

19 Plugins

Add, remove, disable or enable plugins that can extend the functionality of Jenkins.

Nodes

Add, remove, control and monitor the various nodes that Jenkins runs jobs on.

Clouds

Add, remove, and configure cloud instances to provision agents on-demand.

Security

Security

Secure Jenkins; define who is allowed to access/use the system.

Credentials

Configure credentials

Credential Providers

Configure the credential providers and types

Users

Create/delete/modify users that can log in to



- Updates 19
- Available plugins
- Installed plugins
- Advanced settings

Plugins

Search plugin updates

Update

☐	Name ↓	Released	Installed
☐	commons-text API 1.11.0-94.v3e1f4a_926e49 Library plugins (for use by other plugins) Jenkins Api Plugin that Bundles Apache Commons Text v1.x. Usage will slim downstream plugin. Provides org.apache.commons:commons-text:1.11.0.	6 days 23 hr ago	1.10.0-78.v3e7b_ea_d5a_fe1
☐	Credentials 1307.v3757c78f17c3 credentials Library plugins (for use by other plugins) This plugin allows you to store credentials in Jenkins.	10 days ago	1293.vff276f713473
☐	Credentials Binding 642.v737c34dea_6c2 Build Wrappers credentials Allows credentials to be bound to environment variables for use from miscellaneous build steps.	13 days ago	636.v55f1275c7b_27
☐	GitHub 1.37.3.1 External Site/Tool Integrations github This plugin integrates GitHub to Jenkins. Applying this update will address security vulnerabilities in the currently installed version.	19 days ago	1.37.3
☐	Gradle 2.9 Build Tools This plugin allows Jenkins to invoke Gradle build scripts directly.	13 days ago	2.8.2
☐	Instance Identity 105.v202d47c645f0		



- Updates 19
- Available plugins
- Installed plugins
- Advanced settings

Plugins

Install

▾

Install	Name ▾	Released
☐	HTML Publisher 1.32 Build Reports This plugin publishes HTML reports.	3 mo 4 days ago
☐	DataTables.net API 1.13.6-5 Library plugins (for use by other plugins) Provides jQuery DataTables for Jenkins Plugins. It is a highly flexible tool, built upon the foundations of progressive enhancement, that adds several advanced features to any HTML table.	1 mo 1 day ago
☐	Active Choices 2.8.1 User Interface Build Parameters This plug-in provides additional parameter types for jobs, that allow you to cascade changes and render images or other HTML elements instead of the traditional parameter.	4 days 3 hr ago
☐	Apache HttpComponents Client 5.x API 5.2.1-1.1 Library plugins (for use by other plugins) Bundles Apache HttpComponents Client \${revision} and allows it to be used by Jenkins plugins.	1 mo 13 days ago
☐	JaCoCo 3.3.5 Build Reports This plugin integrates JaCoCo code coverage reports to Jenkins.	1 mo 3 days ago
☐	Node Iterator API 55.v3b_77d4032326 Library plugins (for use by other plugins) This plugin provides support for iterating through all the Node instances that are in use by Jenkins, even those Node instances that	14 days ago



- Updates 19
- Available plugins
- Installed plugins
- Advanced settings

Plugins

Install



Install	Name ▾	Released
	HTML Publisher 1.32 Build Reports This plugin publishes HTML reports.	3 mo 4 days ago
☐	DataTables.net API 1.13.6-5 Library plugins (for use by other plugins) Provides jQuery DataTables for Jenkins Plugins. It is a highly flexible tool, built upon the foundations of progressive enhancement, that adds several advanced features to any HTML table.	1 mo 1 day ago
☐	Active Choices 2.8.1 User Interface Build Parameters This plug-in provides additional parameter types for jobs, that allow you to cascade changes and render images or other HTML elements instead of the traditional parameter.	4 days 3 hr ago
☐	Apache HttpComponents Client 5.x API 5.2.1-1.1 Library plugins (for use by other plugins) Bundles Apache HttpComponents Client \${revision} and allows it to be used by Jenkins plugins.	1 mo 13 days ago
☐	JaCoCo 3.3.5 Build Reports This plugin integrates JaCoCo code coverage reports to Jenkins.	1 mo 3 days ago
☐	Node Iterator API 55.v3b_77d4032326 Library plugins (for use by other plugins) This plugin provides support for iterating through all the Node instances that are in use by Jenkins, even those Node instances that	14 days ago



- Updates 19
- Available plugins
- Installed plugins
- Advanced settings

Plugins



Install ▾



Install	Name ▾	Released
☒	HTML Publisher 1.32 Build Reports This plugin publishes HTML reports.	3 mo 4 days ago
☐	DataTables.net API 1.13.6-5 Library plugins (for use by other plugins) Provides jQuery DataTables for Jenkins Plugins. It is a highly flexible tool, built upon the foundations of progressive enhancement, that adds several advanced features to any HTML table.	1 mo 1 day ago
☐	Active Choices 2.8.1 User Interface Build Parameters This plug-in provides additional parameter types for jobs, that allow you to cascade changes and render images or other HTML elements instead of the traditional parameter.	4 days 3 hr ago
☐	Apache HttpComponents Client 5.x API 5.2.1-1.1 Library plugins (for use by other plugins) Bundles Apache HttpComponents Client \${revision} and allows it to be used by Jenkins plugins.	1 mo 13 days ago
☐	JaCoCo 3.3.5 Build Reports This plugin integrates JaCoCo code coverage reports to Jenkins.	1 mo 3 days ago
☐	Node Iterator API 55.v3b_77d4032326 Library plugins (for use by other plugins) This plugin provides support for iterating through all the Node instances that are in use by Jenkins, even those Node instances that	14 days ago



- Updates
- Available plugins
- Installed plugins
- Advanced settings
- Download progress

19

Download progress

Preparation

- Checking internet connectivity
- Checking update center connectivity

HTML Publisher ... Pending

Loading plugin extensions ... Pending

→ [Go back to the top page](#)
(you can start using the installed plugins right away)

→ ☐ Restart Jenkins when installation is complete and no jobs are running

+ New Item

 People

 Build History

 Manage Jenkins

 My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 Idle

2 Idle

All +

S

W

Name ↓

Last Success

Last Failure

Last Duration





Hello - freestyle

17 days [#1](#)

N/A

0.12 sec







Hello - pipeline

17 days [#5](#)

N/A

42 sec







Laptop assembly

17 days [#31](#)

17 days [#29](#)

1.2 sec







learn-jenkins-app

7 min 8 sec [#15](#)

5 hr 2 min [#13](#)

36 sec



Icon: S M L

Icon legend

 Atom feed for all

 Atom feed for failures

 Atom feed for just latest builds

REST API

Jenkins 2.414.3 

+ New Item

 People

 Build History

 Manage Jenkins

 My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 Idle

2 Idle

All +

S	W	Name ↓	Last Success	Last Failure	Last Duration	
		Hello - freestyle	17 days #1	N/A	0.12 sec	
		Hello - pipeline	17 days #5	N/A	42 sec	
		Laptop assembly	17 days #31	17 days #29	1.2 sec	
		learn-jenkins-app ▾	7 min 8 sec #15	5 hr 2 min #13	36 sec	

Icon: S M **L**


Icon legend

 Atom feed for all

 Atom feed for failures

 Atom feed for just latest builds

SOURCE CONTROL



Message (%Enter to commit on "main")

✓ Commit

Jenkinsfile x

Jenkinsfile

```
40 ..... }
41 ..... }
42 .....
43 ..... stage('E2E') {
44 .....     agent {
45 .....         docker {
46 .....             image 'mcr.microsoft.com/playwright:v1.39.0-jammy'
47 .....             reuseNode true
48 .....         }
49 .....     }
50 .....
51 .....     steps {
52 .....         sh '''
53 .....             npm install serve
54 .....             node_modules/.bin/serve -s build &
55 .....             sleep 10
56 .....             npx playwright test --reporter=html
57 .....         '''
58 .....     }
59 ..... }
60 .....
61 .....
62 ..... post {
63 .....     always {
64 .....         junit 'jest-results/junit.xml'
65 .....     }
66 ..... }
67 }
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

COMMENTS

bash + ▾

@vdespa-jenkins → /workspaces/learn-jenkins-app (main) \$



Status

</> Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Rename

Pipeline Syntax

Pipeline learn-jenkins-app

Add description

Disable Project


Stage View

Average stage times:
(Average full run time: 111s)

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
	911ms	9s	43s	86ms
#15 Nov 06 16:51 1 commit	1s	9s	23s	81ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11 Nov 06 11:35 1 commit	1s	9s	2min 33s aborted	95ms
#10				

Test Result Trend

Passed Skipped Failed

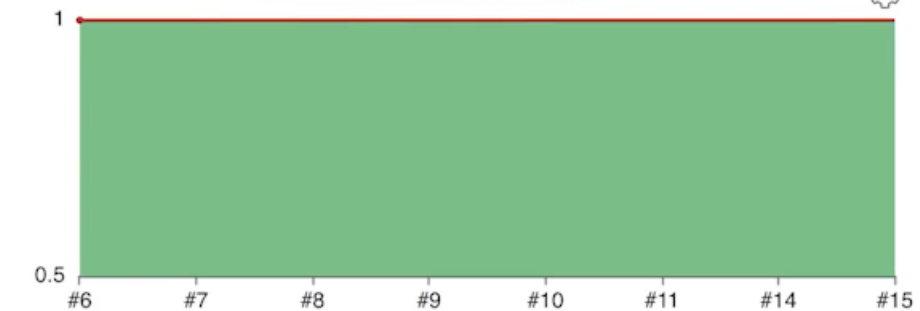

Build History

trend

Filter builds...

- ✓ #15 Nov 6, 2023, 7:51 PM
- ✓ #14 Nov 6, 2023, 3:02 PM
- ✗ #13 Nov 6, 2023, 2:56 PM
- ✗ #12 Nov 6, 2023, 2:51 PM
- ✗ #11 Nov 6, 2023, 2:35 PM
- ✗ #10 Nov 6, 2023, 2:28 PM
- ✗ #9 Nov 6, 2023, 2:18 PM
- ✓ #8 Nov 4, 2023, 3:08 PM
- ✓ #7 Nov 4, 2023, 2:51 PM
- ✓ #6 Nov 4, 2023, 2:46 PM
- ✓ #5 Nov 4, 2023, 2:04 PM

Configure

- General
- Advanced Project Options
- Pipeline**

Advanced ▾

Add Repository

Branches to build ?

Branch Specifier (blank for 'any') ?

*/main

Add Branch

Repository browser ?

(Auto) ▾

Additional Behaviours

Add ▾

Script Path ?

Jenkinsfile

☒ Lightweight checkout ?

[Pipeline Syntax](#)

Save Apply



- ↑ Back
- ⚙ Snippet Generator
- ⚙ Declarative Directive Generator
- ❓ Declarative Online Documentation
- ❓ Steps Reference
- ❓ Global Variables Reference
- ❓ Online Documentation
- ❓ Examples Reference
- ❓ IntelliJ IDEA GDSL

Overview

This **Snippet Generator** will help you learn the Pipeline Script code which can be used to define various steps. Pick a step you are interested in from the list, configure it, click **Generate Pipeline Script**, and you will see a Pipeline Script statement that would call the step with that configuration. You may copy and paste the whole statement into your script, or pick up just the options you care about. (Most parameters are optional and can be omitted in your script, leaving them at default values.)

Steps

Sample Step

archiveArtifacts: Archive the artifacts

archiveArtifacts ?

Files to archive ?

Advanced

Generate Pipeline Script

Global Variables

There are many features of the Pipeline that are not steps. These are often exposed via global variables, which are not supported by the snippet generator. See the [Global Variables Reference](#) for details.

[↑ Back](#) **Snippet Generator**

Declarative Directive Generator

Declarative Online Documentation

Steps Reference

Global Variables Reference

Online Documentation

Examples Reference

IntelliJ IDEA GDSL

Overview

This **Snippet Generator** will help you learn the Pipeline Script code which can be used to define various steps. Pick a step you are interested in from the list, configure it, click **Generate Pipeline Script**, and you will see a Pipeline Script statement that would call the step with that configuration. You may copy and paste the whole statement into your script, or pick up just the options you care about. (Most parameters are optional and can be omitted in your script, leaving them at default values.)

Steps

Sample Step

- ✓ archiveArtifacts: Archive the artifacts
- bat: Windows Batch Script
- build: Build a job
- catchError: Catch error and set build result to failure
- checkout: Check out from version control**
- cleanWs: Delete workspace when build is done
- deleteDir: Recursively delete the current directory from the workspace
- dir: Change current directory
- echo: Print Message
- emailxext: Extended Email
- emailxextrecipients: Extended Email Recipients
- error: Error signal
- fileExists: Verify if file exists in workspace
- findBuildScans: Find published build scans
- fingerprint: Record fingerprints of files to track usage
- git: Git
- input: Wait for interactive input
- isUnix: Checks if running on a Unix-like node
- junit: Archive JUnit-formatted test results
- library: Load a library on the fly

Global Variables

There are many features of the Pipeline that are not steps. These are often exposed via global variables, which are not supported by the snippet generator. See the [Global Variables Reference](#) for details.



- [Back](#)
- Snippet Generator**
- [Declarative Directive Generator](#)
- [Declarative Online Documentation](#)
- [Steps Reference](#)
- [Global Variables Reference](#)
- [Online Documentation](#)
- [Examples Reference](#)
- [IntelliJ IDEA GDSL](#)

Overview

This **Snippet Generator** will help you learn the Pipeline Script code which can be used to define various steps. Pick a step you are interested in from the list, configure it, click **Generate Pipeline Script**, and you will see a Pipeline Script statement that would call the step with that configuration. You may copy and paste the whole statement into your script, or pick up just the options you care about. (Most parameters are optional and can be omitted in your script, leaving them at default values.)

Steps

Sample Step

publishHTML: Publish HTML reports ▾

publishHTML

HTML directory to archive ?

Index page[s] ?

Index page title[s] (Optional) ?

Report title ?

Publishing options ▾

- Snippet Generator
- Declarative Directive Generator
- Declarative Online Documentation
- Steps Reference
- Global Variables Reference
- Online Documentation
- Examples Reference
- IntelliJ IDEA GDSDL

This **Snippet Generator** will help you learn the Pipeline Script code which can be used to define various steps. Pick a step you are interested in from the list, configure it, click **Generate Pipeline Script**, and you will see a Pipeline Script statement that would call the step with that configuration. You may copy and paste the whole statement into your script, or pick up just the options you care about. (Most parameters are optional and can be omitted in your script, leaving them at default values.)

Steps

Sample Step

publishHTML: Publish HTML reports

publishHTML

HTML directory to archive ?

Index page[s] ?

Index page title[s] (Optional) ?

Report title ?

Publishing options

Generate Pipeline Script



- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Rename
- Pipeline Syntax

Build History

trend

Filter builds...


✓ #15	Nov 6, 2023, 7:51 PM
✓ #14	Nov 6, 2023, 3:02 PM
✗ #13	Nov 6, 2023, 2:56 PM
✗ #12	Nov 6, 2023, 2:51 PM
✗ #11	Nov 6, 2023, 2:35 PM
✗ #10	Nov 6, 2023, 2:28 PM
✗ #9	Nov 6, 2023, 2:18 PM
✓ #8	Nov 4, 2023, 3:08 PM
✓ #7	Nov 4, 2023, 2:51 PM
✓ #6	Nov 4, 2023, 2:46 PM
✓ #5	Nov 4, 2023, 2:04 PM

Pipeline learn-jenkins-app

Stage View

Average stage times:
(Average full run time: ~35s)

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
	911ms	9s	43s	86ms
#15 Nov 06 16:51 1 commit	1s	9s	23s	81ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11 Nov 06 11:35 1 commit	1s	9s	2min 33s aborted	95ms
#10				

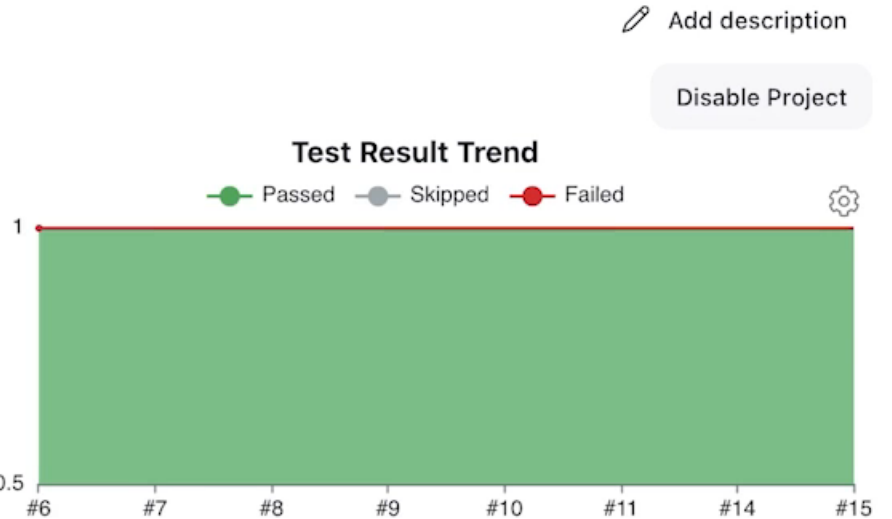



Status

</> Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Rename

Pipeline Syntax

Pipeline learn-jenkins-app

Add description

Disable Project

Stage View

Average stage times:
(Average full run time: ~35s)Declarative:
Checkout
SCM

Test

E2E

Declarative:
Post Actions

911ms

9s

43s

86ms

1s

9s

23s

81ms

1s

8s

22s

89ms

712ms

9s

25s

95ms

1s

10s

22s

86ms

1s

9s


2min 33s

95ms

aborted

Test Result Trend

Passed Skipped Failed

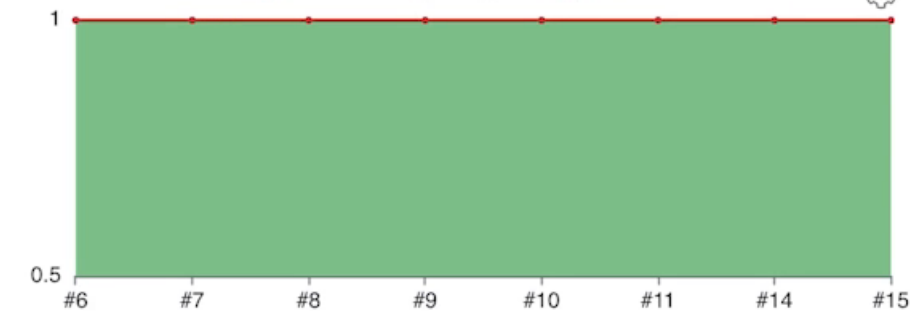

Build History

trend ▾

Filter builds... /

- #15 ▾ Nov 6, 2023, 7:51 PM
- #14 Nov 6, 2023, 3:02 PM
- #13 Nov 6, 2023, 2:56 PM
- #12 Nov 6, 2023, 2:51 PM
- #11 Nov 6, 2023, 2:35 PM
- #10 Nov 6, 2023, 2:28 PM
- #9 Nov 6, 2023, 2:18 PM
- #8 Nov 4, 2023, 3:08 PM
- #7 Nov 4, 2023, 2:51 PM
- #6 Nov 4, 2023, 2:46 PM
- #5 Nov 4, 2023, 2:04 PM

 #15
Nov 06
16:51
1
commit#14
Nov 06
12:02
1
commit#13
Nov 06
11:44
No
Changes#12
Nov 06
11:40
2
commits#11
Nov 06
11:35
1
commit

#10



- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#15'
- Git Build Data
- Test Result
- Restart from Stage
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Workspaces for learn-jenkins-app #15

- /var/jenkins_home/workspace/learn-jenkins-app on built-in



-  Up
-  Status
-  Console Output
-  **Workspace**

Workspace

/

→

	.devcontainer			
	.git			
	build			
	e2e			
	jest-results			
	node_modules			
	playwright-report			
	public			
	src			
	test-results			
	test-results-e2e			
	tests-examples			
	.gitignore	Nov 3, 2023, 4:14:20 PM	365 B	
	Jenkinsfile	Nov 6, 2023, 7:51:25 PM	1.43 KB	
	package.json	Nov 6, 2023, 7:51:41 PM	1.29 KB	
	package-lock.json	Nov 6, 2023, 7:51:41 PM	705.17 KB	
	playwright.config.js	Nov 6, 2023, 2:56:11 PM	1.96 KB	
	README.md	Nov 3, 2023, 4:14:20 PM	3.26 KB	

 (all files in zip)

- Snippet Generator
- Declarative Directive Generator
- Declarative Online Documentation
- Steps Reference
- Global Variables Reference
- Online Documentation
- Examples Reference
- IntelliJ IDEA GDSDL

This **Snippet Generator** will help you learn the Pipeline Script code which can be used to define various steps. Pick a step you are interested in from the list, configure it, click **Generate Pipeline Script**, and you will see a Pipeline Script statement that would call the step with that configuration. You may copy and paste the whole statement into your script, or pick up just the options you care about. (Most parameters are optional and can be omitted in your script, leaving them at default values.)

Steps

Sample Step

publishHTML: Publish HTML reports

publishHTML

HTML directory to archive ?

playwright-report

Index page[s] ?

index.html

Index page title[s] (Optional) ?

Report title ?

HTML Report

Publishing options

Generate Pipeline Script

- ↑ Up
- 🔍 Status
- 📄 Console Output
- 📁 Workspace

Workspace

/ playwright-report /

 [index.html](#)

Nov 6, 2023, 7:51:56 PM

419.46 KB



 [\(all files in zip\)](#)

- Snippet Generator
- Declarative Directive Generator
- Declarative Online Documentation
- Steps Reference
- Global Variables Reference
- Online Documentation
- Examples Reference
- IntelliJ IDEA GDSDL

This **Snippet Generator** will help you learn the Pipeline Script code which can be used to define various steps. Pick a step you are interested in from the list, configure it, click **Generate Pipeline Script**, and you will see a Pipeline Script statement that would call the step with that configuration. You may copy and paste the whole statement into your script, or pick up just the options you care about. (Most parameters are optional and can be omitted in your script, leaving them at default values.)

Steps

Sample Step

publishHTML: Publish HTML reports

publishHTML

HTML directory to archive ?

playwright-report

Index page[s] ?

index.htm

Index page title[s] (Optional) ?

Report title ?

HTML Report

Publishing options

Generate Pipeline Script

- Snippet Generator
- Declarative Directive Generator
- Declarative Online Documentation
- Steps Reference
- Global Variables Reference
- Online Documentation
- Examples Reference
- IntelliJ IDEA GDSDL

This **Snippet Generator** will help you learn the Pipeline Script code which can be used to define various steps. Pick a step you are interested in from the list, configure it, click **Generate Pipeline Script**, and you will see a Pipeline Script statement that would call the step with that configuration. You may copy and paste the whole statement into your script, or pick up just the options you care about. (Most parameters are optional and can be omitted in your script, leaving them at default values.)

Steps

Sample Step

publishHTML: Publish HTML reports

publishHTML

HTML directory to archive ?

playwright-report

Index page[s] ?

index.html

Index page title[s] (Optional) ?

Report title ?

Playwright HTML Report

Publishing options

Generate Pipeline Script

- [Global Variables Reference](#)
- [Online Documentation](#)
- [Examples Reference](#)
- [IntelliJ IDEA GDSDL](#)

publishHTML: Publish HTML reports

publishHTML

HTML directory to archive

playwright-report

Index page[s]

index.html

Index page title[s] (Optional)

Report title

Playwright HTML Report

Publishing options

Generate Pipeline Script

```
publishHTML([allowMissing: false, alwaysLinkToLastBuild: false, keepAll: false, reportDir: 'playwright-report', reportFiles: 'index.html', reportName: 'Playwright HTML Report', reportTitles: '', useWrapperFileDirectly: true])
```

Global Variables

There are many features of the Pipeline that are not steps. These are often exposed via global variables, which are not supported by the snippet generator. See the [Global Variables Reference](#) for details.

- (?) Global Variables Reference
- (?) Online Documentation
- (?) Examples Reference
- (?) IntelliJ IDEA GDSDL

publishHTML: Publish HTML reports

publishHTML

HTML directory to archive ?

playwright-report

Index page[s] ?

index.html

Index page title[s] (Optional) ?

Report title ?

Playwright HTML Report

Publishing options

Generate Pipeline Script

```
publishHTML([allowMissing: false, alwaysLinkToLastBuild: false, keepAll: false, reportDir: 'playwright-report', reportFiles: 'index.html', reportName: 'Playwright HTML Report', reportTitles: '', useWrapperFileDirectly: true])
```

Global Variables

There are many features of the Pipeline that are not steps. These are often exposed via global variables, which are not supported by the snippet generator. See the [Global Variables Reference](#) for details.

Odemy

SOURCE CONTROL

Message (%Enter to commit on "main")

✓ Commit

✓ Changes

1

Jenkinsfile

M

Jenkinsfile M x

Jenkinsfile

```
40 ..... }
41 ..... }
42 .....
43 ..... stage('E2E') {
44 .....     agent {
45 .....         docker {
46 .....             image 'mcr.microsoft.com/playwright:v1.39.0-jammy'
47 .....             reuseNode true
48 .....         }
49 .....     }
50 .....
51 .....     steps {
52 .....         sh '''
53 .....             npm install serve
54 .....             node_modules/.bin/serve -s build &
55 .....             sleep 10
56 .....             npx playwright test --reporter=html
57 .....         '''
58 .....     }
59 ..... }
60 .....
61 .....
62 ..... post {
63 .....     always {
64 .....         junit 'jest-results/junit.xml'
65 .....         publishHTML([allowMissing: false, alwaysLinkToLastBuild: false, keepAll: false, reportDir: 'playwright-report
66 .....     ]
67 ..... }
68 }
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

COMMENTS

bash + ▾ □ ✕ ... ^ ×

@vdespa-jenkins → /workspaces/learn-jenkins-app (main) \$

SOURCE CONTROL

Message (%Enter to commit on "main")

✓ Commit

Changes

Jenkinsfile

M

Jenkinsfile M

Jenkinsfile

```
40 ..... }
41 ..... }
42 .....
43 ..... stage('E2E') {
44 .....     agent {
45 .....         docker {
46 .....             image 'mcr.microsoft.com/playwright:v1.39.0-jammy'
47 .....             reuseNode true
48 .....         }
49 .....     }
50 .....
51 .....     steps {
52 .....         sh '''
53 .....             npm install serve
54 .....             node_modules/.bin/serve -s build &
55 .....             sleep 10
56 .....             npx playwright test --reporter=html
57 .....         '''
58 .....     }
59 ..... }
60 .....
61 .....
62 ..... post {
63 .....     always {
64 .....         junit 'jest-results/junit.xml'
65 .....         publishHTML([allowMissing: false, alwaysLinkToLastBuild: false, keepAll: false, reportDir: 'playwright-report
66 .....     ]
67 ..... }
68 ..... }
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

COMMENTS

bash + ▾ □ ✕ ... ^ ×

@vdespa-jenkins → /workspaces/learn-jenkins-app (main) \$

SOURCE CONTROL

Message (%Enter to commit on "main")

✓ Commit

Changes

Jenkinsfile

M

Jenkinsfile M

Jenkinsfile

```
40 ..... }
41 ..... }
42 .....
43 ..... stage('E2E') {
44 .....     agent {
45 .....         docker {
46 .....             image 'mcr.microsoft.com/playwright:v1.39.0-jammy'
47 .....             reuseNode true
48 .....         }
49 .....     }
50 .....
51 .....     steps {
52 .....         sh '''
53 .....             npm install serve
54 .....             node_modules/.bin/serve -s build &
55 .....             sleep 10
56 .....             npx playwright test --reporter=html
57 .....         '''
58 .....     }
59 ..... }
60 ..... }
61 .....
62 ..... post {
63 .....     always {
64 .....         junit 'jest-results/junit.xml'
65 .....         publishHTML([allowMissing: false, alwaysLinkToLastBuild: false, keepAll: false, reportDir: 'playwright-report
66 .....     ]
67 ..... }
68 }
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

COMMENTS

bash + ▾ □ ✕ ... ^ ×

@vdespa-jenkins → /workspaces/learn-jenkins-app (main) \$



- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Rename
- Pipeline Syntax

Build History trend

Filter builds...


✓ #16	Nov 6, 2023, 8:02 PM
✓ #15	Nov 6, 2023, 7:51 PM
✓ #14	Nov 6, 2023, 3:02 PM
✗ #13	Nov 6, 2023, 2:56 PM
✗ #12	Nov 6, 2023, 2:51 PM
✗ #11	Nov 6, 2023, 2:35 PM
✗ #10	Nov 6, 2023, 2:28 PM
✗ #9	Nov 6, 2023, 2:18 PM
✓ #8	Nov 4, 2023, 3:08 PM
✓ #7	Nov 4, 2023, 2:51 PM
✓ #6	Nov 4, 2023, 2:46 PM

Pipeline learn-jenkins-app

Stage View

Average stage times:
(Average full run time: ~35s)

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
	917ms	9s	40s	89ms
#16 Nov 06 17:02 1 commit	953ms	8s	24s	112ms
#15 Nov 06 16:51 1 commit	1s	9s	23s	81ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11				

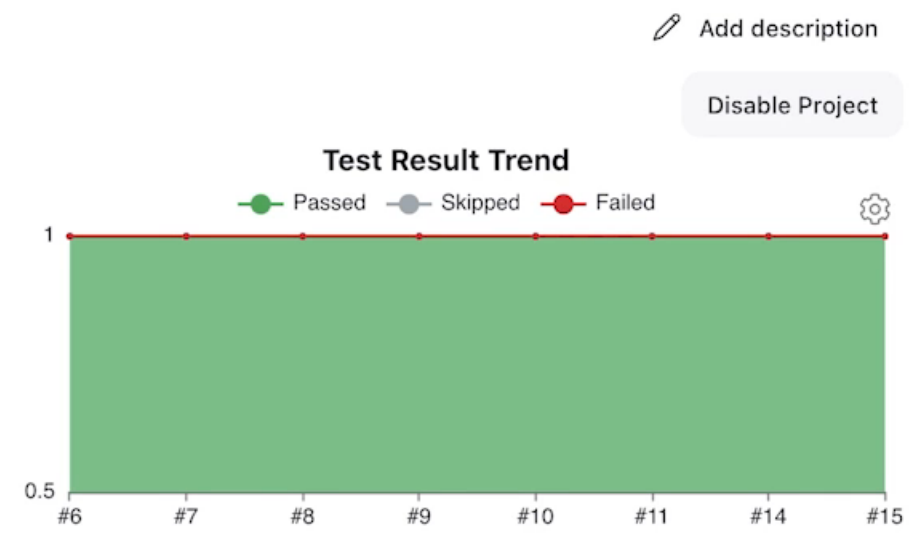



- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Playwright HTML Report
- Rename
- Pipeline Syntax

Build History trend

Filter builds...


#16	Nov 6, 2023, 8:02 PM
#15	Nov 6, 2023, 7:51 PM
#14	Nov 6, 2023, 3:02 PM
#13	Nov 6, 2023, 2:56 PM
#12	Nov 6, 2023, 2:51 PM
#11	Nov 6, 2023, 2:35 PM
#10	Nov 6, 2023, 2:28 PM
#9	Nov 6, 2023, 2:18 PM
#8	Nov 4, 2023, 3:08 PM
#7	Nov 4, 2023, 2:51 PM

Pipeline learn-jenkins-app

Stage View

Average stage times:
(Average full run time: ~35s)

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
	917ms	9s	40s	89ms
#16 Nov 06 17:02 1 commit	953ms	8s	24s	112ms
#15 Nov 06 16:51 1 commit	1s	9s	23s	81ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11				

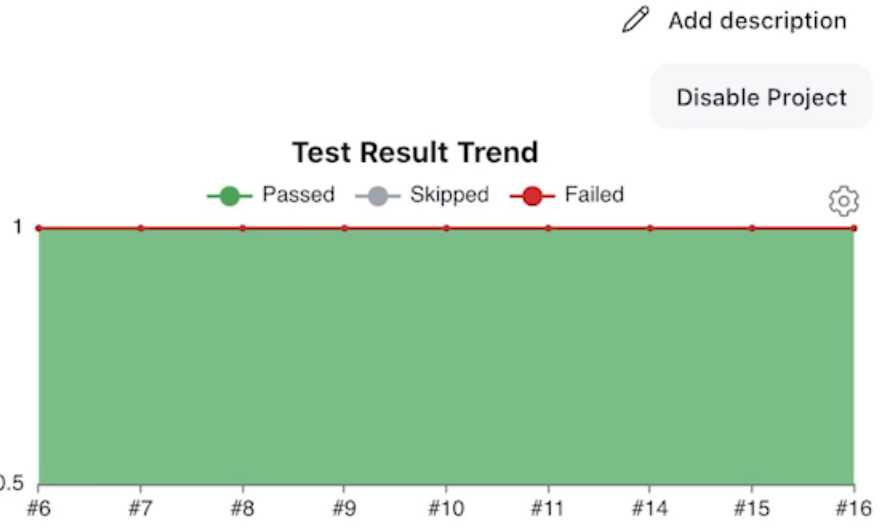



Status

</> Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Playwright HTML Report

Rename

Pipeline Syntax

Pipeline learn-jenkins-app

Add description

Disable Project

Stage View

Average stage times:
(Average full run time: ~35s)Declarative:
Checkout
SCM

Test

E2E

Declarative:
Post Actions

917ms

9s

40s

89ms

#16

Nov 06
17:021
commit

953ms

8s

24s

112ms

#15

Nov 06
16:511
commit

1s

9s

23s

81ms

#14

Nov 06
12:021
commit

1s

8s

22s

89ms

#13

Nov 06
11:44No
Changes

712ms

9s

25s

95ms

#12

Nov 06
11:402
commits

1s

10s


22s

86ms

#11

Test Result Trend

Passed Skipped Failed

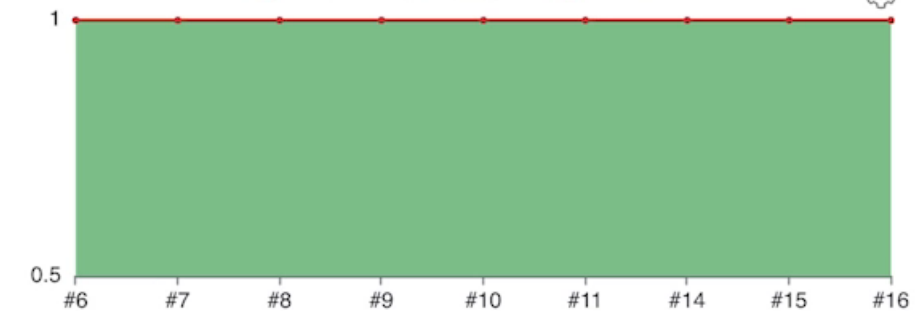

✓ #16 Nov 6, 2023, 8:02 PM

✓ #15 Nov 6, 2023, 7:51 PM

✓ #14 Nov 6, 2023, 3:02 PM

✗ #13 Nov 6, 2023, 2:56 PM

✗ #12 Nov 6, 2023, 2:51 PM

✗ #11 Nov 6, 2023, 2:35 PM

✗ #10 Nov 6, 2023, 2:28 PM

✗ #9 Nov 6, 2023, 2:18 PM

✓ #8 Nov 4, 2023, 3:08 PM

✓ #7 Nov 4, 2023, 2:51 PM

All 3

Passed 3

Failed 0

Flaky 0

Skipped 0

Project: chromium06/11/2023, 17:03:19 Total time: 662ms

▼ app.spec.js	
✓ has title app.spec.js:4	287ms
✓ has Jenkins in the body app.spec.js:11	185ms
✓ has expected app version app.spec.js:18	190ms





Q

All3

Passed3

Failed0

Flaky0

Skipped0

Project: chromium

06/11/2023, 17:03:19 Total time: 662ms

▼ app.spec.js		
✓	has title	287ms
	app.spec.js:4	
✓	has Jenkins in the body	185ms
	app.spec.js:11	
✓	has expected app version	190ms
	app.spec.js:18	



Status

</> Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Playwright HTML Report

Rename

Pipeline Syntax

Pipeline learn-jenkins-app

Add description

Disable Project

Stage View

Average stage times:
(Average full run time: ~35s)Declarative:
Checkout
SCM

Test

E2E

Declarative:
Post Actions

917ms

9s

40s

89ms

#16

Nov 06
17:021
commit

953ms

8s

24s

112ms

#15

Nov 06
16:511
commit

1s

9s

23s

81ms

#14

Nov 06
12:021
commit

1s

8s

22s

89ms

#13

Nov 06
11:44No
Changes

712ms

9s

25s

95ms

#12

Nov 06
11:402
commits


1s

10s

22s

86ms

#11

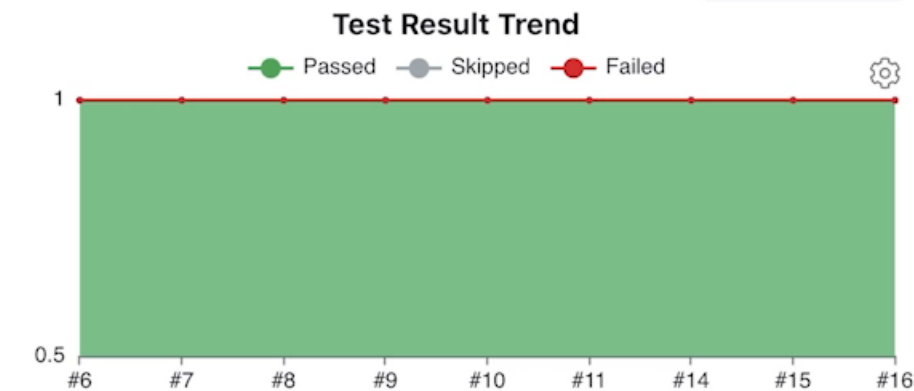



- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Playwright HTML Report
- Rename
- Pipeline Syntax

Build History trend

Filter builds...

- #16 Nov 6, 2023, 8:02 PM
- #15 Nov 6, 2023, 7:51 PM
- #14 Nov 6, 2023, 3:02 PM
- #13 Nov 6, 2023, 2:56 PM
- #12 Nov 6, 2023, 2:51 PM
- #11 Nov 6, 2023, 2:35 PM
- #10 Nov 6, 2023, 2:28 PM
- #9 Nov 6, 2023, 2:18 PM
- #8 Nov 4, 2023, 3:08 PM
- #7 Nov 4, 2023, 2:51 PM

Pipeline learn-jenkins-app

Stage View

	Declarative: Checkout SCM	Test	E2E	Declarative: Post Actions
Average stage times: (Average full run time: ~35s)	917ms	9s	40s	89ms
#16 Nov 06 17:02 1 commit	953ms	8s	24s	112ms
#15 Nov 06 16:51 1 commit	1s	9s	23s	81ms
#14 Nov 06 12:02 1 commit	1s	8s	22s	89ms
#13 Nov 06 11:44 No Changes	712ms	9s	25s	95ms
#12 Nov 06 11:40 2 commits	1s	10s	22s	86ms
#11				

Add description

Disable Project

