

DevOpsovich

None

None

None

Table of contents

1. 01 Linux	3
1.1 Welcome to MkDocs	3
1.2 Welcome123 to MkDocs	4
2. 02 DevOps	5
2.1 Welcome123 to MkDocs	5
3. 03 IaC	6
3.1 Welcome123 to MkDocs	6

1. 01 Linux

1.1 Welcome to MkDocs

English docs mkdocs.org.

1.1.1 Commands


- `mkdocs new [dir-name]` - Create a new project.
- `mkdocs serve` - Start the live-reloading docs server.
- `mkdocs build` - Build the documentation site.
- `mkdocs -h` - Print help message and exit.

1.1.2 Project layout

```
1 mkdocs12345.yml # The configuration file.
2 docs/
3   index.md # The documentation homepage.
4   ...      # Other markdown pages, images and other files.
```

1.1.3 New ansible script

```
1 mkdocs12345.yml # The configuration file.
2 docs/
3   index.md # The documentation homepage.
4   ...      # Other markdown pages, images and other files.
```

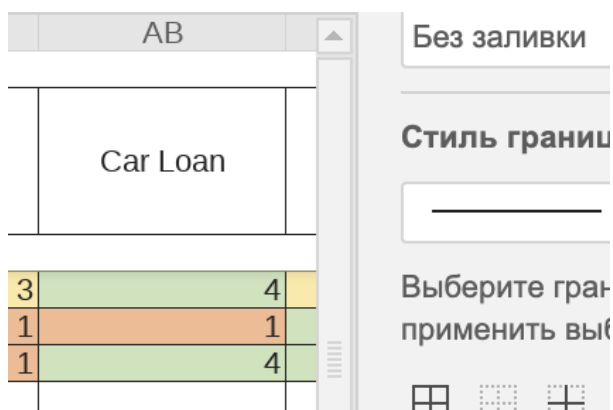

Пример

1.2 Welcome123 to MkDocs

For full documentation visit mkdocs.org.

2. 02 DevOps

2.1 Welcome123 to MkDocs

For full documentation visit [mkdocs.org](https://www.mkdocs.org).

```
1 def bubble_sort(items):
2     for i in range(len(items)):
3         for j in range(len(items) - 1 - i):
4             if items[j] > items[j + 1]:
5                 items[j], items[j + 1] = items[j + 1], items[j]
```

```
1 # Code block content
2 # Welcome123 to MkDocs
3
4 For full documentation visit [mkdocs.org](https://www.mkdocs.org).
```

3. 03 IaC

3.1 Welcome123 to MkDocs

For full documentation visit [mkdocs.org](https://www.mkdocs.org).

```
1 def bubble_sort(items):
2     for i in range(len(items)):
3         for j in range(len(items) - 1 - i):
4             if items[j] > items[j + 1]:
5                 items[j], items[j + 1] = items[j + 1], items[j]
```

```
1 # Code block content
2 # Welcome123 to MkDocs
3
4 For full documentation visit [mkdocs.org](https://www.mkdocs.org).
```