



Empirical Study


We precompute instruction pairs for the task type.

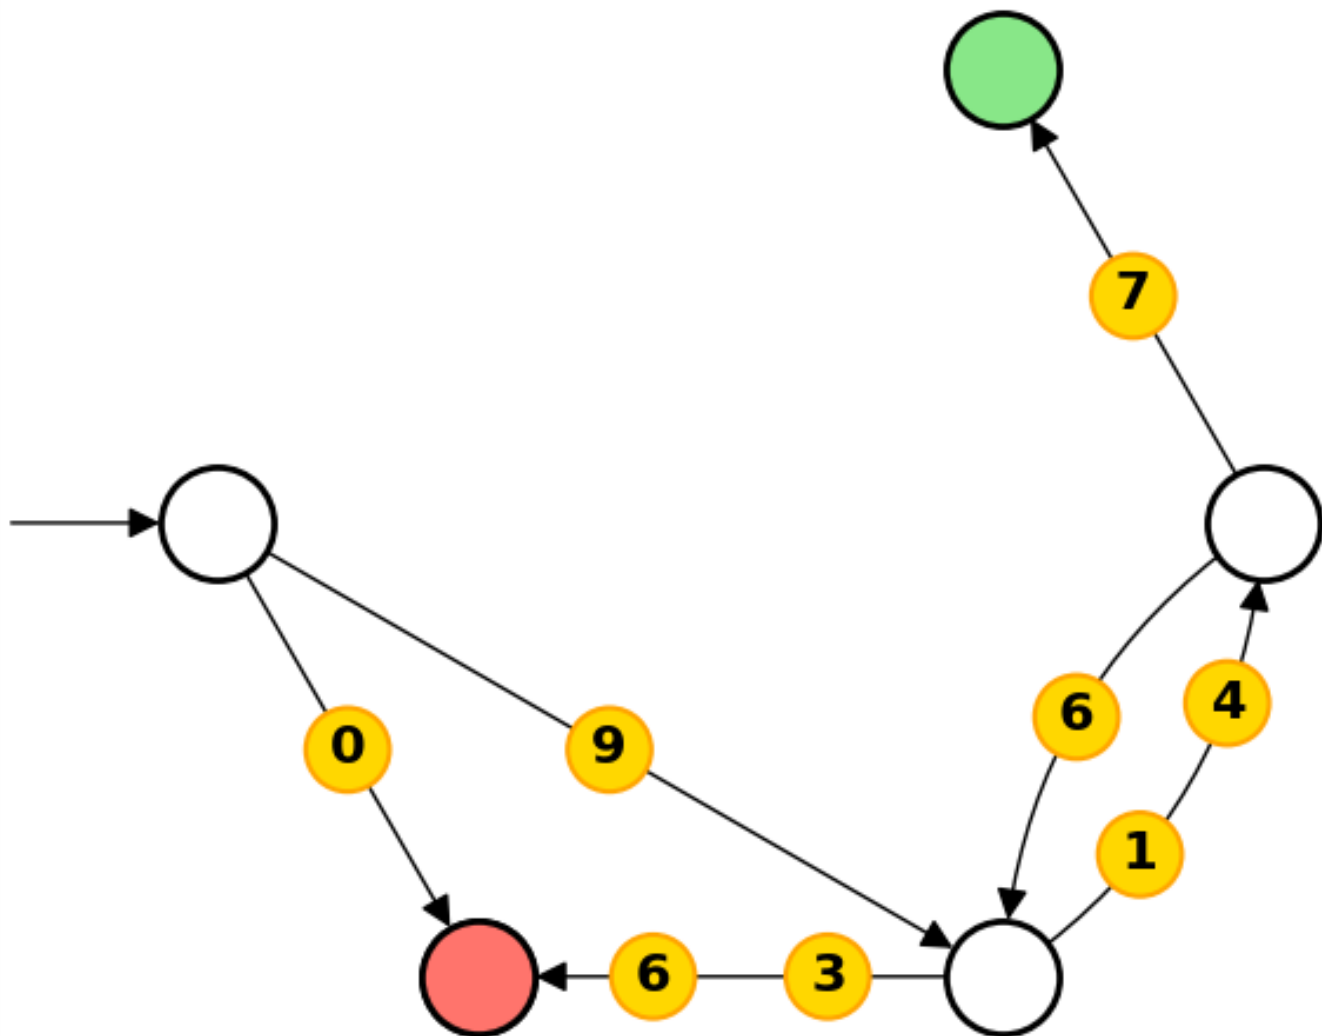

ReachAvoidDerived (RAD)
tasks are randomly mutated
Reach and ReachAvoid tasks.

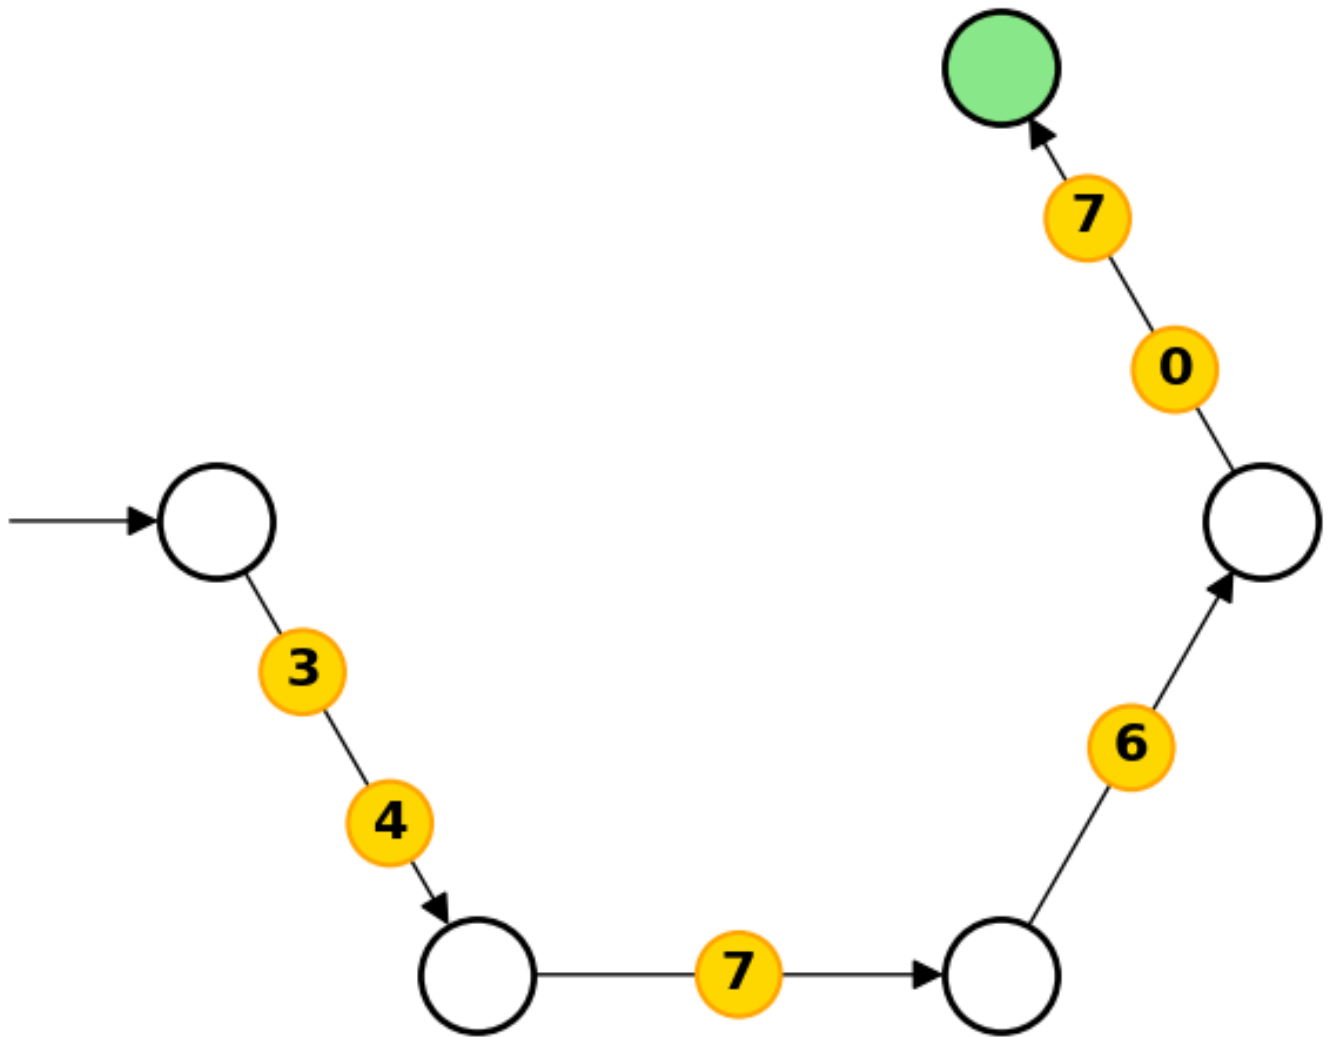

Reach (R) tasks define partial and/or total orders over tokens.

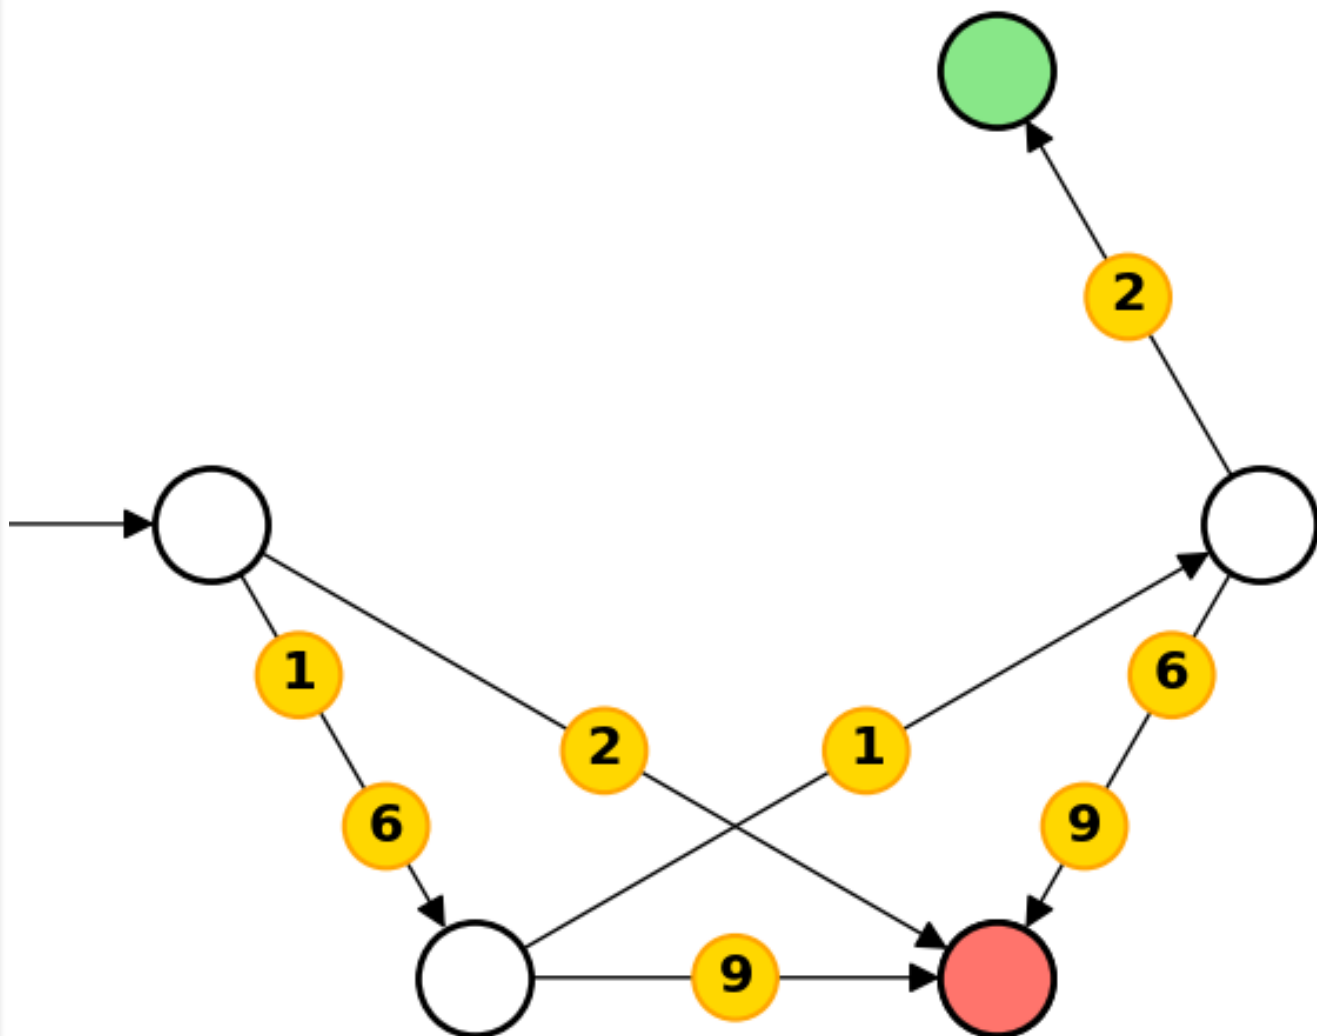

ReachAvoid (RA) tasks order tokens with unrecoverable constraints.

139 pairs generated.


479 pairs generated.

102 pairs generated.




Empirical Study


- We precompute automaton-instruction pair datasets for three task types.

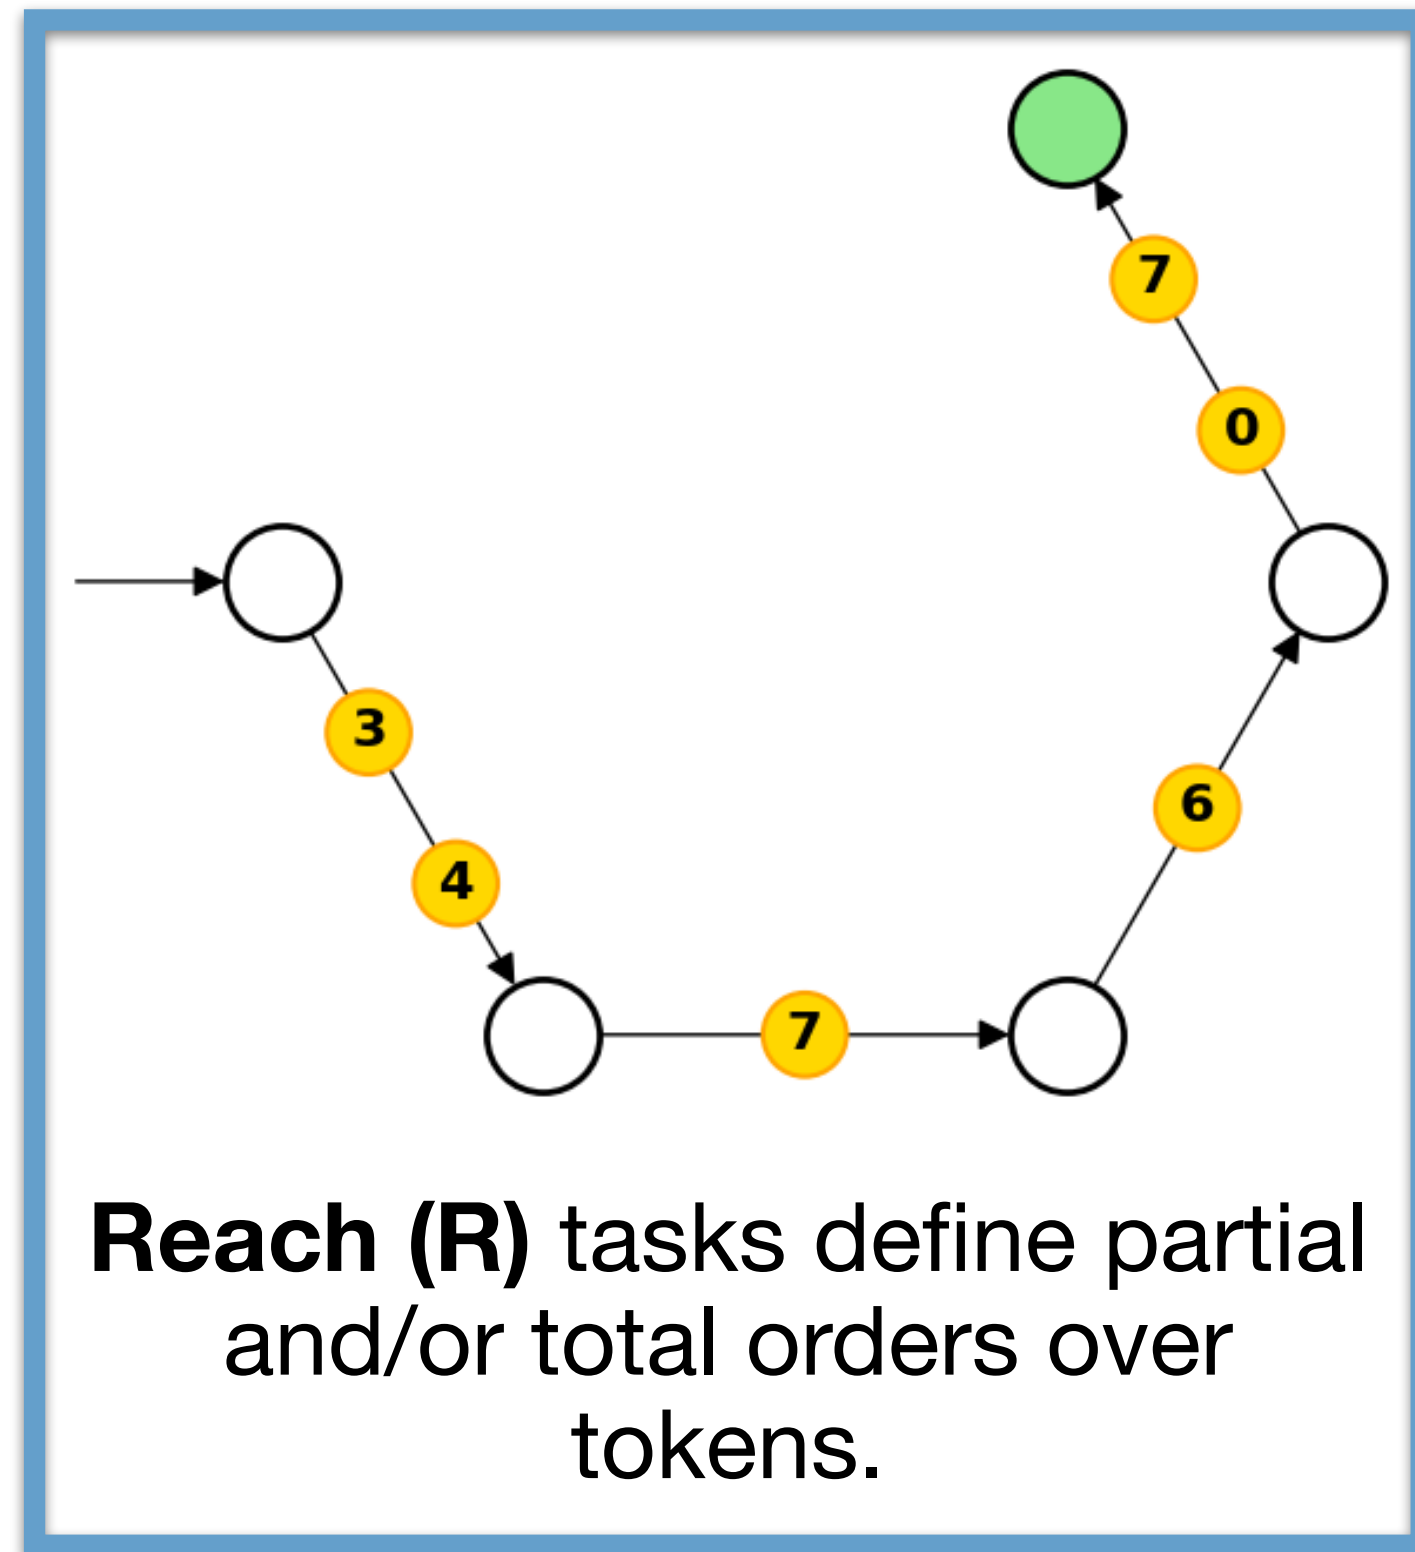

139 pairs generated.

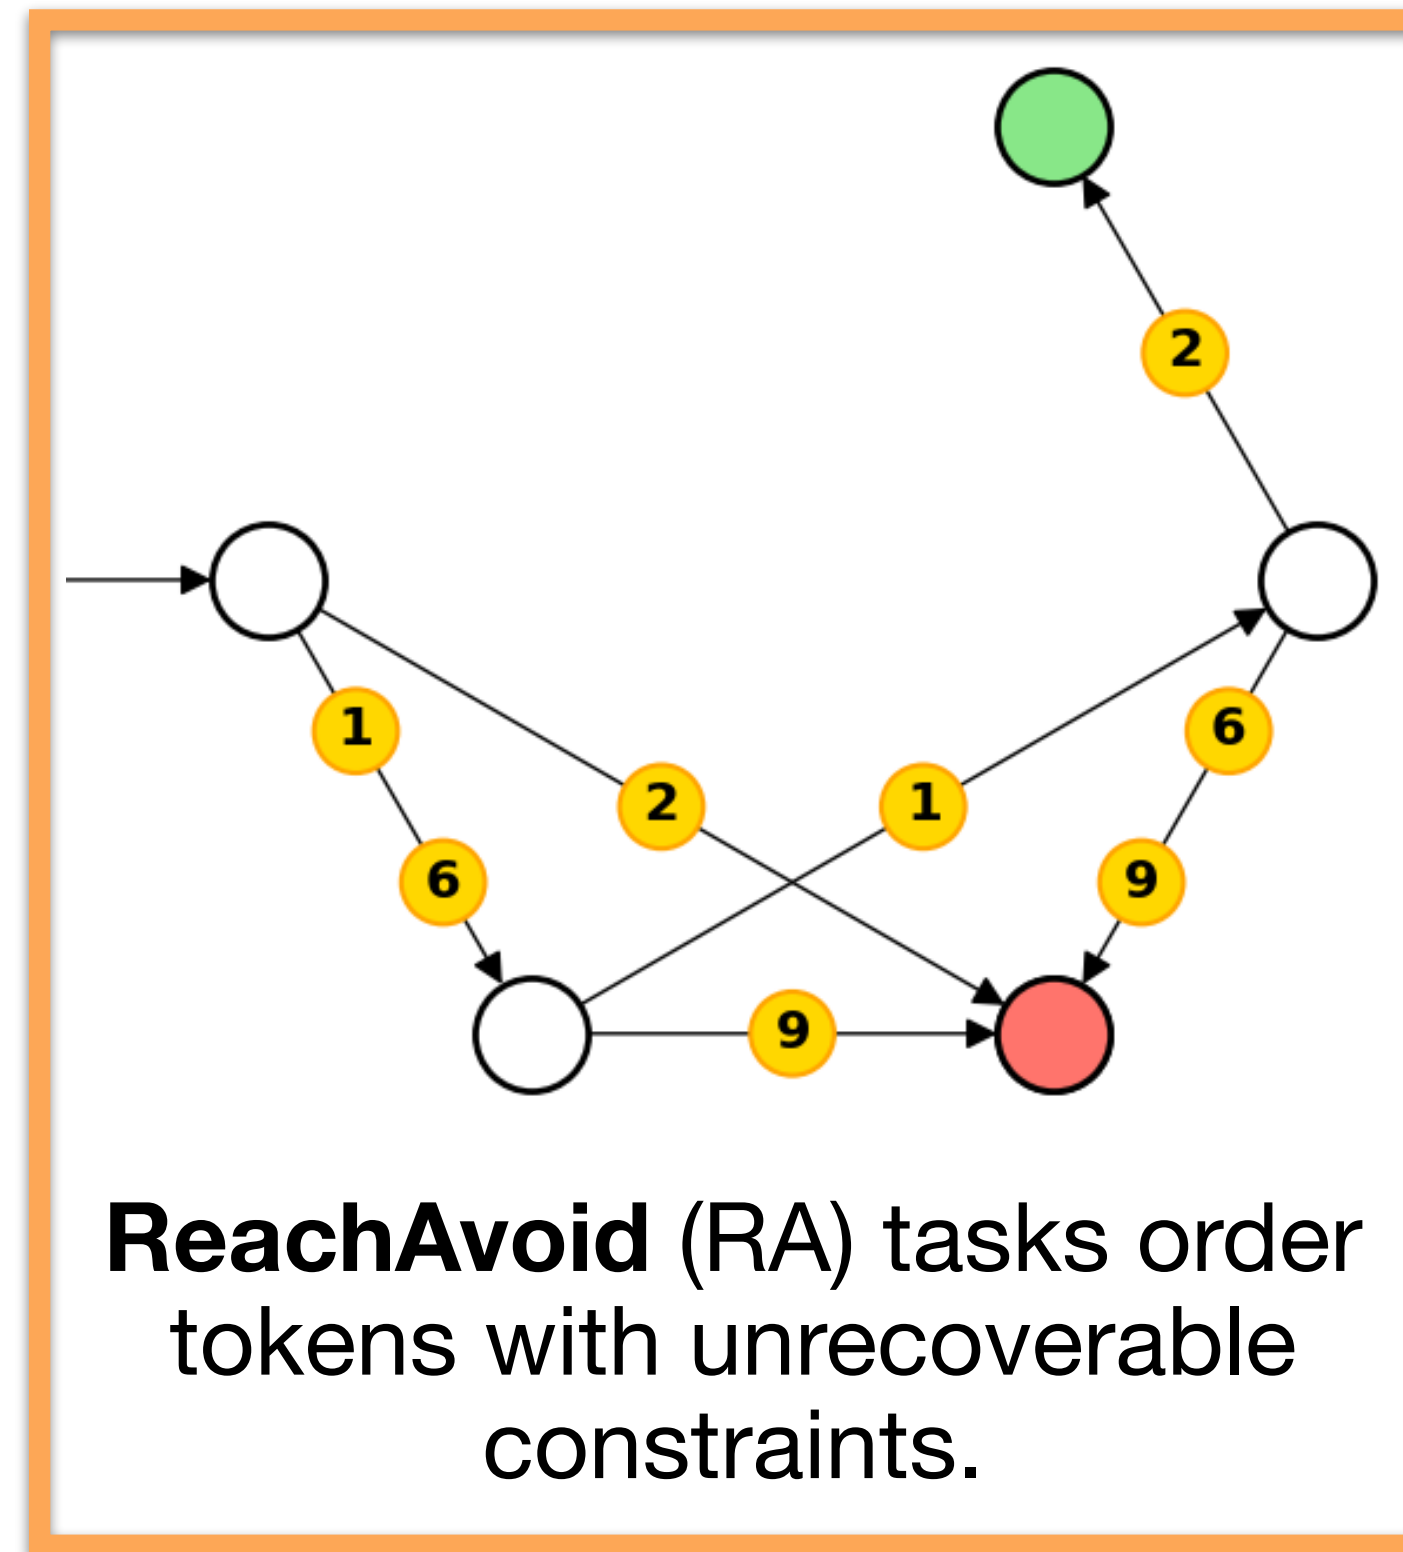

479 pairs generated.

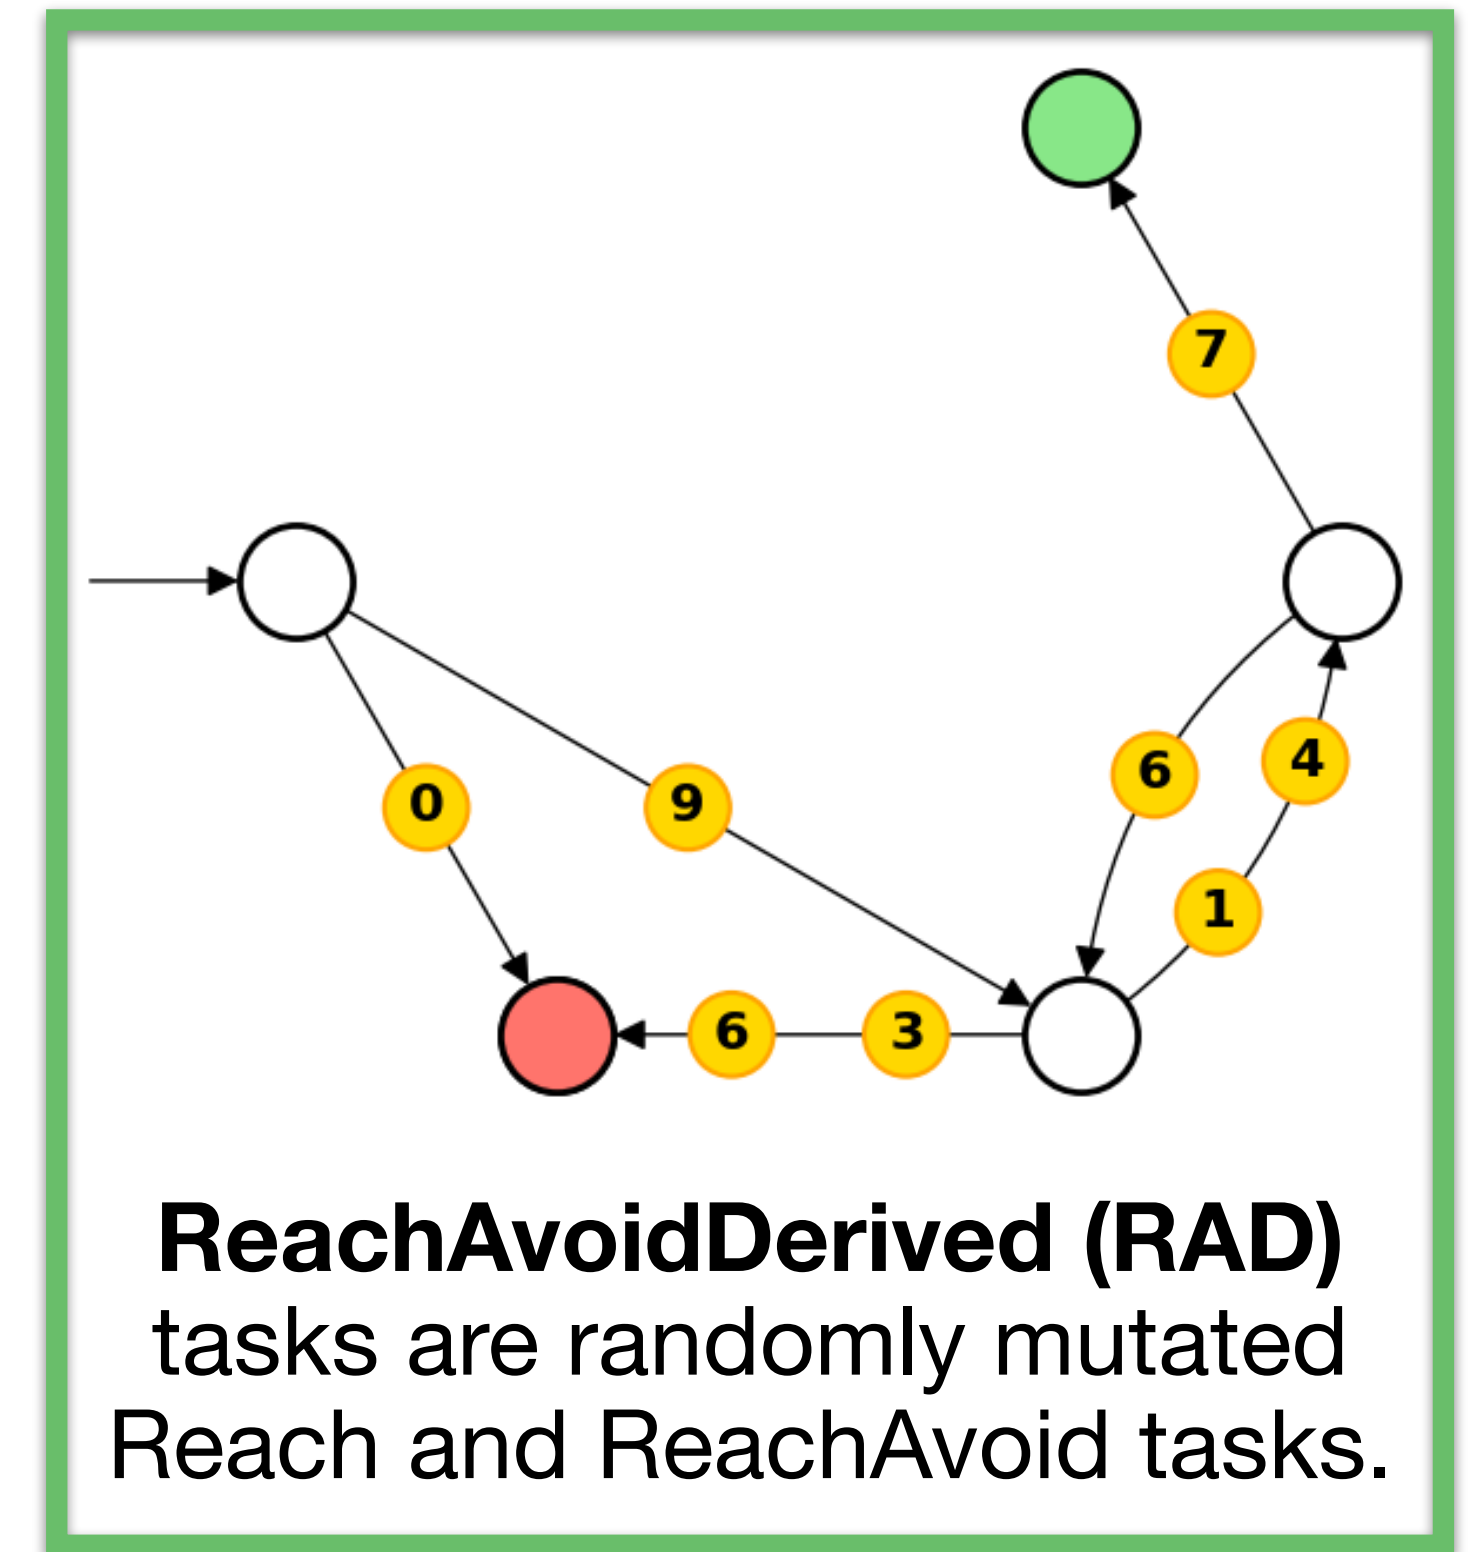

102 pairs generated.

Empirical Study