Tutorial III.V - Plotting in Julia

Applied Optimization with Julia



Introduction

Welcome to this tutorial on plotting in Julia! We'll be using the powerful Plots.jl package to create beautiful and informative visualizations. Don't worry if you're new to plotting. We'll start with the basics and gradually build up to more advanced techniques.

In this tutorial, you'll learn how to:

1. Create simple plots like line graphs and scatter plots
2. Customize your plots with colors, labels, and styles
3. Add multiple data series to a single plot
4. Save your plots as image files for use in reports or presentations
5. Give your plots a clear look that puts the data first

Follow the instructions, write your code in the designated code blocks, and validate your results with `@assert` statements.

We need the Plots and StatsPlots packages (StatsPlots adds statistical plot recipes like `boxplot`, which we will use at the end of this tutorial). Both ship with the course environment, so you can use them right away. In your own projects, you add them first:

```
import Pkg
Pkg.add(["Plots","StatsPlots"])
```

Now, let's load these packages:

```
using Plots, StatsPlots
```

Section 1 - Creating Basic Plots


The Plots.jl package simplifies the process of creating a wide array of plots, from simple line plots to complex 3D visualizations. Let's start with the simplest type of plot: a line plot. We'll create some example data and then plot it.

```
# Create some example data
x = 1:10      # This creates a range of numbers from 1 to 10
y = rand(10)  # This creates 10 random numbers between 0 and 1

# Create a basic line plot
line_plot = plot(
    x, y,
    title="My First Line Plot",
```

```
    xlabel="X-axis Label",
    ylabel="Y-axis Label",
    legend=false
)

# Display the plot
display(line_plot)
```

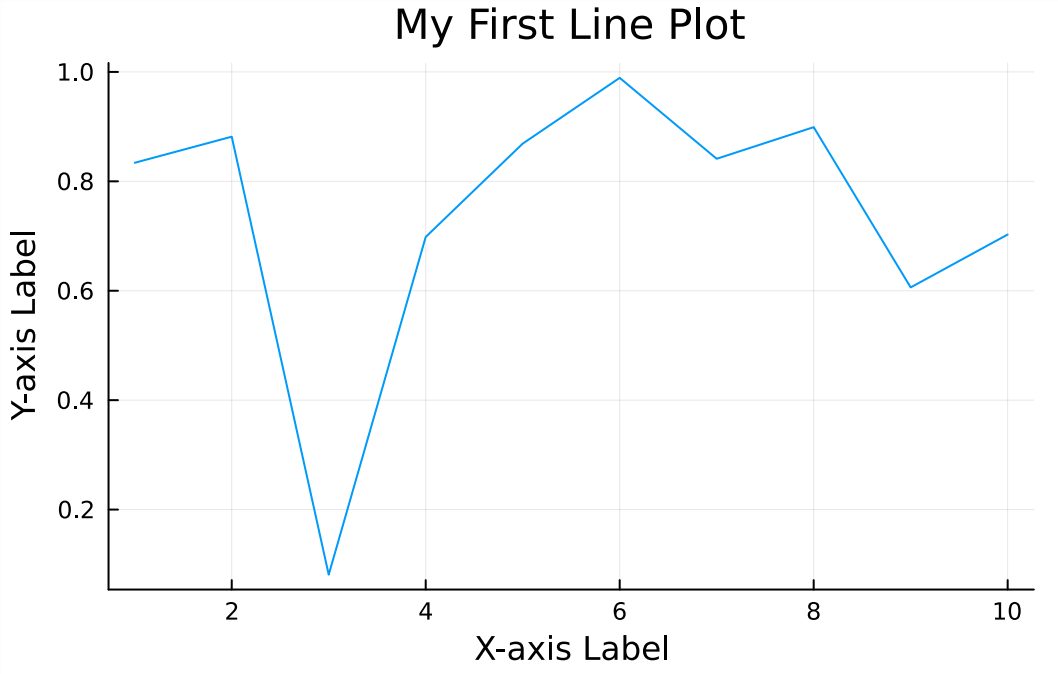

Let's break down what each part of this code does:

- `plot(x, y, ...)` creates the plot using our x and y data
- `title=...` sets the title of the plot
- `xlabel=...` and `ylabel=...` label the x and y axes
- `legend=false` turns off the legend (we'll use this later)
- `display(line_plot)` shows the plot. When you run a cell, its last expression is displayed automatically, so this line is optional here - but you will need `display` when you create plots inside loops or functions later in the course.

> **Note**
> We use random numbers in this tutorial, so your plots will look different from the ones shown here. That is expected and not a mistake!

Exercise 1.1 - Create a Scatter Plot

Now it's your turn! Create a scatter plot using the `scatter()` function instead of `plot()`. Use a range from 1 to 20 for x, and generate 20 random numbers for y. Save the plot in the variable `scatter_plot`.

```
# YOUR CODE BELOW
# Hint: Use x = 1:20 and y = rand(20)


# Test your answer
@assert @isdefined scatter_plot
@assert scatter_plot isa Plots.Plot "scatter_plot should be a plot object"
println("Great job! You've created your first scatter plot.")
```


Section 2 - Customizing Plots

One of the best things about Plots.jl is how easy it is to customize your plots. Let's explore some options:

```
x = 1:10
y = rand(10)

custom_plot = plot(
    x, y,
    title="Customized Line Plot",
    xlabel="X-axis",
    ylabel="Y-axis",
    line=(:dash, 2),  # Dashed line with width 2
    color=:red,       # Red color
    marker=(:circle, 8)  # Circle markers of size 8
)

display(custom_plot)
```

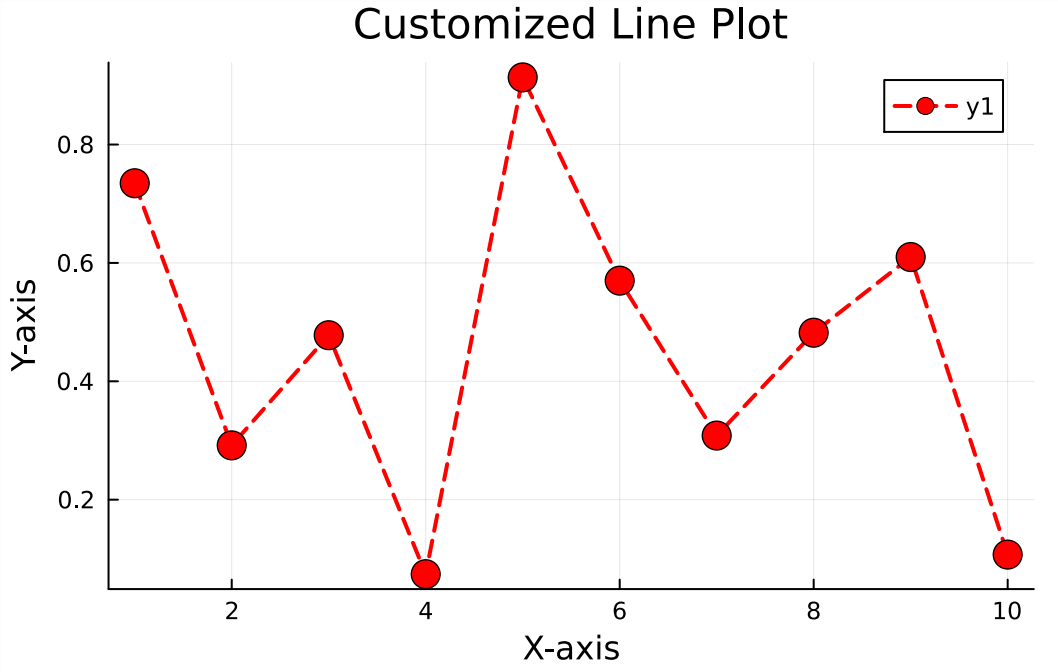

Exercise 2.1 - Customize a Line Plot

Now it's your turn to get creative! Customize a line plot with your choice of colors, line styles, and markers. Save your masterpiece in the variable `custom_line_plot`.

```
# YOUR CODE BELOW
# Hint: Try different line styles (:dash, :dot), colors (:blue, :green), and
markers (:star, :diamond)


# Test your answer
@assert @isdefined custom_line_plot
@assert custom_line_plot isa Plots.Plot "custom_line_plot should be a plot
object"
println("Excellent! You've created a custom line plot.")
```

> **Note**
> Feel free to experiment with different options. There's no "right" answer here: it's all about what looks good to you!

Section 3 - Adding Multiple Series to a Plot


Now, let's learn how to add multiple data series to a single plot:

```
x = 1:20
a = rand(20)
```

```
b = rand(20)

multi_plot = plot(
    x, a,
    title="Plot with Two Series",
    xlabel="X-axis",
    ylabel="Y-axis",
    label="Series A"
)
plot!(multi_plot,
    x, b,
    label="Series B"
)

display(multi_plot)
```

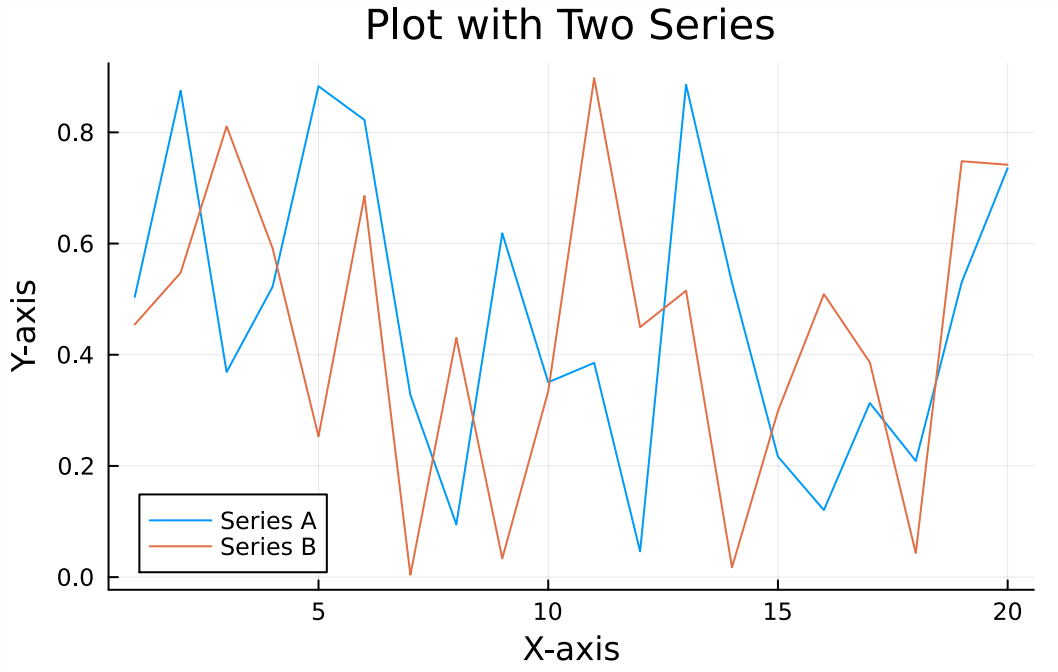

> **Note**
> The `plot!()` function (with an exclamation mark) adds to an existing plot instead of creating a new one. In addition, we used the label here to add a legend to the plot. Remember how we switched the legend off with `legend=false` in Section 1? With multiple series, labels and the legend are exactly how the reader tells the series apart.

Exercise 3.1 - Create a Multiple Series Plot

Your turn! Create a plot called `multi_series_plot` with three data series `y1`, `y2`, and `y3`. Give each series a label. You don't have to pick colors yourself - Plots.jl automatically cycles through different colors for each series - but feel free to set your own with `color=`.

```
# YOUR CODE BELOW
# Hint: Use plot() for the first series, then plot!() for the second and third


# Test your answer
@assert @isdefined y1
@assert @isdefined y2
@assert @isdefined y3
@assert @isdefined multi_series_plot
@assert multi_series_plot isa Plots.Plot "multi_series_plot should be a plot
object"
println("Fantastic! You've created a plot with multiple series.")
```

Section 4 - Saving Plots to Files

Plots.jl supports saving your plots to various file formats including PNG, SVG, and PDF, enabling you to use your plots outside of Julia. The function to save plots is `savefig()`: the first argument is the plot itself and the second argument is the file path as a string. The file extension (`.png`, `.pdf`, `.svg`, ...) determines the format. For example:

```
savefig(plot_name, "path/filename.png")
```

This saves the plot as a PNG file.

Exercise 4.1 - Save a Plot to a File

Save your `multi_series_plot` as a PNG file named "saved_plot.png" in the "ExampleData" folder. The first line in the code block below creates the folder in case it does not exist yet - do you remember `mkpath` from the previous tutorial?

```
# This creates the ExampleData folder if it does not exist yet
mkpath("$(@__DIR__)/ExampleData")
# YOUR CODE BELOW
# Don't forget to use the @__DIR__ macro to get the correct file path!



# Test your answer
@assert isfile("$(@__DIR__)/ExampleData/saved_plot.png") "File does not exist
yet."
println("Well done! You've saved your plot as an image file.")
```

Section 5 - Advanced Plotting Techniques

Let's explore some other common plot types. While you don't have to solve any task here, the code might come in handy later on during the course as recipes you can copy.


Bar Plot

```
# Bar plot
x_categories = ["A", "B", "C", "D"]
y_values = [15, 23, 18, 30]
bar_plot = bar(
    x_categories,
    y_values,
    title="Bar Plot Example"
)
display(bar_plot)
```

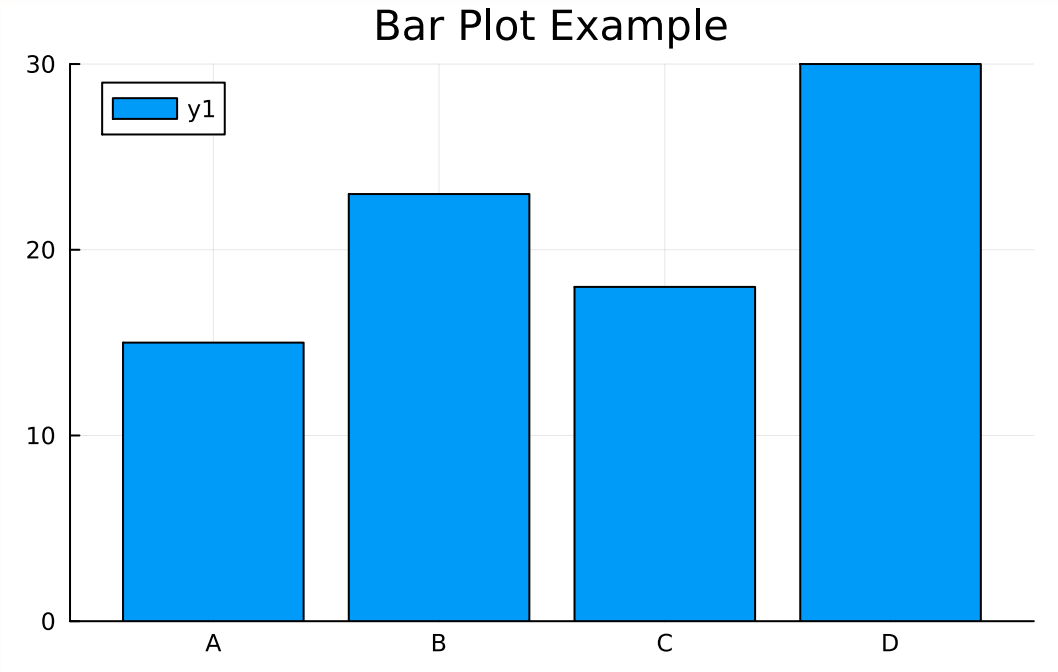


Histogram

```
data = randn(1000)
hist_plot = histogram(
    data,
    bins=30,
    title="Histogram Example"
)
display(hist_plot)
```

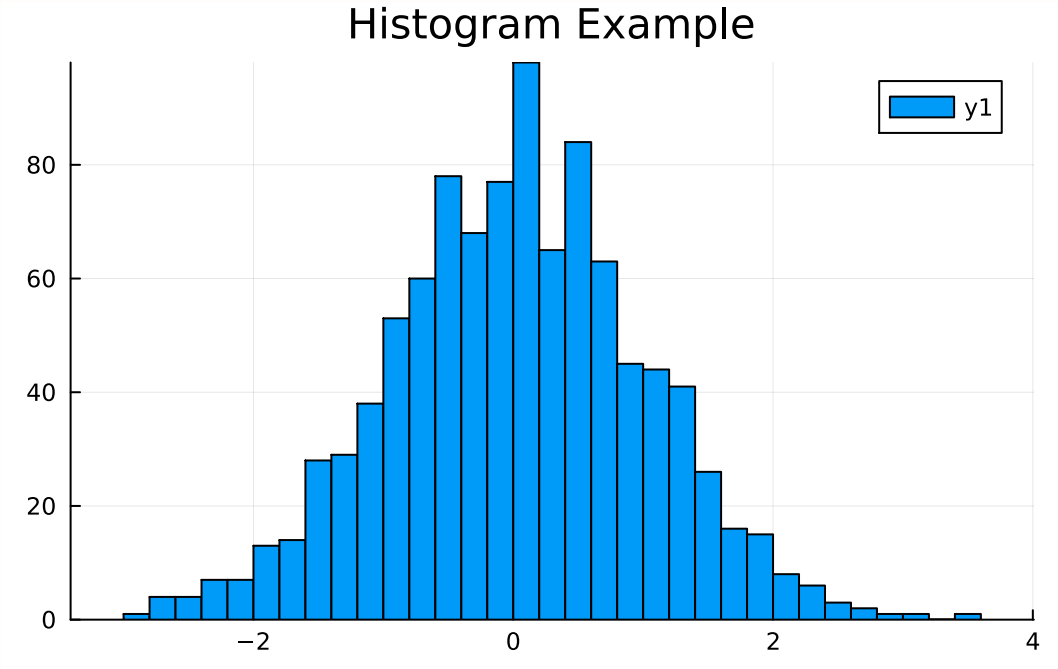

Box Plot

```
# Box plot
group = repeat(1:4, inner=50)
y = randn(200) .+ group
box_plot = boxplot(
    group,
    y,
    title="Box Plot Example"
)
display(box_plot)
```

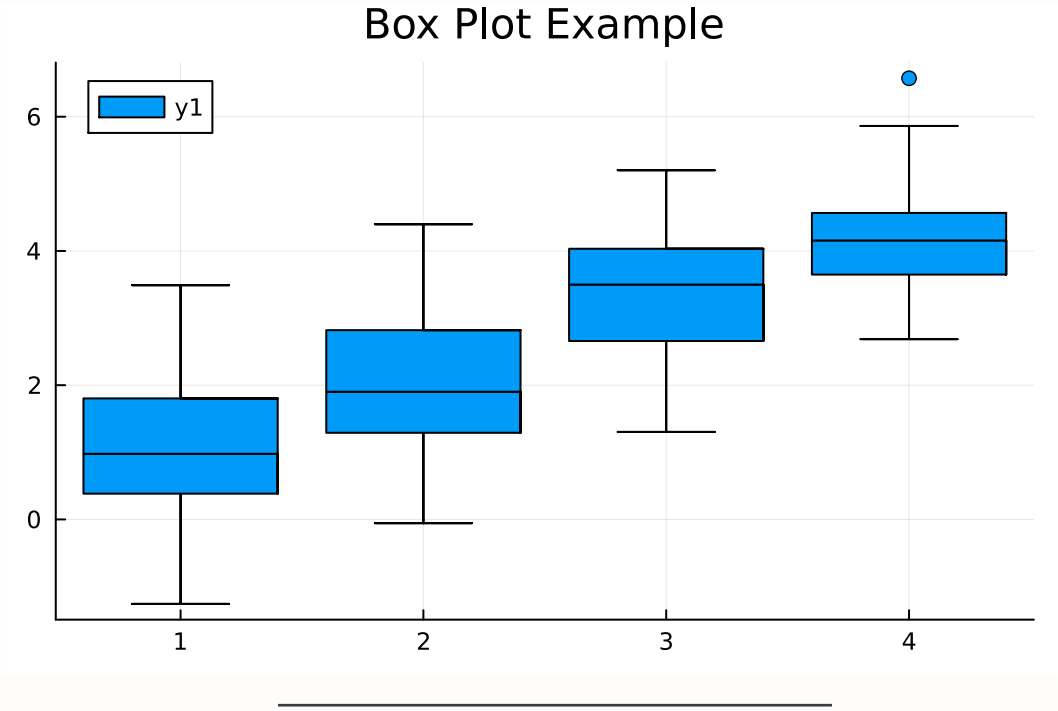

Section 6 - The Course Look

The plots above use the defaults of Plots.jl. They are correct, but a reader should get their point at a glance. Four rules from the plotting lecture of our Python course get you most of the way:

- **The title states the point**: "Category D sells most" says more than "Bar Plot Example".
- **Every number axis has a label with its unit**, for example *Sales (units)*.
- **Bars start at 0**: a bar shows its number by its length, so a cut axis distorts the comparison.
- **Quiet everything that is not data**: no frame, light grid lines, grey labels, calm colors.

The later tutorials share one style for this, called `course_style`.


The next cell sets the look of the plots below: the course colors, quiet grey labels and no frame. Run it once. A plot picks it up when you add `course_style...` to its keywords, after a semicolon.

```
using Plots
# The course look for plots, used like this: bar(x, y; course_style...)
course_style = (
    palette=["#537E8F", "#F6B265", "#3D5369", "#A7C7C6", "#DB6B6B", "#FCCF9C"],
    background_color="#FFFDFC",
    fontfamily="Helvetica",
    titlefontfamily="Helvetica Bold",
    titlefontsize=18,
    titlefontcolor="#363D45",
```

```
    titlelocation=:left,
    foreground_color_text="#6B7480",
    foreground_color_guide="#6B7480",
    foreground_color_axis="#9AA1A8",
    foreground_color_border="#9AA1A8",
    yforeground_color_border="#FFFDFC", # no line on the left, the grid is
enough
    guidefontsize=12,
    tickfontsize=11,
    legendfontsize=11,
    foreground_color_legend=nothing,
    background_color_legend=nothing,
    grid=:y,
    gridcolor="#E8E4E0",
    gridalpha=1,
    framestyle=:axes,
    tick_direction=:none,
    yformatter=:plain,
    dpi=300,
    top_margin=4Plots.mm,
    left_margin=8Plots.mm,
    bottom_margin=6Plots.mm
)
```

Here is the bar plot from above in the course look:

```
course_bar_plot = bar(
    x_categories,
    y_values;
    title="Category D sells most: 30 units",
    xlabel="Category",
    ylabel="Sales (units)",
    legend=false,
    course_style...,
    linecolor=course_style.background_color,
    size=(800, 400)
)
display(course_bar_plot)
```

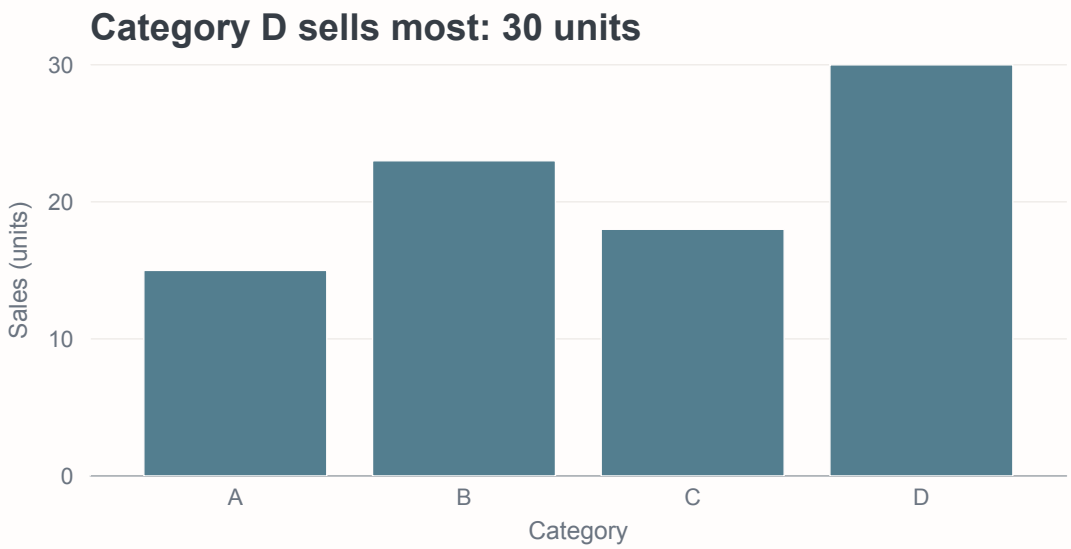

The three dots after `course_style` unpack all of its settings into the call, as if you had typed each of them. You can add more settings after it, like `size=(800, 400)` here, and if one of them is already in `course_style`, the one after it wins.
`course_style.background_color` reads a single setting back, so the gaps between the bars match the background.

Conclusion

Fantastic! You've completed the tutorial on basic plotting in Julia. You've learned how to create basic plots and customize and save them. Continue to the next file to learn more.

Solutions

You will likely find solutions to most exercises online. However, I strongly encourage you to work on these exercises independently without searching explicitly for the exact answers to the exercises. Understanding someone else's solution is very different from developing your own. Use the lecture notes and try to solve the exercises on your own. This approach will significantly enhance your learning and problem-solving skills.

Remember, the goal is not just to complete the exercises, but to understand the concepts and improve your programming abilities. If you encounter difficulties, review the lecture materials, experiment with different approaches, and don't hesitate to ask for clarification during class discussions.

Bibliography