IN1140: Introduksjon til språkteknologi

Forelesning #11

Samia Touileb

Universitetet i Oslo

26. oktober 2020



Tema for i dag



- ► Språkteknologiske applikasjoner
- ► Se på noen eksempler
 - ► Teknikker i informasjonsekstraksjon
 - Leksikon for sentimentanalyse
 - Question Answering
 - ► Dialogsystemer og chatbots

Språkteknologiske applikasjoner



- ► Mange språkteknologiske applikasjoner kombinerer teknikker vi har sett på tidligere i kurset.
- ► Motiverer de teknikkene vi har lært.
- ► Introdusere nye metoder.





- ► Samlebegrep for teknikker som henter ut (ekstraherer) forskjellige typer semantisk informasjon fra tekst.
- ► Ustruktert informasjon ⇒ strukturerte data (relasjonsdatabase)
 - ► F.eks. relasjoner mellom organisasjoner og steder

Organisasjon	Steder
Omnicom	New York
DDB Needham	New York
Kaplan Thaler Group	New York
BBDO South	Atlanta
Georgia Pacific	Atlanta





Fed Chairman
Ben Bernanke
said the U.S.
economy...
The euro rose to
\$1.2008,
compared to
\$1.1942
on Tuesday.

Facts.

Ben Bernanke is a Person.

Fed is an Organization.

The US is a Country.


Fed is located in the US.

Ben Bernanke is the

US Fed Chairman.

\$1.2008 is an amount of money.



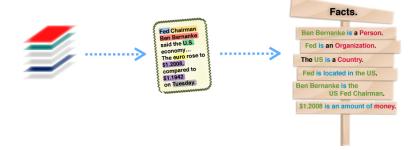

- ► Named entity recognition
- ► Relation extraction
- ► Coreference resolution
- Event extraction

Named Entity Recognition (NER)



Citing high fuel prices, United Airlines said Friday it has increased fares by \$6 per round trip on flights to some cities also served by lower-cost carriers. American Airlines, a unit of AMR Corp., immediately matched the move, spokesman Tim Wagner said. United, a unit of UAL Corp. said the increase took effect Thursday and applies to most routes where it competes against discount carriers, such as Chicago to Dallas and Denver to San Francisco.

7

Named Entity Recognition (NER)



Citing high fuel prices, [ORG] United Airlines] said [TIME] Friday] it has increased fares by [MONEY] \$6] per round trip on flights to some cities also served by lower-cost carriers. [ORG] American Airlines], a unit of [ORG] AMR Corp.], immediately matched the move, spokesman [PER] Tim Wagner] said. [ORG] United], a unit of [ORG] UAL Corp]. said the increase took effect [TIME] Thursday] and applies to most routes where it competes against discount carriers, such as [LOC] Chicago] to [LOC] Dallas] and [LOC] Denver] to [LOC] San Francisco].

Relasjonsekstraksjon



Finne fram til **relasjoner** mellom entitetene i en tekst

Input

Citing high fuel prices, [ORG] United Airlines and [TIME] Friday it has increased fares by [MONEY] per round trip on flights to some cities also served by lower-cost carriers. [ORG] American Airlines, a unit of [ORG] AMR Corp., immediately matched the move, spokesman [PER] Tim Wagner said.

- ightharpoonup PER ightharpoonup ORG: spokesman_of(Tim Wagner, American Airlines)
- $ightharpoonup ORG: unit_of(American Airlines, AMR Corp)$



Regulære uttrykk over NE-tagget tekst

- (X, α, Y) , der X, Y er egennavn og α er ordstrengen som forekommer mellom dem
- Søke etter spesifikke ord/fraser i α , feks *in*
 - [ORG WHYY] 'in' [LOC Philadephia]
 - ullet [$_{ORG}$ Brookings Institution] 'the research group in' [$_{LOC}$ Washington]
 - ► [ORG] OpenText] 'based in' [LOC] Waterloo]
 - $~~ \boldsymbol{\vdash}~ [_{ORG} ~\mathsf{Omnicom}] ~\mathsf{'in'}~ [_{LOC} \mathsf{New} ~\mathsf{York}]$



Klassifisering (supervised learning), to oppgaver:

- 1. Hvorvidt to entiteter står i en relasjon (binær klassifiserer).
- 2. Tildele kategori til relasjonene.

```
function FindRelations(words) returns relations relations \leftarrow nil entities \leftarrow FindEntities(words) forall entity pairs < e1, e2> in entities do if Related?(e1, e2) relations \leftarrow relations+ClassifyRelation(<math>e1, e2)
```



- Viktig del er å finne fram til gode trekk
 - ► NE-kategoriene (PER, ORG, LOC etc.)
 - Ord hentet fra konteksten (teksten): bag-of-words, lemmaer, distanse, antall entiteter mellom, etc.
 - ► Syntaktisk struktur fra konteksten: chunk-kategorier, funksjoner, frasestrukturkategorier (NP, VP, ...), etc.



Kan også bruke:

- ► Semisupervised learning via Bootstrapping: bruke lite treningsdata, liten håndfull regulære uttrykk (RE mønstre), bootsrap en klassifiserer.
- ► **Distant supervision**: bruke en stor database for å hente ut stor andel eksempler av relasjoner og lage flere mønstre (med mye støy) og kombinære dem i en supervised klassifiserer.
- ► Unsupervised: også kjent som open information extraction. Bruker ikke annotert treningsdata, men bruker masse data fra f.eks. internet. Relasjonene her anses som strenger av ord som vanligvis begynner med et verb.

Temporal Expression Extraction



Absolute	Relative	Durations
April 24, 1916	yesterday	four hours
The summer of '77	next semester	three weeks
10:15 AM	two weeks from yesterday	six days
The 3rd quarter of	last quarter	the last three quarters
2016		

Coreference Resolution





But the little prince could not restrain admiration: "Oh! How beautiful you are!"

"Am I not?" the flower responded, sweetly. "And I was born at the same moment as the sun ..."

The little prince could guess easily enough that she was not any too modest—but how moving—and exciting—she was!

"I think it is time for breakfast," she added an instant later. "If you would have the kindness to think of my needs—"

And the little prince, completely abashed, went to look for a sprinkling-can of fresh water. So, he tended the flower.

Event Extraction



- ► Who did what to whom, when, where, through what methods (instruments) and why.
- ► Innebærer bruk av NER og relation extraction.

Event Extraction




- ► Who did what to whom, when, where, through what methods (instruments) and why.
- ► Innebærer bruk av NER og relation extraction.

"Masked gunmen armed with assault rifles and grenades attacked a wedding party in mainly Kurdish southeast Turkey, killing at least 44 people."

perpetrators	masked gunmen
victims	people
number of killed/injured	at least 44
weapons and means used	rifles and grenades
location	southeast Turkey
event	attacked



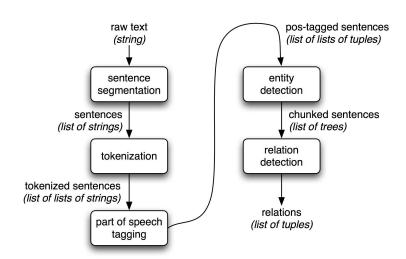



Leksikon for sentimentanalyse

Affective states



- $\blacktriangleright \ \, \text{Affective meaning} = \text{emotion, sentiment, personality, mood, attitudes}.$
- ► Affective meaning is related to subjectivity (the study of a writer/speaker's evaluations, opinions, emotions, and speculations).

Affective states



Emotion: angry, sad, joyful, ashamed, proud, elated, desperate.

Mood: cheerful, gloomy, irritable, listles, depressed.

Interpersonal stance: distant, cold, warm, supportive, friendly.


Attitude: liking, loving, hating, valuing, desiring.

Personality trait: nervous, anxious, reckles, morose, hostile, jealous.

Emotions – 2 teorier



► Teori 1: Plutchik (1980) wheel of emotion.



https://web.stanford.edu/~jurafsky/slp3/21.pdf

Emotions – 2 teorier



- ► Teori 2: Russel (1980):
 - valence: pleasantness of the stimulus.
 - ► arousal: the intensity of emotion provoked by the stimulus.
 - dominance: the degree of control exerted by the stimulus.

Sentiment Analaysis





https://www.clickworker.de/wp-content/uploads/2017/02/Sentiment-Analyse.jpg

Sentiment leksikon



- ► General Inquirer: eldste, 1966. Inneholder 1915 positive ord og 2291 negative ord.
- ► MPQA (2005): 2718 positive og 4912 negative ord.
- ► Hu and Liu (2004): 2006 positive og 4783 negative ord.
- ▶ NRC Valence, Arousal, Dominance (VAD, 2018): 20.000 ord.
- ► EmoLex (2013): 14.000 ord (8 emotions).
- ► Norsk sentiment leksikon (2019): 1.601 positive og 3.917 negative ord. Fullform: 6.103 positive og 14.839 negative ord. https://github.com/ltgoslo/norsentlex

Å lage sentiment-leksikoner



- ► Manuelt: eksperter lager lister av positive og negative ord.
- ▶ Semi-supervised: starte med "seed words" f.eks. god og dålig. Regne ut hvorvidt hvert ord w som skal bli klassifisert, er lik ordet god, og hvorvidt det er annerledes fra ordet dårlig
- ► **Supervised**: bruke anmeldelser (f.eks terningkast, stjerner) for å lage leksion av positive og negative ord.

Supervised



Movie review excerpts (IMDb)

- 10 A great movie. This film is just a wonderful experience. It's surreal, zany, witty and slapstick all at the same time. And terrific performances too.
- 1 This was probably the worst movie I have ever seen. The story went nowhere even though they could have done some interesting stuff with it.

Restaurant review excerpts (Yelp)

- 5 The service was impeccable. The food was cooked and seasoned perfectly... The watermelon was perfectly square ... The grilled octopus was ... mouthwatering...
- 2 ...it took a while to get our waters, we got our entree before our starter, and we never received silverware or napkins until we requested them...

Book review excerpts (GoodReads)

- 1 I am going to try and stop being deceived by eye-catching titles. I so wanted to like this book and was so disappointed by it.
- 5 This book is hilarious. I would recommend it to anyone looking for a satirical read with a romantic twist and a narrator that keeps butting in

Product review excerpts (Amazon)

- 5 The lid on this blender though is probably what I like the best about it... enables you to pour into something without even taking the lid off! ... the perfect pitcher! ... works fantastic.
- 1 I hate this blender... It is nearly impossible to get frozen fruit and ice to turn into a smoothie... You have to add a TON of liquid. I also wish it had a spout ...

Figure 21.9 Excerpts from some reviews from various review websites, all on a scale of 1 to 5 stars except IMDb, which is on a scale of 1 to 10 stars.



- ► Kan bruke anmeldelser: positive ord forekommer mest sannsynlig i 5-stjerners anmeldelser, negative ord i 1-stjerners anmeldelser.
- ► Slike anmeldelser kan brukes for mer enn kun binære klassifisseringer.
- ► Vi kan identifisere fordeling over stjerner/terningkast for hvert ord.

Potts Score



Potts Score (Potts, 2011):

$$P(w|c) = \frac{count(w,c)}{\sum_{w \in C} count(w,c)}$$

$$PottsScore(w) = \frac{P(w|c)}{\sum_{c} P(w|c)}$$

Potts Score



For eksempel:

Vi kan beregne IMDB sannsynligheten av forekomsten av ordet disapointing i en 1-stjerners anmeldelse.

$$P(disapointing|1) = \frac{count(disapointing, 1)}{\sum_{w \in 1} count(w, 1)} = \frac{8557}{25395214} = 0.0003$$

$$PottsScore(disapointing) = \frac{0.0003}{\sum_{c} P(w|C)} = 0.10$$

Og ordet *disapointing* er da assosiert med vektoren [0.10, 0.12, 0.14, 0.14, 0.13, 0.11, 0.08, 0.06, 0.06, 0.05] som representerer Potts score for hver klasse fra 1-10.

Potts Score



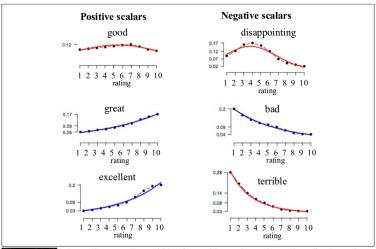


Figure 21.10 Potts diagrams (Potts, 2011) for positive and negative scalar adjectives, showing the J-shape and reverse J-shape for strongly positive and negative adjectives, and the hump-shape for more weakly polarized adjectives.

https://web.stanford.edu/~jurafsky/slp3/21.pdf

Bruk av leksikon



Sentiment leksikon kan:

- ▶ brukes direkte ved å telle forekomster av ord.
- ▶ brukes som trekk i en Naive Bayes klassifissering.
- ▶ brukes med andre maskinlæringsalgoritmer.



Question Answering

Question Answering



- Begynnelsen av 1960-tallet: systemene brukte de to store paradigmene

 informasjonsinnhentingsbasert (Information Retrieval) og
 kunnskapsbasert for å svare på spørsmål om baseballstatistikk eller vitenskapelige fakta.
- ► Uekte maskiner: *Deep Thought*, datamaskinen i "The Hitchhiker's Guide to the Galaxy" klarte å svare på "*The Ultimate Question Of Life, The Universe, and Everything*"¹
- ► 2011: IBMs **Watson** question-answering system (bruker en hybridarkitektur) vant TV-showet Jeopardy!

Question Answering



- ► De fleste Question-Answering (QA) systemer fokuserer på fakta-basert spørsmål, spørsmål som kan besvares med enkle fakta uttrykt i korte tekster.
- ► Svarene på spørsmålene nedenfor kan uttrykkes med navn, tidsmessig uttrykk, eller sted:
 - 1. Hvem grunnla Virgin Airlines?
 - 2. Hva er gjennomsnittsalderen i Real Madrid?
 - 3. Hvor er SAS basert?

Question Answering – IR-based



- ► informasjonsinnhentingsbasert eller IR-basert QA er avhengig av store mengder tekster fra f.eks. nettet.
- Gitt et brukerspørsmål:
 - finner relevante dokumenter og avsnitt.
 - systemene deretter bruker (feature-based, nevrale eller mix av begge)
 "reading comprehension" algoritmer for å lese hentede dokumenter/avsnitter.
 - hente svar direkte fra tekstene (sekvenser av strengene).

Question Answering – IR-based



Question	Answer		
Where is the Louvre Museum located?	in Paris, France		
What's the abbreviation for limited partnership?	L.P.		
What are the names of Odin's ravens?	Huginn and Muninn		
What currency is used in China?	the yuan		
What kind of nuts are used in marzipan?	almonds		
What instrument does Max Roach play?	drums		
What's the official language of Algeria?	Arabic		
How many pounds are there in a stone?	14		


Figure 25.1 Some sample factoid questions and their answers.

 $\verb|https://web.stanford.edu/~jurafsky/slp3/25.pdf|$

Question Answering – IR-based

answer processing.



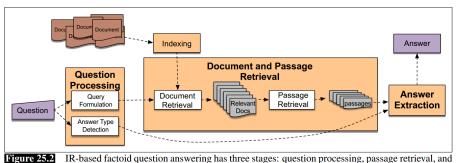

https://web.stanford.edu/~jurafsky/slp3/25.pdf

Question Answering - Knowledge-based



- kunnskapsbasert QA system bygger en semantisk representasjon av spørringen.
 - ► Fra "Hvilke stater grenser til Texas?" til den logiske representasjonen: $\lambda x.state(x) \wedge borders(x, texas)$
 - ► Fra "Når ble Ada Lovelace født?" til birth-year(Ada Lovelace,?x)
- Disse semantiske representasjoner blir deretter brukt til å søke i fakta-databaser.

QA - Knowledge-based



- ► Regelbaserte systemer.
- ► Supervised learning.

QA - Knowledge-based - Supervised learning




```
\begin{array}{c} \begin{array}{c} \left( \operatorname{nsubj} \right) \\ \downarrow \bigvee \end{array} & \left( \operatorname{dobj} \right) \\ \text{Who V ENTITY} & \rightarrow \operatorname{relation}(\ ?x, \ \operatorname{entity}) \\ \\ \left( \begin{array}{c} \left( \operatorname{lnsubj} \right) \\ \downarrow \bigvee \end{array} \right) \\ \downarrow \end{array} \\ \text{When V ENTITY} & \rightarrow \operatorname{relation}(\ ?x, \ \operatorname{entity}) \end{array}
```

QA - Knowledge-based - Supervised learning



```
\begin{array}{c} \underbrace{\left( \text{nsubj} \right)}_{\text{V}} \underbrace{\left( \text{dobj} \right)}_{\text{V}} \\ \text{Who V ENTITY} \rightarrow \text{relation( ?x, entity)} \\ \underbrace{\left( \text{mod} \right)}_{\text{V}} \underbrace{\left( \text{nsubj} \right)}_{\text{V}} \\ \text{When V ENTITY} \rightarrow \text{relation( ?x, entity)} \end{array}
```




QA - Knowledge-based - Supervised learning



```
\begin{array}{c} \underbrace{\left( \text{nsubj} \right)}_{\text{V}} \underbrace{\left( \text{dobj} \right)}_{\text{Who V ENTITY}} \rightarrow \text{relation( ?x, entity)} \\ \underbrace{\left( \text{tmod} \right)}_{\text{V}} \underbrace{\left( \text{nsubj} \right)}_{\text{When V ENTITY}} \rightarrow \text{relation( ?x, entity)} \end{array}
```



When was Ada Lovelace born \rightarrow birth-year(Ada Lovelace, ?x)



https://web.stanford.edu/~jurafsky/slp3/25.pdf



Dialogsystemer og chatbots

Dialogsystemer



- ► To hovedalgoritmer av dialogsystemer:
 - 1. Oppgaveorienterte dialogagenter.
 - 2. Chatbots.

Egenskaper av menneskelig samtaler



 C_1 : ... I need to travel in May.

 A_1 : And, what day in May did you want to travel?

C₂: OK uh I need to be there for a meeting that's from the 12th to the 15th.

A₂: And you're flying into what city?

C₃: Seattle.

A₃: And what time would you like to leave Pittsburgh?

C₄: Uh hmm I don't think there's many options for non-stop.

A₄: Right. There's three non-stops today.

 C_5 : What are they?

A₅: The first one departs PGH at 10:00am arrives Seattle at 12:05 their time. The second flight departs PGH at 5:55pm, arrives Seattle at 8pm. And the last flight departs PGH at 8:15pm arrives Seattle at 10:28pm.

C₆: OK I'll take the 5ish flight on the night before on the 11th.

A₆: On the 11th? OK. Departing at 5:55pm arrives Seattle at 8pm, U.S. Air flight 115.

C₇: OK.

A₇: And you said returning on May 15th?

C₈: Uh, yeah, at the end of the day.

A₈: OK. There's #two non-stops . . . #

C₉: #Act...actually #, what day of the week is the 15th?

A₉: It's a Friday.

C₁₀: Uh hmm. I would consider staying there an extra day til Sunday.

A₁₀: OK...OK. On Sunday I have ...

Figure 26.1 Part of a phone conversation between a human travel agent (A) and human client (C). The passages framed by # in A_8 and C_9 indicate overlaps in speech.

Samtaler



- Hver sin tur til å snakke.
 - ► Men hvordan vet vi at den andre er ferdig med å snakke?
- ▶ Talehandling: be noen å gjøre noe, stille et spørsmål som krever et svar, gi en begrensning, takke. f.eks linje C_2 og C_1 i forrige bilde.
- ▶ Forankring: å si ok, eller repetere det den andre sa. f.eks. linje A_1 , A_8 , A_{10} .
- ▶ Struktur: rekkefølgende er ikke alltid konsekvent, av og til ombestemmer vi oss. f.eks. fra C_9 til A_{10} .
- ▶ Inferens og implikasjon: f.eks. A_1 og C_2 .

Regelbasert chatbot



► Første: Eliza (Weizenbaum, 1966).

► Regelbasert: bruk av regulære utrykk-lignende regler.

User: Men are all alike ELIZA: IN WHAT WAY?

ELIZA: IN WHAT WAY!

User: They're always bugging us about something

ELIZA: CAN YOU THINK OF AN EXAMPLE?

User: Well, my boyfriend made me come here

ELIZA: YOUR BOYFRIEND MADE YOU COME HERE.

User: He says I am depressed much of the time

User: He says I am depressed much of the time

ELIZA: I'M SORRY TO HEAR THAT YOU ARE DEPRESSED.

Chatbots



- ► Finnes også korpus-basert chatbots.
- ► Krever stor dataset av menneske menneske samtaler.
- ▶ Bruker blant annet maskinlæringsmetoder for å trene modeller.
- Fokuset er å generere setninger, og de fleste chatbots sliter fortsatt med å beholde en sammenhengde samtale.

User: Do you like Doctor Who?

Cleverbot: Yes, so funny.
User: What's your fa

What's your favorite show?

Cleverbot: I don't have one.
User: What's your name?
Cleverbot: Jason I already told you.

User: No your real name.

Cleverbot: Stephanie IS my real name. User: I thought it was Jason?

Cleverbot: How did you come to that conclusion.

User: Because you said so.

Cleverbot: I have to do my homework.

Figure 26.2 Chatbots: A conversation between a user and Cleverbot, an IR-based chatbot (Carpenter, 2017).

Ramme-basert dialogsystemer



Slot	Type	Question Template	
ORIGIN CITY	city	"From what city are you leaving?"	
DESTINATION CITY	city	"Where are you going?"	
DEPARTURE TIME	time	"When would you like to leave?"	
DEPARTURE DATE	date	"What day would you like to leave?"	
ARRIVAL TIME	time	"When do you want to arrive?"	
ARRIVAL DATE	date	"What day would you like to arrive?"	
Element 2000 A former in a former based distance contains about a the town of each also and			

Figure 26.9 A frame in a frame-based dialogue system, showing the type of each slot and a question used to fill the slot.

Ramme-basert dialogsystemer



GUS: Hello. My name is GUS. I can help you plan a simple trip by air. Where do you

want to go?

Client: I want to go to San Diego on May 28 GUS: What time do you want to leave?

Client: I must be in San Diego before 10 am

GUS: Would you like P.S.A. flight 102 that arrives at 9.15 am?

Client: What is the next flight?

GUS: Air California flight 310 that leaves at 8.30am and arrives at 10.00am

Client: I'll take the first one

GUS: In what name should I make a reservation, please?

Client: Dan Bobrow

GUS: I have confirmed the following flight: P.S.A. flight 102 on Wednesday May 28

from San Jose to San Diego that leaves at 7.30 am and arrives at 9.15 am.

GUS: What date do you want to return on?

Client: On Friday in the evening.

GUS: Would you like the flight that leaves at 7.45 pm?

Client: That's fine.

GUS: I have confirmed the following flight: P.S.A. flight 307 on Friday May 30 from San Diego to San Jose that leaves at 7.45 pm and arrives at 9.30 pm Thank you

for calling. Goodbye

Figure 26.8 The travel domain: A transcript of an actual dialogue with the GUS system of Bobrow et al. (1977). P.S.A. and Air California were airlines of that period.

Oppsummering



- ► Sett på en rekke språkteknologiske applikasjoner
- Berører kjente lingvistiske nivåer:
 - Morfologi
 - Ordklasser
 - ► Syntaks
 - Semantikk
- ► Berører kjente **språkteknologiske oppgaver**:
 - ► Tokenisering/stemming
 - Ordklassetagging
 - Morfologisk analyse
 - ► Chunking

Oppsummering



- ► Berører kjente **metoder/modeller**:
 - ► Regulære uttrykk
 - Klassifisering

Oppsummering



- ► Ser på en rekke applikasjoner:
 - ► Teknikker i informasjonsekstraksjon
 - ► Leksikon for sentimentanalyse
 - Question Answering
 - ► Dialogsystemer og chatbots