C:\Users\bkd6b\.lichtfeld\plugins\EDIT\session_log.json - Notepad++

session_log.json


```
[
  {
    "time": "2026-04-09T07:38:032",
    "action": "apply",
    "node": "Trained Model14154-Cr",
    "transform": {
      "tx": 9.74,
      "ty": 0.0,
      "tz": 0.0,
      "rx": 0.0,
      "ry": 0.0,
      "rz": 0.0,
      "sx": 0.5,
      "sy": 0.5,
      "sz": 0.5,
      "uniform_scale": true,
      "live": true
    }
  }
]
```


length Ln : 1 Col : 1 Pos : 1 Windows (CR LF) UTF-8 INS

C:\Users\bkd6b\.lichtfeld\plugins\EDIT\settings.json - Notepad++

settings.json


```
{
  "limits": {
    "translation_min": -50.0,
    "translation_max": 50.0,
    "rotation_min": -180.0,
    "rotation_max": 180.0,
    "scale_min": 0.01,
    "scale_max": 5.0,
    "translation_step": 0.001,
    "rotation_step": 0.001,
    "scale_step": 0.001
  },
  "transform": {
    "tx": 9.74,
    "ty": 0.0,
    "tz": 0.0,
    "rx": 0.0,
    "ry": 0.0,
    "rz": 0.0,
    "sx": 0.5,
    "sy": 0.5,
    "sz": 0.5,
    "uniform_scale": true,
    "live": true,
    "merge_name": "merged",
    "folder_name": "Group",
    "move_target": "Selection"
  }
```


length Ln : 17 Col : 8 Pos : 350 Windows (CR LF) UTF-8 INS

LichtFeld Studio

File Edit Tools View Help

Scene History

1 model 1 node 1 selected item

Models (1)

Trained Model14154-Cr (1117327)

Training Camera Path Keyframe Editor Training Render Edit

Node: Trained Model14154-Cr

Grab from viewport Live Read Settings Open Log Open Settings

Translation

X 0.000

Y 0.000

Z 0.000

Rotation (°)

X 0.0

Y 0.0

Z 0.0

Scale

Uniform

X 1.000

Y 1.000

Z 1.000

Apply Reset

Bake

Bake Transform

Permanently writes transform into Gaussian data.
Save a backup before baking.

Merge Visible Nodes

merged Merge Visible

Combines all visible splat nodes into one named node.

New Group Folder

Group Create

Adds an empty folder node to the scene hierarchy.

Move Selected Splats

Selection Move

Target node name to move selected splats into.

Reset to identity.

Viewer 1.12M Gaussians GeForce RTX 3070 Ti Laptop GPU LFS 2.5GB GPU 3.5/8.6GB 0FPS 4ad2d1a4

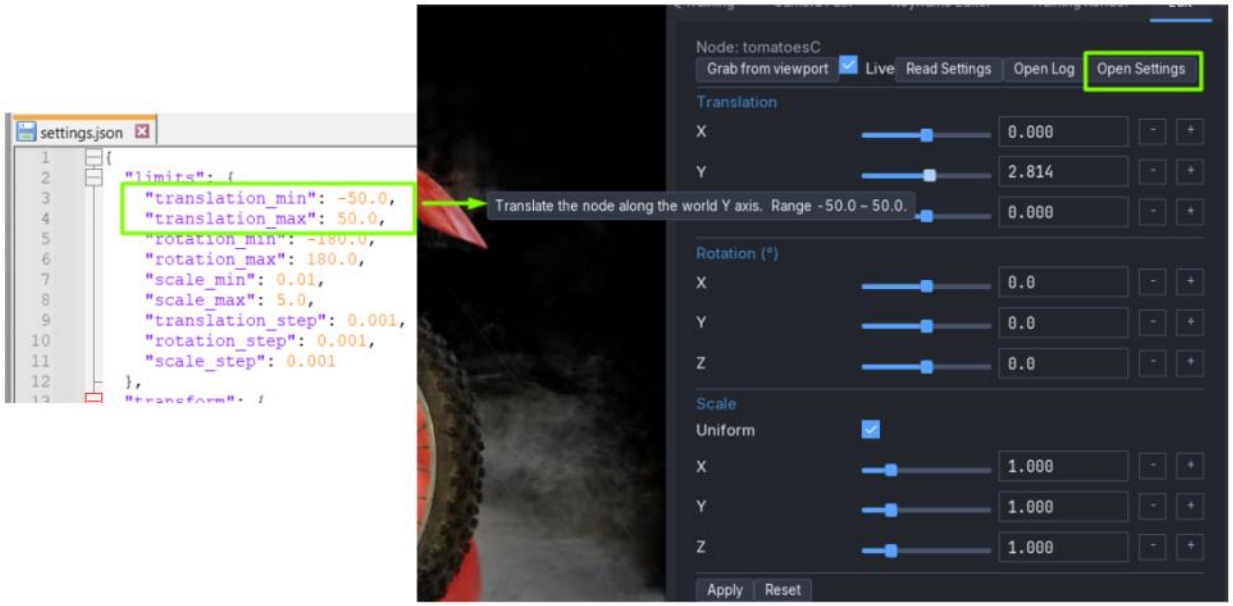
settings.json
{
"limits": {
"translation_min": -50.0,
"translation_max": 50.0,
"rotation_min": -180.0,
"rotation_max": 180.0,
"scale_min": 0.01,
"scale_max": 5.0,
"translation_step": 0.001,
"rotation_step": 0.001,
"scale_step": 0.001
},
Node: tomatoesC
Grab from viewport
Live
Read Settings
Open Log
Open Settings
Translation
X 0.000
Y 2.814
Translate the node along the world Y axis. Range -50.0 – 50.0.
0.000
Rotation (°)
X 0.0
Y 0.0
Z 0.0
Scale
Uniform
X 1.000
Y 1.000
Z 1.000
Apply
Reset

{
"limits": {
"translation_min": -10.0,
"translation_max": 10.0,
"rotation_min": -180.0,
"rotation_max": 180.0,
"scale_min": 0.01,
"scale_max": 5.0,
"translation_step": 0.001,
"rotation_step": 0.001,
"scale_step": 0.001
Grab from viewport
Live
Read Settings
Open Log
Open Settings
Translation
X 0.000
Translate the node along the world X axis. Range -10.0 – 10.0.
2.814
Z 0.000
Rotation (°)
X 0.000
Y 75.589
Z 0.000

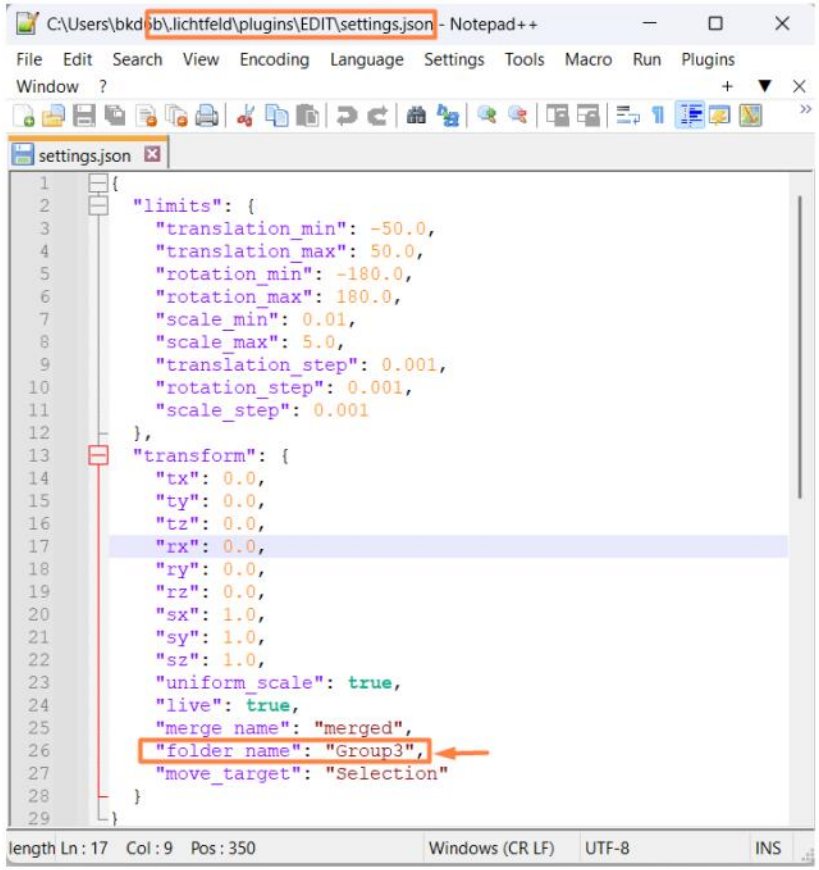
C:\Users\bkd\b\.lichtfeld\plugins\EDIT\settings.json - Notepad++
File Edit Search View Encoding Language Settings Tools Macro Run Plugins
Window ?
settings.json
{
"limits": {
"translation_min": -50.0,
"translation_max": 50.0,
"rotation_min": -180.0,
"rotation_max": 180.0,
"scale_min": 0.01,
"scale_max": 5.0,
"translation_step": 0.001,
"rotation_step": 0.001,
"scale_step": 0.001
},
"transform": {
"tx": 0.0,
"ty": 0.0,
"tz": 0.0,
"rx": 0.0,
"ry": 0.0,
"rz": 0.0,
"sx": 1.0,
"sy": 1.0,
"sz": 1.0,
"uniform_scale": true,
"live": true,
"merge_name": "merged",
"folder_name": "Group3",
"move_target": "Selection"
}
}
length Ln : 17 Col : 9 Pos : 350
Windows (CR LF) UTF-8 INS

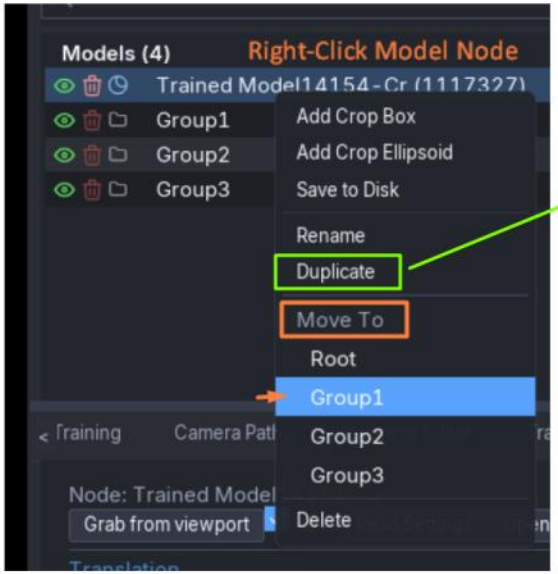
Models (4)
Right-Click Model Node
Trained Model14154-Cr (1117327)
Group1
Group2
Group3
Add Crop Box
Add Crop Ellipsoid
Save to Disk
Rename
Duplicate
Move To
Root
Group1
Group2
Group3
Delete
Training
Camera Path
Node: Trained Model
Grab from viewport

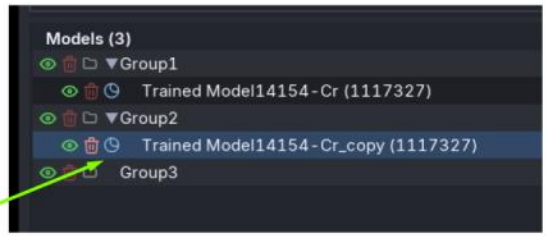
Models (3)
Group1
Trained Model14154-Cr (1117327)
Group2
Trained Model14154-Cr_copy (1117327)
Group3

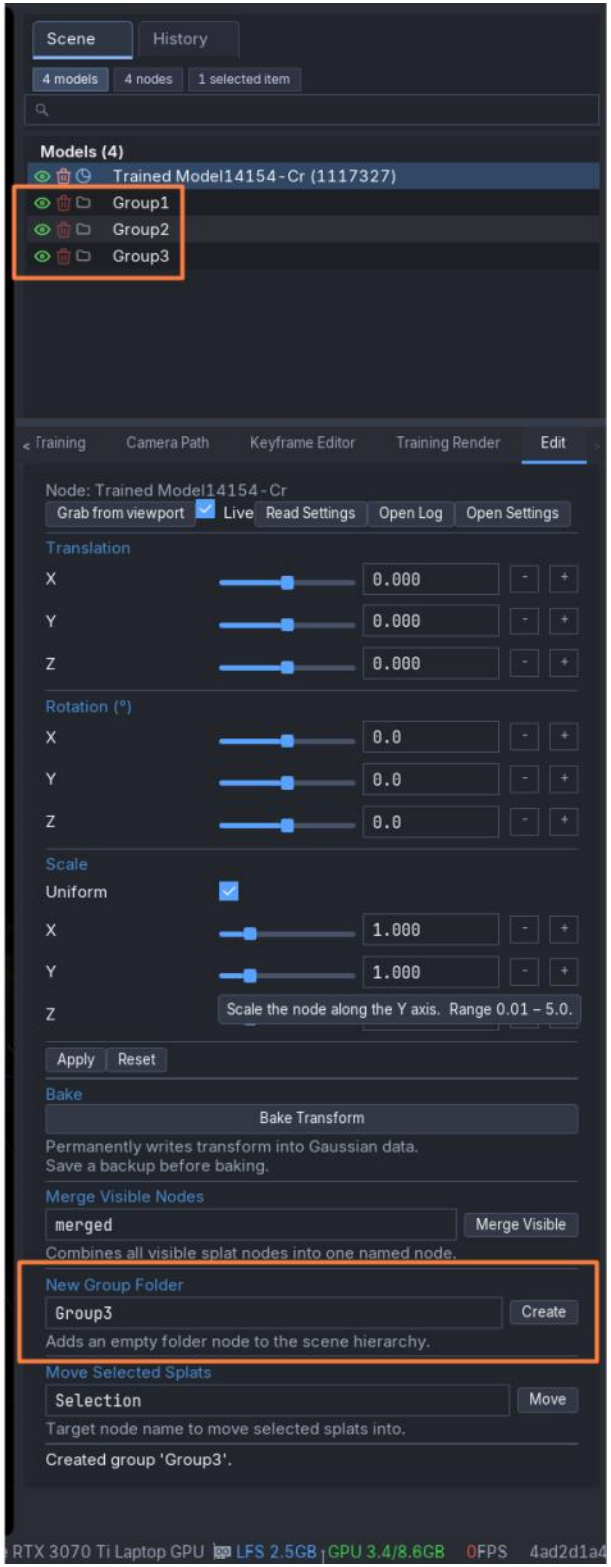
Scene
History
4 models
4 nodes
1 selected item
Models (4)
Trained Model14154-Cr (1117327)
Group1
Group2
Group3
Training
Camera Path
Keyframe Editor
Training Render
Edit
Node: Trained Model14154-Cr
Grab from viewport
Live
Read Settings
Open Log
Open Settings
Translation
X 0.000
Y 0.000
Z 0.000
Rotation (°)
X 0.0
Y 0.0
Z 0.0
Scale
Uniform
X 1.000
Y 1.000
Z
Scale the node along the Y axis. Range 0.01 – 5.0.
Apply
Reset
Bake
Bake Transform
Permanently writes transform into Gaussian data.
Save a backup before baking.
Merge Visible Nodes
merged
Merge Visible
Combines all visible splat nodes into one named node.
New Group Folder
Group3
Create
Adds an empty folder node to the scene hierarchy.
Move Selected Splats
Selection
Move
Target node name to move selected splats into.
Created group 'Group3'.
RTX 3070 Ti Laptop GPU
LFS 2.5GB
GPU 3.4/8.6GB
0FPS
4ad2d1a4

Z
0.788
Apply
Reset
Bake
Bake Transform
Permanently fold the current transform into the raw Gaussian data (means, scales, rotations), then reset the node transform to identity. This cannot be undone — save a backup first.
transform into Gaussian data.
Save a backup before baking.

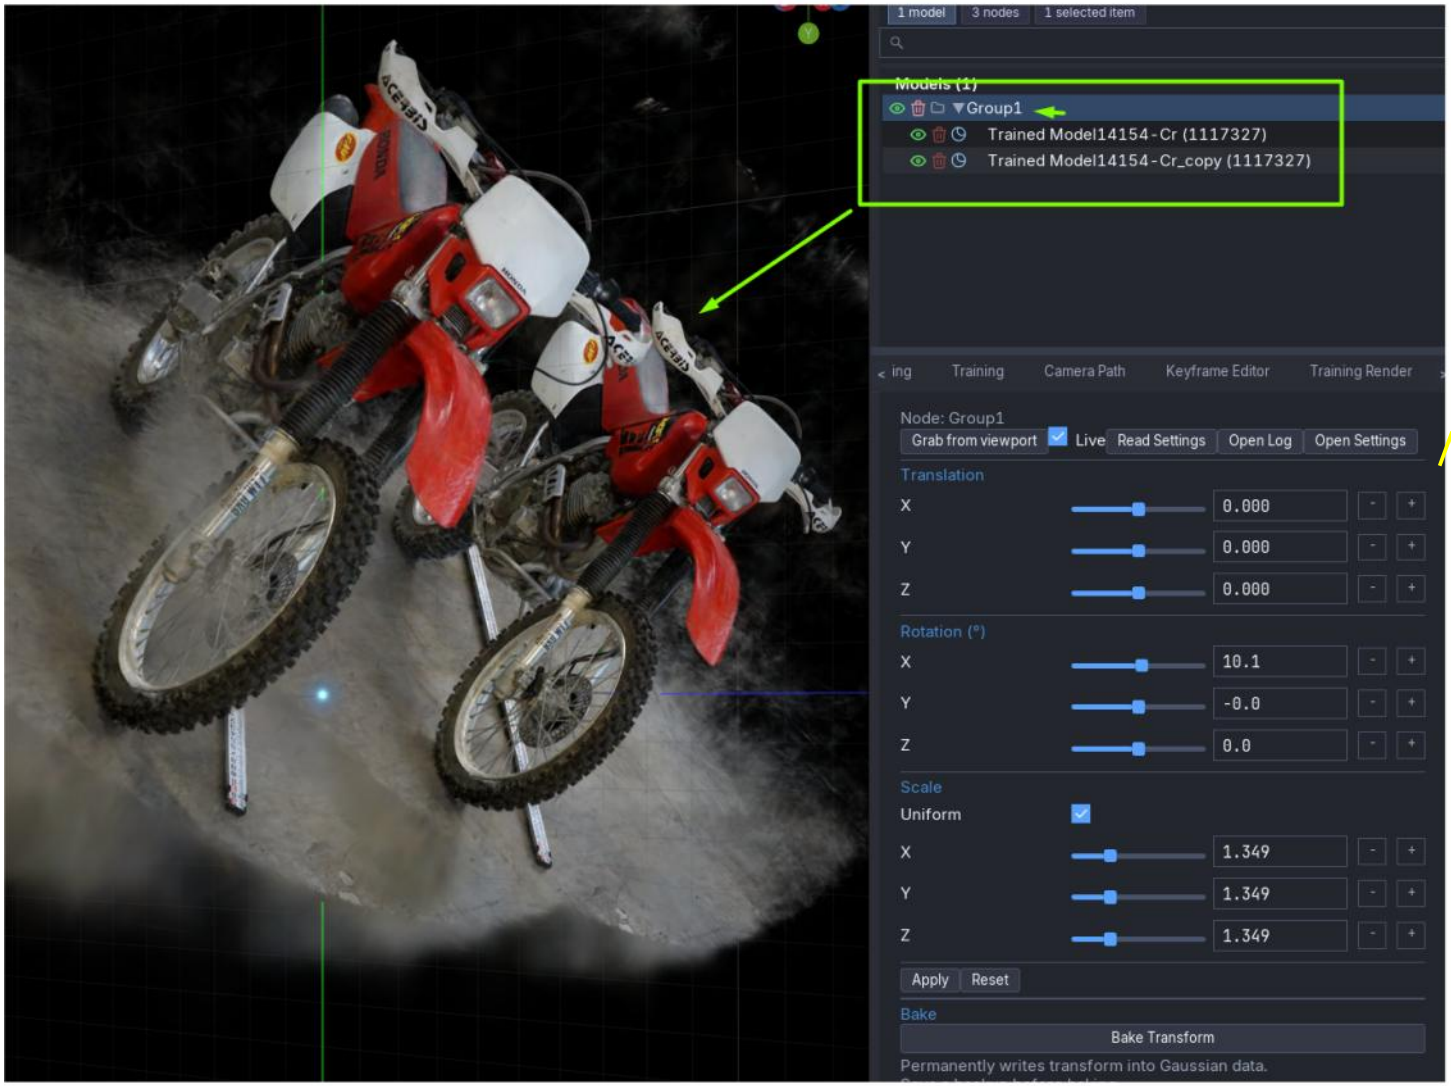
1 model
3 nodes
1 selected item
Models (1)
Group1
Trained Model14154-Cr (1117327)
Trained Model14154-Cr_copy (1117327)
ing
Training
Camera Path
Keyframe Editor
Training Render
Node: Group1
Grab from viewport
Live
Read Settings
Open Log
Open Settings
Translation
X 0.000
Y 0.000
Z 0.000
Rotation (°)
X 10.1
Y -0.0
Z 0.0
Scale
Uniform
X 1.349
Y 1.349
Z 1.349
Apply
Reset
Bake
Bake Transform
Permanently writes transform into Gaussian data.

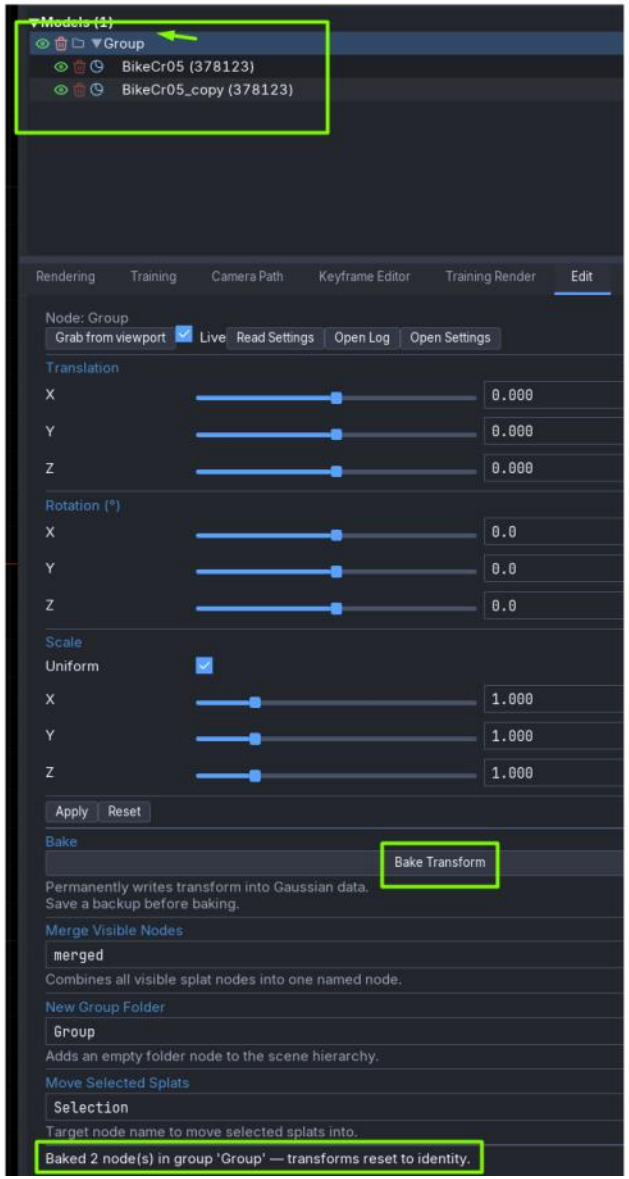
Models (1)
Group
BikeCr05 (378123)
BikeCr05_copy (378123)
Rendering
Training
Camera Path
Keyframe Editor
Training Render
Edit
Node: Group
Grab from viewport
Live
Read Settings
Open Log
Open Settings
Translation
X 0.000
Y 0.000
Z 0.000
Rotation (°)
X 0.0
Y 0.0
Z 0.0
Scale
Uniform
X 1.000
Y 1.000
Z 1.000
Apply
Reset
Bake
Bake Transform
Permanently writes transform into Gaussian data.
Save a backup before baking.
Merge Visible Nodes
merged
Combines all visible splat nodes into one named node.
New Group Folder
Group
Adds an empty folder node to the scene hierarchy.
Move Selected Splats
Selection
Target node name to move selected splats into.
Baked 2 node(s) in group 'Group' — transforms reset to identity.