

# CORE JAVA

## With

# SCJP / OCJP

## Study Material

### Chapter 16: Garbage Collection



**DURGA M.Tech**

(Sun certified & Realtime Expert)

**Ex. IBM Employee**

**Trained Lakhs of Students  
for last 14 years across INDIA**

**India's No.1 Software Training Institute**

# DURGASOFT

**www.durgasoft.com Ph: 9246212143 ,8096969696**

JAVA Means DURGASOFT

## Garbage Collection

1. **Introduction:**
  2. **The way to make an object eligible for GC**
    - i. **Nullifying the reference variable**
    - ii. **Reassign the reference variable**
    - iii. **Objects created inside a method**
    - iv. **Island of Isolation**
  3. **The methods for requesting JVM to run GC**
    - i. **By System class**
    - ii. **By Runtime class**
  4. **Finalization**
    - **Case 1 : Just before destroying any object GC calls finalize() method on the object**
    - **Case 2 : We can call finalize() method explicitly**
    - **Case 3 : finalize() method can be call either by the programmer or by the GC**
    - **Case 4 : On any object GC calls finalize() method only once**
- Memory leaks**

**CORE JAVA with**  
**OCJP/SCJP**  
**JAVA CERTIFICATION**



**Mr. DURGA M.Tech**  
**JAVA EXPERT**  
 Trained Thousands of Students



One to One  
**VIDEO**  
**CLASSES**

EVERYTHING AT YOUR CONVENIENCE

At your convenient Time

With in your convenient duration

AN ISO 9001:2008 CERTIFIED  
**DURGA**  
**Software Solutions®**  
[www.durgasoft.com](http://www.durgasoft.com)

# 202, 2nd Floor, HUDA Maitrivanam,  
 Ameerpet, Hyd. Ph: 040-64512786,  
**9246212143, 8096969696**

### Introduction:

- In old languages like C++ programmer is responsible for both creation and destruction of objects. Usually programmer is taking very much care while creating object and neglect destruction of useless objects. Due to his negligence at certain point of time for creation of new object sufficient memory may not be available and entire application may be crashed due to memory problems.
- But in java programmer is responsible only for creation of new object and his not responsible for destruction of objects.
- Sun people provided one assistant which is always running in the background for destruction at useless objects. Due to this assistant the chance of failing java program is very rare because of memory problems.
- This assistant is nothing but garbage collector. Hence the main objective of GC is to destroy useless objects.

### The ways to make an object eligible for GC:


- Even though programmer is not responsible for destruction of objects but it is always a good programming practice to make an object eligible for GC if it is no longer required.
- **An object is eligible for GC if and only if it does not have any references.**

**The following are various possible ways to make an object eligible for GC:**

### **1.Nullifying the reference variable:**

If an object is no longer required then we can make eligible for GC by assigning "null" to all its reference variables.

**Example:**

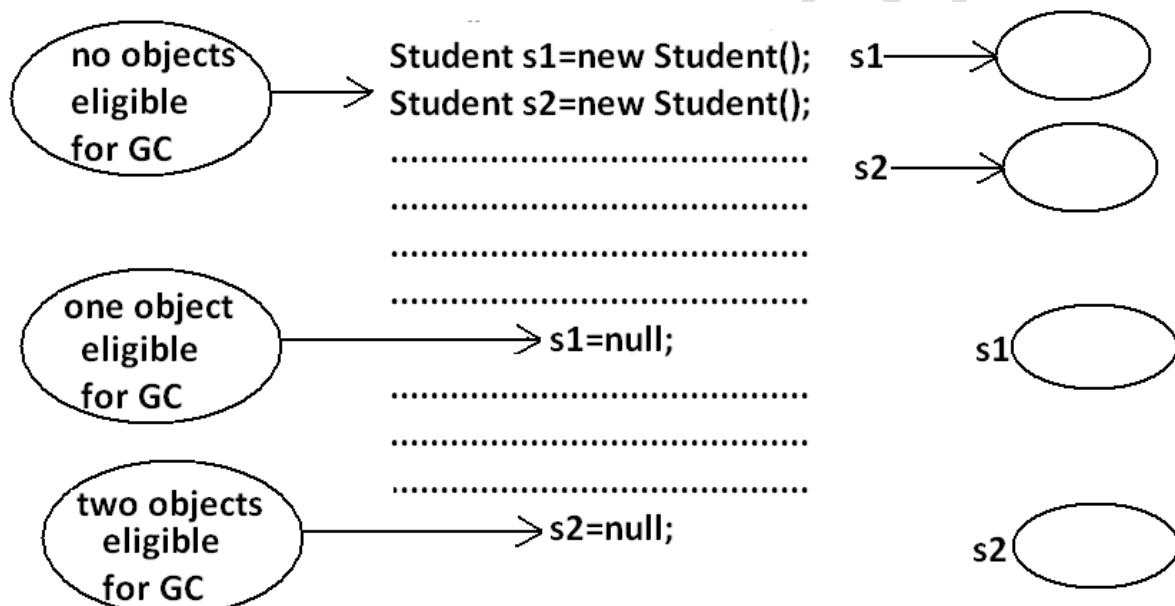

### **2.Reassign the reference variable:**


If an object is no longer required then reassign all its reference variables to some other objects then old object is by default eligible for GC.

**Example:**

### **3. Objects created inside a method:**

Objects created inside a method are by default eligible for GC once method completes.

### Example 1:

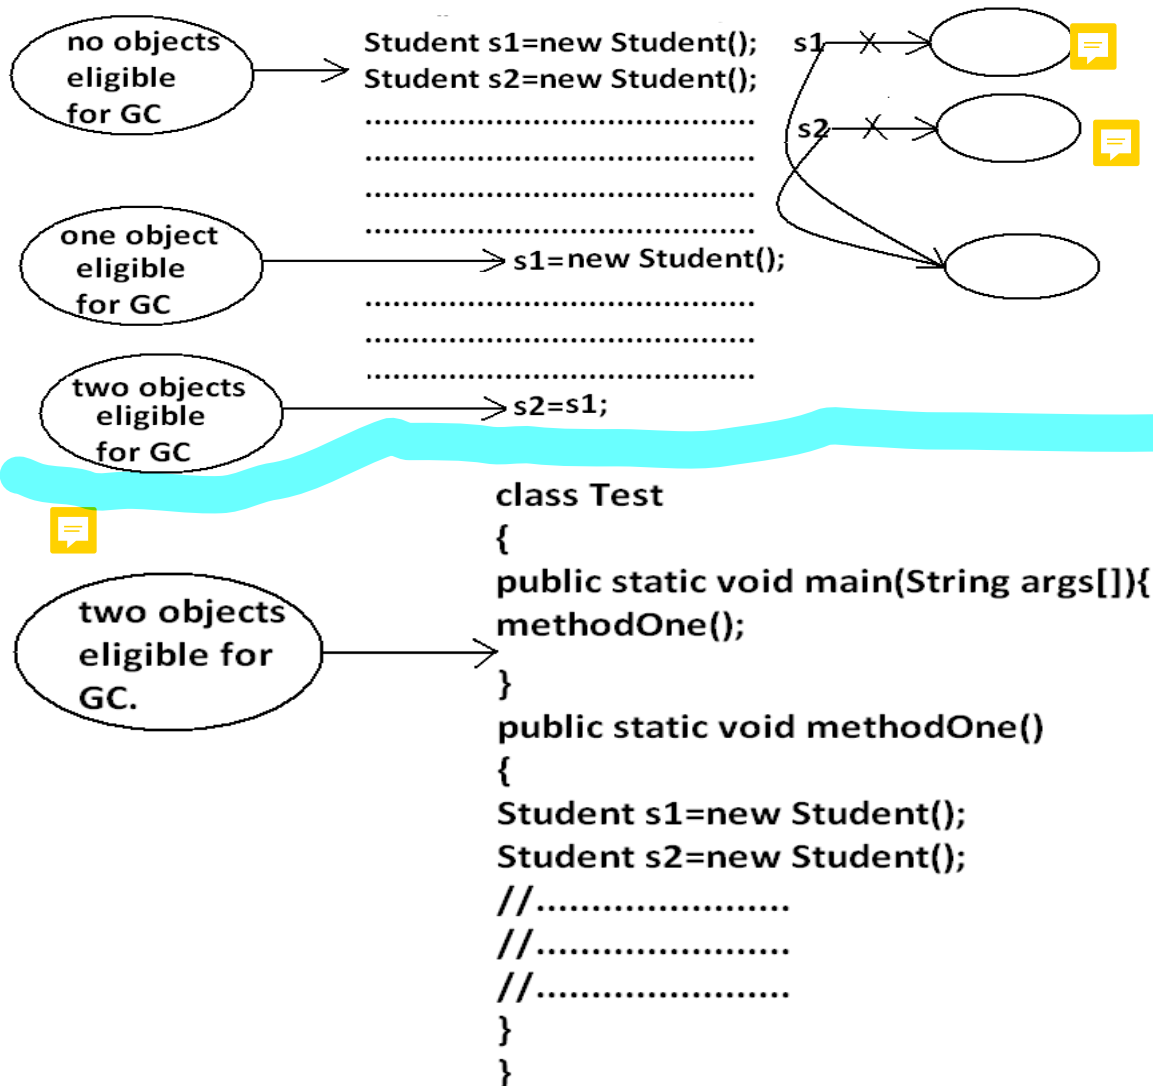



**www.durgasoftonlinetraining.com**




**Online Training  
Pre Recorded Video  
Classes Training  
Corporate Training**

**Ph: +91-8885252627, 7207212427  
+91-7207212428**

 **USA Ph : 4433326786**

**E-mail : durgasoftonlinetraining@gmail.com**


Example 2:

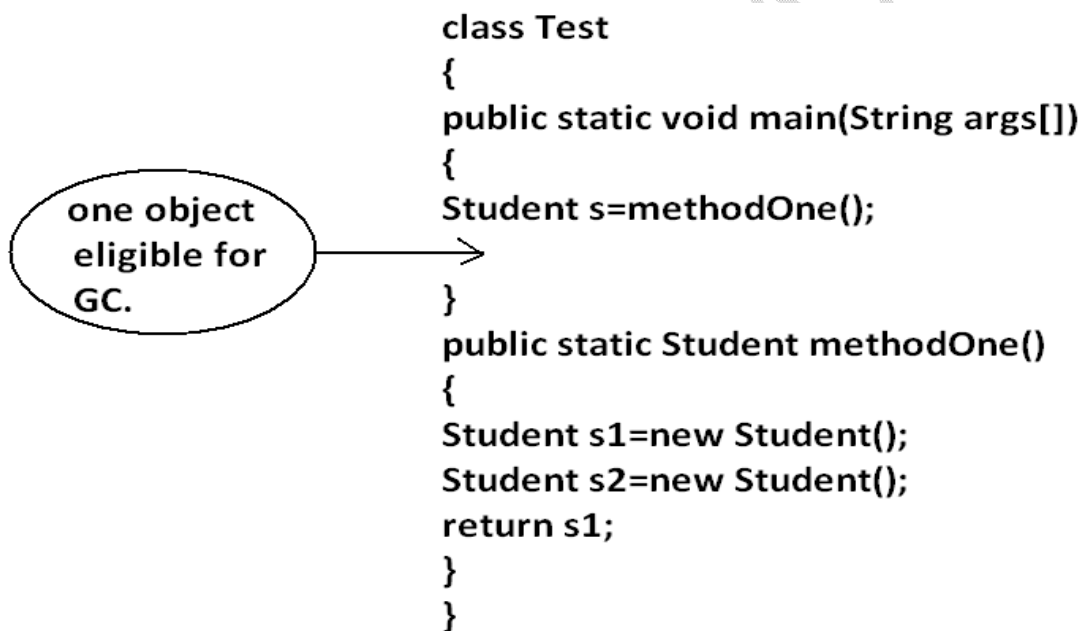

**FREE TRAINING VIDEOS**

**You Tube** **3000+ VIDEOS**

**www.youtube.com/durgasoftware**

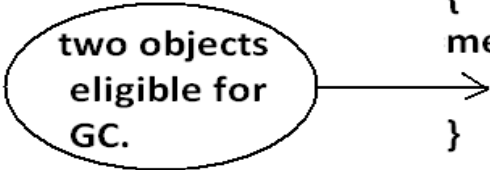**Example 3:**

two objects eligible for GC.

```
class Test
{
    public static void main(String args[])
    {
        methodOne();
    }
    public static Student methodOne()
    {
        Student s1=new Student();
        Student s2=new Student();
        return s1;
    }
}
```






**www.durgajobs.com**  
*Continuous Job Updates for every hour*

Fresher Jobs   Govt Jobs   Bank Jobs  
Walk-ins   Placement Papers   IT Jobs  
Interview Experiences

*Complete Job information across India*

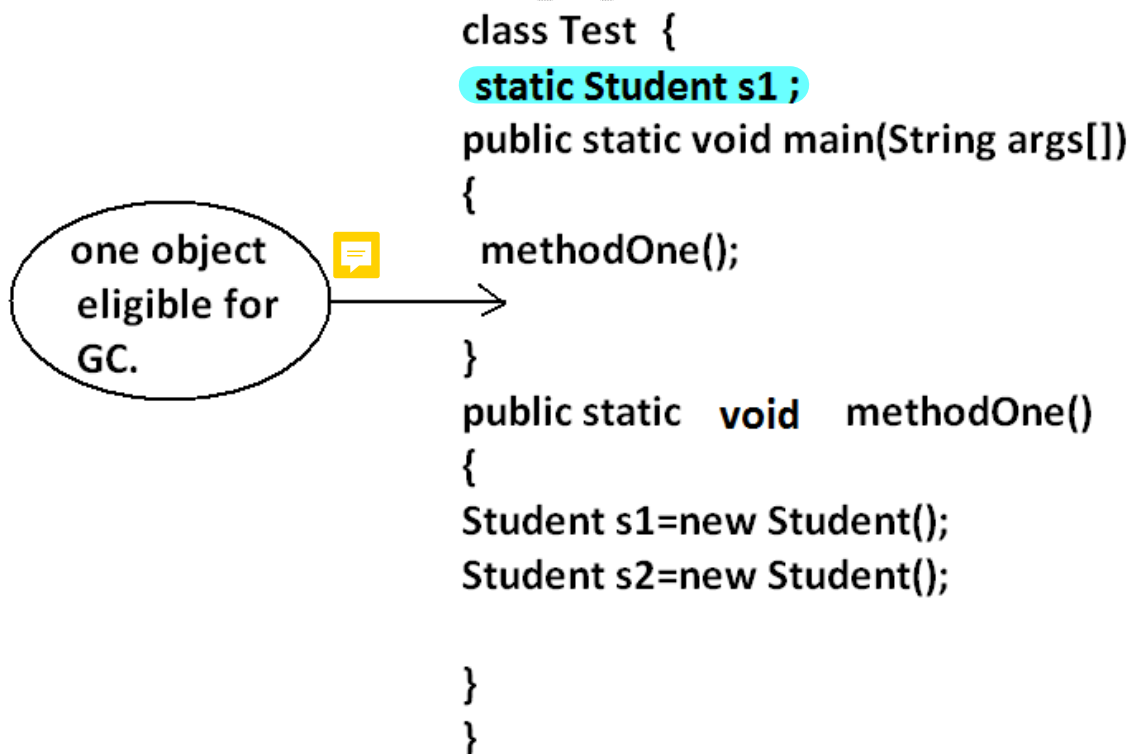**Example 4:**

LEARN FROM EXPERT & DIAMOND FACULTIES OF AMEERPET...

**JAVA MEANS DURGASOFT**


INDIA'S NO. 1 SOFTWARE TRAINING INSTITUTE

AN ISO 9001:2008 CERTIFIED  
**DURGA**  
SOFTWARE SOLUTIONS

#202 2<sup>nd</sup> FLOOR  
[www.durgasoft.com](http://www.durgasoft.com)

040-64512786  
+91 9246212143  
+91 8096969696

#### 4. Island of Isolation:

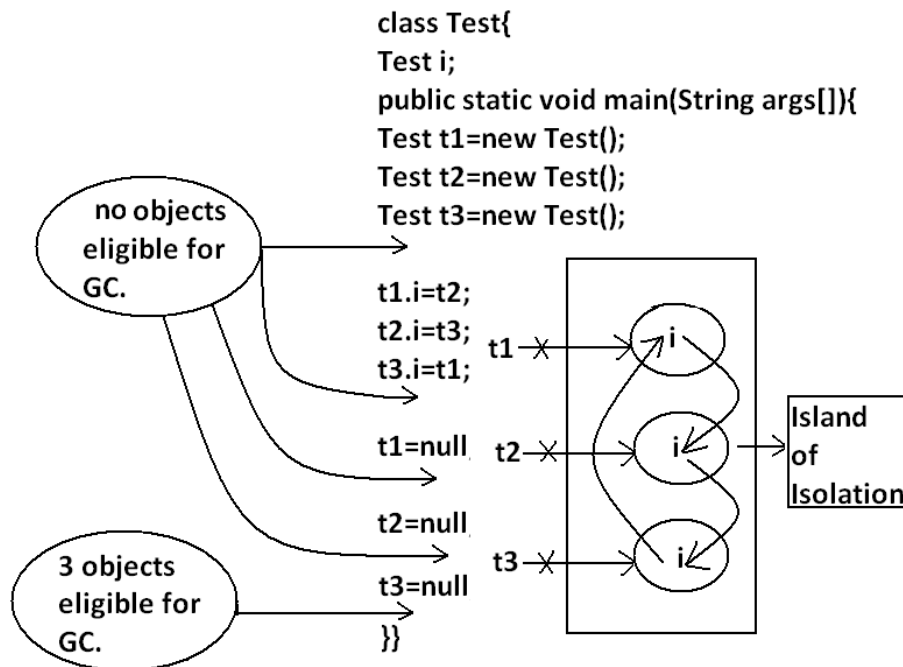

**www.durgasoftonlinelearning.com**



**Online Training  
Pre Recorded Video  
Classes Training  
Corporate Training**

**Ph: +91-8885252627, 7207212427  
+91-7207212428**

 **USA Ph : 4433326786**

**E-mail : durgasoftonlinelearning@gmail.com**

**Note:** if an object doesn't have any reference then it always eligible for GC.

**Note:** Even though object having reference still it is eligible for GC some times.

**Example:**

island of isolation. (Island of Isolation all references are internal references )

**The methods for requesting JVM to run GC:**

- Once we made an object eligible for GC it may not be destroyed immediately by the GC. Whenever jvm runs GC then only object will be destroyed by the GC. But when exactly JVM runs GC we can't expect it is vendor dependent.
- We can request jvm to run garbage collector programmatically, but whether jvm accept our request or not there is no guaranty. But most of the times JVM will accept our request.

### **The following are various ways for requesting jvm to run GC:**

#### **By System class:**

System class contains a static method GC for this purpose.

Example:

```
System.gc();
```

#### **By Runtime class:**

- A java application can communicate with jvm by using Runtime object.
- Runtime class is a singleton class present in java.lang. Package.
- We can create Runtime object by using factory method getRuntime().

Example:

```
Runtime r=Runtime.getRuntime();
```

Once we got Runtime object we can call the following methods on that object.

**freeMemory()**: returns the free memory present in the heap.

**totalMemory()**: returns total memory of the heap.

**gc()**: for requesting jvm to run gc.

#### **Example:**

```
import java.util.Date;
class RuntimeDemo
{
    public static void main(String args[]){
        Runtime r=Runtime.getRuntime();
        System.out.println("total memory of the heap :"+r.totalMemory());
        System.out.println("free memory of the heap :"+r.freeMemory());
        for(int i=0;i<10000;i++)
        {
            Date d=new Date();
            d=null;
        }
        System.out.println("free memory of the heap :"+r.freeMemory());
        r.gc();
        System.out.println("free memory of the heap :"+r.freeMemory());
    }
}
```

Output:

Total memory of the heap: 5177344

Free memory of the heap: 4994920  
Free memory of the heap: 4743408  
Free memory of the heap: 5049776

**Note :** Runtime class is a singleton class so not create the object to use constructor.

**Which of the following are valid ways for requesting jvm to run GC ?**

System.gc(); (valid)

Runtime.gc(); (invalid)

(new Runtime).gc(); (invalid) 

Runtime.getRuntime().gc(); (valid)

**Note:** gc() method present in System class is static, where as it is instance method in Runtime class.

**Note:** Over Runtime class gc() method , System class gc() method is recommended to use.


**Note:** in java it is not possible to find size of an object and address of an object.



### **Finalization:**

- Just before destroying any object gc always calls finalize() method to perform cleanup activities.
- If the corresponding class contains finalize() method then it will be executed otherwise Object class finalize() method will be executed.

which is declared as follows.

**protected void finalize() throws Throwable** 

#### **Case 1:**

Just before destroying any object GC calls finalize() method on the object which is eligible for GC then the corresponding class finalize() method will be executed.

For Example if String object is eligible for GC then String class finalize() method is executed but not Test class finalize() method. 



**Example:**

```

class Test
{
    public static void main(String args[]){
        String s=new String("bhaskar");
        Test t=new Test();
        s=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method is executed");
    }
}

```

Output:

End of main.

In the above program String class finalize() method got executed. Which has empty implementation.

If we replace String object with Test object then Test class finalize() method will be executed .

The following program is an Example of this.

**LEARN FROM EXPERT & DIAMOND FACULTIES OF AMEERPET...**

# JAVA MEANS DURGASOFT

**INDIA'S NO. 1 SOFTWARE TRAINING INSTITUTE**

AN ISO 9001:2008 CERTIFIED  
  
SOFTWARE SOLUTIONS

**#202 2<sup>nd</sup> FLOOR**  
[www.durgasoft.com](http://www.durgasoft.com)

**040-64512786**  
**+91 9246212143**  
**+91 8096969696**

**Example:**

```

class Test
{
    public static void main(String args[]){
        String s=new String("bhaskar");
        Test t=new Test();
        t=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method is executed");
    }
}

```

Output:

finalize() method is executed  
End of main

**Case 2:**

We can call `finalize()` method explicitly then it will be executed just like a normal method call and object won't be destroyed. But before destroying any object GC always calls `finalize()` method.

**Example:**

```
class Test
{
    public static void main(String args[]){
        Test t=new Test();
        t.finalize();
        t.finalize();
        t=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method called");
    }
}
```

Output:

finalize() method called.

finalize() method called.

finalize() method called

End of main.

In the above program `finalize()` method got executed 3 times in that 2 times explicitly by the programmer and one time by the gc.

**Note:** In Servlets we can call `destroy()` method explicitly from `init()` and `service()` methods. Then it will be executed just like a normal method call and Servlet object won't be destroyed.


**www.durgajobs.com**  
*Continuous Job Updates for every hour*

<b>Fresher Jobs</b>	<b>Govt Jobs</b>	<b>Bank Jobs</b>
<b>Walk-ins</b>	<b>Placement Papers</b>	<b>IT Jobs</b>
<b>Interview Experiences</b>		

*Complete Job information across India*



Diagram:

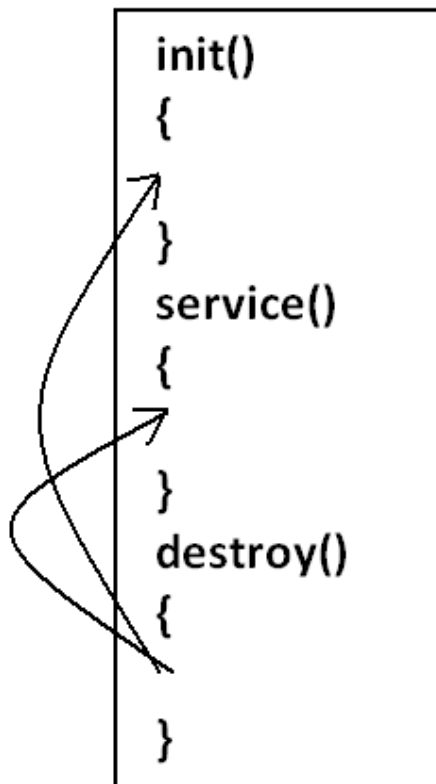

**FREE TRAINING VIDEOS**

**You Tube** **3000+ VIDEOS**

**[www.youtube.com/durgasoftware](http://www.youtube.com/durgasoftware)**

**Case 3:**

**finalize()** method can be call either by the programmer or by the GC .

If the programmer calls explicitly **finalize()** method and while executing the **finalize()** method if an exception raised and uncaught then the program will be terminated abnormally.

If GC calls **finalize()** method and while executing the **finalize()** method if an exception raised and uncaught then JVM simply ignores that exception and the program will be terminated normally.

**Example:**

```
class Test
{
    public static void main(String args[]){
        Test t=new Test();
        //t.finalize();-----line(1)
        t=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method called");
        System.out.println(10/0);
    }
}
```

If we are not comment line1 then programmer calling **finalize()** method explicitly and while executing the **finalize()** method ArithmeticException raised which is uncaught hence the program terminated abnormally.

If we are comment line1 then GC calls **finalize()** method and JVM ignores ArithmeticException and program will be terminated normally.

**Which of the following is true?**

While executing **finalize()** method JVM ignores every exception (invalid).

While executing **finalize()** method JVM ignores only uncaught exception (valid).

**Case 4:**

**On any object GC calls **finalize()** method only once.**

**Example:**

```
class FinalizeDemo
{
    static FinalizeDemo s;
    public static void main(String args[])throws Exception{
        FinalizeDemo f=new FinalizeDemo();
        System.out.println(f.hashCode());
        f=null;
        System.gc();
        Thread.sleep(5000);
        System.out.println(s.hashCode());
        s=null;
    }
}
```

```
System.gc();
Thread.sleep(5000);
System.out.println("end of main method");
}
public void finalize()
{
    System.out.println("finalize method called");
    s=this;
}
}
```

Output:

```
D:\Enum>java FinalizeDemo
4072869
finalize method called
4072869
End of main method
```

**Note:**

The behavior of the GC is vendor dependent and varied from JVM to JVM hence we can't expect exact answer for the following.



What is the algorithm followed by GC.

2. Exactly at what time JVM runs GC.
3. In which order GC identifies the eligible objects.
4. In which order GC destroys the object etc.
5. Whether GC destroys all eligible objects or not.

When ever the program runs with low memory then the JVM runs GC, but we can't expect exactly at what time.

Most of the GC's followed mark & sweep algorithm , but it doesn't mean every GC follows the same algorithm.

LEARN FROM EXPERT & DIAMOND FACULTIES OF AMEERPET...

# JAVA MEANS DURGASOFT

INDIA'S NO. 1 SOFTWARE TRAINING INSTITUTE

AN ISO 9001:2008 CERTIFIED  
**DURGA**  
SOFTWARE SOLUTIONS

#202 2<sup>nd</sup> FLOOR  
www.durgasoft.com

040-64512786  
+91 9246212143  
+91 8096969696

### Memory leaks:

- An object which is not using in our application and it is not eligible for GC such type of objects are called "memory leaks".
- In the case of memory leaks GC also can't do anything the application will be crashed due to memory problems.
- In our program if memory leaks present then certain point we will get `OutOfMemoryException`. Hence if an object is no longer required then it's highly recommended to make that object eligible for GC.
- By using monitoring tools we can identify memory leaks.

Example:

HPJ meter  
HP ovo  
IBM Tivoli  
J Probe  
Patrol and etc

These are monitoring tools.  
(or memory management tools)

**CORE JAVA with**  
**OCJP/SCJP**  
**JAVA CERTIFICATION**



**Mr. DURGA** M.Tech  
**JAVA EXPERT**  
Trained Thousands of Students



**One to One**  
**VIDEO**  
**CLASSES**

**EVERYTHING AT YOUR CONVENIENCE**

**At your convenient Time**

**With in your convenient duration**

AN ISO 9001:2008 CERTIFIED  
**DURGA**  
Software Solutions®  
[www.durgasoft.com](http://www.durgasoft.com)

# 202, 2nd Floor, HUDA Maitrivanam,  
Ameerpet, Hyd. Ph: 040-64512786,  
**9246212143, 8096969696**



**LEARN FROM EXPERTS ...**

# **COMPLETE JAVA**

CORE JAVA, ADV. JAVA, ORACLE, STRUTS, HIBERNATE, SPRING, WEB SERVICES,...

# **COMPLETE .NET**

C#.NET, ASP.NET, SQL SERVER, MVC 5 & WCF

# **TESTING TOOLS**

MANUAL + SELENIUM

# **ORACLE | D2K**

# **MSBI | SHARE POINT**

# **HADOOP | ANDROID**

# **C, C++ , DS, UNIX**

# **CRT & APTITUDE TRAINING**

AN ISO 9001:2008 CERTIFIED

**DURGA**

Software Solutions®

# 202, 2nd Floor, HUDA Maitrivanam,  
Ameerpet, Hyd. Ph: 040-64512786,

**9246212143, 8096969696**

**[www.durgasoft.com](http://www.durgasoft.com)**