

NAME- Bhagesh Rankhamb

PRN NO- 202501050035

BATCH- CH2

## PRACTICAL NO.4

Write a Python program that takes a list of numbers from the user, creates a Pandas series from it, and then calculates the mean of even and odd numbers separately using the groupby and mean() operations.

Hint: You can group the Series based on whether each number is even or odd.

Input Format:

The user should enter a list of numbers separated by space when prompted.

Output Format:

The program should display the mean of even and odd numbers separately.

Each mean value should be displayed with a label indicating whether it corresponds to even or odd numbers.

## CODE:

```
import pandas as pd
```

```
#Take inputs from the user to create a list of numbers
```

```
numbers = list(map(int, input().split()))
```

```
#Create a Pandas series from the list of numbers
```

```
series = pd.Series(numbers)
```

```
# Grouping by even and odd numbers and calculating the mean
```

```
grouped = series.groupby(series%2==0).mean()
```

```
#Display the mean of even and odd numbers with labels
```

```
grouped.index = ['Even' if is_even else 'Odd' for is_even in grouped.index]
```

```
print("Mean of even and odd numbers:")
```

```
print(grouped)
```

## OUTPUT:

```
1 2 3 4 5 6 7 8 9 10
Mean of even and odd numbers:
Odd      5.0
Even     6.0
dtype: float64
```

```
=== YOUR PROGRAM HAS ENDED ===
```

Terminal Test cases

A dictionary of lists has been provided to you in the editor. Create a DataFrame from the dictionary of lists and perform the listed operations, then display the DataFrame before and after each manipulation.

Create the DataFrame:

- Convert the dictionary to a Pandas DataFrame.

Add a new row:

- Take inputs from the user for the new row data (name, age).

- Add the new row to the DataFrame.

- Display the DataFrame after adding the new row.

Modify a row:

- Modify a specific row by changing the age. Take the row index and new age value from the user.

- Display the DataFrame after modifying the row.

Delete a row:

- Take the row index to be deleted from the user.

- Remove the specified row.

- Display the DataFrame after deleting the row.

Add a new column:

- Add a column Gender with values taken from the user.

- Display the DataFrame after adding the new column.

Modify a column:

Convert names to uppercase.

Display the DataFrame after modifying the column.

Delete a column:

Remove the Age column.

Display the DataFrame after deleting the column.

## CODE:

```
import pandas as pd
```

```
#Provided dictionary of lists
```

```
data = {  
    'Name': ['Alice', 'Bob', 'Charlie'],  
    'Age': [25, 30, 35],  
}
```

```
#Convert the dictionary to a DataFrame
```

```
df= pd.DataFrame(data)
```

```
#Display the original DataFrame
```

```
print("Original DataFrame:")
```

```
print(df)
```

```
#Adding a new row
```

```
new_name = input("New name: ")
```

```
new_age = int(input("New age: "))
```

```
new_row = {'Name': new_name, 'Age': new_age }
```

```
df = df.append(new_row,ignore_index = True)

# Display the DataFrame after adding a new row
print("After adding a row:\n",df)


#Modifying a row
row_to_modify = int(input("Index of row to modify: "))
new_age_value = int(input("New age: "))
df.at[row_to_modify, "Age"] = new_age_value
# Display the DataFrame after modifying a row
print("After modifying a row:")
print(df)
row_to_delete = int(input("Index of row to delete: "))
df= df.drop(index=row_to_delete).reset_index(drop=True)
#Deleting a row


#Display the DataFrame after deleting a row
print("After deleting a row:")
print(df)


#Adding a new column
genders = input("Enter genders separated by space: ").split()
df["Gender"] = genders


#Display the DataFrame after adding a new column
print("After adding a new column:")
print(df)
```

```
#Modifying a column
```

```
df['Name'] = df['Name'].str.upper()
```

```
# Display the DataFrame after modifying a column
```

```
print("After modifying a column:")
```

```
print(df)
```

```
#Deleting a column
```

```
df= df.drop(columns ='Age').reset_index(drop=True)
```

```
#Display the DataFrame after deleting a column
```

```
print("After deleting a column:")
```

```
print(df)
```

**OUTPUT:**

```
Original DataFrame:
  Name  Age
0  Alice  25
1   Bob  30
2  Charlie 35
New name: Susan
New age: 29
After adding a row:
  Name  Age
0  Alice  25
1   Bob  30
2  Charlie 35
3   Susan 29
Index of row to modify: 0
New age: 27
After modifying a row:
  Name  Age
0  Alice  27
1   Bob  30
2  Charlie 35
3   Susan 29
Index of row to delete: 3
After deleting a row:
  Name  Age
0  Alice  27
1   Bob  30
2  Charlie 35
Enter genders separated by space: F M M
After adding a new column:
  Name  Age Gender
0  Alice  27     F
1   Bob  30     M
2  Charlie 35     M
After modifying a column:
  Name  Age Gender
0  ALICE  27     F
1   BOB  30     M
2  CHARLIE 35     M
After deleting a column:
  Name Gender
0  ALICE     F
1   BOB     M
2  CHARLIE  M
=== YOUR PROGRAM HAS ENDED ===
```

Write a program to read a text file containing student information (name, age, and grade) using Pandas. Perform the following tasks:

Display the first five rows of the data frame.

Calculate the average age of the students (limit the average age up to 2 decimal places).

- Filter out the students who have a grade above a certain threshold (consider the threshold grade is 'B').

Note:

Refer to the displayed test cases for better understanding.

## CODE:

```
import pandas as pd
```

```
#Read the text file into a DataFrame
```

```
file = input()
```

```
data = pd.read_csv(file, sep="\s+", header=None, names=["Name", "Age",  
"Grade"])
```

```
#write your code here..
```

```
print("First five rows:")
```

```
print(data.head())
```

```
average_age= round(data["Age"].mean(), 2)
```

```
print(f"Average age: {average_age}")
```



```
filtered_student = data[data["Grade"] <= "B"]
```

```
print("Students with a grade up to B")
```

```
print(filtered_student)
```

## OUTPUT:

```
studentdata.txt
First five rows:
  Name  Age Grade
0  John   25    A
1  Alin   22    B
2  Emma   24    A
3  Mike   23    C
4  Sony   21    B
Average age: 23.29
Students with a grade up to B
  Name  Age Grade
0  John   25    A
1  Alin   22    B
2  Emma   24    A
4  Sony   21    B
5  Amia   26    A
=== YOUR PROGRAM HAS ENDED ===
```

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

The CSV file contains the columns: Date, Product, Quantity, Price, and City.

Group the data by Month and calculate the total sales for each month.

Find the month with the highest total sales and display it.

Also, display the total sales for the best month.

## CODE:

```
import pandas as pd

#Prompt the user for the file name
file_name = input()

#Load the data
df= pd.read_csv(file_name)

df["Date"] = pd.to_datetime(df["Date"])

df["Month"] = df["Date"].dt.to_period("M")

df["Total Sales"] = df["Quantity"] * df["Price"]

monthly_sales = df.groupby("Month")["Total Sales"].sum()

best_month = monthly_sales.idxmax()
highest_sales = monthly_sales.max()
```

```
print(f"Best month: {best_month}")  
print(f"Total sales: ${highest_sales:.2f}")
```

## OUTPUT:

A terminal window with a light blue title bar and three window control buttons. The terminal text is as follows:

```
sales_data.csv  
Best month: 2025-01  
Total sales: $1210.00  
=== YOUR PROGRAM HAS ENDED ===
```

The output shows the best month as 2025-01 and total sales as \$1210.00. A message "=== YOUR PROGRAM HAS ENDED ===" is displayed on a dark background.

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

The CSV file contains the columns: Date, Product, Quantity, Price, and City.

Find the product that sold the most in terms of quantity sold.

Display the product that sold the most and the total quantity sold for that product.

## CODE:

```
import pandas as pd
```

```
#Prompt the user for the file name
```

```
file_name = input()
```

```
#Load the data
```

```
df= pd.read_csv(file_name)
```

```
product_sales = df.groupby("Product")["Quantity"].sum()
```

```
best_product = product_sales.idxmax()
```

```
highest_quantity = product_sales.max()
```

```
#Display the result
```

```
print(f"Best selling product: {best_product}")
```

```
print(f"Total quantity sold: {highest_quantity}")
```

## OUTPUT:



```
sales_data.csv
Best selling product: Product A
Total quantity sold: 23
=== YOUR PROGRAM HAS ENDED ===
```

The image shows a terminal window with a light blue header bar containing three dots and a close button. The terminal output is as follows:

```
sales_data.csv
Best selling product: Product A
Total quantity sold: 23
=== YOUR PROGRAM HAS ENDED ===
```

At the bottom of the terminal window, there is a dark blue bar with two tabs: "Terminal" (active) and "Test cases".

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

The CSV file contains the columns: Date, Product, Quantity, Price, and City.

Group the data by City and calculate the total quantity of products sold for each city.

Find the city that sold the most products (based on the total quantity sold).

## CODE:

```
import pandas as pd

#Prompt the user for the file name
file_name = input()

#Load the data
df= pd.read_csv(file_name)

#write the code..
city_sales = df.groupby("City")["Quantity"].sum()
best_city = city_sales.idxmax()
# Display the result
print(f"City sold the most products: {best_city}")
```

## OUTPUT:



```
sales_data.csv
City sold the most products: Los Angeles
YOUR PROGRAM HAS ENDED
```

The image shows a terminal window with a light blue border. The title bar at the top contains three small circles on the left and a close button on the right. The terminal content shows the filename 'sales\_data.csv', the output 'City sold the most products: Los Angeles', and a confirmation message 'YOUR PROGRAM HAS ENDED' on a dark background. At the bottom, there is a tab labeled 'Terminal' and a link labeled 'Test cases'.

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

The CSV file contains the following columns: Date, Product, Quantity, Price, and City.

For each date, find all pairs of products that were sold together (i.e., two products sold on the same date).

Output the product pair/s that was sold most frequently.

## CODE:

```
import pandas as pd

from itertools import combinations
from collections import Counter

#Prompt user to input the file name
file_name = input()

#Read data from the specified CSV file
df= pd.read_csv(file_name)

#write the code
grouped = df.groupby("Date")["Product"].apply(list)

#Output the most frequent product pairs
pairs_counter = Counter()
for products in grouped:
    pairs = combinations(sorted(products), 2)
    pairs_counter.update(pairs)
```



```
max_frequency = max(pairs_counter.values())
```

```
most_common_pairs = [(pair, freq) for pair, freq in pairs_counter.items() if freq  
== max_frequency]
```

```
for (product1,product2),frequency in most_common_pairs:
```

```
    print(f"{product1} and {product2}: {frequency} times")
```

OUTPUT:

A terminal window with a light blue header bar containing window control icons and a close button. The main area is white and displays the following text: 'sales\_data.csv', 'Product A and Product B: 2 times', 'Product A and Product C: 2 times', and a dark blue banner with white text that reads '=== YOUR PROGRAM HAS ENDED ==='. Below the banner is a cursor. At the bottom, a light blue bar contains two tabs: 'Terminal' (active) and 'Test cases'.

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset. For each question, perform necessary data cleaning, transformations, and calculations as required.

1. Display the first 5 rows of the dataset.
2. Display the last 5 rows of the dataset.
3. Get the shape of the dataset (number of rows and columns).
4. Get a summary of the dataset (using `.info()`).
5. Get basic statistics (mean, standard deviation, etc.) of the dataset using `.describe()`.
6. Check for missing values and display the count of missing values for each column.
7. Fill missing values in the 'Age' column with the median age.
8. Fill missing values in the 'Embarked' column with the most frequent value (`mode()`).
9. Drop the 'Cabin' column due to many missing values.
10. Create a new column, 'FamilySize' by adding the 'SibSp' and 'Parch' columns.

The Titanic dataset contains columns as shown below,

[illegible]

## CODE:

```
import pandas as pd
```

```
import numpy as np
```

```
#Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
#1. Display the first 5 rows of the dataset
```

```
print(data.head())
```

```
#2. Display the last 5 rows of the dataset
```

```
print(data.tail())
```

```
#3. Get the shape of the dataset
```

```
print(data.shape)
```

```
#4. Get a summary of the dataset (info)
```

```
print(data.info())
```

```
#5. Get basic statistics of the dataset
```

```
print(data.describe())
```

```
#6. Check for missing values
```

```
print(data.isnull().sum())
```

```
#7. Fill missing values in the 'Age' column with the median age
```

```
median_age = data["Age"].median()  
data["Age"].fillna(median_age,inplace=True)
```

```
#8. Fill missing values in the 'Embarked' column with the mode  
mode_embarked = data['Embarked'].mode() [0]
```

```
data['Embarked'].fillna(mode_embarked, inplace=True)
```

```
# 9. Drop the 'Cabin' column due to many missing values  
data.drop('Cabin', axis=1, inplace=True)
```

```
#10. Create a new column 'FamilySize' by adding 'SibSp' and 'Parch'  
data['FamilySize'] = data['SibSp'] + data['Parch']
```

**OUTPUT:**

```

0 PassengerId Survived Pclass ... Fare Cabin Embarked
1 1 0 3 ... 7.2500 NaN S
2 2 1 1 ... 71.2833 C85 C
3 3 1 3 ... 7.9250 NaN S
4 4 1 1 ... 53.1000 C123 S
5 5 0 3 ... 8.0500 NaN S

[5 rows x 12 columns]
0 PassengerId Survived Pclass ... Fare Cabin Embarked
886 887 0 2 ... 13.00 NaN S
887 888 1 1 ... 30.00 B42 S
888 889 0 3 ... 23.45 NaN S
889 890 1 1 ... 30.00 C148 C
890 891 0 3 ... 7.75 NaN Q

[5 rows x 12 columns]
(891, 12)
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
# Column Non-Null Count Dtype
---
0 PassengerId 891 non-null int64
1 Survived 891 non-null int64
2 Pclass 891 non-null int64
3 Name 891 non-null object
4 Sex 891 non-null object
5 Age 714 non-null float64
6 SibSp 891 non-null int64
7 Parch 891 non-null int64
8 Ticket 891 non-null object
9 Fare 891 non-null float64
10 Cabin 204 non-null object
11 Embarked 889 non-null object
dtypes: float64(2), int64(5), object(5)
memory usage: 66.2+ KB
None
PassengerId Survived Pclass ... SibSp Parch Fare
count 891.000000 891.000000 891.000000 ... 891.000000 891.000000 891.000000
mean 446.000000 0.383838 2.308642 ... 0.523008 0.381594 32.204208
std 257.353842 0.486592 0.836071 ... 1.102743 0.806057 49.693429
min 1.000000 0.000000 1.000000 ... 0.000000 0.000000 0.000000
25% 223.500000 0.000000 2.000000 ... 0.000000 0.000000 7.910400
50% 446.000000 0.000000 3.000000 ... 0.000000 0.000000 14.454200
75% 668.500000 1.000000 3.000000 ... 1.000000 0.000000 31.000000
max 891.000000 1.000000 3.000000 ... 8.000000 6.000000 512.329200

[8 rows x 7 columns]
PassengerId 0
Survived 0
Pclass 0
Name 0
Sex 0
Age 177
SibSp 0
Parch 0
Ticket 0
Fare 0
Cabin 687
Embarked 2
dtype: int64
=== YOUR PROGRAM HAS ENDED ===

```

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Create a new column 'IsAlone' which is 1 if the passenger is alone (FamilySize = 0), otherwise 0.
2. Convert the 'Sex' column to numeric values (male: 0, female: 1).
3. One-hot encode the 'Embarked' column, dropping the first category.
4. Get the mean age of passengers.
5. Get the median fare of passengers.
6. Get the number of passengers by class.
7. Get the number of passengers by gender.
8. Get the number of passengers by survival status.
9. Calculate the survival rate of passengers.
10. Calculate the survival rate by gender.

The Titanic dataset contains columns as shown below

| P<br>a<br>s<br>s<br>e<br>n<br>g<br>e<br>r<br>I<br>d | Su<br>r<br>v<br>i<br>v<br>e<br>d | Pc<br>l<br>a<br>s<br>s | N<br>a<br>m<br>e | S<br>e<br>x | A<br>g<br>e | S<br>i<br>b<br>S<br>p | P<br>a<br>r<br>c<br>h | T<br>i<br>c<br>k<br>e<br>t | F<br>a<br>r<br>e | C<br>a<br>b<br>i<br>n | E<br>m<br>b<br>a<br>r<br>k<br>e<br>d |
|-----------------------------------------------------|----------------------------------|------------------------|------------------|-------------|-------------|-----------------------|-----------------------|----------------------------|------------------|-----------------------|--------------------------------------|
|                                                     |                                  |                        |                  |             |             |                       |                       |                            |                  |                       |                                      |

## CODE:

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
data['FamilySize'] = data['SibSp'] + data['Parch']
```

```
# 1. Create a new column 'IsAlone' (1 if alone, 0 otherwise)
```

```
data['IsAlone'] = np.where(data['FamilySize'] == 0, 1, 0)
```

#2. Convert 'Sex' to numeric (male: 0, female: 1)

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

#3. One-hot encode the 'Embarked' column

```
data = pd.get_dummies(data, columns=['Embarked'])
```

#4. Get the mean age of passengers

```
mean_age = data['Age'].mean()
```

```
print( mean_age)
```

#5. Get the median fare of passengers

```
median_fare = data['Fare'].median()
```

```
print( median_fare)
```

#6. Get the number of passengers by class

```
print( data['Pclass'].value_counts())
```

#7. Get the number of passengers by gender

```
print( data['Sex'].value_counts())
```

#8. Get the number of passengers by survival status

```
print( data['Survived'].value_counts())
```

#9. Calculate the overall survival rate

```
survival_rate = data['Survived'].mean()
print(format(survival_rate))
```

#10. Calculate the survival rate by gender

```
survival_by_gender = data.groupby('Sex')['Survived'].mean()
print(survival_by_gender)
```

OUTPUT:

```
29.69911764705882
14.4542
3    491
1    216
2    184
Name: Pclass, dtype: int64
0    577
1    314
Name: Sex, dtype: int64
0    549
1    342
Name: Survived, dtype: int64
0.3838383838383838
Sex
0    0.188908
1    0.742038
Name: Survived, dtype: float64
=== YOUR PROGRAM HAS ENDED ===
```



You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Calculate the survival rate by class.
2. Calculate the survival rate by embarkation location (Embarked\_S).
3. Calculate the survival rate by family size (FamilySize).
4. Calculate the survival rate by being alone (IsAlone).
5. Get the average fare by passenger class (Pclass).
6. Get the average age by passenger class (Pclass).
7. Get the average age by survival status (Survived).
8. Get the average fare by survival status (Survived).
9. Get the number of survivors by class (Pclass).
10. Get the number of non-survivors by class (Pclass).

The Titanic dataset contains columns as shown below,

| P<br>as<br>se<br>ng<br>er<br>d | Su<br>rvi<br>ve<br>d | Pc<br>la<br>ss | N<br>a<br>m<br>e | S<br>ex | Ag<br>e | Si<br>bS<br>p | P<br>ar<br>ch | Ti<br>ck<br>et | Fa<br>re | C<br>ab<br>in | E<br>m<br>ba<br>rk<br>ed |
|--------------------------------|----------------------|----------------|------------------|---------|---------|---------------|---------------|----------------|----------|---------------|--------------------------|
|                                |                      |                |                  |         |         |               |               |                |          |               |                          |

**CODE:**

```
import pandas as pd
```

```
import numpy as np
```

```
#Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
data['FamilySize'] = data['SibSp'] + data['Parch']
```

```
data['IsAlone'] = np.where(data['FamilySize'] > 0, 0, 1)
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
#1. Calculate the survival rate by class
```

```
print(data.groupby('Pclass')['Survived'].mean())
```

```
#2. Calculate the survival rate by embarked location
```

```
print(data.groupby('Embarked_S')['Survived'].mean())
```

```
#3. Calculate the survival rate by family size
```

```
print(data.groupby('FamilySize')['Survived'].mean())
```

```
#4. Calculate the survival rate by being alone
```

```
print(data.groupby('IsAlone')['Survived'].mean())
```

```
#5. Get the average fare by class
```

```
print(data.groupby('Pclass')['Fare'].mean())
```

```
#6. Get the average age by class
```

```
print(data.groupby('Pclass')['Age'].mean())
```

# 7. Get the average age by survival status

```
print(data.groupby('Survived')['Age'].mean())
```

#8. Get the average fare by survival status

```
print(data.groupby('Survived')['Fare'].mean())
```


#9. Get the number of survivors by class

```
print(data[data['Survived'] == 1] ['Pclass'].value_counts())
```

#10. Get the number of non-survivors by class

```
print(data[data['Survived'] == 0] ['Pclass'].value_counts())
```

## OUTPUT:

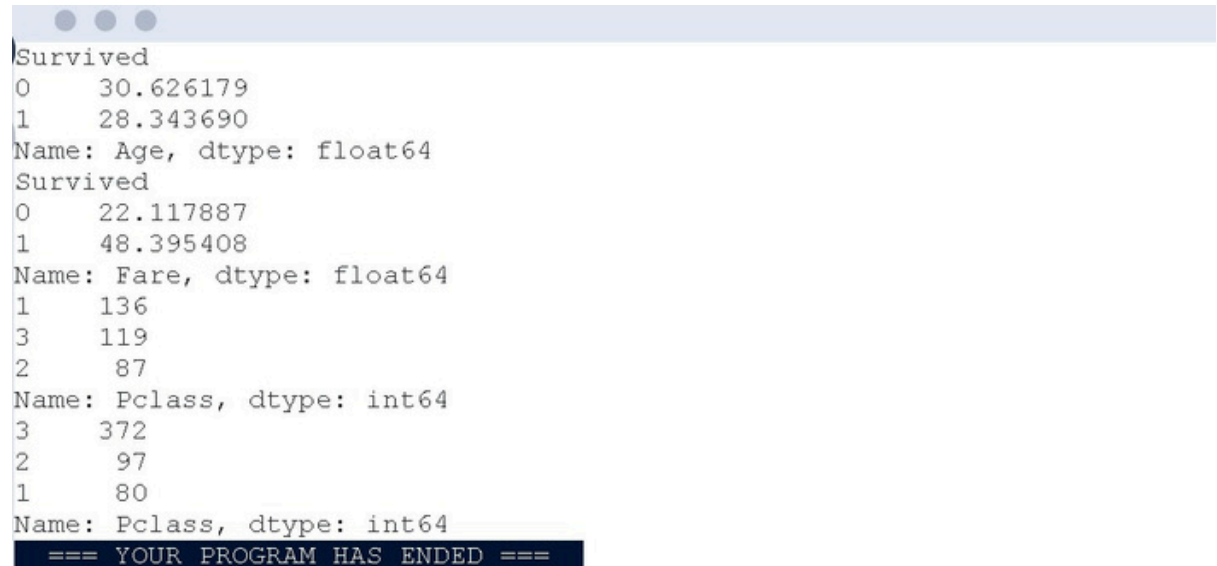

```
Survived
0    30.626179
1    28.343690
Name: Age, dtype: float64
Survived
0    22.117887
1    48.395408
Name: Fare, dtype: float64
1    136
3    119
2     87
Name: Pclass, dtype: int64
3    372
2     97
1     80
Name: Pclass, dtype: int64
=== YOUR PROGRAM HAS ENDED ===
```

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Get the number of survivors by gender (Sex).
2. Get the number of non-survivors by gender (Sex).
3. Get the number of survivors by embarkation location (Embarked\_S).
4. Get the number of non-survivors by embarkation location (Embarked\_S).
5. Calculate the percentage of children (Age < 18) who survived.
6. Calculate the percentage of adults (Age >= 18) who survived.
7. Get the median age of survivors.
8. Get the median age of non-survivors.
9. Get the median fare of survivors.
10. Get the median fare of non-survivors.

The Titanic dataset contains columns as shown below,

| P<br>as<br>se<br>ng<br>er<br>l<br>d | Su<br>rvi<br>ve<br>d | Pc<br>la<br>ss | N<br>a<br>m<br>e | S<br>ex | Ag<br>e | Si<br>bS<br>p | P<br>ar<br>ch | Ti<br>ck<br>et | Fa<br>re | C<br>ab<br>in | E<br>m<br>ba<br>rk<br>ed |
|-------------------------------------|----------------------|----------------|------------------|---------|---------|---------------|---------------|----------------|----------|---------------|--------------------------|
|                                     |                      |                |                  |         |         |               |               |                |          |               |                          |

CODE:

```
import pandas as pd
```

```
import numpy as np
```

```
#Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
#1. Get the number of survivors by gender
```

```
print(data[data['Survived'] == 1]['Sex'].value_counts())
```

```
#2. Get the number of non-survivors by gender
```

```
print(data[data['Survived'] == 0]['Sex'].value_counts())
```

```
#3. Get the number of survivors by embarked location
```

```
print(data[data['Survived'] == 1]['Embarked_S'].value_counts())
```

```
#4. Get the number of non-survivors by embarked location
```

```
print(data[data['Survived'] == 0]['Embarked_S'].value_counts())
```

```
#5. Calculate the percentage of children (Age < 18) who survived
```

```
children = data[data['Age'] < 18]
```

```
print(children['Survived'].mean())
```

```
# 6. Calculate the percentage of adults (Age >= 18) who survived
```

```
adults = data[data['Age'] >= 18]
```

```
print(adults['Survived'].mean())
```

# 7. Get the median age of survivors

```
print(data[data['Survived'] == 1]['Age'].median())
```

#8. Get the median age of non-survivors

```
print(data[data['Survived'] == 0]['Age'].median())
```

#9. Get the median fare of survivors

```
print(data[data['Survived'] == 1]['Fare'].median())
```

#10. Get the median fare of non-survivors

```
print(data[data['Survived'] == 0]['Fare'].median())
```

## OUTPUT:

```
Name: Sex, dtype: int64
male      468
female    81
Name: Sex, dtype: int64
1         217
0         125
Name: Embarked_S, dtype: int64
1         427
0         122
Name: Embarked_S, dtype: int64
0.5398230088495575
0.3810316139767055
28.0
28.0
26.0
10.5
=== YOUR PROGRAM HAS ENDED ===
```