

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns

# Load dataset
df = pd.read_csv('/content/swiggy_all_menus_india.csv')

# Display first 5 rows
df.head()
```

	State	City	Restaurant Name	Location	Category	Dish Name
0	Karnataka	Bengaluru	Anand Sweets & Savouries	Rajarajeshwari Nagar	Snack	Butter Murukku-200gm
1	Karnataka	Bengaluru	Srinidhi Sagar Deluxe	Kengeri	Recommended	Badam Milk

```
# Dataset information
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 197430 entries, 0 to 197429
Data columns (total 9 columns):
#   Column                Non-Null Count  Dtype
---  -
0   State                 197430 non-null object
1   City                 197430 non-null object
2   Restaurant Name      197430 non-null object
3   Location             197430 non-null object
4   Category             197430 non-null object
5   Dish Name            197430 non-null object
6   Price (INR)          197430 non-null float64
7   Rating               197430 non-null float64
8   Rating Count         197430 non-null int64
dtypes: float64(2), int64(1), object(6)
memory usage: 13.6+ MB
```

```
# Statistical summary  
df.describe()
```

	Price (INR)	Rating	Rating Count
count	197430.000000	197430.000000	197430.000000
mean	268.512920	2.613625	28.321805
std	219.338363	2.145706	87.542593
min	0.950000	0.000000	0.000000
25%	139.000000	0.000000	0.000000
50%	229.000000	3.900000	2.000000
75%	329.000000	4.500000	15.000000
max	8000.000000	5.000000	999.000000

```
# Missing values  
df.isnull().sum()
```

	0
State	0
City	0
Restaurant Name	0
Location	0
Category	0
Dish Name	0
Price (INR)	0
Rating	0
Rating Count	0

dtype: int64


```
plt.figure(figsize=(10,6))  
  
top_cities = df['City'].value_counts().head(10)  
  
sns.barplot(
```

```
x=top_cities.values,  
y=top_cities.index,  
palette='Oranges_r'  
)  
  
plt.title('Top 10 Cities by Restaurant Count')  
plt.xlabel('Restaurant Count')  
plt.ylabel('City')  
  
plt.show()
```

/tmp/ipykernel_900/2296208863.py:5: FutureWarning:

Passing `palette` without assigning `hue` is deprecated and will be

```
sns.barplot(
```

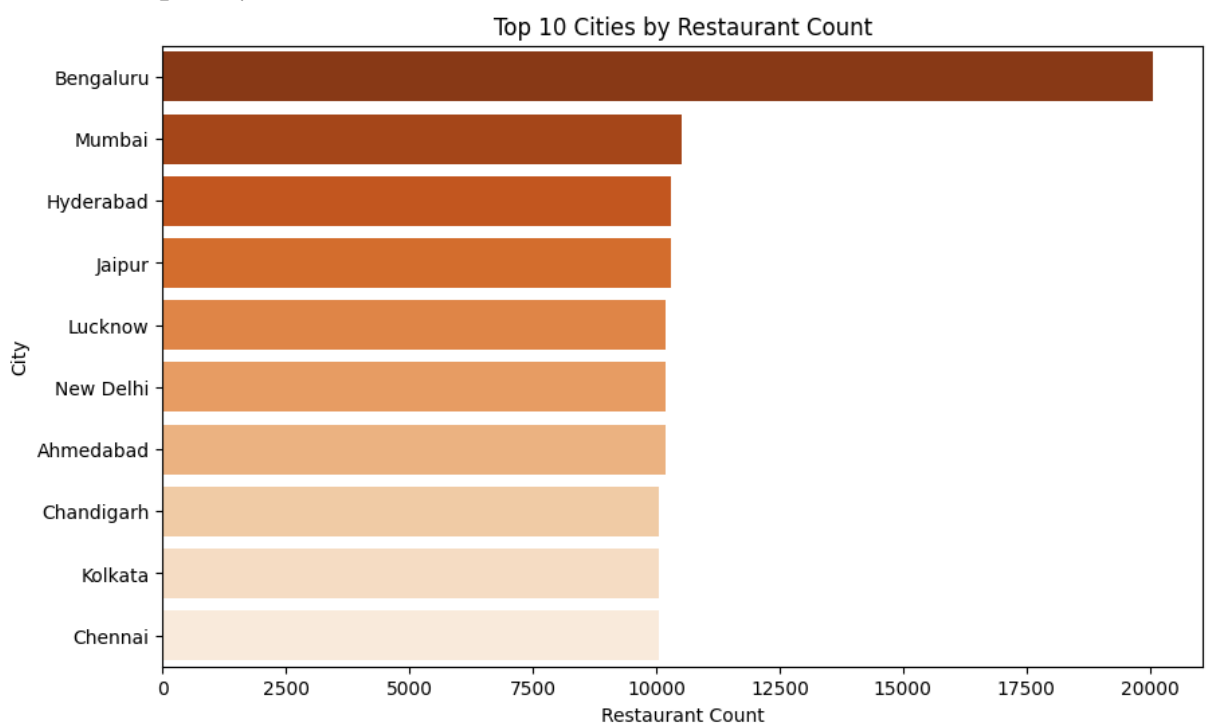

```
plt.figure(figsize=(10,6))
```

```
top_categories = df['Category'].value_counts().head(10)


sns.barplot(
    x=top_categories.values,
    y=top_categories.index,
    palette='rocket'
)

plt.title('Top Food Categories')
plt.xlabel('Count')
plt.ylabel('Category')

plt.show()
```

/tmp/ipykernel_900/2046707591.py:5: FutureWarning:

Passing `palette` without assigning `hue` is deprecated and will be

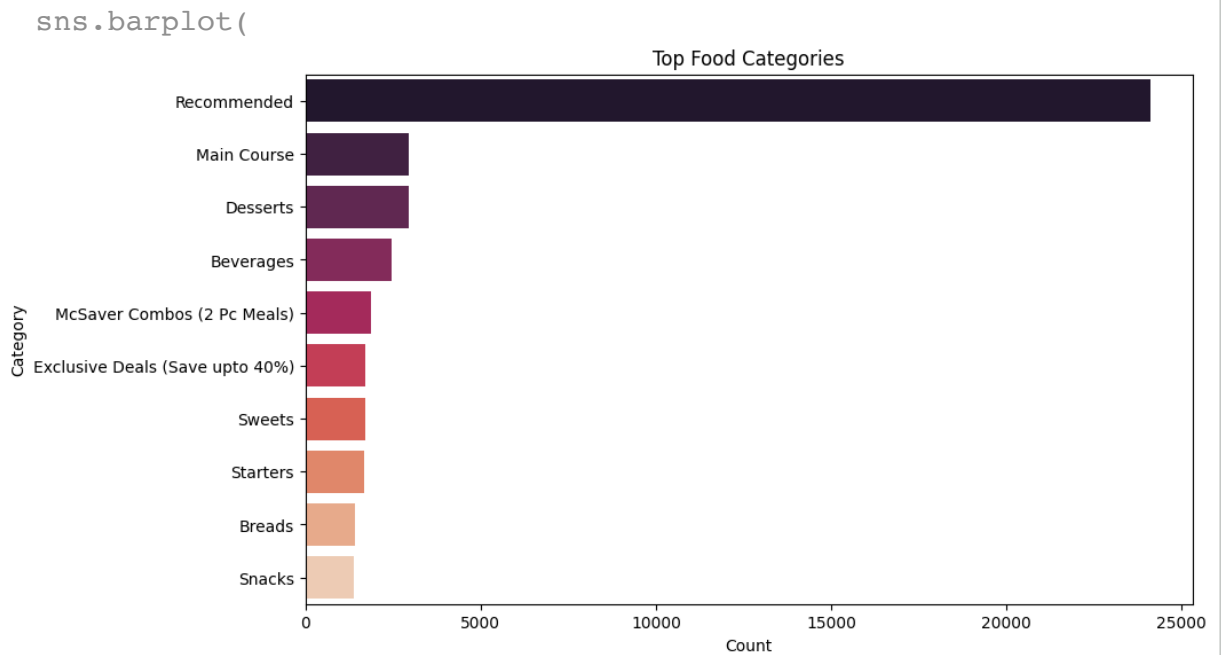


```
plt.figure(figsize=(10,6))

sns.histplot(df['Rating'], bins=20, kde=True)

plt.title('Restaurant Rating Distribution')
plt.xlabel('Rating')
plt.ylabel('Frequency')

plt.show()
```

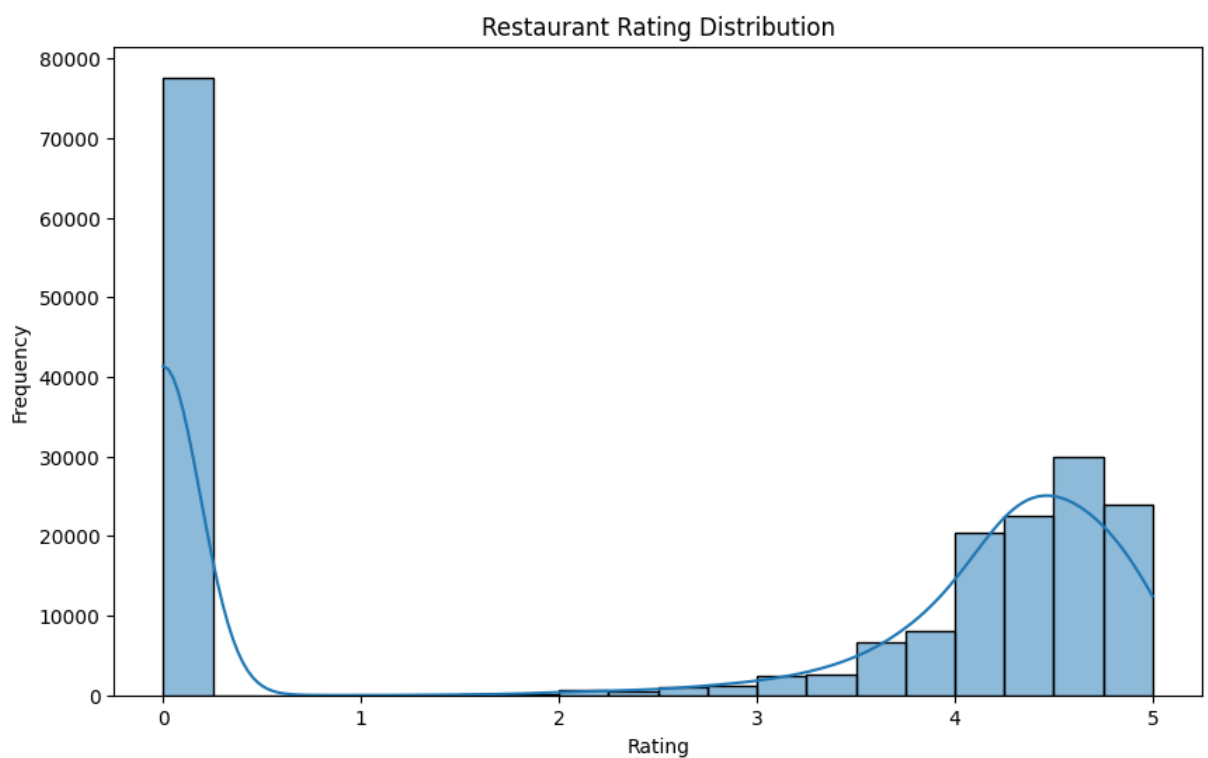


```
plt.figure(figsize=(10,6))

sns.scatterplot(
    x='Price (INR)',
    y='Rating',
    data=df
)

plt.title('Price vs Rating')
plt.xlabel('Price')
plt.ylabel('Rating')

plt.show()
```

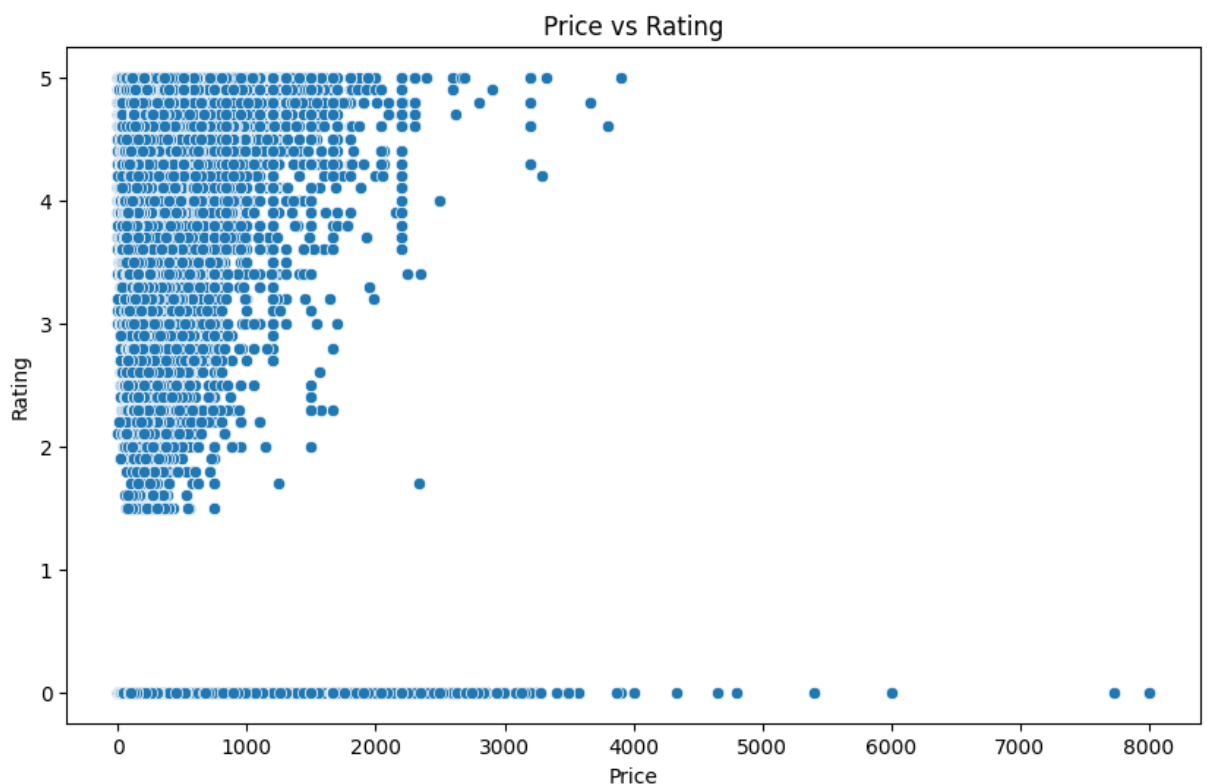

Close

Key Insights

- Bengaluru has the highest number of restaurants.
- Recommended and Main Course are the most popular food categories.
- Most restaurants have ratings between 4.0 and 5.0.
- Higher-priced restaurants generally tend to receive better ratings.
- Dataset contains no missing values.

Conclusion

This Exploratory Data Analysis project provides meaningful insights into Swiggy restaurant data across India.

Using Python libraries such as Pandas, Matplotlib, and Seaborn, various trends related to restaurant pricing, ratings, categories, and cities were analyzed successfully.

The project demonstrates practical data analysis and visualization skills useful for real-world business analytics.

Key Insights

- Bengaluru has the highest number of restaurants.
- Recommended and Main Course are the most popular food categories.
- Most restaurants have ratings between 4.0 and 5.0.
- Higher-priced restaurants generally tend to receive better ratings.
- Dataset contains no missing values.

Conclusion

This Exploratory Data Analysis project provides meaningful insights into Swiggy restaurant data across India.

Using Python libraries such as Pandas, Matplotlib, and Seaborn, various trends related to restaurant pricing, ratings, categories, and cities were analyzed successfully.

The project demonstrates practical data analysis and visualization skills useful for real-world business analytics.

