

## 1. Your First SOAP Project

**Tip:** The sample WSDL service that appears in this video has been removed. Please use one of the following WSDL URLs instead:


- <http://www.dataaccess.com/webservicesserver/numberconversion.wso?WSDL>
- <http://webservices.oorsprong.org/websamples.countryinfo/CountryInfoService.wso?WSDL>

ReadyAPIjects are the central point in all SoapUI testing. Once you create the project, you can expand it with functional tests, load tests, mock services, and much more. This tutorial describes the two main steps of creating a SOAP project:

1. [Create a project](#)
2. [Add a WSDL file](#)

### 1.1. Create a SOAP Project


- In the **Navigator**, which is in the left part of the SoapUI window, right-click **Projects** and select *New SOAP Project*.

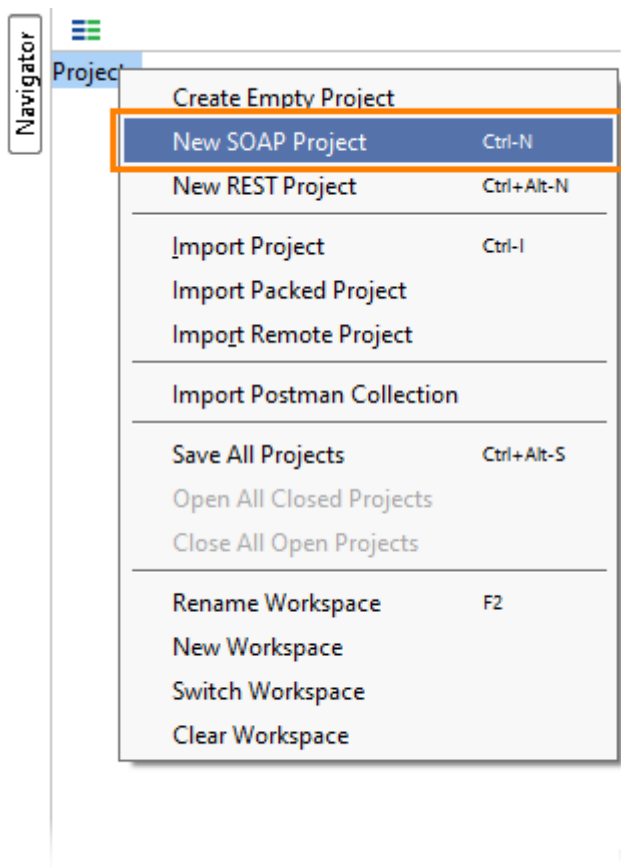

The **New SOAP Project** dialog will appear.


**Note:** To create a new SOAP project, you can also press CTRL+N (in Windows) or CMD+N (in OS X).

- In the **New SOAP Project** dialog, specify a name for your new project in the **Project Name** edit box.

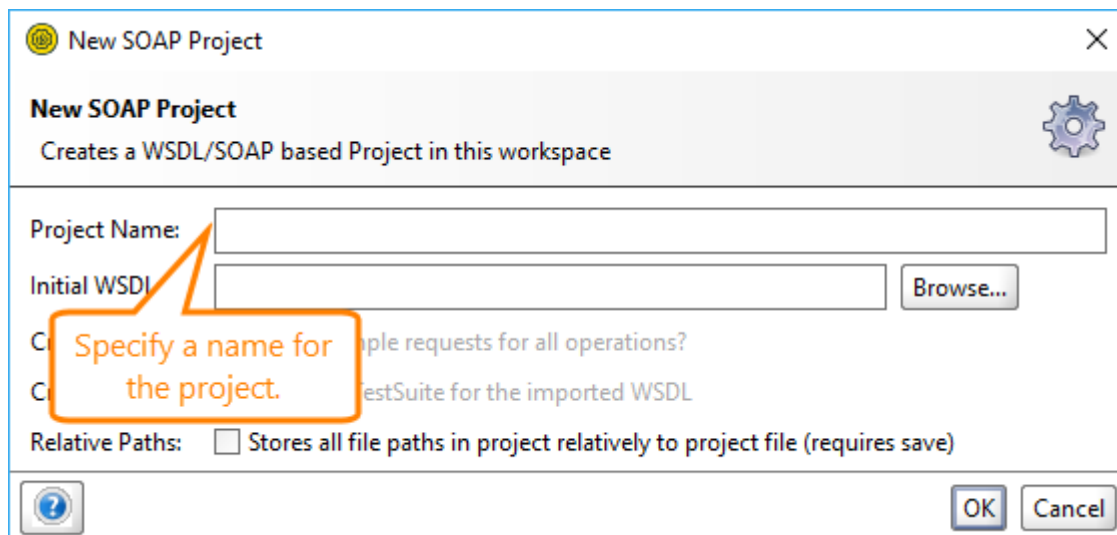

- Click **OK**.

The new project will appear in the **Navigator**.

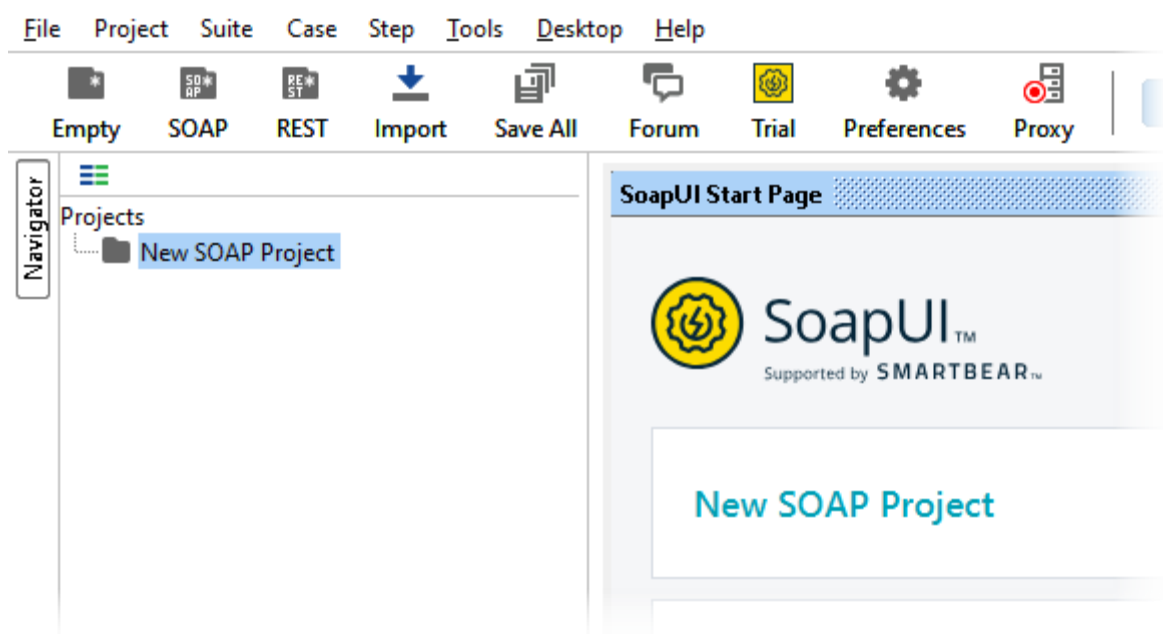

Congratulations, you have just created your first SOAP Project!


**Tip:** You may also want to try importing an existing project. See [Web Service sample project](#) for more details.

## 1.2. Add a WSDL File

In SoapUI, the SOAP projects mostly use WSDL services as a primary resource. It is not necessary to add a WSDL file, but if you do this, the testing process will become easier since the WSDL file usually contains all necessary information about the web service you want to test.


Let us add a WSDL to the newly created project:

- Right-click the name of the new project in the **Navigator** and select *Add WSDL*.

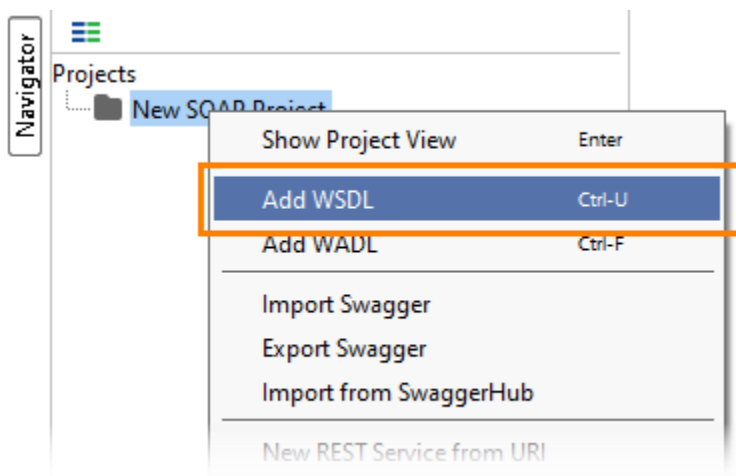


The **Add WSDL** dialog will appear.

- In the **WSDL Location** edit box of the dialog, specify the path to the WSDL file or service:

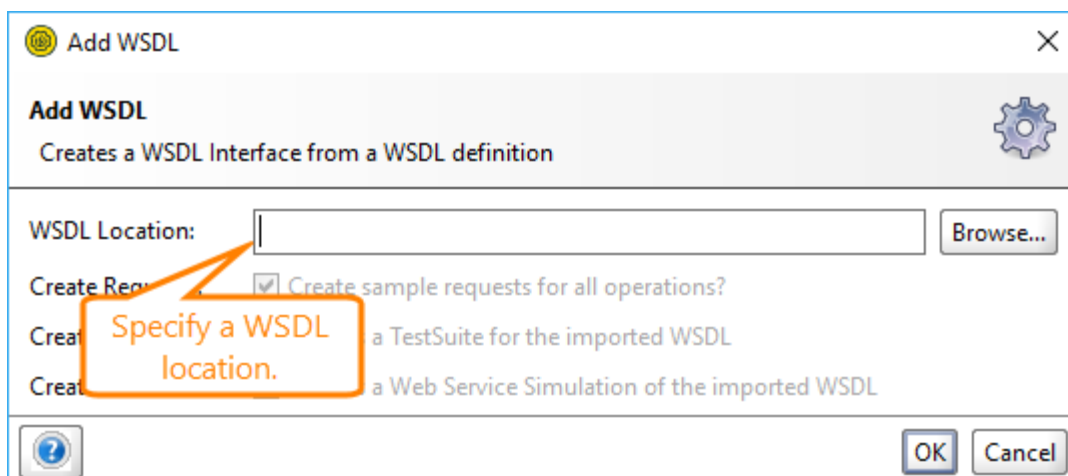


- Click **OK**.

- The web service operations associated with the project should appear in the **Navigator**. This means you have successfully added WSDL to your project.

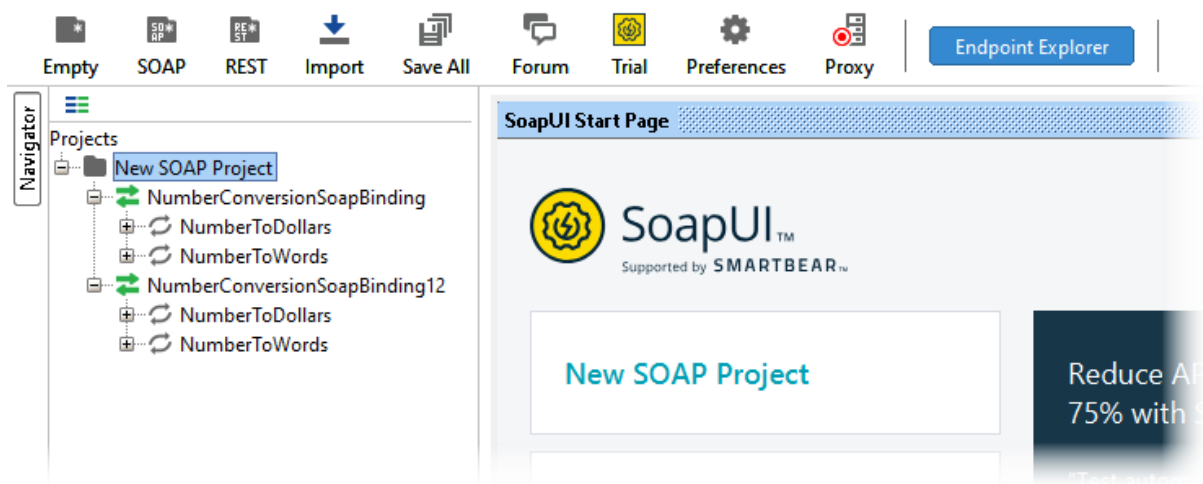


- Double-click the project name in the **Navigator**. The project editor appears with an overview of your project, including security configurations and basic requirements.

**Tip:** In ReadyAPI, the project overview contains even more useful information, such as a list of available JDBC connections, test run history and statistics, and so on. You can check these tools out by [by downloading the ReadyAPI trial](#).

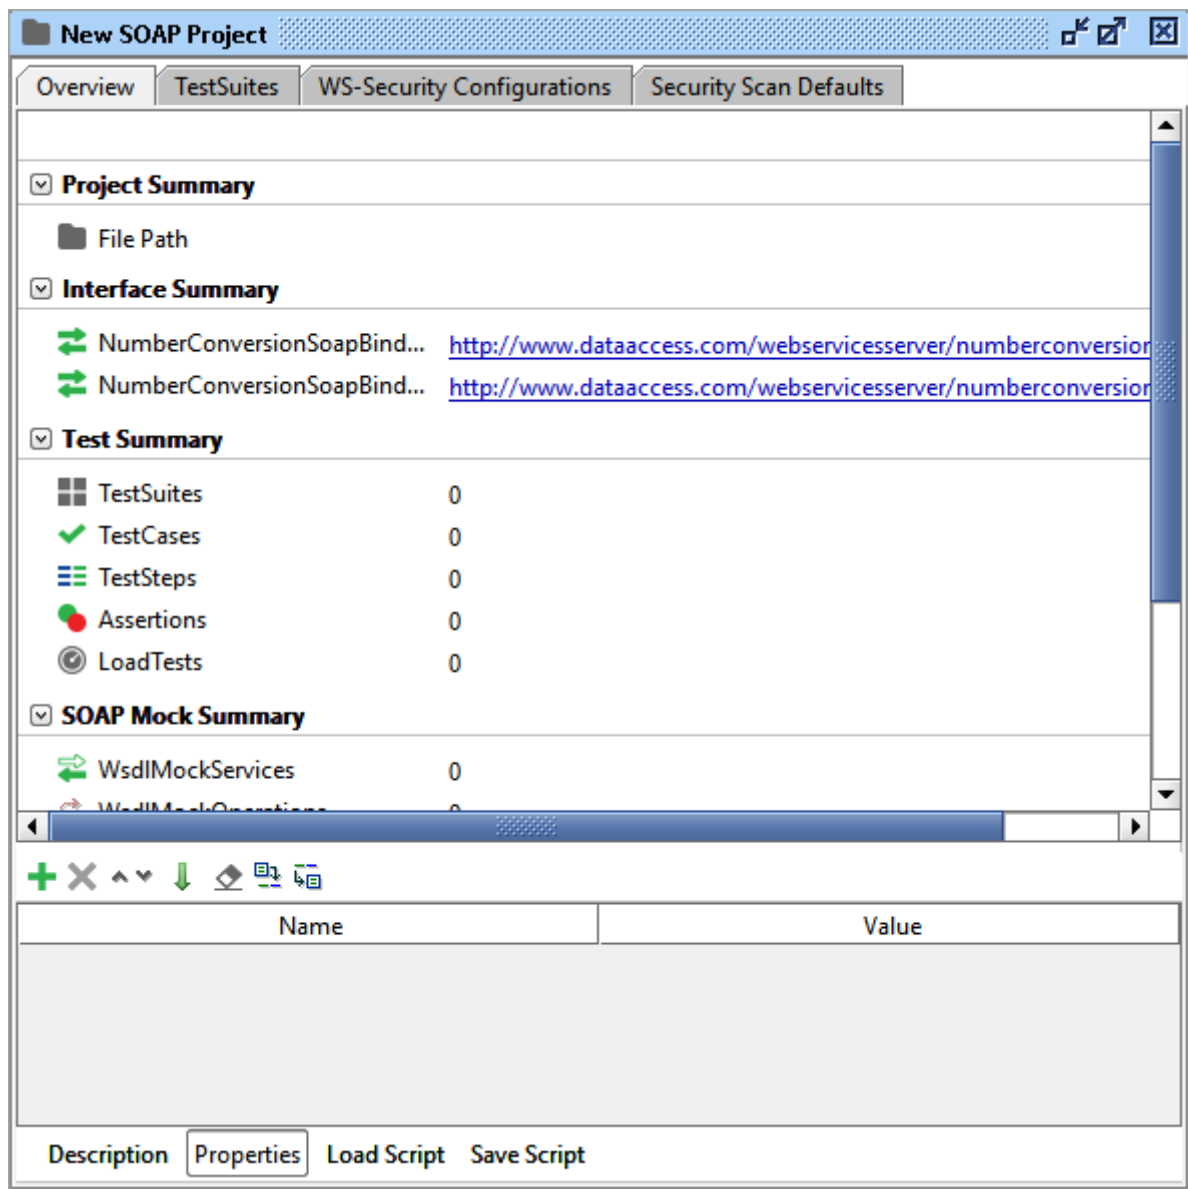

Double-click the interface name to get an interface overview. In the resulting window window, you will see information about the WSDL file.

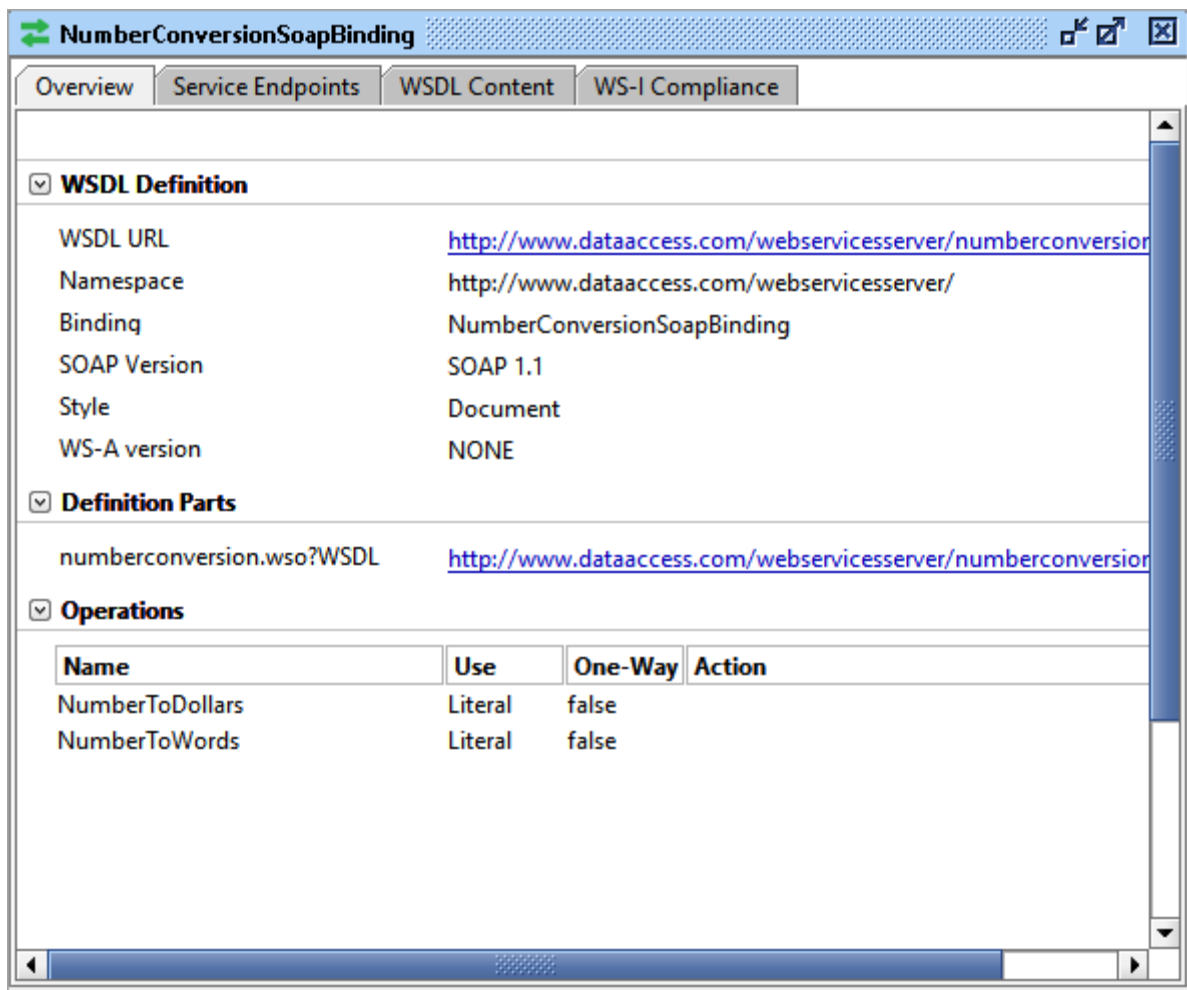

## 2. Your First REST Project


### [How to Test RESTful APIs & Web Services | Getting Started | SoapUI](#)

The REST testing bases around sending different requests to a RESTful API and verifying responses from it. This tutorial describes the basic ways of creating REST projects in SoapUI:

- Create REST project from [URI](#)
- Create REST project from [WADL definition](#)

### 2.1. Create REST Project From URI


- In the **Navigator**, right-click **Projects** and select *New REST Project*.

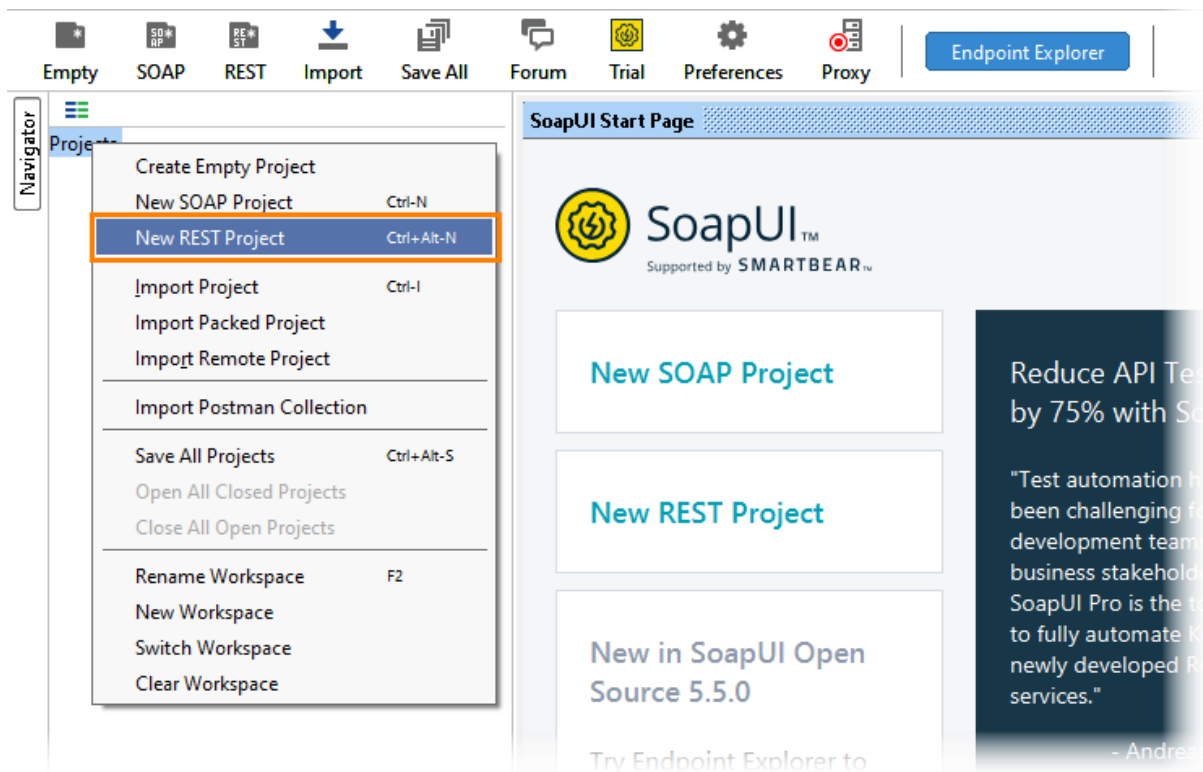

The **New REST Project dialog** will appear.

**Note:** To create a new REST project, you can also press CTRL+ALT+N (in Windows) or CMD+ALT+N (in OS X).

- In the dialog, specify the URI path to your REST API in the **URI** edit box.

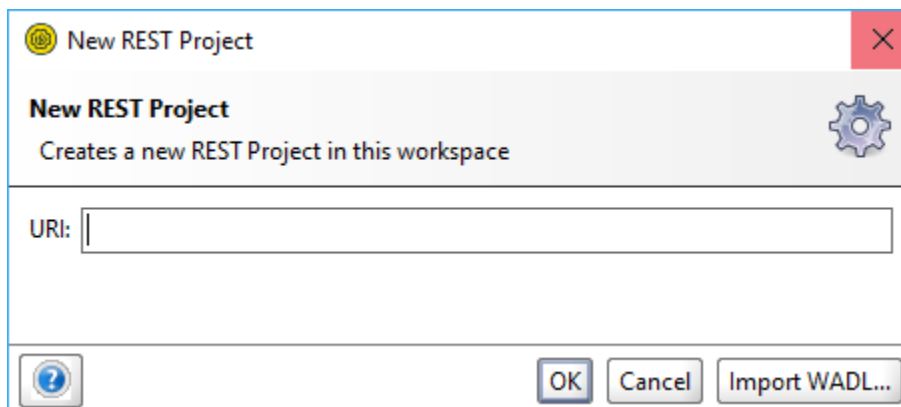

**Tip:** To see how it works, you can use the sample Petstore web service: <http://petstore.swagger.io/v2/swagger.json>.

- Click **OK**.

The new project will appear in the **Navigator**, along with the web service operations available for the REST API in question. You can then double-click the name of the project to get a project overview:

Empty SOAP REST Import Save All Forum Trial Preferences Proxy Endpoint Explorer Search Forum

Navigator

Projects

- REST Project 1
  - http://petstore.swagger.io
  - Swagger.json [/v2/swagger.json]
  - Swagger.json 1
    - Request 1

Project Properties Custom Properties

| Property          | Value                   |
|-------------------|-------------------------|
| Name              | REST Project 1          |
| Description       |                         |
| File              |                         |
| Resource Root     |                         |
| Cache Definitions | true                    |
| Project Password  |                         |
| Script Language   | Groovy                  |
| Hermes Config     | \${System#user.home...} |

REST Project 1

Overview TestSuites WS-Security Configurations Security Scan Defaults

**Project Summary**

File Path

**Interface Summary**

<http://petstore.swagger.io> <http://petstore.swagger.io/wadl>

**Test Summary**

|            |   |
|------------|---|
| TestSuites | 0 |
| TestCases  | 0 |
| TestSteps  | 0 |
| Assertions | 0 |
| LoadTests  | 0 |

**SOAP Mock Summary**

|                   |   |
|-------------------|---|
| WsdMockServices   | 0 |
| WsdMockOperations | 0 |
| WsdMockResponses  | 0 |


+ X ^ v ↓ ↺ ↻ ↺ ↻

| Name | Value |
|------|-------|
|------|-------|

Description Properties Load Script Save Script

Double-click the name of the service to get the service overview:



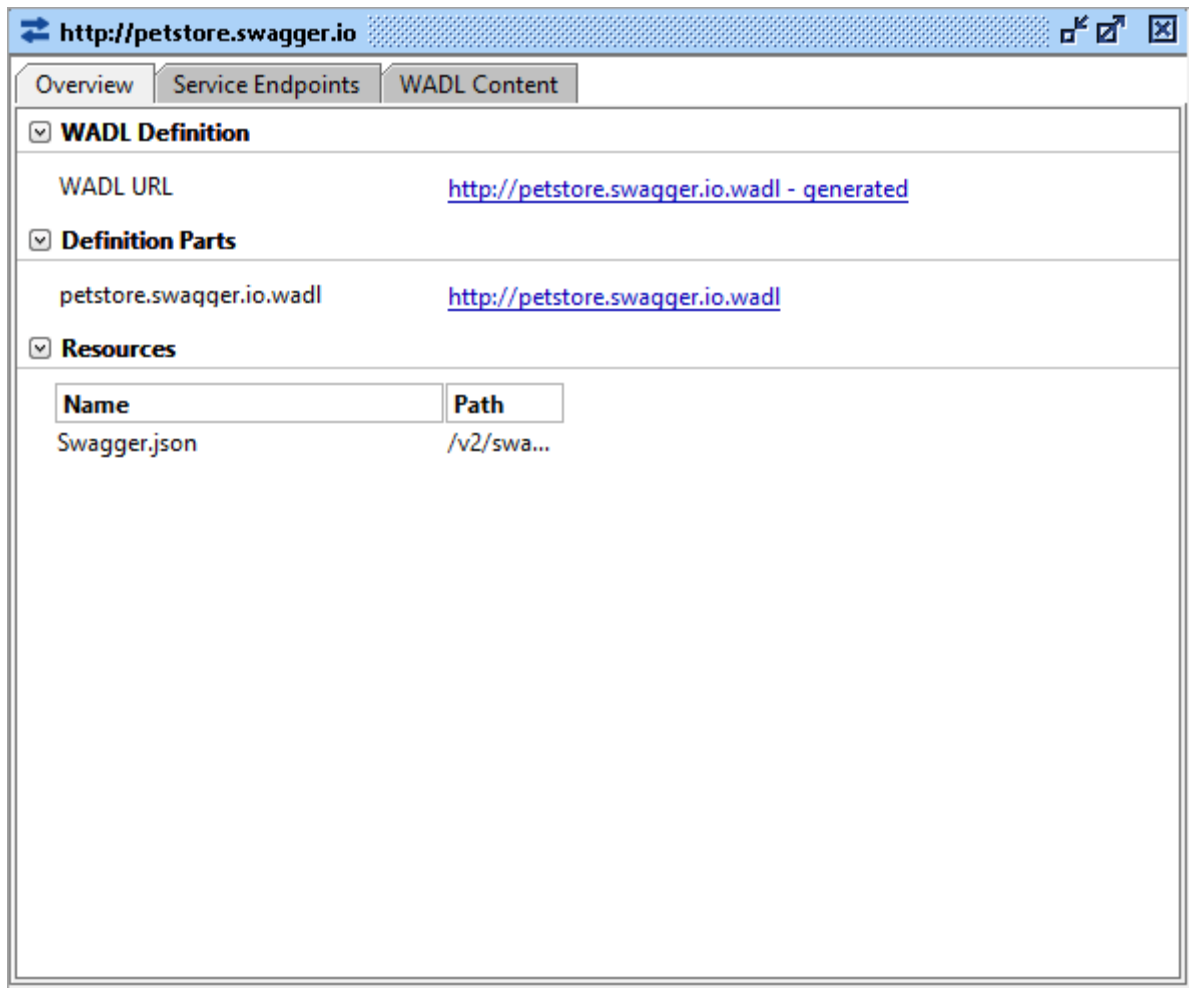


**Note:** To gain access to more convenient tools for REST API testing, check out ReadyAPI – our advanced solution for REST and SOAP APIs testing. To try it out, [download a free ReadyAPI trial](#).

Congratulations on creating your first REST project!

## 2.2. Create REST Project From WADL Definition


- In the **Navigator**, right-click **Projects** and select *New REST Project*.

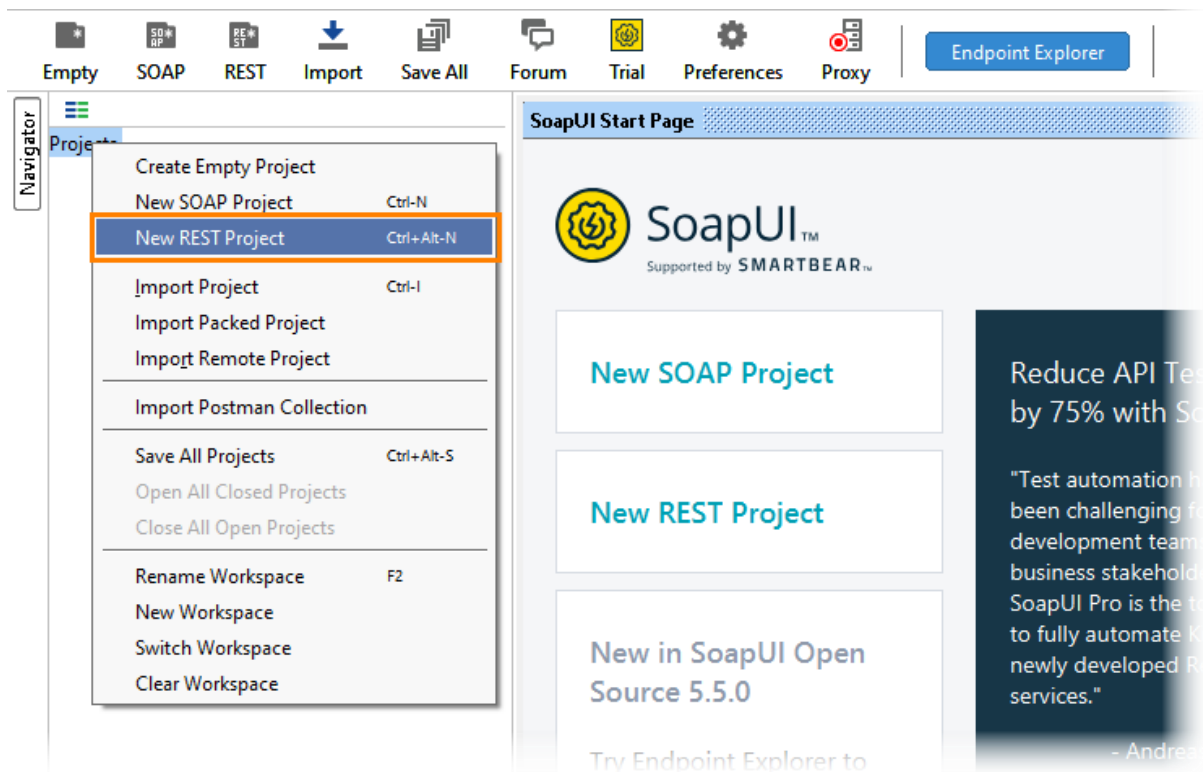

After that, the **New REST Project dialog** will appear.


**Note:** To create a new REST project, you can also press CTRL+ALT+N (in Windows) or CMD+ALT+N (in OS X).

- In the dialog, click **Import WADL**.

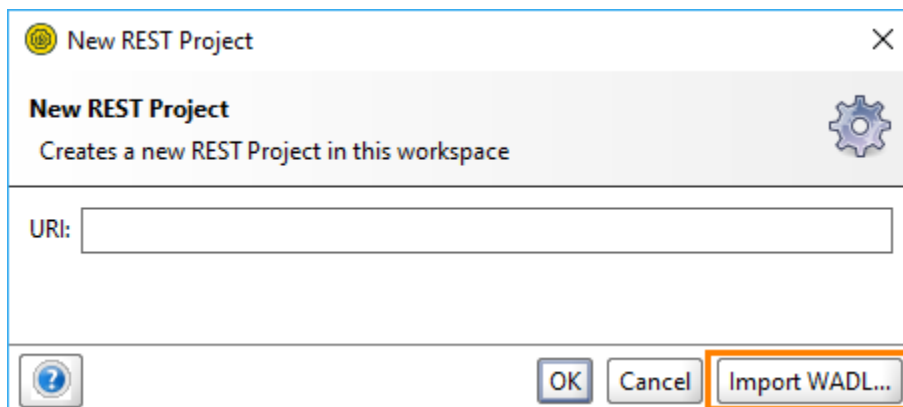

The **New WADL Project dialog** appears.


- In the dialog, specify the path to the initial WADL file that describes the available resources and operations.

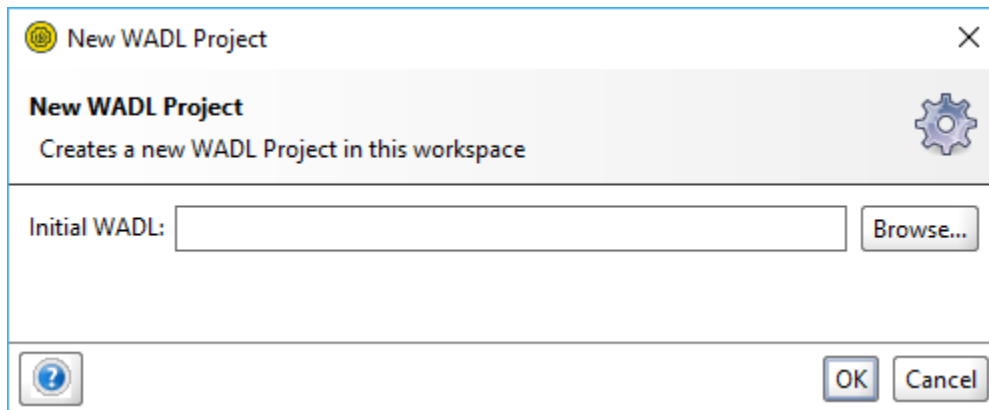

**Tip:** You can use the sample WADL file (*sample-service.wadl*) located in your system's user directory, in the *SoapUI-Tutorials\WSDL-WADL* folder.

- Click **OK**.

The new project will appear in the **Navigator**, along with the web service operations available for the REST API in question. As in the example above, you can then double-click the name of the project to get a project overview:

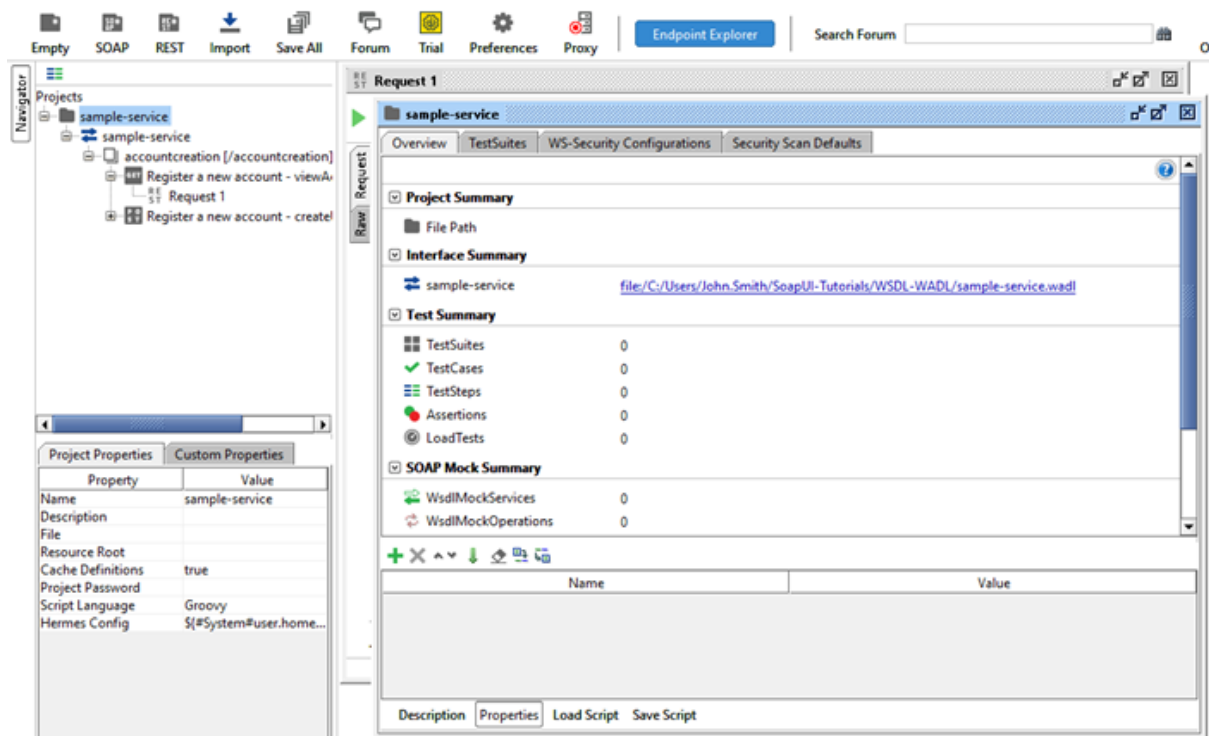

Double-click the name of the service to get the service overview:

 sample-service

Overview

Service Endpoints

WADL Content

☒ WADL Definition

WADL URL

file:/C:/Users/ /SoapUI-Tutorials/WSDL-WADL/sample-s

☒ Definition Parts

sample-service.wadl

file:/C:/Users/ /SoapUI-Tutorials/WSDL-WADL/sample-s

☒ Resources

| Name            | Path       |
|-----------------|------------|
| accountcreation | account... |